

IPS-G803SM-DD

IEC 61850-3 8x10/100/1000Base-T+ 3x 100/1000Base-X SFP Managed Switch (Dual isolated DC Input)

IPS-G803SM-AD

IEC 61850-3 8x10/100/1000Base-T+ 3x 100/1000Base-X SFP Managed Switch (AC+isolated DC Input)



IPS-G803SM managed Gigabit Ethernet switch is designed to meet the demands of power substation systems and is fully compliant with the requirement of IEC 61850-3 and IEEE 1613. The switch provide a variety of redundant functions to increase the reliability of your communications system, including redundant and isolated power supplies (24/48 VDC) and 110/220VDC/VAC), STP/RSTP/MSTP and ITU-T G.8032 Ethernet Ring Protection Switching (recovery time<50ms) and can compatibly work with other switches in the network for ring protection. The proprietary u-Ring (with recovery time of less than 20ms) can easy to work with a variety CTC industrial managed switch for ring protection. The switch also provide many function, such as Web management, SNMP, IGMP, VLAN, LACP, QoS, Security, IPv6, bandwidth control, port mirroring, cable diagnostics and Green Ethernet. IPS-803GSM can be managed centrally and conveniently by CTC SmartView Element Management System.

Features

- 8x 10/100/1000Base-T RJ-45 with 3x 100/1000Base-X SFP Fiber
- UL60950-1, CE, FCC, certification
- IEC61850-3, IEEE1613 certified for power substation
- Redundancy isolated ±24/48 VDC power inputs (IPS-G803SM-DD)
- Isolated ±24/48VDC and 110/240VDC/VAC power input (IPS-G803SM-AD)
- Wide Operating Temperature -40~85°C
- DIN Rail mounting or wall mounting
- IP30 rugged metal housing
- Cable diagnostic, Measuring cable OK or broken point distance
- Supports IEEE802.3az EEE (Energy Efficient Ethernet) Management to optimize the power consumption
- STP, RSTP, MSTP, ITU-T G.8032 Ethernet Protection Ring(EPR), u-Ring for cabling redundant
- **u-Ring** for Redundant Ethernet Ring, recovery time<20ms in 250 units
- QoS, Traffic classification QoS, CoS, bandwidth control for Ingress and Egress, Storm Control, DiffServ
- IEEE802.1Q VLAN, port based VLAN, MAC based VLAN, IP subnet based VLAN, Protocol based VLAN, VLAN translation, MVR
- Dynamic IEEE 802.3ad LACP Link Aggregation, Static Link Aggregation
- IGMP/MLD snooping V1/V2/V3, IGMP Filtering / Throttling, IGMP query, IGMP proxy reporting, MLD snooping
- Security : Port based and Mac based IEEE802.1X, RADIUS, ACL, TACACS+, HTTP/HTTPS, SSL/SSH v2
- Software upgrade via TFTP and HTTP, redundant firmware in case of upgrade failure
- Supports DHCP client/Relay/Snooping/Snooping option 82/ Relay option 82
- Supports RMON, MIB II, Port mirroring, Event syslog, DNS, NTP/ SNTP, IEEE802.1ab LLDP
- Supports IPv6 Telnet server /ICMP v6, SNMP, HTTP, SSH/SSL, NTP/ SNTP, TFTP, QoS, ACL
- CLI, Web based management, **SNMP** v1/v2c/v3, Telnet server for management
- SmartView Management System

Specifications

IEEE Standard	IEEE 802.3 10Base-T Ethernet
	IEEE 802.3u 100Base-TX Fast Ethernet
	IEEE 802.3ab 1000Base-T Gigabit Ethernet
	IEEE 802.3z 1000Base-X Gigabit Ethernet
	IEEE 802.1d STP
	IEEE 802.1w RSTP
	IEEE 802.1s MSTP
	IEEE 802.1Q for VLAN Tagging
	IEEE 802.1X for Authentication
	IEEE 802.3ad for Port Trunk with LACP
	IEEE802.3x Flow Control and Back Pressure
	ITU-T G.8032/ Y.1344 EPR (Ethernet Protection Ring)
	IEEE 802.1ad Stacked VLANs, Q-in-Q
	IEEE 802.1p LAN Layer 2 QoS/CoS Protocol for Traffic Prioritization
	IEEE 802.1ab Link Layer Discovery Protocol (LLDP)
IEEE 802.3az EEE (Energy Efficient Ethernet)	
VLAN ID	4096
IGMP Group	256
Switch Architecture	Back-plane (Switching Fabric): 22Gbps
Data Processing	Store and Forward
Flow Control:	IEEE 802.3x flow control, back pressure flow control
Jumbo Frame	9.6KB
MAC Address Table	8K

Network Connector	8x RJ-45 10/100/1000Base-T auto negotiation speed Auto MDI/MDI-X function, Full/Half duplex 3x 100/1000Base-X dual speed mode SFP slot, with DDM1
Console	RS-232 (RJ-45)
Network Cable	UTP/STP above Cat. 5e cable EIA/TIA-568 100-ohm (100m)
Protocols	CSMA/CD
LED	Per unit : Power 1 (Green), Power 2 (Green), Fault (Amber) Per RJ-45 port :10/100Link/Act: Green, 1000Link/Act: Amber SFP Fiber Per port : Link/Active (Green)
Reverse Polarity Protection	Present for Power Input
Overload Current Protection	Present
CPU Watch Dog	Present
Power Input	IPS-G803SM-DD : Redundant Isolated DC ±24/48V (±18~72VDC) Input power (Removable Terminal Block) IPS-G803SM-AD : Redundant 1X Low Voltage Isolated DC and 1 High Voltage AC/DC DC : Isolated ±24/48V (±18~72VDC) Input power (Removable Terminal Block) AC : 88VAC~264VAC /DC85VDC~300VDC
Alarm Relay Contact	Relay outputs with current carrying capacity of 1 A @24VDC
Removable Terminal Block	Provide 2 redundant power, alarm relay contact, 6 Pin
Operating Temperature	-40°C~85°C

Specifications & design are subject to change without prior notice. Please visit CTC Union website for more details.

Operating Humidity	5% to 95% (Non-condensing)
Storage Temperature	-40°C~85°C
Housing	Rugged Metal, IP30 Protection
Installation mounting	DIN Rail mounting or wall mounting
EMC/EMS	CE, FCC
EMI	FCC Part 15 Subpart B Class A EN 55022 Class A

EMS	EN61000-4-2 (ESD) Level 4, Criteria B EN61000-4-3 (RS) Level 3, Criteria A EN61000-4-4 (EFT) Level 4, Criteria A EN61000-4-5 (Surge) Level 4, Criteria B EN61000-4-6 (CS) Level 4, Criteria A EN61000-4-8 (Magnetic Field) Level 5, Criteria A
Safety	UL60950-1 (Pending)
Power Substation	IEC 61850-3, IEEE 1613
Shock	IEC 60068-2-27
Freefall	IEC 60068-2-32
Vibration	IEC 60068-2-6
MTBF	TBD (Above 30 years)
Warranty	5 years

Software Specifications

Topology	
VLAN	IEEE 802.1q VLAN, up to 4095 ID IEEE 802.1q VLAN, up to 4095 Groups IEEE 802.1ad Q-in-Q Port Based VLAN MAC-based VLAN, up to 256 entries IP Subnet-based VLAN, up to 128 entries Protocol-based VLAN (Ethernt, SNAP, LLC), up to 128 entries VLAN Translation, up to 256 entries MVR (Multiple VLAN Registration)
Link Aggregation (Port Trunk)	Static (Hash with SA, DA, IP, TCP/UDP port), up to 5 trunk group Dynamic (IEEE 802.3ad LACP), up to 5 trunk group
Spanning Tree	IEEE802.1d STP IEEE802.1w RSTP IEEE802.1s MSTP
Loop Protection u-Ring	Present Easy set for Ethernet Protection Ring Recovery time <20ms Maximum 250 Node
ITU-T G.8032 / Y.1344 ERPS (Ethernet Ring Protection)	Convergence time <50ms Single Ring, Sub-Ring, Multiple ring topology network
QoS Feature	
Class of Service	IEEE802.1p 8 active priorities queues for per port
Traffic Classification QoS	IEEE802.1p based CoS IP Precedence based CoS IP DSCP based CoS QCL(QoS Control List): MAC Access control list (Source/Destination MAC, Ether type, Priority ID/ VLAN ID) QCL: IP extended access control list (Source/Destination IP, Protocol, TCP/UDP port number)
Bandwidth Control for Ingress	Rate in steps : 100 kbps / 1fps / 100fps Range : 100 kbps to 1Gbps / 1fps to 3300kfps Rate Unit : bit or frame
Bandwidth Control for Egress	Rate in steps : 100 kbps / 1fps / 100fps Range : 100 kbps to 1Gbps / 1fps to 3300kfps Rate Unit : bit or frame Per queue shaper
DiffServ (RF 2474) Remarking	
Storm Control	for Unicast, Broadcast, Multicast
IP Multicasting Feature	
IGMP / MLD Snooping	IGMP Snooping v1, v2, v3 / MLD Snooping v1, v2 Port Filtering Profile Throttling Fast Leave Query

Security Features	
IEEE 802.1X	Port-Based MAC-Based
ACL	Number of rules : up to 256 entries for L2 / L3 / L4
RADIUS authentication & accounting TACACS+ authentication & accounting, TACACS+ 3.0 HTTPS, HTTP SSL / SSH v2	
User Name Password Authentication	Local Authentication Remote Authentication (via RADIUS/TACACS+)
Management Interface Access Filtering	Web, Telnet / SSH
Management Features	
CLI	
Web Based Management	
Telnet	Server
SNMP	V1, V2c, V3
SW & Configuration Upgrade	TFTP, HTTP Redundant firmware in case of upgrade failure
RMON	RMON I (1, 2, 3, 9 group), RMON II
MIB II	RFC 1213
DHCP	Client Relay Snooping Snooping option 82 Relay option 82
IP Source Guard	
Port Mirroring	
Event Syslog	Syslog server (RFC3164) (Support 1 server)
Warning Message	System Syslog, e-mail, alarm relay
DNS	Client, Proxy
NTP /SNTP	
LLDP (IEEE 802.1ab)	Link Layer Discovery Protocol LLDP-MED

Software Specifications

IPv6 Features	
IPv6 Management	Telnet Server/ICMP v6
Stateless Auto Configuration	
SNMP over IPv6	
HTTP over IPv6	
SSH over IPv6	
IPv6 Telnet Support	
IPv6 NTP / SNTP Support	
IPv6 TFTP Support	
IPv6 QoS	
IPv6 ACL	Number of rules: up to 256 entries L2 / L3 / L4

Others Features	
Green Ethernet	Supports IEEE802.3az EEE (Energy Efficient Ethernet) Management to optimize the power consumption Determine the cable length and lowering the power for ports with short cables Lower the power for a port when there is no link LED Power Management: Adjustment LEDs intensity
Cable Diagnostic	Measuring cable OK or broken point distance

Application

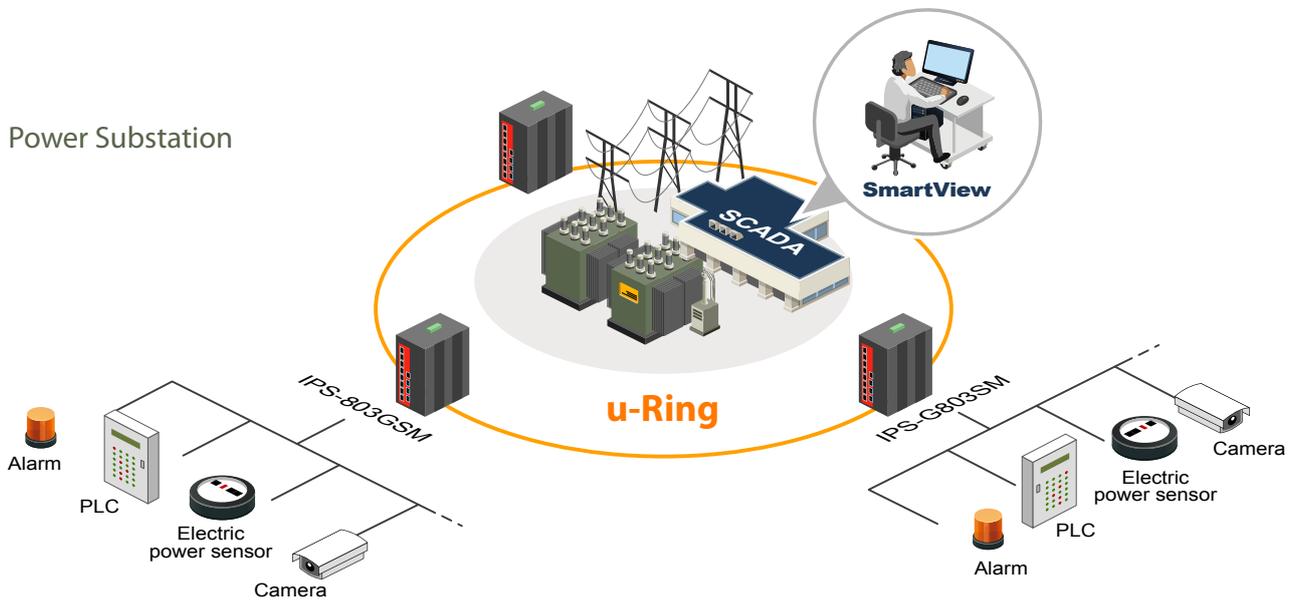


Figure : IPS Series in Power Substation Application

Ordering Information

Model Name	Description
IPS-G803SM-DD	IEC 61850-3 8x 10/100/1000Base-T+ 3x 100/1000Base-X SFP Ethernet Managed Switch (Dual isolated DC input)
IPS-G803SM-AD	IEC 61850-3 8x 10/100/1000Base-T+ 3x 100/1000Base-X SFP Ethernet Managed Switch (AC+isolated DC input)

Accessories

DR-4524	Industrial Power, Input 85 ~ 264VAC, Output 24VDC, 48W, -10 ~ +50°C
MDR-40-24	Industrial Power, Input 85 ~ 264VAC, Output 24VDC, 40W, -20 ~ +70°C
MDR-60-24	Industrial Power, Input 85 ~ 264VAC, Output 24VDC, 60W, -20 ~ +70°C
SFP Transceiver	Compatible, Reliable, 5-year Warranty

Power Type
IPS - G803SM - [] []
 Example: IPS - G803SM - DD



Specifications & design are subject to change without prior notice. Please visit CTC Union website for more details.

IEC 61850-3



NEW



SmartView



u-Ring



EN50121-4



EN61000-6-2
EN61000-6-4

IPS-803GSM-DD

IEC 61850-3 8x 10/100Base-TX+ 3x 100/1000Base-X SFP
Managed Switch (Dual isolated DC Input)

IPS-803GSM-AD

IEC 61850-3 8x 10/100Base-TX+ 3x 100/1000Base-X SFP
Managed Switch (AC+isolated DC Input)

IPS-G803SM managed Fast Ethernet switch is designed to meet the demands of power substation systems and is fully compliant with the requirement of IEC 61850-3 and IEEE 1613. The switch provide a variety of redundant functions to increase the reliability of your communications system, including redundant and isolated power supplies (24/48 VDC) and 110/220 VDC/VAC), STP/RSTP/MSTP and ITU-T G.8032 Ethernet Ring Protection Switching (recovery time<50ms) and can compatibly work with other switches in the network for ring protection. The proprietary u-Ring (with recovery time of less than 20ms) can easy to work with a variety CTC industrial managed switch for ring protection. The switch also provide many function, such as Web management, SNMP, IGMP, VLAN, LACP, QoS, Security, IPv6, bandwidth control, port mirroring, cable diagnostics and Green Ethernet. IPS-803GSM can be managed centrally and conveniently by CTC SmartView Element Management System.

Features

- 8x 10/100/1000Base-T RJ-45 with 3x 100/1000Base-X SFP Fiber
- UL60950-1, CE, FCC, certification
- IEC61850-3, IEEE1613 certified for Power substation
- Redundancy isolated $\pm 24/48$ VDC power inputs (IPS-803GSM-DD)
- Isolated $\pm 24/48$ VDC and 110/240VDC/VAC power input (IPS-803GSM-AD)
- Wide operating temperature $-40\sim 85^{\circ}\text{C}$
- DIN Rail mounting or wall mounting
- IP30 rugged metal housing
- Cable diagnostic, Measuring cable OK or broken point distance
- Supports IEEE802.3az EEE (Energy Efficient Ethernet) Management to optimize the power consumption
- STP, RSTP, MSTP, ITU-T G.8032 Ethernet Protection Ring(EPR),u-Ring for cabling redundant
- u-Ring for Redundant Ethernet Ring, recovery time<20ms in 250 units
- QoS, Traffic classification QoS, CoS, bandwidth control for Ingress and Egress, Storm Control, DiffServ
- IEEE802.1q VLAN, port based VLAN, MAC based VLAN, IP subnet based VLAN, Protocol based VLAN, VLAN translation, MVR
- Dynamic IEEE 802.3ad LACP Link Aggregation, Static Link Aggregation
- IGMP/MLD snooping V1/V2/V3, IGMP Filtering/ Throttling, IGMP query, IGMP proxy reporting, MLD snooping
- Security : Port based and MAC based IEEE802.1X, RADIUS, ACL, TACACS+, HTTP/HTTPS, SSL/SSH v2
- Software upgrade via TFTP and HTTP, redundant firmware in case of upgrade failure
- Supports DHCP client/Relay/Snooping/Snooping option 82/ Relay option 82
- Supports RMON, MIB II, Port mirroring, Event syslog, DNS, NTP/ SNTP, IEEE802.1ab LLDP
- Supports IPv6 Telnet server /ICMP v6, SNMP, HTTP, SSH/SSL, NTP/ SNTP, TFTP, QoS, ACL
- CLI, Web based management, **SNMP** v1/v2c/v3, Telnet server for management
- **SmartView** Management System

Specifications

IEEE Standard	IEEE 802.3 10Base-T Ethernet
	IEEE 802.3u 100Base-TX Fast Ethernet
	IEEE 802.3ab 1000Base-T Gigabit Ethernet
	IEEE 802.3z 1000Base-X Gigabit Ethernet
	IEEE 802.1d STP
	IEEE 802.1w RSTP
	IEEE 802.1s MSTP
	IEEE 802.1Q for VLAN Tagging
	IEEE 802.1X for Authentication
	IEEE 802.3ad for Port Trunk with LACP
	IEEE802.3x Flow Control and Back Pressure
	ITU-T G.8032/ Y.1344 EPR (Ethernet Protection Ring)
	IEEE 802.1ad Stacked VLANs, Q-in-Q
	IEEE 802.1p LAN Layer 2 QoS/CoS Protocol for Traffic Prioritization
IEEE 802.1ab Link Layer Discovery Protocol (LLDP)	
IEEE 802.3az EEE (Energy Efficient Ethernet)	
VLAN ID	4096
IGMP Group	256
Switch Architecture	Back-plane (Switching Fabric): 7.6Gbps
Data Processing	Store and Forward
Flow Control	IEEE 802.3x flow control, back pressure flow control
Jumbo Frame	9.6KB
MAC Address Table	8K

Network Connector	8x RJ-45 10/100Base-TX auto negotiation speed Auto MDI/MDI-X function, Full/Half duplex 3x 100/1000Base-X dual speed mode SFP slot, with DDMI
Console	RS-232 (RJ-45)
Network Cable	UTP/STP above Cat. 5e cable EIA/TIA-568 100-ohm (100m)
Protocols	CSMA/CD
LED	Per unit: Power 1 (Green), Power 2 (Green), Fault (Amber), CPU Act (Green) ,Ring Master (Yellow) Per RJ-45 port: Link/Active (Green) SFP Fiber Per port: Link/Active (Green)
Reverse Polarity Protection	Present for Power Input
Overload Current Protection	Present
CPU Watch Dog	Present
Power Input	IPS-803GSM-DD : Redundant Isolated DC $\pm 24/48$ V ($\pm 18\sim 72$ VDC) Input power (Removable Terminal Block) IPS-803GSM-AD : Redundant 1x Low Voltage Isolated DC and 1x High Voltage AC/DC DC: Isolated $\pm 24/48$ V ($\pm 18\sim 72$ VDC) Input power (Removable Terminal Block) AC: 88VAC~264VAC / DC: 85VDC~300VDC
Alarm Relay Contact	Relay outputs with current carrying capacity of 1 A @24VDC
Removable Terminal Block	Provide 2 Redundant power ,Alarm relay contact, 6 Pin
Operating Temperature	$-40^{\circ}\text{C}\sim 85^{\circ}\text{C}$

Specifications & design are subject to change without prior notice. Please visit CTC Union website for more details.

Operating Humidity	5% to 95% (Non-condensing)
Storage Temperature	-40°C~85°C
Housing	Rugged Metal, IP30 Protection
Installation Mounting	DIN Rail mounting or wall mounting
EMC/EMS	CE, FCC
EMI	FCC Part 15 Subpart B Class A, EN 55022 Class A

EMS	EN61000-4-2 (ESD) Level 4, Criteria B EN61000-4-3 (RS) Level 3, Criteria A EN61000-4-4 (EFT) Level 4, Criteria A EN61000-4-5 (Surge) Level 4, Criteria B EN61000-4-6 (CS) Level 4, Criteria A EN61000-4-8 (Magnetic Field) Level 5, Criteria A
Safety	UL60950-1 (Pending)
Power substation	IEC 61850-3, IEEE 1613
Shock	IEC 60068-2-27
Freefall	IEC 60068-2-32
Vibration	IEC 60068-2-6
MTBF	TBD (Above 30 years)
Warranty	5 years

Software Specifications

Topology	
VLAN	IEEE 802.1q VLAN, up to 4095 ID IEEE 802.1q VLAN, up to 4095 Groups IEEE 802.1ad Q-in-Q Port Based VLAN MAC-based VLAN, up to 256 entries IP Subnet-based VLAN, up to 128 entries Protocol-based VLAN (Ethernt, SNAP, LLC), up to 128 entries VLAN Translation, up to 256 entries MVR (Multiple VLAN Registration)
Link Aggregation (Port Trunk)	Static (Hash with SA, DA, IP, TCP/UDP port), up to 5 trunk group Dynamic (IEEE 802.3ad LACP), up to 5 trunk group
Spanning Tree	IEEE802.1d STP IEEE802.1w RSTP IEEE802.1s MSTP
Loop Protection u-Ring	Present Easy set for Ethernet Protection Ring Recovery time <20ms Maximum 250 Node
ITU-T G.8032 / Y.1344 ERPS (Ethernet Ring Protection)	Convergence time <50ms Single Ring, Sub-Ring, Multiple ring topology network
QoS Feature	
Class of Service	IEEE802.1p 8 active priorities queues for per port
Traffic Classification QoS	IEEE802.1p based CoS IP Precedence based CoS IP DSCP based CoS QCL(QoS Control List): MAC Access control list (Source/Destination MAC, Ether type, Priority ID/VLAN ID) QCL: IP extended access control list (Source/Destination IP, Protocol, TCP/UDP port number)
Bandwidth Control for Ingress	Rate in steps : 100 kbps / 1fps / 100fps Range : 100 kbps to 1Gbps / 1fps to 3300kfps Rate Unit : bit or frame
Bandwidth Control for Egress	Rate in steps : 100 kbps / 1fps / 100fps Range : 100 kbps to 1Gbps / 1fps to 3300kfps Rate Unit : bit or frame Per queue shaper
DiffServ (RF 2474) Remarking	
Storm Control	for Unicast, Broadcast, Multicast
IP Multicasting Feature	
IGMP / MLD Snooping	IGMP Snooping v1, v2, v3 / MLD Snooping v1, v2 Port Filtering Profile Throttling Fast Leave Query

Security Features	
IEEE 802.1X	Port-Based MAC-Based
ACL	Number of rules : up to 256 entries for L2 / L3 / L4
RADIUS authentication & accounting	
TACACS+ authentication & accounting, TACACS+ 3.0	
HTTPS, HTTP	
SSL / SSH v2	
User Name	Local Authentication
Password Authentication	Remote Authentication (via RADIUS / TACACS+)
Management Interface Access	Web, Telnet / SSH
Filtering	
Management Features	
CLI	
Web Based Management	
Telnet	Server
SNMP	V1, V2c, V3
SW & Configuration Upgrade	TFTP, HTTP Redundant firmware in case of upgrade failure
RMON	RMON I (1, 2, 3, 9 group), RMON II
MIB II	RFC 1213
DHCP	Client Relay Snooping Snooping option 82 Relay option 82
IP Source Guard	
Port Mirroring	
Event Syslog	Syslog server (RFC3164) (Support 1 server)
Warning Message	System syslog, e-mail, alarm relay
DNS	Client, Proxy
NTP /SNTP	
LLDP (IEEE 802.1ab)	Link Layer Discovery Protocol LLDP-MED

Software Specifications

IPv6 Features	
IPv6 Management	Telnet Server/ICMP v6
Stateless Auto Configuration	
SNMP over IPv6	
HTTP over IPv6	
SSH over IPv6	
IPv6 Telnet Support	
IPv6 NTP / Sntp Support	
IPv6 TFTP Support	
IPv6 QoS	
IPv6 ACL	Number of rules: up to 256 entries L2 / L3 / L4

Others Features	
Green Ethernet	Supports IEEE802.3az EEE (Energy Efficient Ethernet) Management to optimize the power consumption Determine the cable length and lowering the power for ports with short cables Lower the power for a port when there is no link LED Power Management : Adjustment LEDs intensity
Cable Diagnostic	Measuring cable OK or broken point distance

Application

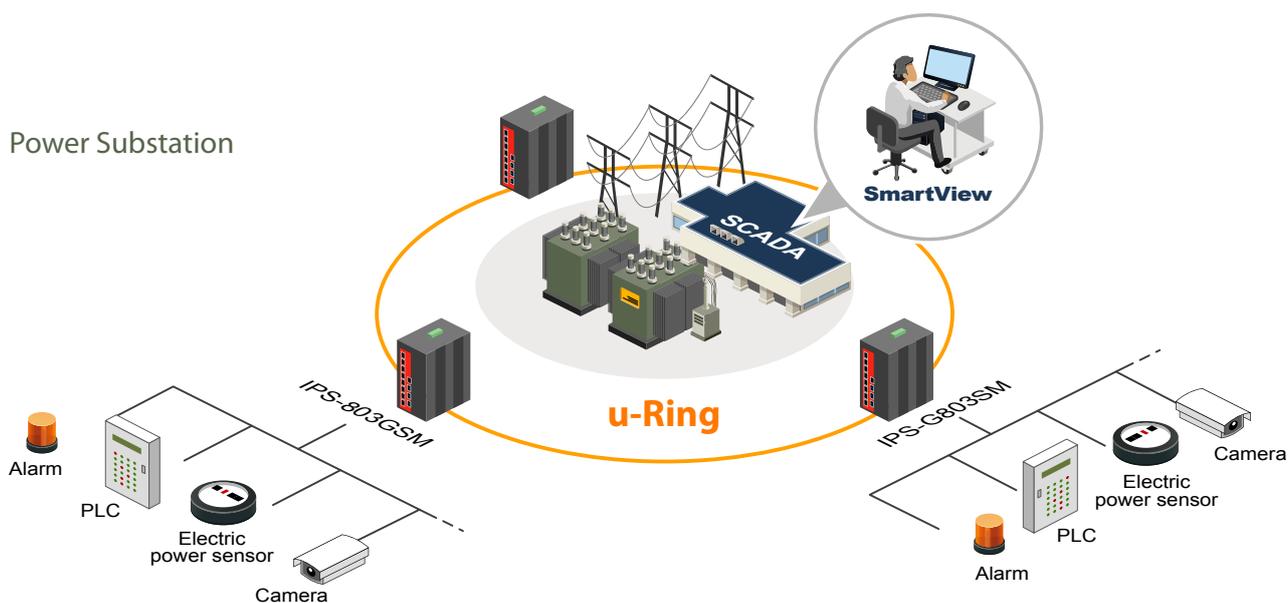


Figure : IPS Series in Power Substation Application

Ordering Information

Model Name	Description
IPS-803GSM-DD	IEC 61850-3 8x 10/100Base-TX+ 3x 100/1000Base-X SFP Ethernet Managed Switch (Dual isolated DC input)
IPS-803GSM-AD	IEC 61850-3 8x 10/100Base-TX+ 3x 100/1000Base-X SFP Ethernet Managed Switch (AC+isolated DC input)

Accessories

DR-4524	Industrial Power, Input 85 ~ 264VAC, Output 24VDC, 48W, -10 ~ +50°C
MDR-40-24	Industrial Power, Input 85 ~ 264VAC, Output 24VDC, 40W, -20 ~ +70°C
MDR-60-24	Industrial Power, Input 85 ~ 264VAC, Output 24VDC, 60W, -20 ~ +70°C
SFP Transceiver	Compatible, Reliable, 5-year Warranty

Power Type
IPS - 803GSM - □□
 Example: IPS - 803GSM - DD



ITP-500-67

EN50155 5x 10/100Base-TX IP67 Ethernet Switch

ITP-800-67

EN50155 8x 10/100Base-TX IP67 Ethernet Switch



The ITP-500-67 (ITP-800-67) Series non-managed Fast Ethernet switches provide 5(8)x 10/100Base-TX Fast Ethernet ports. This series of unmanaged Ethernet switches is designed for industrial applications in harsh environments. The ITP-500-67 (ITP-800-67) series switches Ethernet ports utilize M12 connectors to ensure tight, robust connections and guarantee reliable operation against environmental disturbances such as vibration and shock. The ITP-500-67 (ITP-800-67) series Ethernet switches are compliant with EN 50155, covering operating temperature, power input voltage, surge, ESD, vibration, and shock, thus making these switches suitable for industrial applications in vehicle, rolling stock and railways.

Features

- 8-Port 10/100Base-TX Ethernet Switch (ITP-800-E67, ITP-800-67)
- 5-Port 10/100Base-TX Ethernet Switch (ITP-500-E67, ITP-500-67)
- Use M12 connector anti vibration and shock for vehicle, rolling stock, and railway applications
- Supports flow control
- DIN rail or wall mounting installation
- Supports broadcast storm protection
- Supports auto-negotiation and auto-MDI/MDI-X
- Built in 2 bypass port (ITP-800-67, ITP-800-E67)
- Redundant dual DC input power 12/24/48VDC (8.4~60VDC)
- IP67 grade rugged housing for against water, dust, and oil
- Wide operating temperature -40~75°C (ITP-500-E67, ITP-800-E67)
- UL60950-1, CE, FCC, EN50155 and EN50121-4 for railway certified
- Industrial Grade EMS, EMI, EN61000-6-2, EN61000-6-4 certified

Specifications

IEEE Standard	IEEE 802.3 10Base-T Ethernet IEEE 802.3u 100Base-TX Fast Ethernet IEEE802.3x Flow Control and Back Pressure	Operating Temperature	-10°C~60°C (ITP-500-67, ITP-800-67) -40°C~75°C (ITP-500-E67, ITP-800-E67)
Switch Architecture	Back-plane (Switching Fabric): 1Gbps (ITP-500-67, ITP-500-E67) Back-plane (Switching Fabric): 1.6Gbps (ITP-800-67, ITP-800-E67)	Operating Humidity	5% to 95% (Non-condensing)
Data Processing	Store and Forward	Storage Temperature	-40°C~85°C
Flow Control	IEEE 802.3x flow control, back pressure flow control	Housing	IP67 grade rugged housing
Provides Broadcast Storm Protection	Present	Weight	TBD
MAC Address Table	1 K	Installation Mounting	DIN rail or wall mounting
Packet Buffer Size	448Kbits	EMC	CE
Network Connector	5x M12 D-code Female (ITP-500-67, ITP-500-E67) 8x M12 D-code Female (ITP-800-67, ITP-800-E67) 10/100Base-TX auto negotiation speed Auto MDI/MDI-X function Full/Half duplex Built in 2 bypass port (ITP-800-67, ITP-800-E67)	EMI	FCC, FCC Part 15 Subpart B Class A CE EN 55022 Class A
Network Cable	10Base-T: 2-pair UTP/STP Cat. 5e cable EIA/TIA-568 100-ohm (100m) 100Base-TX: 2-pair UTP/STP Cat. 5e cable EIA/TIA-568 100-ohm (100m)	Railway Traffic Immunity for Heavy Industrial Environment	EN50155, EN50121-4 EN61000-6-2
Protocols	CSMA/CD	Emission for Heavy Industrial Environment	EN61000-6-4
LED	Per unit: Power 1 (Green), Power 2 (Green) (ITP-800-67, ITP-800-E67) Per unit: Power (Green) (ITP-500-67, ITP-500-E67) Per port: Link/Active (Green)	EMS (Electromagnetic Susceptibility) Protection Level	EN61000-4-2 (ESD) Level 3, Criteria B EN61000-4-3 (RS) Level 3, Criteria A EN61000-4-4 (Burst) Level 3, Criteria B EN61000-4-5 (Surge) Level 3, Criteria B EN61000-4-6 (CS) Level 3, Criteria A EN61000-4-8 (PFMF, Magnetic Field) Field Strength: 300A/m, Criteria A EN 61000-4-11 Voltage Dips EN 61000-4-12
Reverse Polarity Protection	Present for power input	Safety Shock	UL60950-1 (Pending) IEC 61373
Overload Current Protection	Present	Freefall	IEC 60068-2-32
Power Supply	Redundant Dual DC 12/24/48V (8.4~60VDC) Input power (ITP-800-67, ITP-800-E67) DC 12/24/48V (8.4~60VDC) Input power (ITP-500-67, ITP-500-E67)	Vibration	IEC 61373
Power	5 Pin Male A-Code M12	Dimension (HxWxD)	206x30x30mm (ITP-500-67) 191x65x23.2mm (ITP-800-67)
		MTBF	TBD (MIL-HDBK-217)
		Warranty	5 years

Specifications & design are subject to change without prior notice. Please visit CTC Union website for more details.

Application

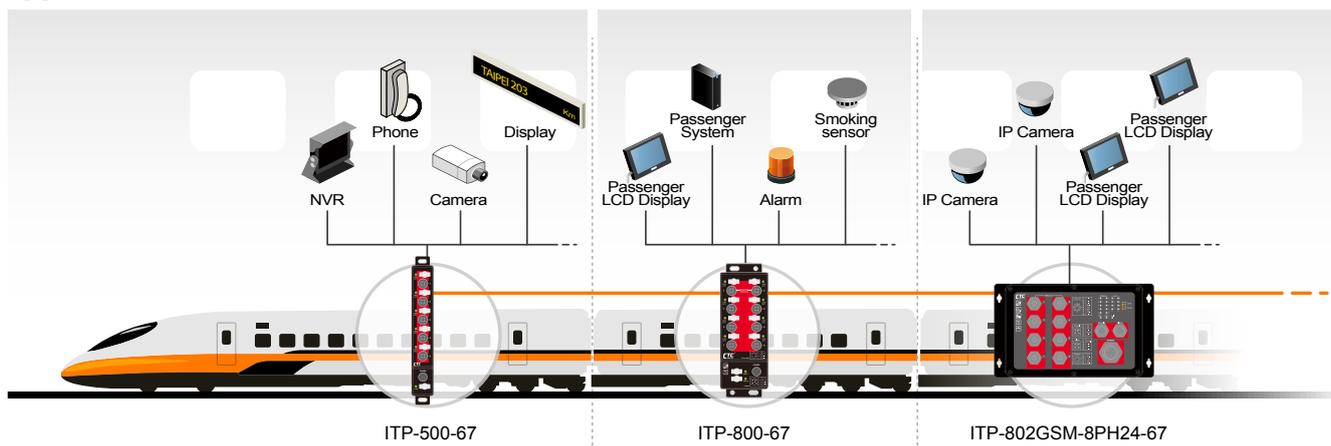


Figure 1 : ITP Series in Railway Application



Figure 2 : IP67 Protection

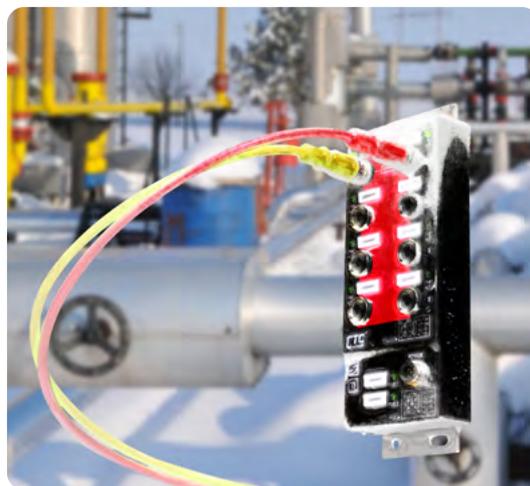


Figure 3 : Wide Range Temperature



Figure 4 : ITP Series for Industrial Automation



Figure 5 : Slim and Compact Size

Ordering Information

Model Name	Description
ITP-500-67	EN50155 5x10/100Base-TX IP67 Ethernet Switch, -10°C~60°C
ITP-500-E67	EN50155 5x10/100Base-TX IP67 Ethernet Switch, -40°C~75°C
ITP-800-67	EN50155 8x10/100Base-TX IP67 Ethernet Switch, -10°C~60°C
ITP-800-E67	EN50155 8x10/100Base-TX IP67 Ethernet Switch, -40°C~75°C

Accessories

DR-4524	Industrial Power, Input 85 ~ 264VAC, Output 24VDC, 48W, -10 ~ +50°C
MDR-40-24	Industrial Power, Input 85 ~ 264VAC, Output 24VDC, 40W, -20 ~ +70°C

Port Number Temperature
ITP - [] 00 - [] 67
 Example: ITP - 500 - E67