


Access Transmission



Multi-Service Access Solutions
Mobile Fronthaul & Backhaul for 4G LTE
10G Ethernet for Data Center Solution
Carrier Ethernet (NID & EDD)
CWDM & DWDM



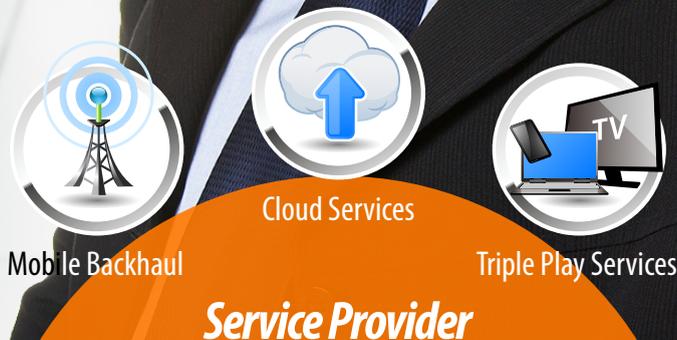

CH20 / CH08 / CH04A

In-Band Managed Multi-Service Platform

Revised - 03. 2015



The FRM220 series is a multi-service chassis platform, which provides a reliable solution of high density media converter modules for applications such as telecom operator, enterprise, long haul transmission and factory automation. All of critical components of FRM220-CH20 and FRM220-CH08 chassis such as power modules, fans, management module and interface cards are hot swappable, allowing online field replacement. FRM220-CH04A is a fixed type AC, DC power built-in chassis. The available power options are built-in AC, DC power or built-in AC+DC, AC+AC, DC+DC redundant power.

FRM220 series is offered in three chassis densities, a 2U 20-slot (FRM220-CH20), a 1U 8-slot (FRM220-CH08), and a 1U 4-slot (FRM220-CH04A)


Features

- Supports AC/DC power module hot swappable and power redundancy (CH20 & CH08)
- Supports fixed type AC/DC power built-in and power redundancy (CH04A)
- Two alarm relays contact for critical events warning
- Interface cards are hot swappable
- Chassis backplane consists of passive components

Specifications

Connectors	Console: RS232 (DB9)	
	LAN 10/100Base-TX RJ45	
Physical Specifications	Dimensions (D x W x H)	303 x 438 x 88 mm (CH20)
		310 x 440 x 44 mm (CH08)
		170 x 310 x 44.7 mm (CH04A)
	Weight (w/o Power)	5.2kg (CH20)
	3.5kg (CH08)	
	TBD (CH04A)	
Temperatures	Operating 0~60°C, Storage -10~70°C	
Power	AC	100~240VAC (CH20/CH08)
	DC24	18~36VDC (CH20/CH08)
	DC48	36~75VDC (CH20/CH08)
	AC	100~240V (CH04A)
	DC	18~75VDC (CH04A)
Humidity	5%~90% non-condensing	
MTBF	65,000 hrs	
Certification	FCC Class A, VCCI Class A, CE, RoHS compliant	
Safety	UL 60950-1 (FRM220-CH20)	

Solutions

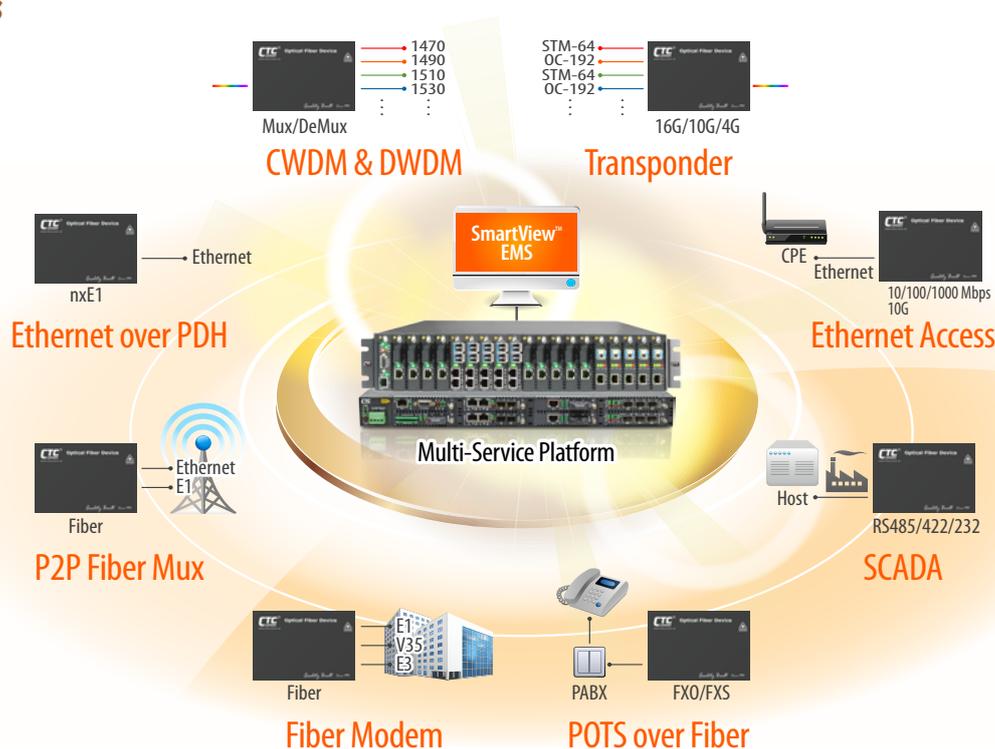

Main Features

• Module Cards for Deployment Scenarios

The FRM220-CH20, FRM220-CH08 and FRM220-CH04A have been designed as a Multi-service platform. This allows network administrators to deploy the chassis in a wide range of networks.


Technologies supported by the chassis include Fast/Gigabit Ethernet, E1/T1, V35/X21/RS-530, Serial RS-485/RS-422, Voice FXO/FXS, Repeater, Fiber Multiplexer, E1 Inverse Multiplexer, CWDM Mux/DeMUX and 10G/16G 3R Transponder

• Network Management


The FRM220-CH20, FRM220-CH08 and FRM220-CH04A require a NMC (Network Management Controller FRM220-NMC page: 2-4) card which must be installed into the first slot of chassis. The NMC card allows a network administrator the ability to configure and monitor the status of the blades. Management can be achieved locally over RS232, or over the network by Telnet, Web or SNMP. If the blades support Ethernet in the First Mile (IEEE 802.3ah), then the management module can also be monitored the status of a remote CPE.

Chassis Overview

• FRM220-CH20 (2U 19" 20 Slots)

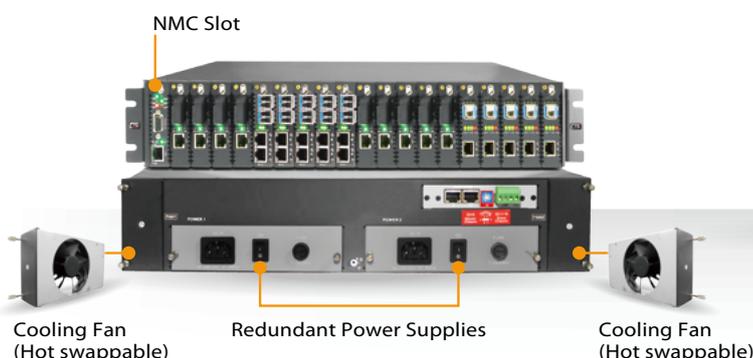

• FRM220-CH08 (1U 19" 8 Slots)

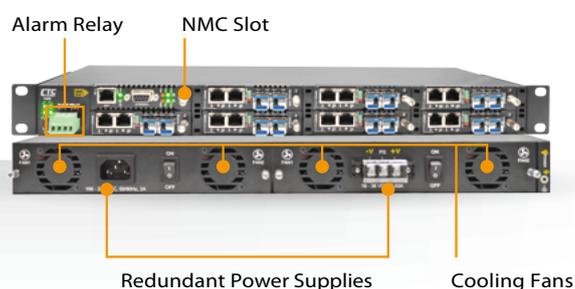

• FRM220-CH04A (1U 4 Slots)



Ordering Information

Model Name	Type	Description
FRM220-CH20	Chassis	2U 20-Slot rack mount chassis with 20 line card blank plate
CH20-AC	Power	Chassis power module 100 ~ 240 VAC, IEC connector
CH20-DC24	Power	Chassis power module 18 ~ 36 VDC, 3 pin terminal block, 200W
CH20-DC48	Power	Chassis power module 36 ~ 72 VDC, 3 pin terminal block, 200W
FRM220-CH08	Chassis	1U 8 slots rack mount chassis with 8 line card blank plate, 200W
CH08-AC	Power	Chassis power module 100 ~ 240 VAC, IEC connector, 120W
CH08-DC24	Power	Chassis power module 18 ~ 36 VDC, 3 pin terminal block, 200W
CH08-DC48	Power	Chassis power module 36 ~ 72 VDC, 3 pin terminal block, 200W
CH08-AC-L	Power	Chassis power module 100 ~ 240 VAC, IEC connector, 65W
CH08-DC24-L	Power	Chassis power module 18 ~ 36 VDC, 3 pin terminal block, 65W
CH08-DC48-L	Power	Chassis power module 36 ~ 72 VDC, 3 pin terminal block, 65W
CH04A-AC	Power	Four slot chassis with built-in AC power, 65W
CH04A-DC	Power	Four slot chassis with built-in DC power, 50W
CH04A-AD	Power	Four slot chassis with built-in AC+DC power (65W/50W)

Chassis
FRM220 -
 Example: FRM220 – CH20



FRM220-NMC


Network Management Controller

The FRM220-NMC is a Network Management Controller card that can be placed in a compatible FRM220 series chassis to provide network management functions. The management interface supports a local RS-232 serial console or remote TCP/IP management by Telnet, HTTP and SNMP protocols. The card is designed to be hot swapped so that it may be field replaced without affecting any online service of any other rack cards. The card also supports online firmware upgrade from TFTP server, using any user interface, without affecting any other inserted line card's transmissions. Support for any standard NMS is provided by the included enterprise MIB file. CTC Union also provides and maintains their own EMS (Element Management System) which is a Java based client/server manager for monitoring and maintaining a large number of network elements over a long period of time.

Features

NMC provides central management for FRM220-CH20, FRM220-CH08, FRM220-CH04A and CH02-NMC

- User interfaces for serial console, Telnet & Web
- Configure, monitor and provide fault management for all installed line cards
- Monitor power and fan status in chassis
- Provides upgrade feature for most line card types
- SNMP agent for complete management by enterprise software
- Running System log with time stamping for SNTP (time server)
- Parameter management for quick configuration, configuration copy/backup/restore
- Card alias and inventory by type and serial number
- Linux Kernel based for high stability and reliability

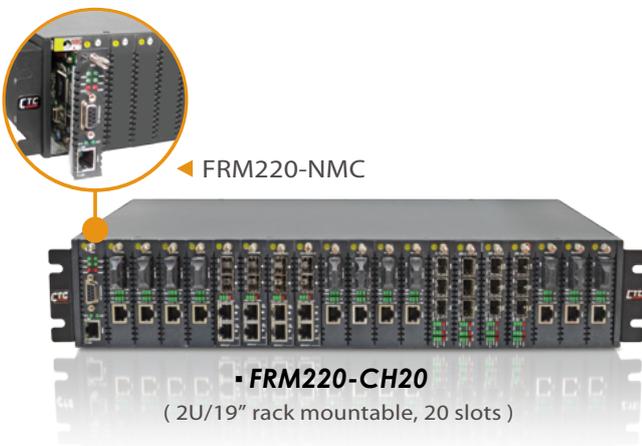

Web GUI

The local area screen (Figure 1) is also the home page for the Web management of the NMC. An overview of all installed network interface cards (NIC) is shown with real-time status of LEDs. To enter the configuration screen for a NIC, simply click on the card.



Figure 1

The SNMP+CHASSIS screen (Figure 2) gives a quick overview of the power and fan status in the chassis. This page is also used to assign the alarm conditions for the two programmable alarms. These alarms activate the electrical relays, display messages in the system log and can generate SNMP traps when a trap receiver is configured.

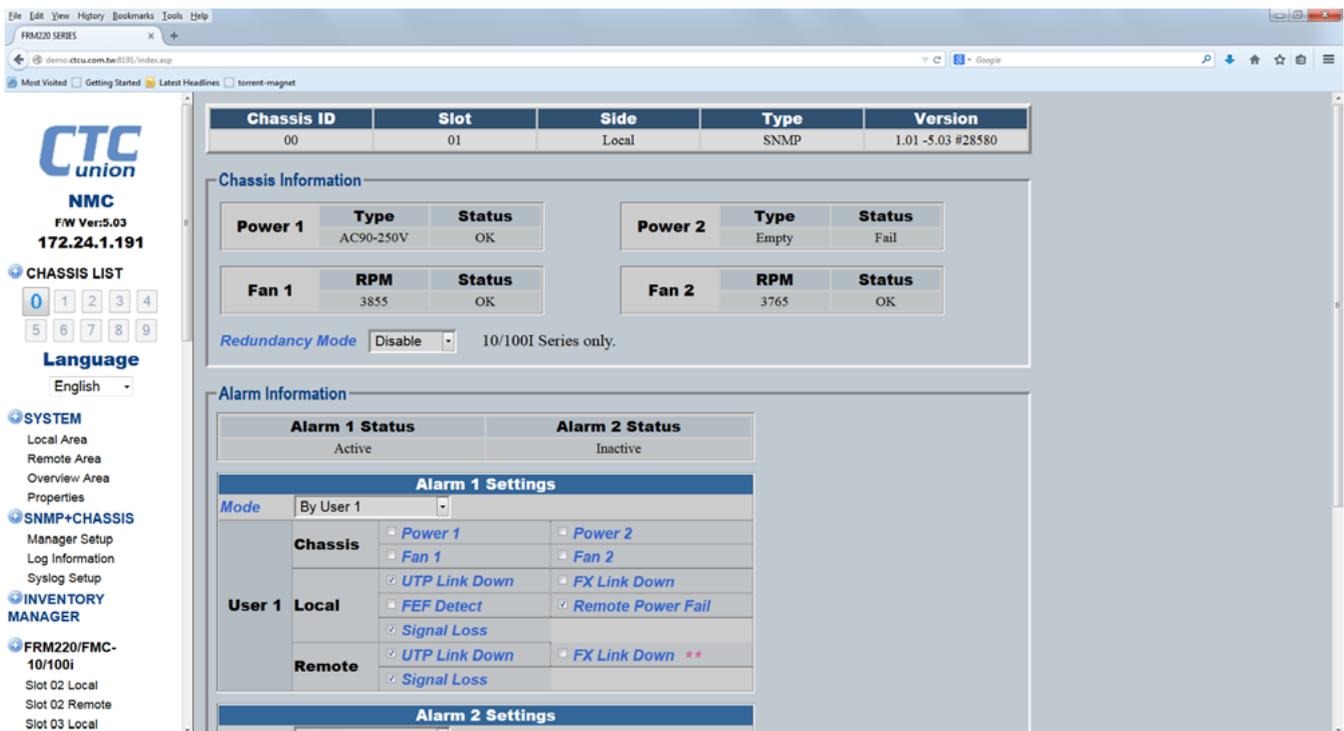


Figure 2

The system setting screen (Figure 3) has the functions for NMC upgrade, line card upgrade, system time and card parameter management.

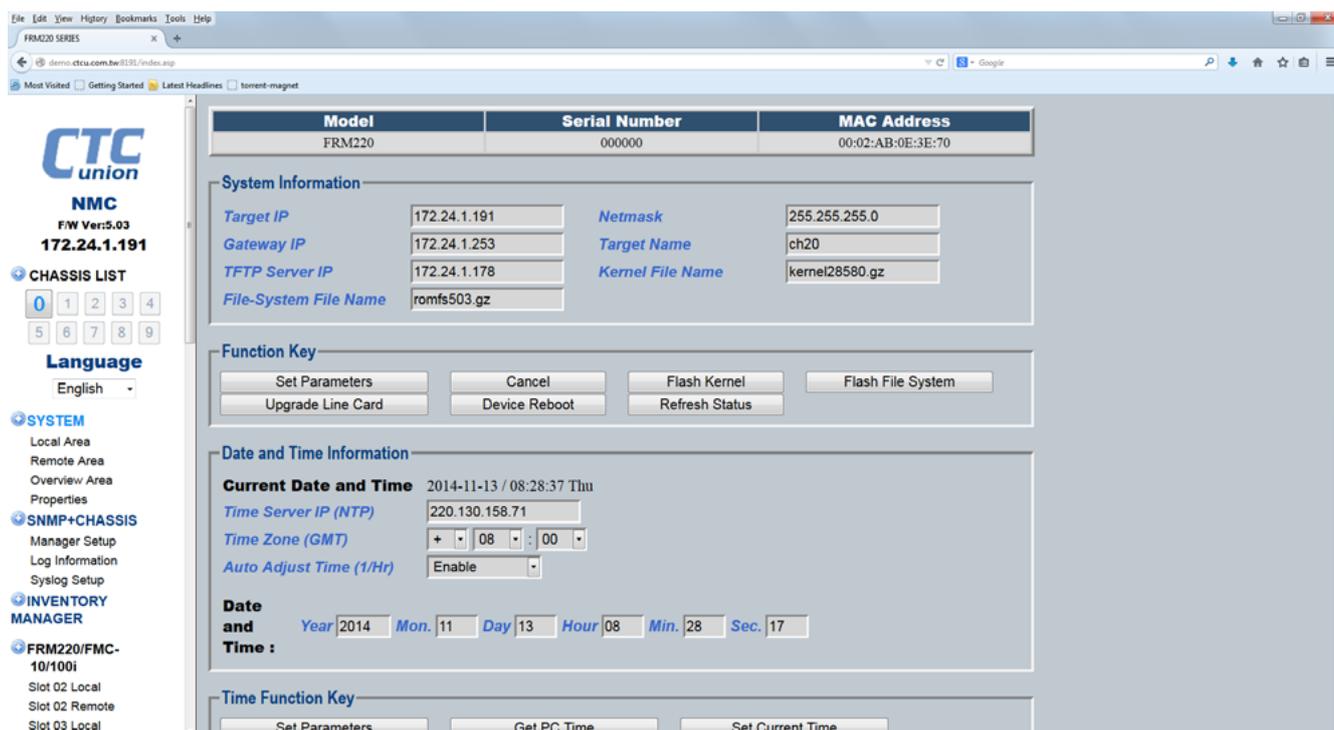


Figure 3

The management (Figure 4) can call up each line card to view detailed status and to make configuration changes to the card. By using a Web GUI, the settings can be made with simple mouse point and click actions.

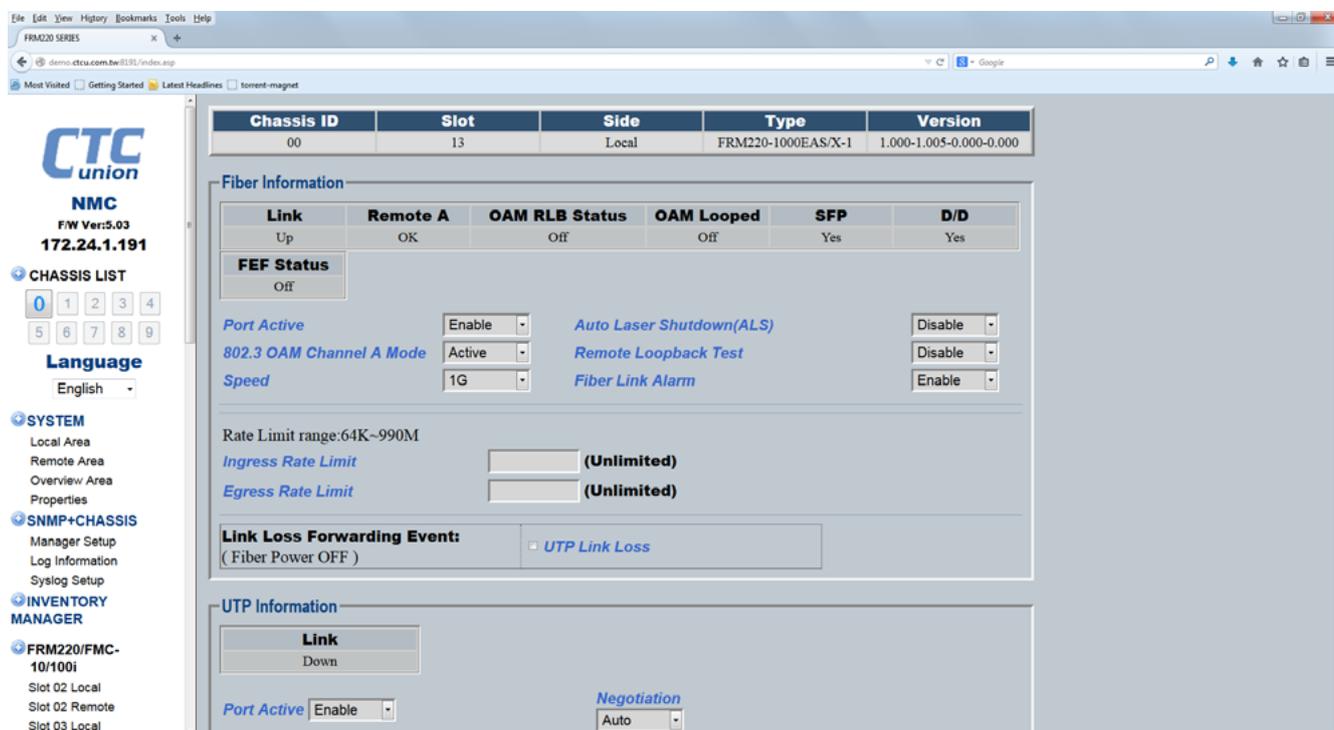


Figure 4

Ordering Information

Model Name	Type	Description
FRM220-NMC	Card	Network Management Controller card, support web, telnet, console, SNMP functions



FRM220A-CH20 Ethernet Aggregation Platform

The FRM220A series is a IP based Ethernet aggregation platform, which incorporates a 24+4 port L2 Gigabit Ethernet switch (FRM220A-GSW/SNMP). The FRM220A has a built-in Gigabit Ethernet backplane to interconnect the Ethernet access and E1 TDM based inverse multiplexer module cards with the FRM220-GSW/SNMP card. The L2 switch card supports many advanced Layer 2 switch technologies including port and tag based VLAN, QoS, LACP, RSTP to name just a few. The FRM220A chassis solution significantly lowers the OPEX for operator and service provider when deploying fiber access networks.

The product lists designed to be adequately to the FRM220A-CH20 Ethernet aggregation application such as Ethernet access and Ethernet over PDH are included


- FRM220A-1000EAS/X : 2x 10/100/1000Base-T + 2x1000Base-X OAM/IP Managed Switch
- FRM220A-1002ES : 2x 10/100/1000Base-T + 2x100/1000Base-X Managed Switch
- FRM220A-iMux Series : E1 inverse multiplexer module card
- FRM220A-FSW103 : 3x 10/100Base-TX + 100Base-FX Managed Switch
- FRM220A-Eoel/G & FRM220-Eoe1 : Ethernet Bridge over E1 & Ethernet Bridge over E1(GFP)

Specifications

Physical Specifications	Dimensions	303 x 438 x 88 mm (D x W x H)
	Weight (w/o Power)	5.2kg
Power	AC	18~240VAC
	DC24	18~36VDC
	DC48	36~72VDC

Temperatures	Operating	0~60°C
	Storage	-10~70°C
Humidity		5%~90% non-condensing
MTBF		65,000 hrs
Certification		FCC Class A, VCCI Class A, CE, RoHS compliant


Chassis Overview

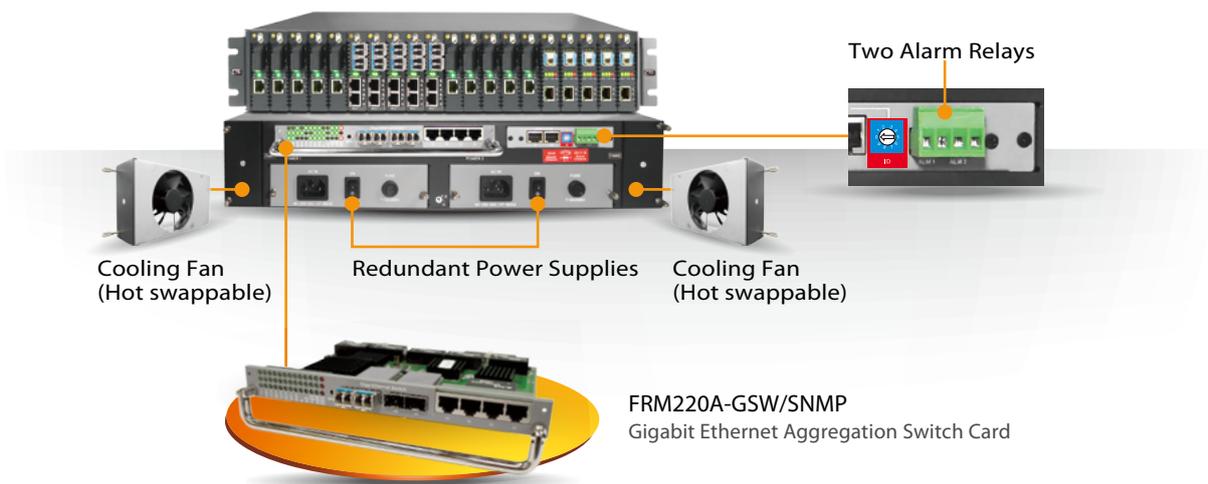

Benefits of FRM220A Chassis Platform

■ Enabling IP Transportation Protection Mechanism

- STP/RSTP Featured Ring Protection

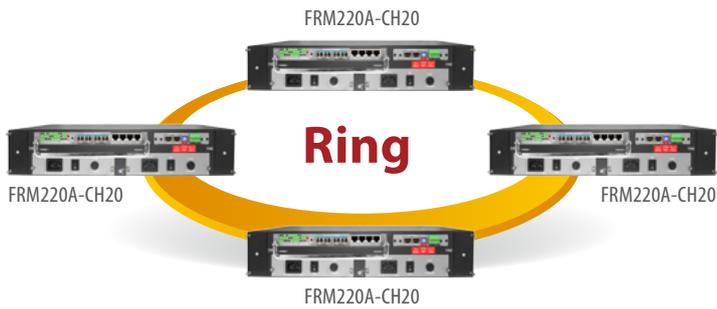


- Standard based but advanced fault protection systems
- Rapidly recovery path from failed connection (1-2 seconds min. recovery time)


■ LACP Enabled Traffic Aggregation

- Fiber Redundant / Trunking Application

- Dynamically port aggregation or trunking to increase bandwidth between LACP peer devices
- Redundant paths to reduce network fault risk

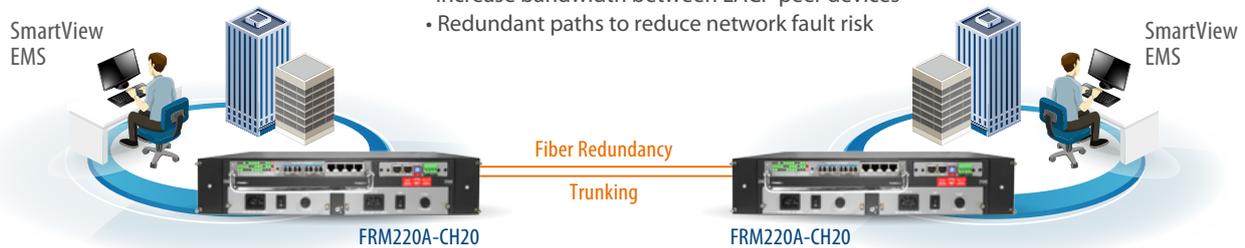


■ Enabling VLAN & QoS Prioritized Multiple Play Services

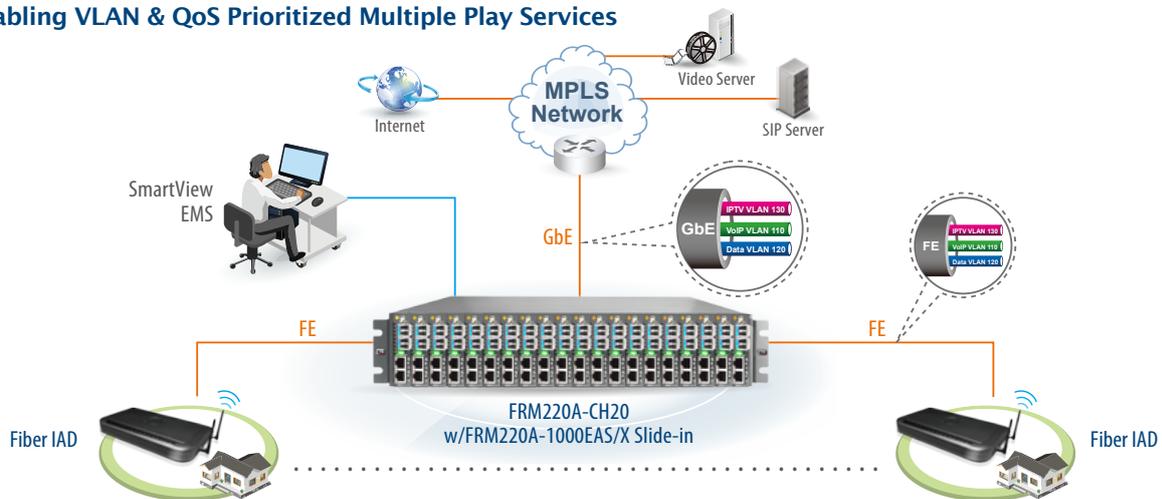

■ Secured Access Control Enhancement

- Centralized Management of Accessing the Network for user or device

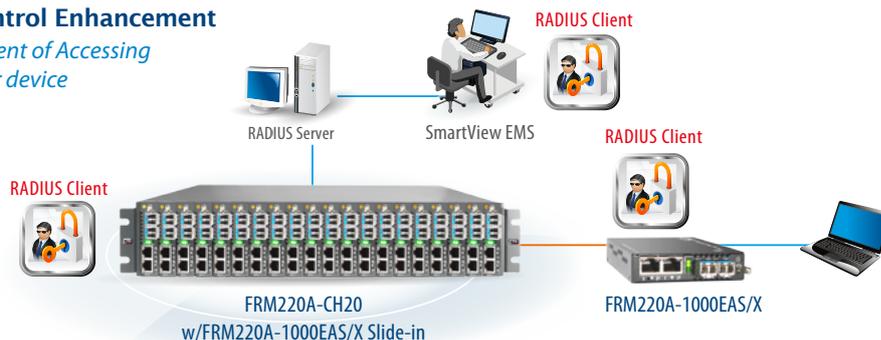



FRM220A-GSW/SNMP

Gigabit Ethernet Aggregate Switch Card

2

Ethernet Aggregate
Switch Card

The FRM220A incorporates a 24+4 Gigabit Ethernet Switch. Twenty ports supply each slot of the 2U 20-slot chassis with an electrical gigabit Ethernet uplink with the remaining four electrical gigabit ports accessible via the rear of the chassis. The additional four ports are provided by SFP sockets. All eight Gigabit ports (4+4) are usable without restrictions for uplink aggregate to the Ethernet Metropolitan Area Network (E-MAN). The FRM220A-GSW/SNMP card transmits Ethernet between the subscriber equipment (bridge/ modem or network interface card) and the E-MAN. The card provides a user-networking interface with Ethernet packets. This card is capable of providing high bandwidth for assembling Ethernet traffic. The FRM220A-GSW/SNMP card is not only the system aggregate/trunk module, but also the system's control module, providing OAM Management functions.

Features

- Provides chassis aggregation via 4x1000Base-X SFP uplink slots (FRM220A-GSW/SNMP)
- Fiber optical ports supports ring or chain topology
- Built-in gigabit Ethernet interface to link with each slot of FRM220A chassis
- Provides Web, Telnet, SNMP management interface
- Supports IEEE802.1D/802.1w/802.1s for ring protection on the trunk interfaces
- Supports IEEE 802.1Q tagged VLAN and IEEE 802.1ad Q-in-Q application

Specifications

Trunk Interface	4x10/100/1000Base-T plus 4x1000Base-X/2500Base-X GbE switch trunk card (FRM220-GSW/SNMP) Supports full-duplex mode for 1000Mbps (FRM220A-GSW/SNMP)
Capacity	Supports up to 20 service cards
Temperature	0~60°C (Operating), -10~70°C (Storage)
Humidity	5~90% non-condensing
Certification	CE, FCC, RoHS compliant

Physical Specifications	In-band management	Provides all system OAM functions: software updates, and management system interaction through Ethernet trunk port
	Out-band management	Supports Web, Telnet and SNMP, EMS management
Indications	PWR, FAN, Alarm, STK	
Dimensions	142 x 200 x 26 mm (D x W x H)	
Weight	0.5kg	
MTBF	65,000 hrs	

Ordering Information

Model Name	Type	Description
FRM220A-CH20	Chassis	2U 20-Slot rack mount chassis with 20 line card blank plate
FRM220A-GSW/SNMP	Card	Gigabit Ethernet Aggregate switch card supports web, telnet, SNMP management interface
FRM220A-AC	Power	Chassis power module 100 ~ 240VAC, IEC connector
FRM220A-DC24	Power	Chassis power module 18 ~ 36VDC, 3 pin terminal block
FRM220A-DC48	Power	Chassis power module 36 ~ 72VDC, 3 pin terminal block


FRM220A – ^{Chassis} □□□□
Example: FRM220A – CH20

FRM220A – ^{Card} □□□□ / □□□□
Example: FRM220A – GSW/SNMP

Standalone Chassis for FRM220 Series

The FRM220 product line includes various metal chassis sizes, which can hold from one to twenty FRM220 slide-in modules. The FRM220-CH01 is one slot chassis, which can be installed with one single width blade card for stand-alone applications. The available power options are external AC adapter, built-in AC, DC power or built-in AC+DC, AC+AC, DC+DC redundant power. The FRM220-CH01M is one slot chassis with DB9 console port for local management on supported cards, which can be installed with one single width blade card for stand-alone applications. The available power options are built-in AC, DC or built-in AC+DC redundant power. The FRM220-CH02 is a two slot chassis, which can be installed with one double width blade card for stand-alone applications. The only available power supply option is an external AC adapter. The FRM220-CH02M is a two slot chassis with DB9 console port for local management, which can be installed with either one or two single width blade cards or one double width blade card. The available power supplies are built-in AC, DC or AC+DC redundant power. The FRM220-CH02/NMC is a two slot chassis, the chassis can be SNMP managed when installing one FRM220-NMC card for Web, Telnet, Console, SNMP management, and the available power options are built-in AC, DC or AC+DC redundant power. The FRM220-CH02/NMC should always be used with an NMC card for management and one single width blade card.

Power Build-in Type

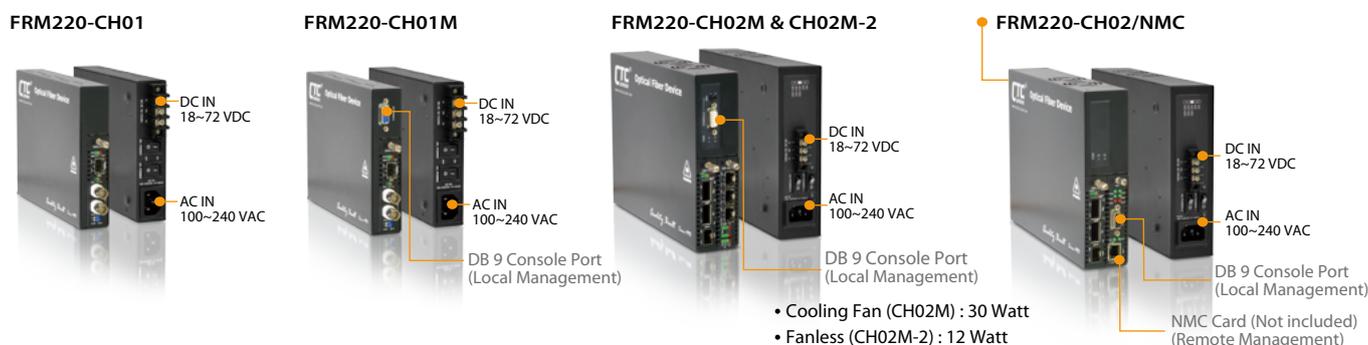

AC Adapter Type



Features

- Fanless (CH01, CH01M, CH02, CH02M-2)
- Cooling Fan (CH02M, CH02/NMC)
- Supports DB9 console port for local management (CH01M, CH02M, CH02M-2)
- Telnet, Web, Console, SNMP management via NMC Card (not included)(CH02/NMC)

Power Type:

- External Power: DC12
- Internal Power: AC, DC, AD, AA or DD redundant power (option)

Specifications

Power Input (Option)	External Adapter	Input Voltage 100~240VAC 50/60Hz
		Output Voltage 120VDC 1A
	Internal Power	AC: 100~240VAC
		DC: 18~72VDC
Weight	0.5~0.8kg (CH01) , 0.9kg (CH01M) 0.8kg (CH02) , 1.3kg (CH02M) , 1.2kg (CH02M-2) , 1kg (CH02/NMC)	

Dimensions (D x W x H)	External Adapter	160x 88x 24mm (CH01)
		139x 88x 44mm (CH02)
	Internal Power	180x 135x 35mm (CH01)
		201x 135x 35mm (CH01M)
		220x 168x 45mm (CH02M, CH02M-2, CH02/NMC)

FRM220 Standalone Selection Table

Model Name	Slot	NMC Card Slot	Console Port	Adapter Type		Power Built-In Type		Cooling Fan	Fan-less	Power Module
				100~240VAC to 12VDC	100~240VAC	18~72VDC	Dual Power 100~240VAC & 18~72VDC			
CH01	1			✓					✓	12W
CH01-AC	1				✓				✓	12W
CH01-DC	1					✓			✓	12W
CH01-AD	1						✓		✓	12W/12W
CH01M-AC	1		✓		✓				✓	12W
CH01M-DC	1		✓			✓			✓	12W
CH01M-AD	1		✓				✓		✓	12W/12W
CH02	2			✓					✓	30W
CH02M-AC	2		✓		✓			✓		30W
CH02M-DC	2		✓			✓		✓		30W
CH02M-AD	2		✓				✓	✓		30W/30W
CH02M-2-AC	2		✓		✓				✓	12W
CH02M-2-DC	2		✓			✓			✓	12W
CH02M-2-AD	2		✓				✓		✓	12W/12W
CH02/NMC-AC	2	✓			✓			✓		30W
CH02/NMC-DC	2	✓				✓		✓		30W
CH02/NMC-AD	2	✓					✓	✓		30W/30W
CH04A-AC	4	✓			✓			✓		65W
CH04A-DC	4	✓				✓		✓		50W
CH04A-AD	4	✓					✓	✓		65W/50W

How to order

- DIP Switch Configuration Order: CH01 and CH02
- Local Console Management Order: CH01M, CH02M and CH02M-2. "M" means the chassis with Console Management.
- Remote Web / SNMP Management Order: CH02 / NMC, CH04A
- Power Type: AD = AC + DC Power

Note: NMC card not included in CH02/NMC & CH04A chassis, it must purchase separately

FRM220 - □□□□ - □□

Example: FRM220 - CH01-AD

FRM220 - CH02/NMC - □□^{Power Type}

Example: FRM220 - CH02/NMC-AD

Slide-in Card vs Standalone Chassis Compatible Table

Card Name	Product Name	Page	FRM220 -CH20	FRM220A -CH20	CH08	CH04A	CH02/ NMC
FRM220-NMC	Network Management Controller	2-3	✓		✓	✓	✓
FRM220A-GSW/SNMP	Gigabit Ethernet Aggregate Switch Card	2-8		✓			
FRM220-16G-3R	16G Multi Rate Transponder (3R)	2-13	✓		✓	✓	✓
FRM220-10G-SXX	10G 3R Transponder SFP+ to XFP Fiber Protection	2-14	✓		✓	✓	✓
FRM220-10G-SS	10G 3R Transponder SFP+ to SFP+	2-15	✓		✓	✓	✓
FRM220-4G-3S	4G Multi-Rate 2R Transponder SFP to SFP Fiber Protection	2-16	✓		✓	✓	✓
FRM220-2.7G-3S	2.7G Multi-Rate 3R Transponder SFP to SFP Fiber Protection	2-17	✓		✓	✓	✓
FRM220-1000DS	1000Base-X to 1000Base-X SFP media converter	2-18	✓		✓	✓	✓
FRM220-10GC-TS	10G Ethernet Converter 10G Base-T to SFP+	2-19	✓		✓	✓	✓
FRM220-10GC-TX	10G Ethernet Converter 10G Base-T to XFP	2-20	✓		✓	✓	✓
FRM220-DWDM	4 and 8-ch DWDM Mux/DeMux	2-21	✓		✓	✓	
FRM220-CWDM	4 and 8-ch CWDM Mux/DeMux	2-23	✓		✓	✓	
FRM220-OADM	Optical Add-Drop Multiplexer	2-25	✓		✓	✓	✓
FRM220-Protection	1+1 Fiber Optical Protection Switch	2-27	✓		✓	✓	✓
FRM220A-1002ES	2x 10/100/1000Base-T + 2x 100/1000Base-X SFP GbE Switch	2-28	✓	✓	✓	✓	✓
FRM220A-FSW103	3x10/100Base-TX + 1x100Base-FX SFP Switch	2-29	✓	✓	✓	✓	✓
FRM220A-1000EAS/X	2-Port 10/100/1000Base-T + 2-Port 1000Base-X OAM/IP Managed Switch	2-30	✓	✓	✓	✓	✓
FRM220-MSW202	2x GbE, RJ45 + 2x Dual Rate L2+ OAM Managed Switch	2-32	✓		✓	✓	
FRM220-MSW404	4x GbE, RJ45 + 4x Dual Rate L2+ OAM Managed Switch	2-33					
FRM220-MX210	2-Port Gigabit Ethernet Muxponder	2-35	✓	✓	✓	✓	✓
FRM220-10/100	10/100Base-TX to 100Base-FX Media Converter	2-36	✓		✓	✓	
FRM220-1000TS	1000Base-T to 1000Base-X SFP Media Converter	2-37	✓		✓	✓	✓
FRM220-1000M	10/100/1000Base-T to 1000Base-X Web Smart OAM/IP Managed Converter	2-38	✓		✓	✓	✓
FRM220-1000MS	10/100/1000Base-T to 100/1000Base-X SFP Web Smart OAM/IP Managed Converter	2-39	✓		✓	✓	✓
FRM220-1000EAS/X-1	10/100/1000Base-T to 100/1000Base-X SFP OAM/IP GbE Media Converter	2-40	✓		✓	✓	✓
FRM220-100AS-1	10/100Base-TX to 100Base-FX Media Converter	2-41	✓		✓	✓	
FRM220-10/100i	10/100Base-TX to 100Base-FX In-band Managed Converter	2-42	✓		✓	✓	✓
FRM220-10/100iS	10/100Base-TX to 100Base-FX SFP In-band Managed Converter	2-43	✓		✓	✓	✓
FRM220-E1/T1	E1/T1 Fiber Modem	2-44	✓		✓	✓	✓
FRM220-Data	V.35/X.21/RS530/449/232 Fiber Modem	2-45	✓		✓	✓	✓
FRM220-ET100	Ethernet over E1 Fiber Modem	2-46	✓		✓	✓	✓
FRM220-DS3/E3	DS3/E3 over Fiber	2-47	✓		✓	✓	✓
FRM220-Serial	RS485/232 Media Converter	2-48	✓		✓	✓	✓
FRM220-FXO-4 & FXS-4	4xPOTS over Fiber	2-49	✓		✓	✓	✓
FRM220-FXO/FXS	POTS over Fiber	2-50	✓		✓	✓	✓
FRM220A-Eoe1	Ethernet Bridge over E1	2-51	✓	✓	✓	✓	✓
FRM220A-Eoe1/G	Ethernet Bridge over E1 (GFP)	2-52	✓	✓	✓	✓	✓
FRM220A-iMux16	Ethernet to 16 E1 Mux NIC	2-53	✓	✓	✓	✓	✓
FRM220A-iMux8	Ethernet to 8 E1 Mux NIC	2-53	✓	✓	✓	✓	✓
FRM220A-iMux4	Ethernet to 4 E1 Mux NIC	2-53	✓	✓	✓	✓	✓
FRM220-GFOM08	8-Port E1/T1+10/100/1000M Ethernet Fiber Multiplexer	2-55	✓		✓	✓	
FRM220-GFOM04	4-Port E1/T1+10/100/1000M Ethernet Fiber Multiplexer	2-56	✓		✓	✓	✓
FRM220-FOM04	4-Port E1/T1+100M Ethernet Fiber Multiplexer	2-57	✓		✓	✓	✓
FRM220-FOM01	E1/T1+100M Ethernet Fiber Multiplexer	2-58	✓		✓	✓	✓
FRM220-FTEC	E1/T1 Cross Rate Converter	2-59	✓		✓	✓	✓
FRM220-E1/Data	E1 to Data	2-60	✓		✓	✓	✓

Power Type vs Standalone Chassis Compatible Table

Power Type (option)	AC: AC Power	DC: DC Power	AC, DC	AC, DC	AC, DC
	AD: AC+DC Power	AA: AC+AC Power	DD: DC+DC Power	AD, AA, DD	AD, AA, DD

Slide-in Card vs Standalone Chassis Compatible Table

Revised - 03. 2015

Card Name	Product Name	Page	CH02M	CH02M-2	CH02	CH01M	CH01
FRM220-NMC	Network Management Controller	2-3					
FRM220A-GSW/SNMP	Gigabit Ethernet Aggregate Switch Card	2-8					
FRM220-16G-3R	16G Multi Rate Transponder (3R)	2-13	✓			✓	✓
FRM220-10G-SXX	10G 3R Transponder SFP+ to XFP Fiber Protection	2-14	✓				
FRM220-10G-SS	10G 3R Transponder SFP+ to SFP+	2-15	✓				
FRM220-4G-3S	4G Multi-Rate 2R Transponder SFP to SFP Fiber Protection	2-16	✓			✓	
FRM220-2.7G-3S	2.7G Multi-Rate 3R Transponder SFP to SFP Fiber Protection	2-17	✓				
FRM220-1000DS	1000Base-X to 1000Base-X SFP media converter	2-18	✓				✓
FRM220-10GC-TS	10G Ethernet Converter 10G Base-T to SFP+	2-19	✓				
FRM220-10GC-TX	10G Ethernet Converter 10G Base-T to XFP	2-20	✓				
FRM220-DWDM	4 and 8-ch DWDM Mux/DeMux	2-21			✓		✓
FRM220-CWDM	4 and 8-ch CWDM Mux/DeMux	2-23			✓		✓
FRM220-OADM	Optical Add-Drop Multiplexer	2-25				✓	✓
FRM220-Protection	1+1 Fiber Optical Protection Switch	2-27				✓	✓
FRM220A-1002ES	2x 10/100/1000Base-T + 2x 100/1000Base-X SFP GbE Switch	2-28				✓	✓
FRM220A-FSW103	3x10/100Base-TX + 1x100Base-FX SFP Switch	2-29				✓	✓
FRM220A-1000EAS/X	2-Port 10/100/1000Base-T + 2-Port 1000Base-X OAM/IP Managed Switch	2-30				✓	✓
FRM220-MSW202	2x GbE, RJ45 + 2x Dual Rate L2+ OAM Managed Switch	2-32	✓			✓	✓
FRM220-MSW404	4x GbE, RJ45 + 4x Dual Rate L2+ OAM Managed Switch	2-33	✓				
FRM220-MX210	2-Port Gigabit Ethernet Muxponder	2-35				✓	✓
FRM220-10/100	10/100Base-TX to 100Base-FX Media Converter	2-36					✓
FRM220-1000TS	1000Base-T to 1000Base-X SFP Media Converter	2-37					✓
FRM220-1000M	10/100/1000Base-T to 1000Base-X Web Smart OAM/IP Managed Converter	2-38				✓	✓
FRM220-1000MS	10/100/1000Base-T to 100/1000Base-X SFP Web Smart OAM/IP Managed Converter	2-39				✓	✓
FRM220-1000EAS/X-1	10/100/1000Base-T to 100/1000Base-X SFP OAM/IP GbE Media Converter	2-40				✓	✓
FRM220-100AS-1	10/100Base-TX to 100Base-FX Media Converter	2-41				✓	✓
FRM220-10/100i	10/100Base-TX to 100Base-FX In-band Managed Converter	2-42				✓	✓
FRM220-10/100iS	10/100Base-TX to 100Base-FX SFP In-band Managed Converter	2-43				✓	✓
FRM220-E1/T1	E1/T1 Fiber Modem	2-44				✓	✓
FRM220-Data	V.35/X.21/RS530/449/232 Fiber Modem	2-45				✓	✓
FRM220-ET100	Ethernet over E1 Fiber Modem	2-46				✓	✓
FRM220-DS3/E3	DS3/E3 over Fiber	2-47				✓	✓
FRM220-Serial	RS485/232 Media Converter	2-48				✓	✓
FRM220-FXO-4 & FXS-4	4xPOTS over Fiber	2-49				✓	✓
FRM220-FXO/FXS	POTS over Fiber	2-50				✓	✓
FRM220A-Eoe1	Ethernet Bridge over E1	2-51				✓	
FRM220A-Eoe1/G	Ethernet Bridge over E1 (GFP)	2-52				✓	
FRM220A-iMux16	Ethernet to 16 E1 Mux NIC	2-53	✓	✓			
FRM220A-iMux8	Ethernet to 8 E1 Mux NIC	2-53				✓	
FRM220A-iMux4	Ethernet to 4 E1 Mux NIC	2-53				✓	
FRM220-GFOM08	8-Port E1/T1+10/100/1000M Ethernet Fiber Multiplexer	2-55	✓	✓			
FRM220-GFOM04	4-Port E1/T1+10/100/1000M Ethernet Fiber Multiplexer	2-56	✓	✓			
FRM220-FOM04	4-Port E1/T1+100M Ethernet Fiber Multiplexer	2-57	✓	✓	✓		
FRM220-FOM01	E1/T1+100M Ethernet Fiber Multiplexer	2-58				✓	
FRM220-FTEC	E1/T1 Cross Rate Converter	2-59				✓	
FRM220-E1/Data	E1 to Data	2-60				✓	

2
FRM220-Slide-in
Card Table

Power Type vs Standalone Chassis Compatible Table

Power Type (option)	DC12: AC Adapter AD: AC+DC Power	AC: AC Power AA: AC+AC Power	DC: DC Power DD: DC+DC Power	AC, DC, AD	AC, DC, AD	DC12	DC12, AC, DC, AD, AA, DD	AC, DC, AD
---------------------	-------------------------------------	---------------------------------	---------------------------------	---------------	---------------	------	-----------------------------	---------------

Specifications & design are subject to change without prior notice. Please visit CTC Union website for more details.

Preliminary

Revised - 03. 2015



FRM220-16G-3R

2 Channels 16Gbps 3R Multi-rate Transponder

The FRM220-16G-3R has 4 SFP+ slots that can be configured as a dual channel 16G 3R multi-rate transponder or in a 1-to-2 port protection mode. The device provides a flexible transmission of various protocols, like 1G/10G Ethernet, SDH STM16/STM64, OTU1/OTU1e/OTU2/OTU2e, FC 1/2/4/8/10/16G, ODU, OBSAI, CPRI.etc. Using SFP+ ports with dedicated CWDM or DWDM wavelengths, the 16G transponder supports a multi-rate functionality with data rates from 1Gbps up to 14Gbps. With its functionality the FRM220-16G-3R transponder is suitable as repeater for transmission over extended distances. In addition, the use of state of the art components greatly reduces the power requirements and heat dissipation factors of our previous transponders.

Features


- Multiple protocol supported. (1Gbps ~ 14Gbps)
- Protocol Transparent 3R fiber Media Transponder / Repeater
- Supports 1+1 Optical Line Protection
- Supports 2 channels with different bit rate.
- Supports Loopback Test.
- SFP DDM Information
- Firmware Upgrade
- Setting from DIP Switch, Console, NMC
- Supports FRM220 -CH01, CH02, CH08, CH20
- FRM220-CH20, Full Load (19 Slots)

Specifications

Optical Interface	Connector	LC (SFP+, SFP)
	Wavelength	CWDM 1271 ~ 1611nm DWDM 1529.5~1565.50nm
Operation mode	Dual channel mode	: Ch 1 SFP1 line / SFP2 client. Ch2 SFP3 line/ SFP4 client.
	Protection mode	: SFP1 line / SFP2, SFP3 client
Protocol	SONET	OC-24, OC-48, OC-192
	SDH	STM-16, STM-64
	Ethernet	1G, 2.5G, 10G
	OTU	OTU1, OTU1e, OTU2, OTU2e
	ODU	ODU1, ODU1e, ODU2, ODU2e
	OBSAI	OBSAI x1, x2, x4, x8
	CPRI	CPRI x1, x2, x4, x5, x8, x10, x16
	Fiber Channel	1/ 2/4/8/10/16 GFC
	Regeneration	Re-Amplification, Re-Shaping, Re-Timing
	Fiber	Signal Mode : 9/125um
	Wavelength	Depend on SFP or SFP+

Indication	LED	Power, System, Mode, Test, FX1 Link, FX2 Link, FX3 Link, FX4 Link
	Power	Input 12V / 1A Power Consumption < 8W
Size	Dimensions	155 x 88 x 23mm (D x W x H)
	Weight	150g
Environment	Operating Temperature	0 ~ 50°C
	Storage Temperature	-10 ~ 70°C
	Humidity	10 ~ 90%
	Certification	CE, FCC RoHS compliant
	MTBF	65000 hrs

Application

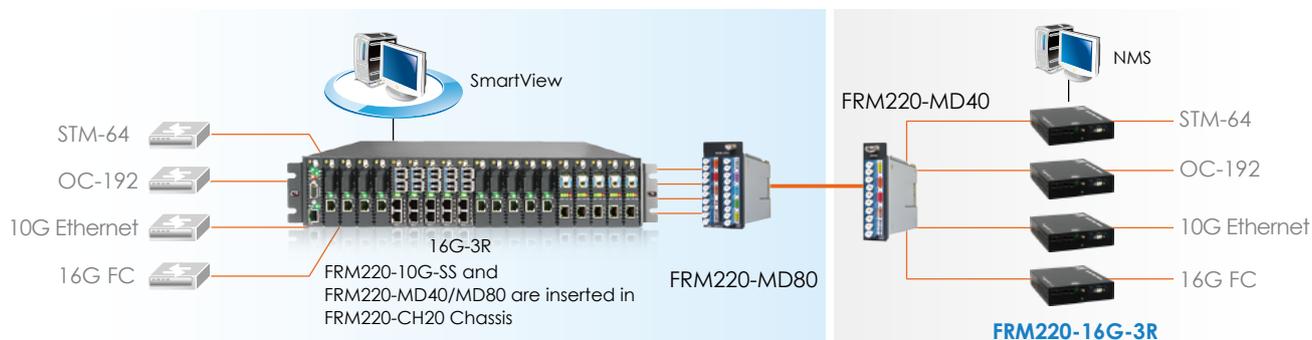

Ordering Information

Model Name	Description
FRM220-16G-3R	2 Channels 16Gbps 3R multi-rate transponder (optional SFP+)

Note: This card may be placed in CH02M, CH01M or CH04A chassis with fan.
For standalone SNMP management, place this card in CH02/NMC chassis.



FRM220-10G-SXX

10G Transponder (3R) with Optical Line Protection

The FRM220-10G-SXX is a 10G fiber to fiber 3R repeater and transponder. Based on 10 Gigabit fiber standards, this transponder supports SFP+ to XFP (SX) or XFP to XFP (XX) fiber connections. 1+1 Automatic optical line Protection Switching is supported for the aggregate XFP fiber ports. The transponder is protocol transparent, providing 3R (Re-amplification, Re-shaping and Re-clocking) between these different optical module types. One of the major applications for this converter is in connecting proprietary transceiver equipment to CWDM or DWDM when these 'colored' optical modules are not available for the proprietary equipment. With transparent bi-directional forwarding capability between the 2 fiber media, the FRM220-10G-SXX brings you the best and simplest solution for your 10G conversion between fiber and fiber.

Features


- Multiple protocol supported 10G Ethernet, STM-64, OC-192, G.709 OTU2, Fiber Channel (8 x FC)
- Network management via Web, Telnet, SNMP in central FRM220-CH20 chassis (10 cards in chassis max.)
- Protocol transparent 3R fiber media transponder / repeater (Re-amplification, Re-shaping and Re-clocking)
- Promotes flexibility and eases management with pluggable SFP+ or XFP transceiver
- Features two 10G ports offering multiservice 10G transponder and regenerator function
- Supports 1+1 optical line protection
- Built-in self test (BIST) function
- Provides superior optics capabilities resulting in extended transport distances for regional application.
- Extend 10G Ethernet transmission over fiber useful as a 'Transponder' in CWDM or DWDM systems for 10G Ethernet/ Fiber Channel/STM-64
- Supports Client / Line loop back tests
- Serial console for stand-alone management when inserted in CH02M dual slot chassis
- XFP power supplies: +5.0V, -5.2V, +3.3V and +1.8V
- Supports reference clock output

Specifications

Optical Interface	Connector	LC
		1x Line SFP+ to 2x Client XFP
		1x Line SFP+ to 1x Client XFP
		1x Line XFP to 1x Client XFP
	Traffic Format	OC-192/STM-64 (9.95328Gbps)
	1 Gigabit Ethernet (1.25Gbps)	
	10 Gigabit Ethernet LAN(10.3125Gbps)	
	G.709 OTU2 (10.709225Gbps)	
	Fiber Channel	
	1xFC(1.062 Gbps); 2xFC(2.125 Gbps);	
	4xFC(4.25 Gbps); 8xFC(8.5 Gbps);	
	10xFC(10 Gbps)	
Regeneration	Re-amplification	
	Re-shaping, Re-timing	

Power	Loopback	Line / Client
	Fiber	SM 9/125µm
		MM 50/125µm or 62.5/125µm
	Wavelength	Depends on SFP+ or XFP
Indications	LED (Power, Line Link, Client Link, Test, Loop back, Port Active, Alarm)	
Power Input	12VDC	
Power Consumption	< 12W	
Dimensions	155 x 88 x 23mm (D x W x H)	
Weight	150g	
Temperature	0 ~ 50°C (Operating), -10 ~ 70°C (Storage)	
Humidity	10 ~ 90% non-condensing	
Certification	CE, FCC, RoHS compliant	
MTBF	65,000 hrs	

Application

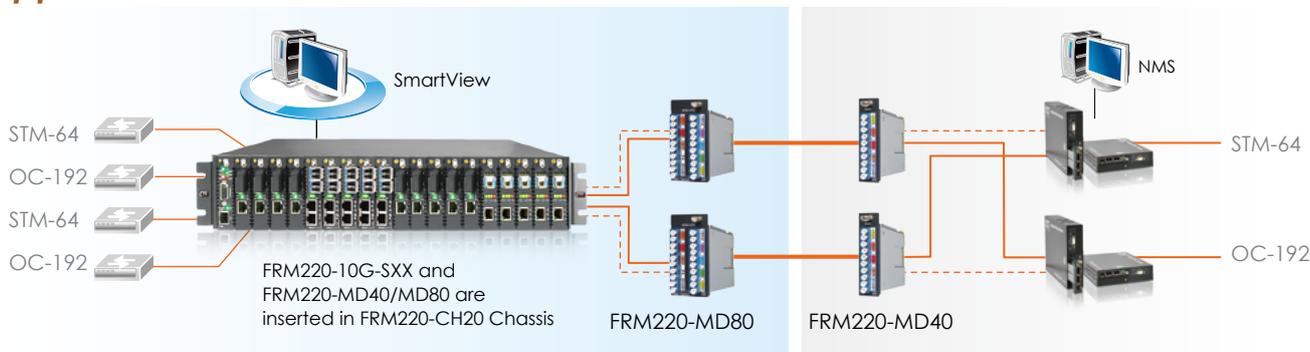

Ordering Information

Model Name	Description
FRM220-10G-SXX	10G 3R SFP+ to XFP fiber protection (optional SFP+, XFP module)

Note: This card may be placed in CH02M or CH04A chassis with fan.
For standalone SNMP management, place this card in CH02/NMC or CH04A chassis.



FRM220-10G-SS

10G Transponder (3R)

The FRM220-10G-SS is a 10G fiber to fiber 3R repeater and transponder. Based on a number of 10 Gigabit Fiber standards, these transponders support SFP+ to SFP+ (SS) fiber connections. The transponders are protocol transparent, providing 3R (Re-amplification, Re-shaping and Re-clocking) regeneration between these different optical module types. One of the major applications for this converter is in connecting proprietary transceiver equipment to CWDM or DWDM when these 'colored' optical modules are not available for the proprietary equipment. With transparent bi-directional forwarding capability between the 2 fiber media, the FRM220-10G-SS brings you the best and simplest solution for your 10G conversion between fiber and fiber.

Features


- Multiple protocol supported 10G Ethernet, STM-64, OC-192, G.709 OTU2, Fiber Channel (8 x FC)
- Network management via Web, Telnet, SNMP in central FRM220 chassis(10 cards in chassis max.)
- Protocol transparent 3R fiber media transponder / repeater (Re-amplification, Re-shaping and Re-clocking)
- Promotes flexibility and eases management with pluggable SFP+ transceiver
- Features two 10G ports offering multiservice 10G transponder and regenerator function
- Provides superior optics capabilities resulting in extended transport distances for regional application.
- Extend 10G Ethernet transmission over fiber
- Useful as a 'Transponder' in CWDM or DWDM systems for 10G Ethernet/Fiber Channel/STM-64
- Supports Client / Line loop back tests
- Serial console for stand-alone management when inserted in CH02M Single Slot Chassis
- SFP+ power supplies: +3.3V

Specifications

Optical Interface	Connector	LC, 1x Line SFP+ to 1x Client SFP+
	Traffic Format	OC-192/STM-64 (9.95328Gbps)
		10 Gigabit Ethernet LAN(10.3125Gbps)
		G.709 OTU2 (10.709225Gbps)
		Fiber Channel
		1xFC (1.062 Gbps); 2xFC (2.125 Gbps)
		4xFC (4.25 Gbps); 8xFC (8.5 Gbps)
		10xFC (10.51875 Gbps)
Regeneration		Re-amplification
		Re-shaping, Re-timing
Loopback		Line / Client
Fiber		SM 9/125µm
		MM 50/125µm or 62.5/125µm

Optical Interface	Wavelength	CWDM 1470 ~ 1610nm
		DWDM 1529.55 ~ 1565.50nm
Indications		LED (Power, Line Link, Client Link, Test, Loop back, Port Active, Alarm)
Power Input		12VDC
Power Consumption		< 12W
Dimensions		155 x 88 x 23mm (D x W x H)
Weight		150g
Temperature		0 ~ 50°C (Operating), -10 ~ 70°C (Storage)
Humidity		10 ~ 90% non-condensing
Certification		CE, FCC, RoHS compliant
MTBF		65,000 hrs

Application

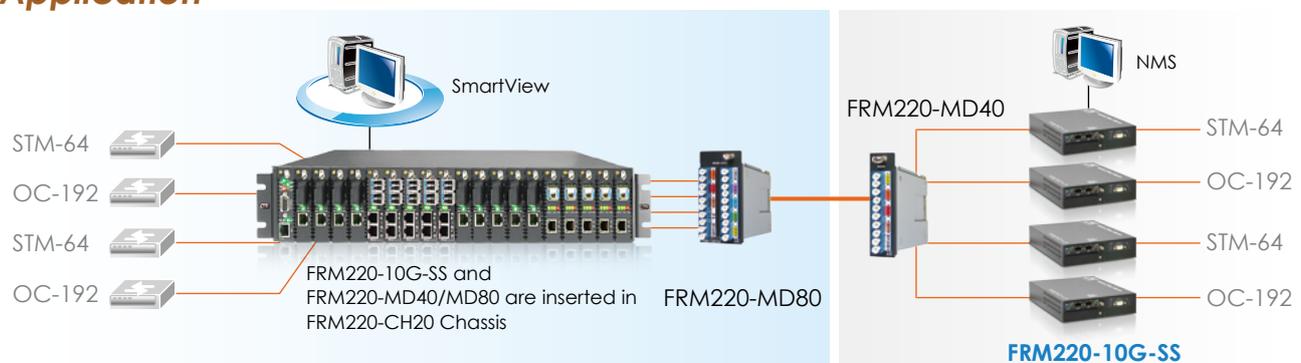

Ordering Information

Model Name	Description
FRM220-10G-SS	10G 3R transponder, SFP+ to SFP+ (optional SFP+ module)

Note: This card may be set by DIP switch or console, but MUST be placed in CH02M chassis with fan
For standalone SNMP management, place this card in CH02/NMC or CH04A chassis.



FRM220-4G-3S

4G Transponder (2R) with Optical Line Protection

The FRM220-4G-3S is a 2R 4G optical regeneration device, which consists of Re-amplification and Re-shaping. The transponder card converts a data signal to the correct wavelength for transmission on a specific channel by supporting SFP optics on both line side and client side interfaces. 1+1 Automatic optical line Protection Switching is supported for the aggregate fiber ports. When the FRM220-4G-3S card is placed in the FRM220 rack with SNMP management, the management can view the converter card's status, type, version, fiber link status and alarms. The card can be configured to enable or disable the port, reset the port and perform diagnostic loop backs.

Features

- Multiple protocol supported at bit rates 28Mbps to 4.25Gbps
- (Fast Ethernet, Gigabit Ethernet, OC -3, OC -6, OC -12, STM-1, STM-4, STM-16, FC -1, FC -2, FC -4)
- Network management via Web, Telnet, SNMP in central FRM220 chassis
- Local configuration via DB9 console port (when placed in CH01M or CH02M)
- Digital diagnostic monitoring of SFP module
- Perform optical repeater function (Re-amplification, Re-shaping)
- Facility loopback on both Client / Line sides
- 1+1 optic fiber protection
- Link Fault Pass-Through (LFPT)
- Auto Laser Shutdown (ALS)
- Detect transceiver transmitter error alarm


Specifications

Optical Interface	Connector	SFP LC
	Data rate	28Mbps to 4.25Gbps
	Regeneration	Re-amplification Re-shaping
	Loop back	Line/Client
	Fiber	MM 62.2/125µm, 50/125µm. SM 9/125µm
	Wavelength	MM 850, 1310nm SM 1310, 1550nm WDM 1310T/1550R, 1550T/1310R CWDM 1470 ~ 1610nm

Indications	LED (PWR, Line Link, Client Link, Test, Loop back, Port Active, Alarm)
Power Input	12VDC
Power Consumption	< 12W
Dimensions	155 x 88 x 23mm (D x W x H)
Weight	120g
Temperature	0 ~ 50°C (Operating), -10 ~ 70°C (Storage)
Humidity	10 ~ 90% non-condensing
Certification	CE, FCC, RoHS compliant
MTBF	65,000 hrs

Application

Managed 4G 2R Transponder with Fiber Protection

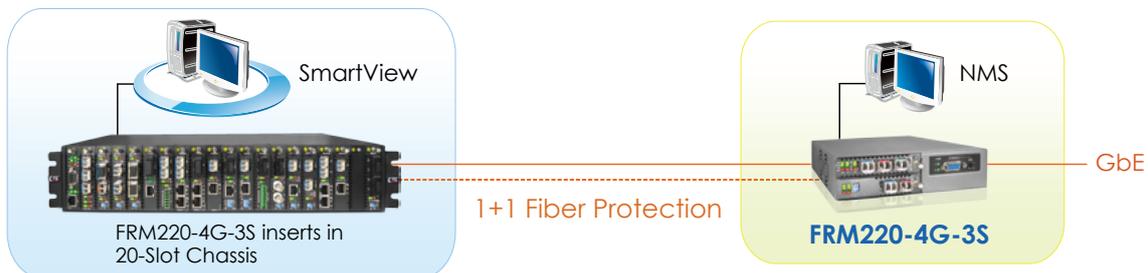

Protocols: Fast Ethernet, Gigabit Ethernet, OC-3, OC-6, OC-12, STM-1, STM-4, STM-16, FC-1, FC-2

Ordering Information

Model Name	Description
FRM220-4G-3S	4G 2R Transponder with fiber protection, (optional SFP module)

Note: This card may be set by DIP switch and placed in CH02M chassis with fan, or set by serial console if placed in CH01M chassis



FRM220-2.7G-3S

2.7G Transponder (3R) with Optical Line Protection

The FRM220-2.7G-3S is a 3R 2.7G optical repeater and transponder, which consists of Re-amplification, Re-shaping and Re-timing. The transponder card converts a data signal to the correct wavelength for transmission on a specific channel by supporting SFP optics on both line side and client side interfaces. 1+1 Automatic optical line Protection Switching are supported for the aggregate fiber ports. When the FRM220-2.7G-3S card is placed in the FRM220 rack with SNMP management, the management can view the converter card's status, type, version, fiber link status and alarms. The card can be configured to enable or disable the port, reset the port and set the desired data rate to match the transmitted protocol.

Features

- Multiple protocol supported at bit rates 34.3Mbps to 2.7Gbps (Fast Ethernet, Gigabit Ethernet, OC-3, OC-6, OC-12, OC-24, OC-48, STM-1, STM-4, STM-16, FC-1, FC-2)
- Network management via Web, Telnet, SNMP in central FRM220 chassis
- Link Fault Pass-Through (LFPT)
- Auto Laser Shutdown (ALS)
- Local configuration via DB9 craft port In Stand-alone
- Digital diagnostic monitoring of SFP module
- Perform optical repeater function (Re-amplification, Re-shaping, and Re-clocking)
- Facility loopback on both Client / Line sides
- 1+1 optic fiber protection
- Dip switch setting data rate
- Detect transceiver transmitter error alarm


Specifications

Optical Interface	Connector	SFP LC
	Data rate	E3 to OC-48
	Regeneration	Re-amplification
		Re-shaping
		Re-clocking
	Loop back	Line/Client
	Fiber	MM 62.2/125μm, 50/125μm
		SM 9/125μm
	Wavelength	MM 850, 1310nm
		SM 1310, 1550nm
WDM 1310T/1550R, 1550T/1310R		
CWDM 1470 ~ 1610nm		

Indications	LED (PWR, Line Link, Client Link, Test, Loop back, Port Active, Alarm)
Power Input	12VDC
Power Consumption	< 12W
Dimensions	155 x 88 x 23mm (D x W x H)
Weight	120g
Temperature	0 ~ 50°C (Operating), -10 ~ 70°C (Storage)
Humidity	10 ~ 90% non-condensing
Certification	CE, FCC, RoHS compliant
MTBF	65,000 hrs

Application

Managed 2.7G 3R Transponder with Fiber Protection

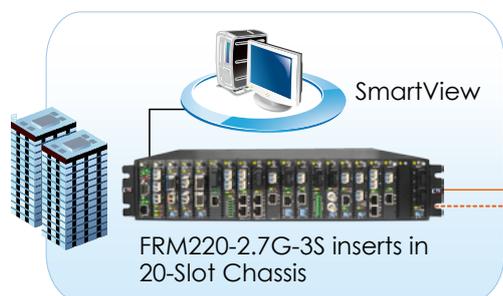

1+1 Fiber Protection



Protocols: Fast Ethernet, Gigabit Ethernet, OC-3, OC-6, OC-12, OC-24, OC-48, STM-1, STM-4, STM-16, FC-1, FC-2

Ordering Information

Model Name	Description
FRM220-2.7G-3S	2.7G 3R Transponder with fiber protection, (optional SFP module)

Note: This card may be set by DIP switch or console, but **MUST** be placed in CH02M chassis with fan. For standalone SNMP management, place this card in CH02/NMC or CH04A chassis.



FRM220-1000DS

1G Transponder (2R)

The FRM220-1000DS is a fiber to fiber optical media converter and repeater that allows data rates up to 1Gbps. FRM220-1000DS supports 2R regeneration, which consists of re-amplification and reshaping. This converter is compatible with fiber interfaces such as 100Mbps Fast Ethernet and 1000Mbps Gigabit Ethernet, STM-1, Fiber Channel 1, 2 and OC3, The FRM220-1000DS works as an FRM220 slide-in card, while the FRM220-1000DS plus FRM220-CH01 work as a stand-alone fiber converter. When the FRM220-1000DS card is placed in the FRM220-CH20 rack with SNMP management, the management can view the converter card's status, type and fiber link status.


Features

- Transparent fiber media converter / repeater
- Data rate up to 1G
- Network management via terminal or SNMP in FRM220 chassis
- Extend transmission from 2km to 120km over fiber
- Perform optical repeater function (Re-amplification & Reshaping)
- Digital diagnostic monitoring of SFP modules

Specifications

Optical Interface	Connector	SFP LC x 2	Indications	LED (Power, FX-Link1, FX-Link2)		
	Data rate	Up to 1G		Power Input	12VDC	
	Duplex mode	Full duplex			Power Consumption	< 6W
	Fiber	MM 50/125µm, 62.5/125µm. SM 9/125µm				Dimensions
Distance	MM 550m, 2km, SM 15/30/50/80/120km WDM 20/40/60km	Weight	130g			
Wavelength	MM 1310nm, SM 1310,1550nm WDM 1310Tx/1550Rx (type A) 1550Tx/1310Rx (type B)		Temperature	0 ~ 50°C (Operating), -10 ~ 70°C (Storage)		
				Humidity	10 ~ 90% non-condensing	
					Certification	CE, FCC, RoHS compliant
		MTBF				65,000 hrs

Application

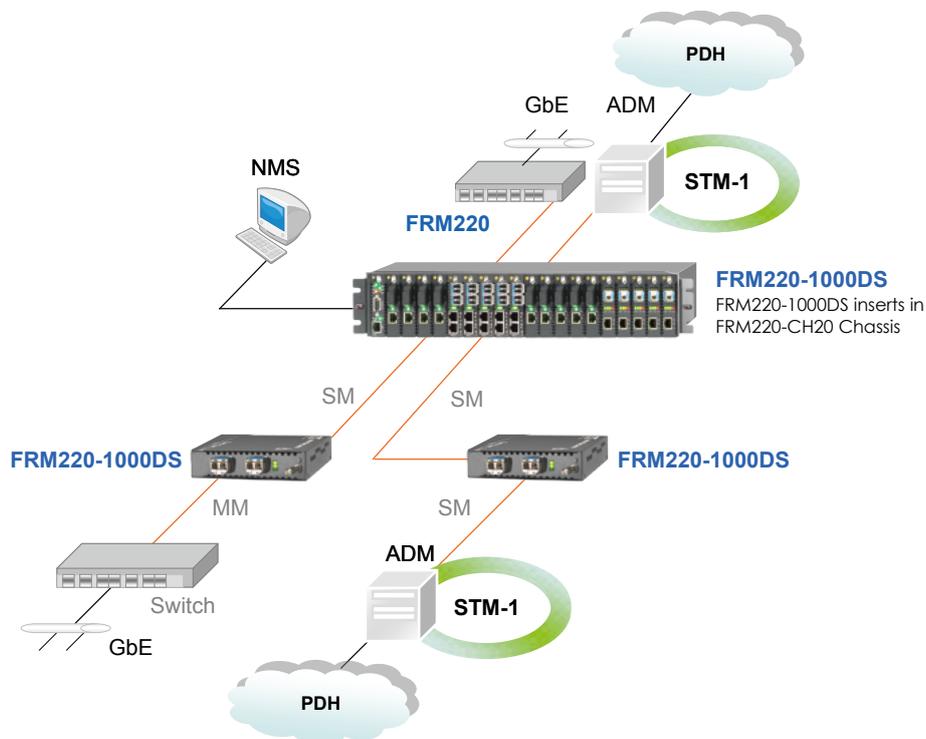

Ordering Information

Model Name	Description
FRM220-1000DS	1000Base-X SFP to 1000Base-X SFP 2R Transponder (Optional SFP)

NEW



FRM220-10GC-TS

10G Ethernet Media Converter with DIP switch
10G Base-T to 10G Base-R SFP+

The FRM220-10GC-TS is a copper to fiber 10G Ethernet media converter based on IEEE802.3an and IEEE802.3ae. With SNMP and Web-based management in the FRM220, the Network administrator can monitor, configure and control the activity of each card in the chassis. This converter uses Cat.6a/Cat 7 twisted pair cable as copper transmission media with RJ-45 and 10G optical solution with SFP+ LC connector. The data stream can be converted bi-directionally from 10G Base-T to 10G Base-R and vice versa. With full duplex wire speed forwarding capability between these two media, the FRM220-10GC-TS brings you the best and simplest solution for the 10G Ethernet conversion between copper wire and fiber.

Features


- Network Management via FRM220 Chassis
- Complies with IEEE802.3an 10GBase-T and IEEE802.3ae 10GBase-R
- Real-Time conversion between 10GBase-T and 10GBase-R
- Common used SFP+ fiber interface and RJ45 connector
- Full duplex wire speed forwarding
- Forwarding 18k bytes jumbo packet
- Built-in diagnostic function enable via Dip switches
- Loopback Test
- Link Fault Pass Through
- Fiber Fault Alert
- IEEE 802.1q VLAN pass through

Specifications

Optical Interface	Connector	SFP+ LC
	Data rate	10.3125Gbps
	Distance	300m, 10km, 40km, 80km
	Wavelength	1550nm, 1310nm, 850nm, WDM
Electrical Interface	Connector	RJ45
	Data rate	10Gbps
	Cable type	Cat.6a, 7
	Distance	95 meters (Cat.7)
Management	Console port	RS-232 via CH01M, DIP Switch with CH01
Standards	IEEE 802.3an, IEEE 802.3ae	

LEDs	SFP+, LR, Link/Act, LBK A/B, SYS
Power	12VDC
Power Consumption	< 12W
Dimensions	155 x 88 x 23mm (D x W x H)
Weight	130g
Temperature	0 ~ 50°C (Operating), -10 ~ 70°C (Storage)
Humidity	0 ~ 85% non-condensing
Certification	CE, FCC, RoHS compliant
MTBF	57,000 hrs

Application

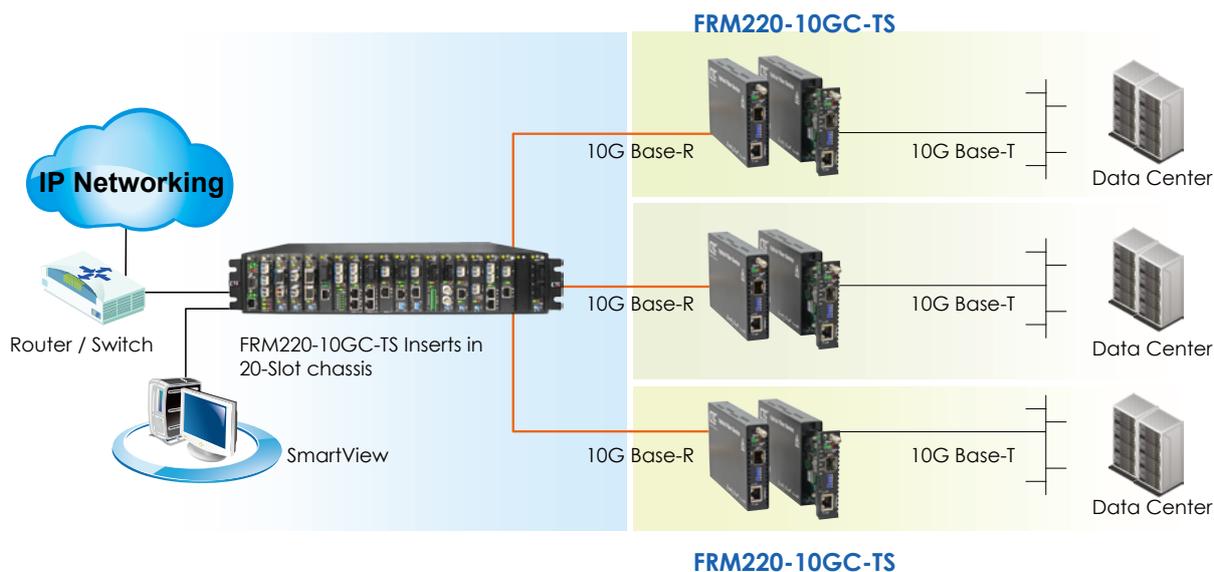

Ordering Information

Model Name	Description
FRM220-10GC-TS	10G Base-T RJ45 to 10G Base-R SFP+, with DIP switch (optional SFP+)

NEW



FRM220-10GC-TX

10G Ethernet Media Converter with DIP switch
10G Base-T to 10G Base-R XFP

The FRM220-10GC-TX is a copper to fiber 10G Ethernet media converter based on IEEE802.3an and IEEE802.3ae. With SNMP and Web-based management in the FRM220, the Network administrator can monitor, configure and control the activity of each card in the chassis. This converter uses Cat.6a/Cat 7 twisted pair cable as copper transmission media with RJ-45 and 10G optical solution with XFP LC connector. The data stream can be converted bi-directionally from 10G Base-T to 10G Base-R and vice versa. With full duplex wire speed forwarding capability between these two media, the FRM220-10GC-TX brings you the best and simplest solution for the 10G Ethernet conversion between copper wire and fiber.

Features


- Network Management via FRM220 Chassis
- Complies with IEEE802.3an 10GBase-T and IEEE802.3ae 10GBase-R
- Real-Time conversion between 10GBase-T and 10GBase-R
- Common used XFP fiber interface and RJ45 connector
- Full duplex wire speed forwarding
- Forwarding 18k bytes jumbo packet
- Built-in diagnostic function enable via Dip switches
- Loopback Test
- Link Fault Pass Through
- Fiber Fault Alert
- IEEE 802.1q VLAN pass through

Specifications

Optical Interface	Connector	XFP LC
	Data rate	10.3125Gbps
	Distance	300m, 10km, 40km, 80km
	Wavelength	1550nm, 1310nm, 850nm, WDM
Electrical Interface	Connector	RJ45
	Data rate	10Gbps
	Cable type	Cat.6a, 7
	Distance	95 meters (Cat.7)
Management	Console port	RS-232 via CH01M, DIP Switch with CH01
	Standards	IEEE 802.3an, IEEE 802.3ae

LEDs	XFP, LR, Link/Act, LBK A/B, SYS
Power	12VDC
Power Consumption	< 12W
Dimensions	155 x 88 x 23mm (D x W x H)
Weight	130g
Temperature	0 ~ 50°C (Operating), -10 ~ 70°C (Storage)
Humidity	0 ~ 85% non-condensing
Certification	CE, FCC, RoHS compliant
MTBF	57,000 hrs

Application

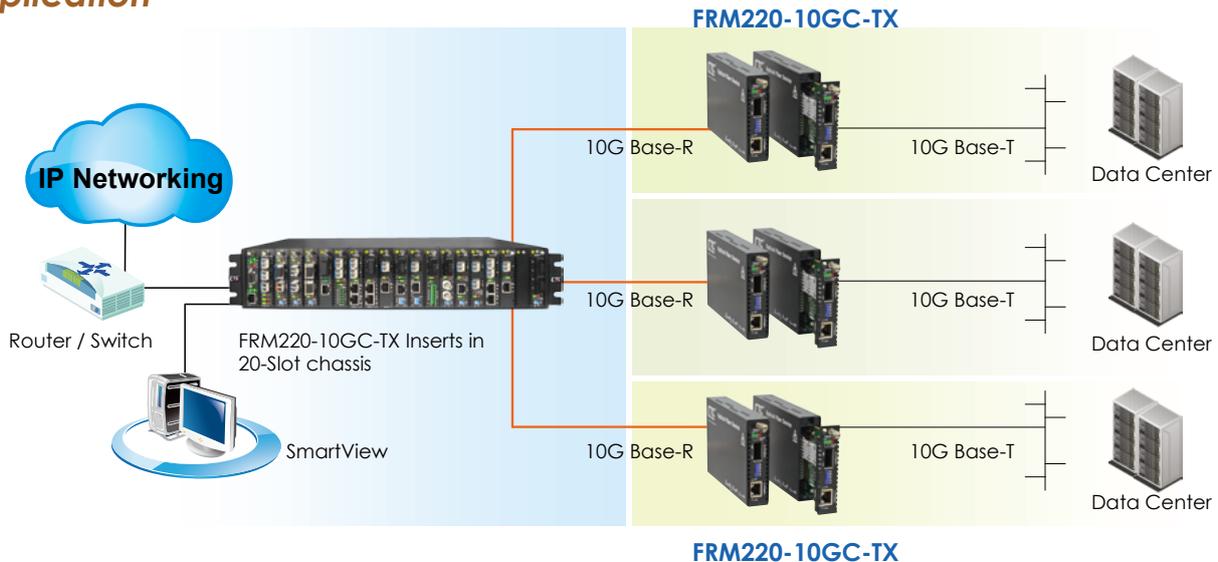

Ordering Information

Model Name	Description
FRM220-10GC-TX	10G Base-T RJ45 to 10G Base-R XFP, with DIP switch (optional XFP)

NEW



DWDM (FRM220 Mux/DeMux)

4 and 8 Channel DWDM Mux/DeMUX

CTC Union DWDM Mux/DeMux Modules with 100GHz channel spacing can be used to combine or separate wavelength channels at standard ITU grid. We supply the common configuration including 4, 8, 16 channels. These DWDM modules passively multiplex the optical signal outputs from 4 or more electronic devices, and send them over a single optical fiber and then de-multiplex the signals into separate, distinct signals for input into electronic devices at the other end of the fiber optic link. All the DWDM Mux/DeMux modules provide excellent optical performance and high reliability to ease of fiber handling and power saving solution.

Features

- Low Optical Insertion Loss
- High channel isolation
- Low PDL
- Good channel-to-channel uniformity
- LC connectors for interfacing
- Reliable passive WDM optical technology
- Scales easily for ring networks
- Compliance with RoHS

Specifications

Model Name	Functional description
FRM220-DWDM-DX40-C35/C33/C31/C29	DWDM 100GHz 4 channels 155x DEMUX
FRM220-DWDM-MX40-C35/C33/C31/C29	DWDM 100GHz 4 channels 155x MUX
Optical Specification	
Connector	LC/UPC
ITU-T channel and wavelength	Ch Wavelength(nm)
	35 1549.32
	33 1550.92
	31 1552.52
	29 1554.13

Model Name	Functional description
FRM220-DWDM-DX40-C59/C57/C55/C53	DWDM 100GHz 4 channels 153x DEMUX
FRM220-DWDM-MX40-C59/C57/C55/C53	DWDM 100GHz 4 channels 153x MUX
Optical Specification	
Connector	LC/UPC
ITU-T channel and wavelength	Ch Wavelength(nm)
	59 1530.33
	57 1531.90
	55 1533.47
	53 1535.04

Environmental Specification	
Operating Temperature	-5 to 70°C
Relative humidity	10 to 85%, non-condensing
Storage Temperature	-40 to 85°C

Parameter	Specification	Unit
Center Wavelength	-	ITU Grid Channels
Channel Spacing	-	100
Channel Pass Band	-	ITU +/- 0.11
Pass Band Insertion Loss	max	2.0
MUX/DEMUX Combination Insertion Loss	max	3.9
Pass Band Ripple	max	0.4
Adjacent Port Isolation	min	30
Non-Adjacent Port Isolation	min	40
Optical Return Loss	min	45
Directivity	min	50
Polarization Dependent Loss	max	0.2
Polarization Mode Dispersion	max	0.2
Optical Power Handling	max	500

Application




DWDM MUX must be used with DEMUX on the other side



Simplex Bi-Directional Transmission should be used in pairs WA and WB

- Access networks
- Metro WDM systems
- Long haul WDM systems
- Enterprise networks
- Telecommunication
- Cellular Application
- Fiber optical amplifier
- Metro Network /Access Network/FTTH
- CATV fiber optic links

Dimension Drawing

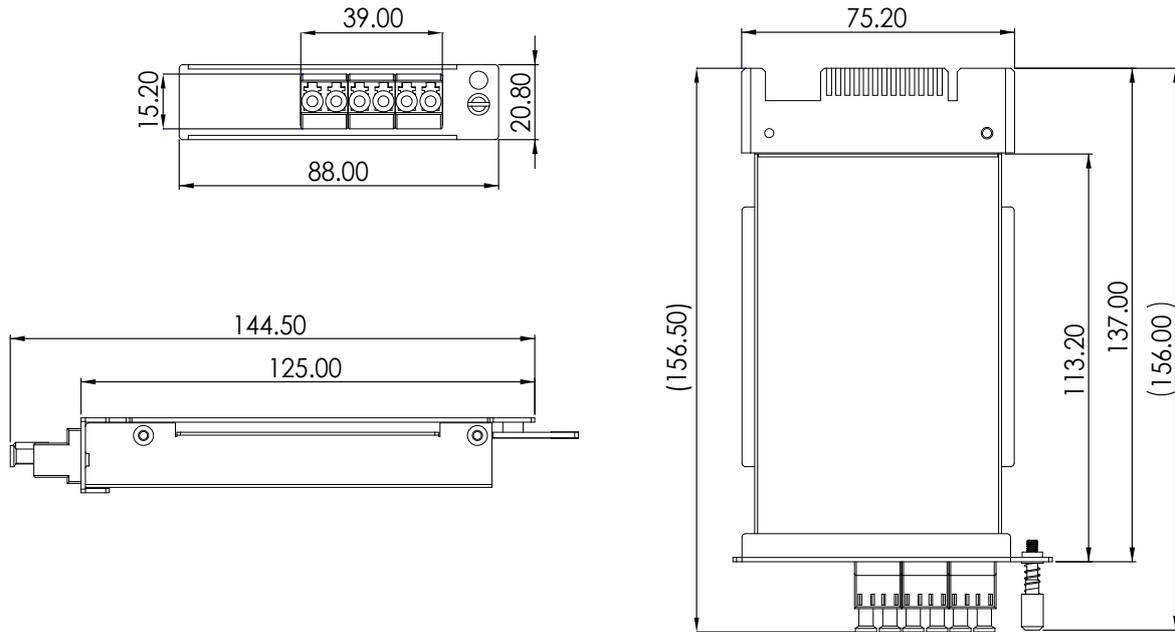

Ordering Information

Model Name	Description
	ab → DX: DeMux, MX: Mux, MD: Mux/DeMux
	cd → 40: 4ch, 80: 8ch
FRM220-DW-ab-cde-xxx	e → 1:100GHz
	xxx → Grid Channel

Example

- FRM220-DW-DX401-C35/C33/C31/C29
DWDM 100GHz 4 channels 155x DEMUX, Ch35/33/31/29, LC/UPC
- FRM220-DW-MX401-C35/C33/C31/C29
DWDM 100GHz 4 channels 155x MUX, Ch35/33/31/29, LC/UPC
- FRM220-DW-DX401-C59/C57/C55/C53
DWDM 100GHz 4 channels 153x DEMUX, Ch59/57/55/53, LC/UPC
- FRM220-DW-MX401-C59/C57/C55/C53
DWDM 100GHz 4 channels 153x MUX, Ch59/57/55/53, LC/UPC
- FRM220-DW-MD401-C59/C57/C55/C53-WA
DWDM 100GHz 4 channels 153x MUX, Ch59/57, Ch55/53, LC/UPC
- FRM220-DW-MD401-C57/C59/C53/C55-WB
DWDM 100GHz 4 channels 153x MUX, Ch57/59, Ch53/55, LC/UPC

Grid Channel

- C21 C22 C23 C24 C25
- C26 C27 C28 C29 C30
- C31 C32 C33 C34 C35
- C36 C37 C38 C39 C40
- C41 C42 C43 C44 C45
- C46 C47 C48 C49 C50
- C51 C52 C53 C54 C55
- C56 C57 C58 C59 C60



CWDM (FRM220 Mux/DeMux)

4 and 8 Channel CWDM Mux/DeMux

The FRM220 CWDM Mux/DeMux is modular design cards that support ITU-T G.694.2 wavelengths between 1271nm to 1611nm in 20nm increments. The FRM220 CWDM modules are protocol and rate transparent allowing different services such as 10G Ethernet, 10GFC, STM-64, OC-192 to be transported across the same fiber link. The passive FRM220 CWDM Mux/DeMux modules are available in 4 and 8-Channel (wavelength) models, supporting a variety of wavelength combinations and port configurations. The small and compact size of the CWDM modules yields one of the highest port densities in the industry. A 2U high 19-module FRM220 chassis populated with modules can yield up to 120 channels of capacity. FRM220 CWDM modules are passive devices that require no external power. They can also be installed in an FRM220 powered chassis with a NMC management module¹ and can be managed using SmartView EMS network management software, third-party SNMP software, Telnet or a serial console port. The modules can be installed in any FRM220 chassis equipped with other FRM220 media converters and transponders to provide a multi-service platform capable of delivering Ethernet, TDM, Voice and other services across a CWDM fiber common link.

Features


- Full native mode performance
- Passive model requires no power
- Protocol transparent, no limitation
- Utilizes industry standard ITU CWDM wavelength
- Standard LC connectors
- Passive device that can be installed in a powered chassis for managed applications
- Integration with Transponder in FRM220 chassis for CWDM application

Specifications

Model	FRM220-MD-XXX
Channel	4 or 8 channels
Standards	ITU-T G.694.2
Wavelength	1271 ~ 1611nm
Insertion Loss	4ch < 1.8dB, 8ch < 2.8dB
Return Loss	>45dB
Option	Upgrade port Wide 1310 ± 50 nm
Line Link	Single fiber or two fiber

Connector	LC / UPC
Dimension	MD40 : 155x 88 x23 mm (D x W x H) MD80 : 155x 88 x42 mm (D x W x H)
Weight	MD40 : 200g MD80 : 380g
Temperature	0 ~ 50°C (Operating) -40 ~ 70°C (Storage)
Humidity	0 ~95% (non-condensing)
Certification	RoHS compliant

Application

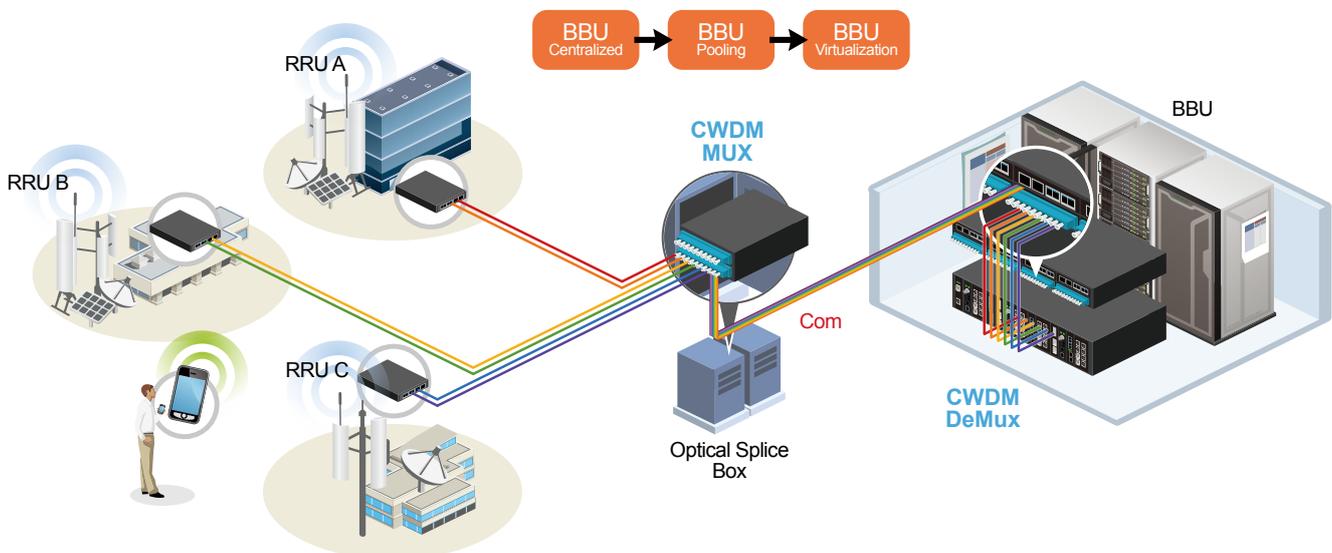

Ordering Information

Model Type	Model Name	Channel Port ITU Center Wavelength(nm)	Chassis Slots Required	Insertion Loss	Client	Line	Monitor	U/P
CWDM 4-Channel MUX/DeMUX	FRM220-MD40-(5157)	1511, 1531, 1551, 1571	1	<1.8dB	LC/UPC			
	FRM220-MD40-(5561)	1551, 1571, 1591, 1611	1	<1.8dB	LC/UPC			
	FRM220-MD40-UP02	1471, 1491, 1591, 1611 + Upgrade port 1 (1531 ~ 1571nm)+ Upgrade port 2 (1261 ~ 1457nm)	2	<2.2dB	LC/UPC			LC/UPC
CWDM 8-Channel MUX/DeMUX	FRM220-MD80	1471, 1491, 1511, 1531, 1551, 1571, 1591, 1611	2	<2.8dB	LC/UPC			
	FRM220-MD81	1471, 1491, 1511, 1531, 1551, 1571, 1591, 1611 + monitor port	2	<2.8dB	LC/UPC		LC/UPC	
	FRM220-MD80-UP01	1471, 1491, 1511, 1531, 1551, 1571, 1591, 1611 + Upgrade port (1261 ~ 1451nm)	2	<2.8dB	LC/UPC			LC/UPC
Single fiber CWDM 4-Channel MUX/DeMUX	FRM220-MD40-WA	TX/RX (1471/1491, 1511/1531, 1551/1571, 1591/1611)	1	<1.8dB	LC/UPC			
	FRM220-MD40-WB	TX/RX (1491/1471, 1531/1511, 1571/1551, 1611/1591)	1	<1.8dB	LC/UPC			
Single fiber CWDM 8-Channel MUX/DeMUX	FRM220-MD81-WA-2	TX/RX (1271/1471, 1291/1491, 1311/1511, 1331/1531, 1351/1551, 1411/1571, 1431/1591, 1451/161nm) + monitor port	2	<2.8dB	LC/UPC	SC/UPC	FC/UPC	
	FRM220-MD81-WB-2	TX/RX (1471/1271, 1491/1291, 1511/1311, 1531/1331, 1551/1351, 1571/1411, 1591/1431, 1611/1451nm) + monitor port	2	<2.8dB	LC/UPC	SC/UPC	FC/UPC	



FRM220-OADM

Optical Add-Drop Multiplexer

The FRM220 CWDM Optical Add/Drop Multiplexer is modular design cards that support ITU-T G.694.2 wavelengths between 1270nm to 1610nm in 20nm increments. The FRM220-OADM Optical Add/Drop Multiplexer takes a single wavelength from a trunk, pulls the signal out, and allows a new signal at the same wavelength to be inserted into the trunk at roughly the same spot. All the other wavelengths pass through the Add/Drop Multiplexer with only a small loss of power (usually < 2.5dB including connectors and adapters). An Optical Add/Drop Multiplexer (OADM) is available allowing a single wavelength to be dropped or added at specific sites in linear Add/Drop topology. FRM220 OADM modules are passive devices that require no external power. They can also be installed in an FRM220 powered chassis with a NMC management module¹ and can be managed using SmartView EMS network management software, Telnet or a serial console port. The FRM220 OADM modules can be installed in any FRM220 chassis equipped with other FRM220 media converters and transponders to provide a multiservice platform capable of delivering Ethernet, TDM, Voice and other services across a CWDM fiber common link.

Features


- Single Add/Drop Channel
- Operating channel : 1311,1471,1491,1511,1531,1551,1571,1591,1611 nm
- Passive optical module, no power required
- Protocol transparent, no limitation
- Utilizes Industry standard ITU CWDM wavelengths
- Optical connectors : LC

Specifications

Number of channels	CWDM: 1 add/drop channel, 2 add/drop channels
Operating Channel CWDM add & drop channel	Any channels out of 1471, 1491, 1511, 1531, 1551, 1571, 1591, 1611 nm (to be defined via order information)
Channel width: CWDM channels	>=13nm (around center wavelength)
Insertion Loss	IN-OUT >= 2.5 dB Add to Drop < 2.0 dB
Isolation	CWDM adjacent channel Isolation >= 30dB CWDM non-adjacent ch's at CWDM drop port >= 35dB

Optical Return Loss	>= 50dB
PDL	>= 0.1dB
Environment	Temperature : 0 ~ 50°C (Operating), -20 ~ 70°C (Storage)
Fiber Type	9 / 125 / 250um
Dimensions	162 x 220 x 25mm (W x D x H)
Weight	0.9kg
Compliance	FCC part 15 class A, CE Mark


Application

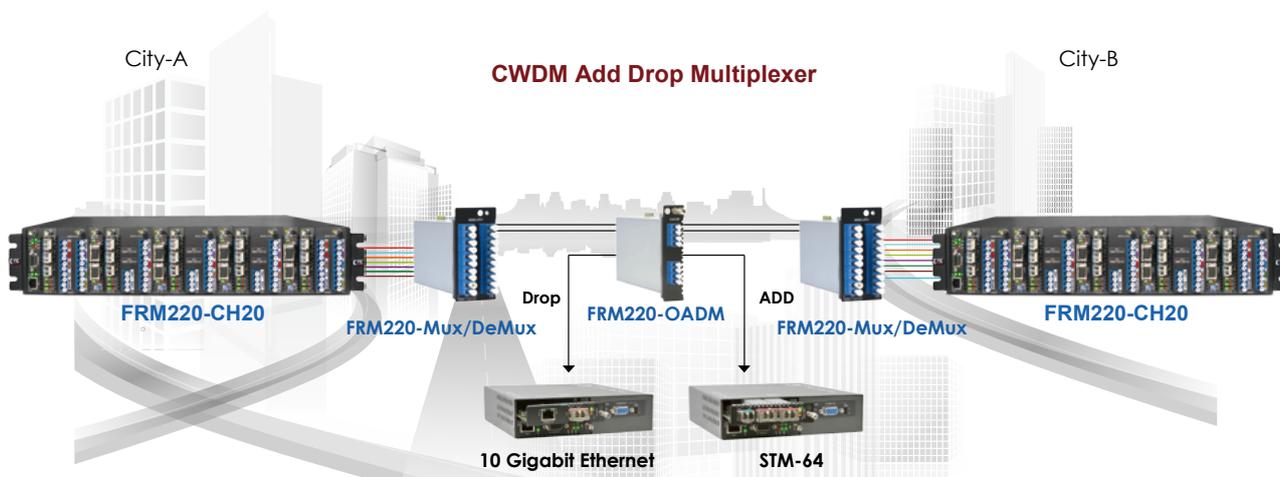

Ordering Information

Model Type	Model Name	Channel Port ITU Center Wavelength(nm)	Chassis Slots Required	Insertion Loss	East	West	Drop	Add
CWDM 1-Channel Add/Drop MUX	FRM220-OADM1001	Add/Drop 1471 with E/W lines	1	<1.1dB			LC/UPC	
	FRM220-OADM1002	Add/Drop 1491 with E/W lines	1	<1.1dB			LC/UPC	
	FRM220-OADM1003	Add/Drop 1511 with E/W lines	1	<1.1dB			LC/UPC	
	FRM220-OADM1004	Add/Drop 1531 with E/W lines	1	<1.1dB			LC/UPC	
	FRM220-OADM1005	Add/Drop 1551 with E/W lines	1	<1.1dB			LC/UPC	
	FRM220-OADM1006	Add/Drop 1571 with E/W lines	1	<1.1dB			LC/UPC	
	FRM220-OADM1007	Add/Drop 1591 with E/W lines	1	<1.1dB			LC/UPC	
	FRM220-OADM1008	Add/Drop 1611 with E/W lines	1	<1.1dB			LC/UPC	

Naming rule

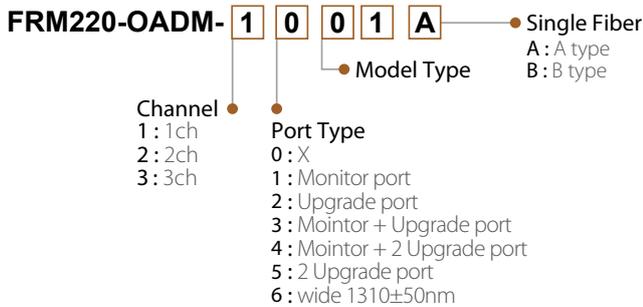

Example :

FRM220-OADM1001 OADM, 1ch, model type 01



FRM220-Protection

1+1 Fiber Optical Protection Switch

FRM220-Protection Optical Line Protection (OLP) unit is able to provide fiber path redundancy on a channel by channel basis. These units are particularly well suited for protection in any type of fiber data transmission. This solution includes monitoring capabilities for both the working and protected path fibers. In case of a fiber cut in the active path, traffic will be switched over to the protected path in less than 50 ms. Monitoring is available through SNMP Management when FRM220-Protection card is placed in FRM220 rack with SNMP management. The management can view the converter card's status, type, version, fiber link status and alarms. The card can be configured to enable or disable the port, reset the port, and configure receive threshold levels for path switching.

Features

- 1+1 full optical protection
- Low channel cross talk < -55dB
- Low insertion loss < 5.5dB
- Latch feature, if power is lost the switch remains in its current state
- Protection transition < 50 ms
- Works with any combination of 1 ~16 wavelengths
- Traffic is switched in one of three modes : revertive,non-revertive, manual
- Programmable Rx threshold setting for switch-over
- Optical Interface Type : LC connectors
- Working and protected lines are physically separated fiber

Specifications

Connector	LC
LEDs	Power System, Working Path, Protection Path, Work mode
Power	DC 12V In
Restoration Time	50ms
Range	Optical Input PWR: 35 ~ +18dBm Detection : -5 ~ -29dBm
Loss	Insertion Loss < 5.5dB, Return Loss > 45dB

Power Consumption	< 6W
Dimensions	155 x 88 x 23mm (D x W x H)
Weight	130g
Temperature	0 ~ 50°C (Operating), -10 ~ 70°C (Storage)
Humidity	10 ~ 90% non-condensing
Certification	CE, FCC, RoHS compliant
MTBF	65,000 hours

Application



Ordering Information

Model Name	Description
FRM220-Protection	1+1 Fiber Optical Protection Switch

Note: This card must use CH01M, with serial console, to configure standalone settings.



FRM220A-1002ES

2x 10/100/1000Base-T +
2x 100/1000Base-X SFP GbE Switch

The FRM220A-1002ES is a dual copper and dual fiber Gigabit Ethernet switch designed to make conversion between 10/100/1000Base-T and 100/1000Base-SX/LX with SFP connector. With SNMP and Web-based management in the FRM220 or FRM220A chassis the network administrator can monitor, configure and control the activity of each FRM220A-1002ES switch card locally via the chassis management. Based on a powerful L2 switch architecture, this converter supports bandwidth control, duplex and speed configuration, VLAN tagging, Q-in-Q, QoS, jumbo frames as well as auto laser shutdown, and link fault pass through.

Features


- 2-Port 10/100/1000Base-T and 2-Port 100/1000Base-X Switch
- Auto-Cross over for MDI/MDIX in TP port
- Auto-Negotiation or manual mode in TP port
- Supports flow control Enable or Disable
- Supports Jumbo Frame 10K Bytes
- Supports 16 Tag VLAN Group
- Supports Double VLAN tag (Q-in-Q)
- Supports Bandwidth control
- Supports Loop Back Test
- Supports Link Fault Pass-Through (LFPT) Function
- Supports Auto Laser Shutdown (ALS) Function
- Supports local management on FRM220A rack management.
- Console management on stand-alone.
- Supports D/D function for SFP fiber transceiver
- Provide Product information for management
- Supports the local management (Monitor or Configure status) by the SNMP manager.
- Supports FRM220A for Ethernet Aggregation

Specifications

Optical Interface	Connector	SFP LC
	Data rate	125Mbps, 1250Mbps
	Duplex mode	Full duplex
	Fiber	MM 50/125µm, 62.5/125µm SM 9/125µm
	Distance	MM 2km, SM 15/30/50/80/120km WDM 20/40/60/80km
	Wavelength	MM 1310nm, SM 1310,1550nm WDM 1310Tx/1550Rx (type A) 1550Tx/1310Rx (type B)
Standards	IEEE 802.3, IEEE 802.3u, 802.3z, 802.3ab, 802.1Q, 802.3X, 802.1ad	
Indications	PWR, LNK1, LNK2, TEST, LAN Link, LAN SPEED	

Certification	FCC Part 15 Class A, CE Mark	
Electrical Interface	Connector	RJ45
	Data rate	10Mbps, 100Mbps, 1000Mbps
	Cable	10Base-T Cat.3, 4, 5, UTP 100Base-TX Cat.5, 5e or higher 1000Base-X Cat.5e or higher
	Power	12VDC
Power Consumption	< 12W	
Dimensions	155 x 88 x 23mm (DxWxH)	
Weight	130g	
Temperature	0~50°C (Operating), -10~70°C (Storage)	
Humidity	0 ~ 95% non-condensing	

Application

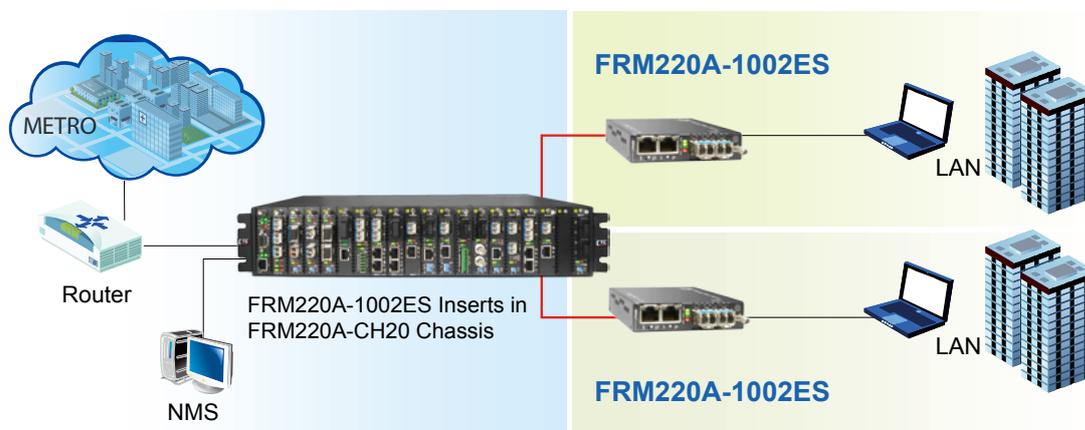

Ordering Information

Model Name	Description
FRM220A-1002ES	2-Port 10/100/1000Base-T and 2-Port 100/1000Base-SX/LX SFP GE Manage Switch (Optional SFP)

Note: Note: This card must use CH01M with serial console, to configure standalone settings.



FRM220A-FSW103

3x 10/100Base-TX + 100Base-FX SFP Ethernet Switch

The FRM220A-FSW103 is a 3-Port 10/100Base-T(X) to 100Base-FX SFP fiber slide-in card Ethernet switch designed for central and remote applications. With SNMP and Web-based management in the FRM220 or FRM220A chassis, the network administrator can monitor, configure and control the activity of each FRM220A-FSW103 switch card locally via the SNMP manager. This switch can be completely controlled and monitored from a centrally located managed rack controlling all switch settings including duplex and speed configuration. This switch is completely transparent to Layer 2 and Layer 3 protocols including IEEE 802.1q, VLAN tag, Q in Q, STP, IPX, IP, etc

Features


- 3-Port 10/100Base-TX + 1-Port 100Base-FX Ethernet Switch
- Auto-Cross over for MDI/MDIX in TP port
- Auto-Negotiation or manual mode in TP port
- Supports flow control
- Forward 1552 bytes (max.) packets in switch mode
- Supports Store and forward switch mode
- Supports FRM220 chassis management system
- Supports FRM220A chassis management system and Ethernet Aggregation
- Supports local management (Monitor or Configure status) by the SNMP manager.
- Supports D/D function for SFP fiber transceiver
- Provides Auto Laser Shutdown (ALS) function
- Provides Product information for management
- Supports On-Line F/W upgrade (local) by the SNMP manager

Specifications

Optical Interface	Connector	SFP LC
	Data rate	125Mbps
	Duplex mode	Full duplex
	Fiber	MM 50/125µm, 62.5/125µm SM 9/125µm
	Distance	MM 2km, SM 15/30/50/80/120km, WDM 20/40/60/80km
	Wavelength	MM 1310nm, SM 1310,1550nm WDM 1310Tx/1550Rx (type A) 1550Tx/1310Rx (type B)
	Electrical Interface	Connector
Data rate		10Mbps, 100Mbps
Duplex mode		Half / Full duplex
Cable		10Base-T Cat.3, 4, 5, UTP 100Base-TX Cat.5, 5e or higher

Standard	IEEE 802.3, IEEE 802.3u
Indications	LED (Power, FEF, FX-Link, TX-SPD, TX-Duplex, TX-Link)
Power Input	Card : 12VDC Standalone : AC, DC options
Power Consumption	< 4W
Dimensions	155 x 88 x 23mm (D x W x H)
Weight	130g
Temperature	0 ~ 80°C (Operating), -10 ~ 80°C (Storage)
Humidity	5 ~ 90% non-condensing
Certification	CE, FCC, LVD, RoHS
MTBF	65,000 hrs

Application

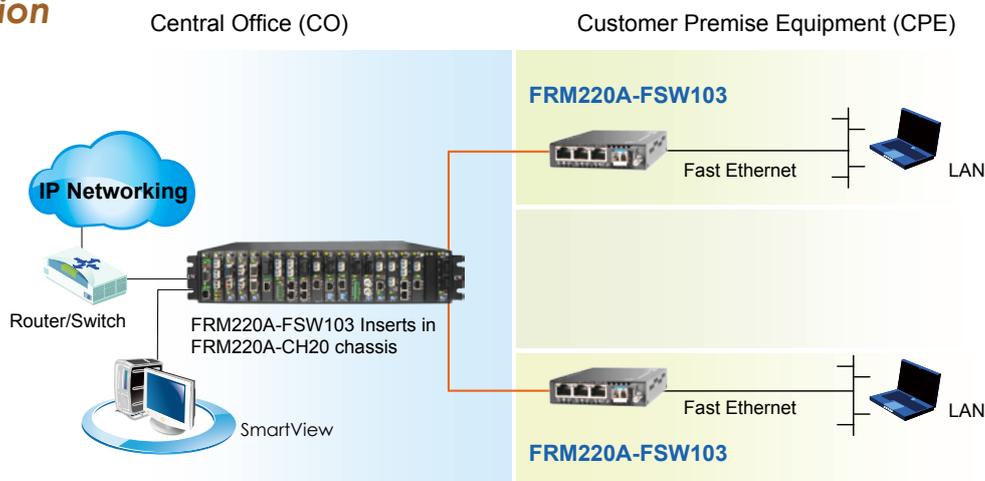

Ordering Information

Model Name	Description
FRM220A-FSW103	3-Port 10/100Base-T(X) to 100Base-FX SFP Switch, (optional SFP)

Note: The card is suitable for use in CH01 standalone chassis.



FRM220A-1000EAS/X

2x 10/100/1000Base-T and
2x 100/1000Base-X SFP OAM/IP GbE
Managed Switch

The FRM220A-1000EAS/X is an IEEE 802.3ah OAM compliant dual copper and dual fiber Gigabit Ethernet switch solution designed to make conversion between 10/100/1000Base-T(X) and 100/1000Base-X with SFP. With embedded SNMP and Web-based management, the network administrator can monitor, configure and control the activity of each IEEE 802.3ah series card and remotely connected OAM compliant converter. Based on a powerful L2 switch architecture, this converter supports bandwidth control, duplex and speed configuration, VLAN tagging, Q-in-Q, QoS, Spanning tree, jumbo frames as well as auto laser shutdown, link fault pass through, OAM loop back and dying gasp.

Features

- 2-port 10/100/1000Base-T and 2-port 100/1000Base-X SFP
- Supports local / remote IEEE 802.3ah OAM / IP In-band management
- Standalone IP Based, Web GUI, Telnet, SNMP management
- Auto-Negotiation or forced mode
- Auto MDI/MDIX
- Supports IEEE 802.1Q Tagged and Port based VLAN
- Supports IEEE 802.1ad Q in Q double tagging
- Forward 10K bytes Jumbo packets (max.)
- Supports Flow control (Pause)
- Supports OAM remote loopback to assist in diagnosing network problems
- RADIUS Client
- Supports bandwidth control
- Supports remote CPE power fail detect (dying gasp)
- Supports Far End Fault Indication (FEFI)
- Supports Link Fault Pass-Through (LFPT)
- Supports RMON counter
- D/D function for supported SFP fiber transceiver
- Auto Laser Shutdown (ALS)
- Online local / remote f/w upgrade
- Fiber Redundant mode
- Spanning Tree Protocol
- Port Trunking
- Default port and 802.1p tag priority QoS
- Fixed or weighted priority QoS

Specifications

Optical Interface	Connector	SFP LC
	Data rate	125/1250Mbps
	Duplex mode	Full duplex
	Fiber	MM 50/125µm, 62.5/125µm. SM 9/125µm
	Distance	MM 550m, 2km, SM 15/30/50/80/120km WDM 20/40/60km
Wavelength	MM	1310nm, SM 1310,1550nm
	WDM	1310Tx/1550Rx (type A) 1550Tx/1310Rx (type B)
Power Consumption	< 12W	
Dimensions	155 x 88 x 23mm (D x W x H)	
Weight	130g	

Electrical Interface	Connector	RJ45	
	Data rate	10Mbps, 100Mbps, 1000Mbps	
	Duplex mode	Half / Full duplex	
	Cable	10Base-T	Cat.3, 4, 5, UTP
		100Base-TX	Cat.5, 5e or higher
	1000Base-T	Cat.5, 5e or higher	
Standards	IEEE 802.3, IEEE 802.3u, IEEE802.1Q, IEEE 802.3ah		
Indications	LED (Power, FX-Link, Test, TX-Link, TX-SPD)		
Power Input	12VDC		
Temperature	0 ~ 50°C (Operating), -10 ~ 70°C (Storage)		
Humidity	10 ~ 90% non-condensing		
Certification	CE, FCC, RoHS compliant		
MTBF	65,000 hrs		


Ordering Information

Model Name	Description
FRM220-1000EAS/X	2-Port 10/100/1000Base-T and 2-Port 100/1000Base-X with OAM/IP management, (optional SFP)

Note: This card may use CH01M to provide console for initial TCP/IP settings, or use CH01 with default IP.


FRM220A-1000EAS/X Application

In the Centrally managed application, the main chassis, all of its cards and all fiber connected remote CPE units can be provisioned and monitored from a single management point

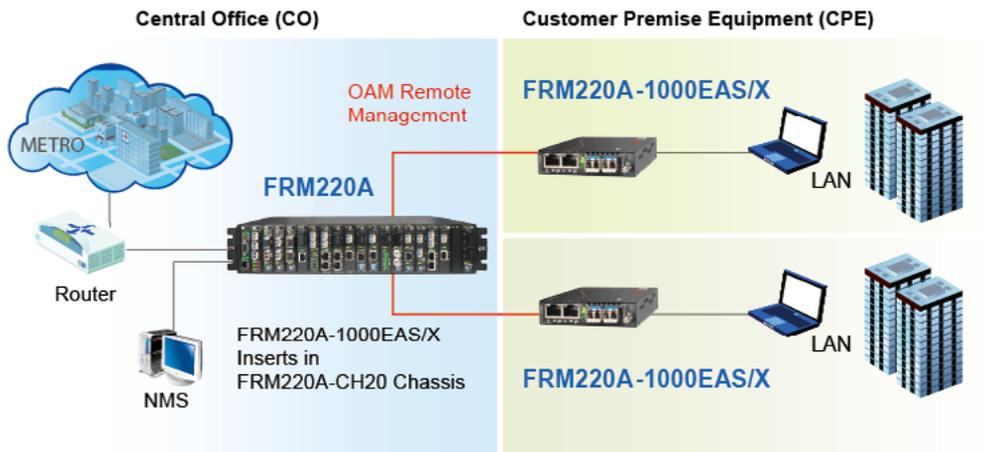


Fiber Redundant / Trunking Application

Utilizing a special trunking function, the 1000EAS/X can be deployed in stand-alone, point-to-point applications and provide 1+1 redundant fiber protection

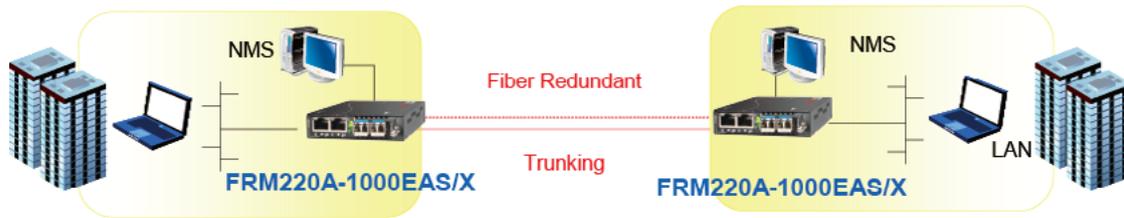

Fiber Ring Application

In the ring or mesh topology, Spanning Tree Protocol enables a highly resilient network based on multiple 1000EAS/X units

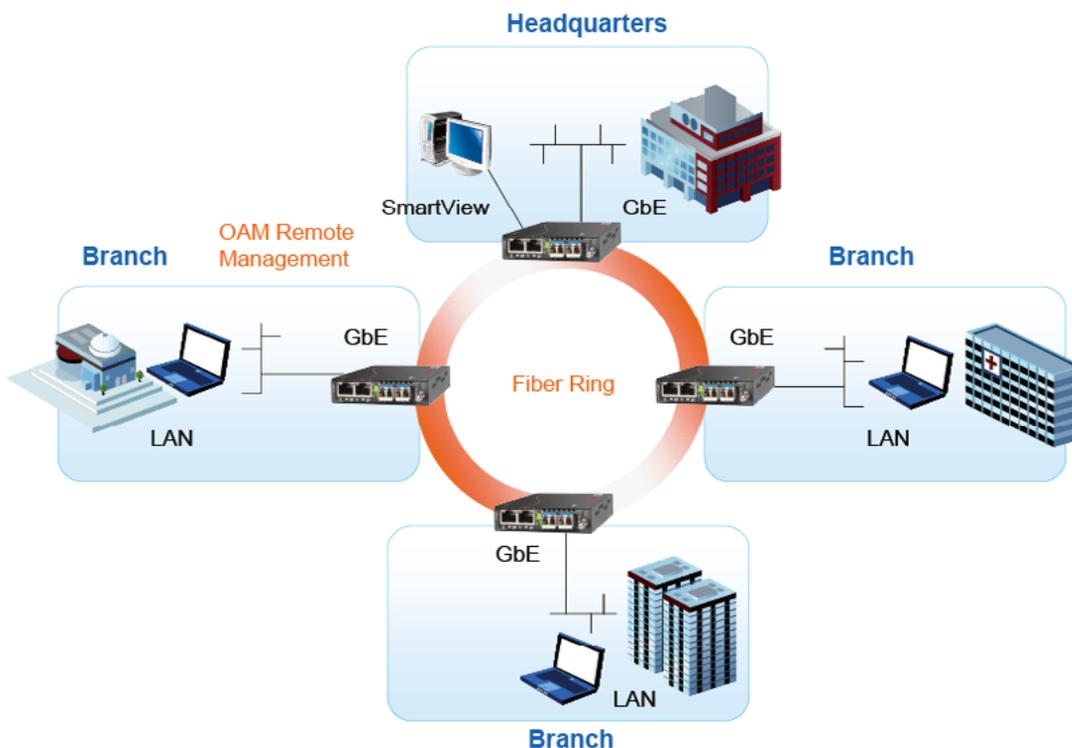



FRM220-MSW202

2x 10/100/1000Base-T +
2x100/1000Base-X L2+ Gigabit Carrier
Ethernet Switch

2

Carrier
Ethernet Switch (EDD)

FRM220-MSW202 is a carrier class Ethernet Demarcation Device (EDD) with 2 x 10/100/1000Base-T Ethernet ports and 2 x 100/1000Base-X dual rate SFP fiber ports which enables EPL (Ethernet Private Line) & EVPL (Ethernet Virtual Private Line) services with advanced carrier Ethernet features per the Metro Ethernet Forum (MEF 9 and 14). By supporting link and service Ethernet OAM schemes, the FRM220-MSW202 also provides extensive fault detection and diagnostic capabilities to ensure that actual network use complies with pre-agreed service level agreements (SLAs).


Features

- Complies with MEF CE1.0
- Supports 8K MAC
- Spanning Tree 802.1D, 802.1s, 802.1w
- Supports 802.1Q / 256 active VLANs
- Double VLAN Tagging (C-tag/S-tag) (IEEE 802.1ad) support for ISP application
- Various QoS capability (MAC/port/802.1p/Diffserv)
- Port-based rate limiting
- DHCP Snooping
- IGMP Snooping
- IPv6 support
- IEEE 802.3x and IEEE 802.1x support
- Jumbo frame for up to 9.6K
- Extensive Ethernet OAM support
 - IEEE 802.3ah, IEEE 802.1ag, ITU-T Y.1731
- SNMP v1/v2c/v3, Telnet, Web GUI
- IEEE 1588 V2 aware (Optional)

Specifications

Optical Interface	Dual-speed (100M and 1000M) 2 WAN ports SFP based Fiber optic: SFP based Fast Ethernet (100BaseFX, 100BaseLX10, 100BaseBX10) Gigabit Ethernet (1000Base-SX, 1000BaseLX10, 1000BaseBX10)	Temperature	0 ~ 50°C (Operating); -10 ~ 70°C (Storage)
LAN Interface	2 LAN ports Copper based : 10/100/1000Base-T RJ-45 Supports manual 10, 100,1000Base-T, Full, Half duplex, or n-way (Auto-Negotiation) each channel	Humidity	20 - 80% non-condensing (Operating); 10-90% (Storage)
Standard	IEEE 802.3 10Base-T, IEEE 802.3u 100Base-TX,100Base-FX, IEEE 802.3z 1000Base-X, IEEE802.3ab 1000Base-T	Power Consumption	< 12W
LEDs	Power, FX-1 Link, FX-2 Link,Test, UTP-1 Link, UTP-1 100/1000, UTP-2 Link, UTP-2 100/1000	VLAN Feature	IEEE 802.1Q tagged VLAN, port based VLAN, MAC based VLAN, protocol based VLAN, private VLAN, IEEE 802.1ad Q-in-Q
		Qos Feature	IEEE 802.1p 8 priority queues per port, Cos based on switch port; VLAN ID; TCP/UDP port. IEEE802.1p priority tag remarking, DSCP remarking, Port based ingress/egress rate limit
		L2 switching Protection	STP, RSTP, MSTP, ITU-T G8031/G.8032
		Trunking	IEEE 802.3ad LACP

Application

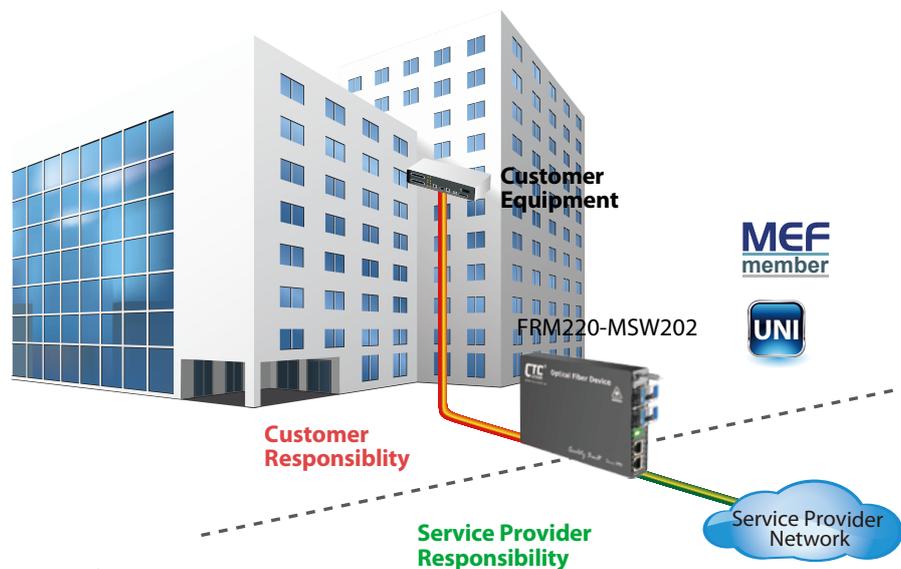

Ordering Information

Model Name	Description
FRM220-MSW202	2x 10/100/1000Base-T + 2x 100/1000Base-X OAM Managed Switch

Note: To Support Console Interface managed, this card must be placed in CH01M chassis.

Preliminary



FRM220-MSW404

**4x SFP Slots in Dual Rate 100/1000Base-X
and 4 Ports 10/100/1000Base-T RJ45
OAM Managed Carrier Ethernet Switch (NID)**

The CTC Union's FRM220-MSW404 is the new generation of carrier grade Ethernet demarcation device for business connection and mobile backhaul transportation service delivered by carriers. The FRM220-MSW404 is equipped 4 SFP slots in dual rate 100/1000Base-X and 4 ports 10/100/1000Base-T RJ45 network interfaces. It is designed to enable E-Line, E-LAN, E-Tree services which are CE (Carrier Ethernet) 2.0 compliant for Metro Ethernet network deployments.

The FRM220-MSW404 device enables carriers and service providers to delivered SLA-based network service with extensive fault detection and diagnostic capabilities which are compliant with the latest Ethernet OAM standards such as IEEE 802.3ah, IEEE 802.1ag and ITU-T Y.1731. With built-in RFC2544 feature sets, The FRM220-MSW404 also enables the service providers to perform the SLA verification anytime to ensure the quantitative latency, jitter and throughput delivery performance indexes. The CE2.0 compliant functions support EVCs and hierarchical QoS traffic management to enable service providers managing bandwidth and enforce SLA guaranteed.

Features


- The next generation of Ethernet demarcation device, at customer premise, fulfilling the large-scale carrier Ethernet deployment for intelligent business connection and mobile backhaul services complied to CE 2.0 standard.
- MEF 9/14 standards compliant product guarantees the fully interoperability with other MEF certified equipment and reduces the risks and cost of Carrier Ethernet network deployment for operators and service providers.

Specifications

Interface	100/1000Mbps SFP slots x 4 + 10/100/1000Base-T RJ45 x 4
Filter & Forward Rate	10M (14880/14880pps); 100M (148800/148800pps); 1000M (1488000/1488000pps)
Transmission Method	Store and Forward Switching
Standard	IEEE 802.3u, IEEE 802.3z, IEEE 802.3ae, IEEE 802.3x, IEEE 802.1p, IEEE 802.1Q, IEEE 802.1ad, IEEE 802.1D, IEEE 802.1w, IEEE 802.1s, IEEE 802.1x, IEEE 802.3ad
Packet Buffer	1M bits
MAC Table Size	8K
Max. Packet Size	10K Bytes
VLAN Feature	IEEE 802.1Q tagged VLAN, port based VLAN, MAC based VLAN, protocol based VLAN, private VLAN, IEEE 802.1ad Q-in-Q
QoS Feature	IEEE 802.1p 8 priority queues per port, CoS based on switch port; VLAN ID; DSCP; TCP/UDP port, IEEE 802.1p priority tag remarking, DSCP remarking, Port based ingress/egress rate limit
L2 switching protection	STP, RSTP, MSTP, ITU-T G.8031/G.8032 Ethernet ring protection
Trunking	IEEE 802.3ad LACP

Security	IEEE 802.1x port based access control, MAC based access control authentication, RADIUS authentication, limited MAC address learning, IP/MAC binding, ACL rule based filtering, TACACS+, IP source guard, DHCP snooping/relay option 82, ARP inspection, IP source guard
IP Multicasting	IGMP throttling, IGMP filtering, IGMP fast leave, IGMP snooping v1/v2/v3, MVR, MLD snooping v1/v2
Storm Control	Unicast/Broadcast/Multicast storm suppression
Management	Web/Telnet CLI/SNMP/console interface, Web/CLI authentication, SSH v2, HTTPs, port mirroring, system syslog, IPv6 management, NTP, SNTP
SNMP Agent	SNMP v1/v2c/v3
Software Upgrade	TFTP/HTTP/HTTPS
Ethernet OAM	IEEE 802.3ah, IEEE 802.1ag, ITU-T Y.1731, RFC2544
LED Display	Power, System, Console, Link, Speed/Act
Power Input	100V ~ 240VAC, -18 ~ -72VDC
Power Consumption	< 20W
Operating Temperature	0 ~ 50°C
Humidity	5% ~ 90% (non-condensing)
Dimensions	220 x 168 x 45 mm (D x W x H)
Regulatory	FCC, CE, RoHS compliant

Application

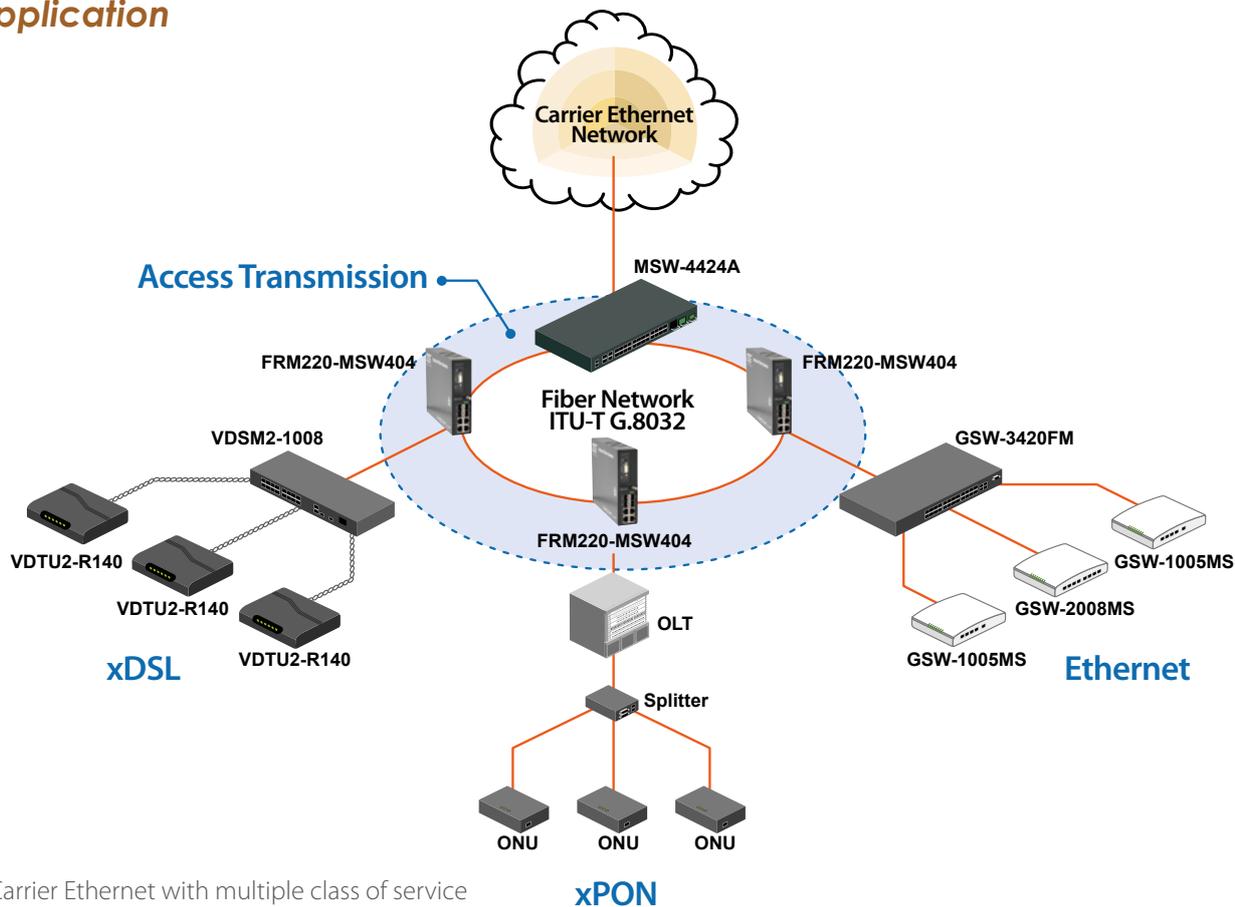

- Carrier Ethernet with multiple class of service
- Traffic Synchronization
- Precisely delivery of time-sensitive service

Ordering Information

Model Name	Description
FRM220-MSW404	4 x SFP Slots in Dual Rate 100/1000Base-X and 4x 10/100/1000Base-T RJ45 OAM Managed Carrier Ethernet Switch

Note: To Support Console Interface managed, this card must be placed in CH02M chassis.

FRM220 – MSW404
Example: FRM220 – MSW404



FRM220-MX210 2-Port Gigabit Ethernet Muxponder

FRM220-MX210 is 4-port Gigabit Ethernet Muxponder which is able to aggregate two wire-speed Gigabit Ethernet services into one 2.5G uplink, reducing CAPEX by effectively increasing fiber utilization. The Multiplexer, based on L2 Ethernet switch technology, can be used either in point-to-point topology, functioning as a media converter for transporting 2 Gigabit Ethernet services over one fiber, or in CWDM systems working as a wavelength converter for extending transmission capacity. FRM220-MX210 is equipped with one 10/100/1000M RJ-45 network management port and three SFP based ports: one 1G Ethernet service port and two 1G/2.5G service/uplink ports. Additionally its advanced features such as downlink and uplink loop back, auto laser shutdown and remote network management provide carriers a flexible, reliable and cost-effective two Gigabit Ethernet over one wavelength conversion solution.

Features

- Complies with MEF CE1.0
- Supports 8K MAC
- Spanning Tree 802.1D, 802.1s, 802.1w
- Supports 802.1Q / 256 active VLANs
- Double VLAN Tagging (C-tag/S-tag) (IEEE 802.1ad) support for ISP application
- Various QoS capability (MAC/port/802.1p/Diffserv)
- Port-based rate limiting
- DHCP Snooping
- IGMP Snooping
- IPv6 support
- IEEE 802.3x and IEEE 802.1x support
- Jumbo frame for up to 9.6K
- Extensive Ethernet OAM support
- IEEE 802.3ah, IEEE 802.1ag, ITU-T Y.1731
- SNMP v1/v2c/v3, Telnet, Web GUI
- IEEE 1588 V2 aware (Optional)

Specifications

Optical Interface	Port1/Port2	100Base-FX, 1000Base-X or 2500Base-X
Electrical Interface	Port3	100Base-FX or 1000Base-X
	Port4	RJ45
		10/100/1000Base-T MDI/MDIX auto crossover IEEE802.3x flow control
Standards		IEEE 802.3, 802.3u, 802.3z, 802.3ab
LEDs		PWR, Link (Port1, Port2, Port3) Port4: Link/Speed
VLAN Feature		IEEE 802.1Q tagged VLAN, port based VLAN, MAC based VLAN, protocol based VLAN, private VLAN, IEEE 802.1ad Q-in-Q
Qos Feature		IEEE 802.1p 8 priority queues per port, Cos based on switch port; VLAN ID; TCP/UDP port.


Qos Feature	IEEE802.1p priority tag remarking, DSCP remarking, Port based ingress/egress rate limit
L2 switching Protection	STP, RSTP, MSTP, ITU-T G8031/G.8032
Trunking	IEEE 802.3ad LACP
Power	12VDC
Power Consumption	< 10W
Dimensions	155 x 88 x 23mm (D x W x H)
Weight	120g
Temperature	0 ~ 50°C (Operating), -10 ~ 70°C (Storage)
Humidity	5 ~ 90% non-condensing
Certification	CE, FCC, RoHS compliant
MTBF	65,000 hrs

Application



In-band Management MX210

- IP address configuration
- Port Configuration—speed, flow control, max frame, traffic statistics
- VLANs configuration
- Mux Mode configuration
- DDM information
- Device Reset
- Set to Default
- Save Startup Configuration

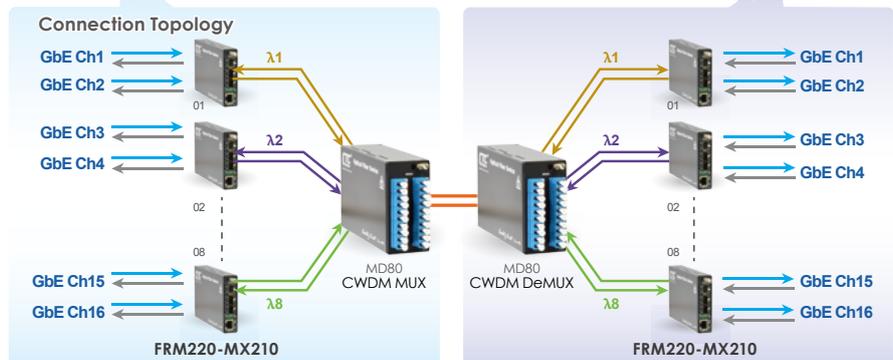

Ordering Information

Model Name	Description
FRM220-MX210	2-port Gigabit Ethernet Muxponder for transporting two Gigabit Ethernet over one 2.5G Fiber

Note: This card may use CH01M to provide console for initial TCP/IP settings, or use CH01 with default IP.



FRM220-10/100

10/100Base-TX to 100Base-FX
Unmanaged Media Converter

FRM220-10/100 is Fast Ethernet 10/100Base-TX to 100Base-FX non-managed stand-alone media converter, which give you the options to choose from the most popular fiber cabling connectors, ST, SC or FC. Both multi-mode and single mode converter models are available as well as BiDi which allows bi-directional transmissions using only a single fiber cable. When auto-negotiation is selected, these units will automatically tailor themselves to convert both half-duplex and full-duplex signals, according to IEEE802.3u standards. LED indicators signal the power status of the converter, UTP port speed, Link, and duplex status, FX port Link and duplex status. These stand-alone converters may also be concentrated into either the FRM220-CH20 or FRM220-CH08 managed chassis.

Features


- 10/100Base-TX to 100Base-FX Converter
- Auto-Negotiation or forced mode
- Auto MDI/MDIX
- Forward 1600 bytes (Max.) packets
- Supports Q in Q double tagged frame transparent
- Supports IEEE 802.1q Tag VLAN pass thru
- Support flow control (Pause)
- Supports Link Fault Pass through (LFP)
- Forward 9K jumbo packets in converter mode

Specifications

Optical Interface	Connector	1x9 (SC, ST, FC)
	Data rate	100Mbps
	Duplex mode	Full duplex
	Fiber	MM 50/125µm, 62.5/125µm SM 9/125µm
	Distance	MM 2km, SM 15/30/50/80/120km WDM 20/40/60/80km
	Wavelength	MM 1310nm, SM 1310,1550nm WDM 1310Tx/1550Rx (type A) 1550Tx/1310Rx (type B)
Standards	IEEE 802.3, IEEE 802.3u	
Indications	LED (Power, FX Link, TX SPD, TX Link, TX Duplex, FEF)	
Certification	CE, FCC, RoHS	

Electrical Interface	Connector	RJ-45
	Data rate	10Mbps, 100Mbps
	Cable	10Base-T Cat.3, 4, 5, UTP, 100Base-TX Cat.5, 5e or higher
Power	12VDC	
Power Consumption	< 4W	
Dimensions	155 x 88 x 23mm (D x W x H)	
Weight	120g	
Temperature	0 ~ 60°C (Operating), -10 ~ 70°C (Storage)	
Humidity	10 ~ 90% non-condensing	
MTBF	65,000 hrs	

Application

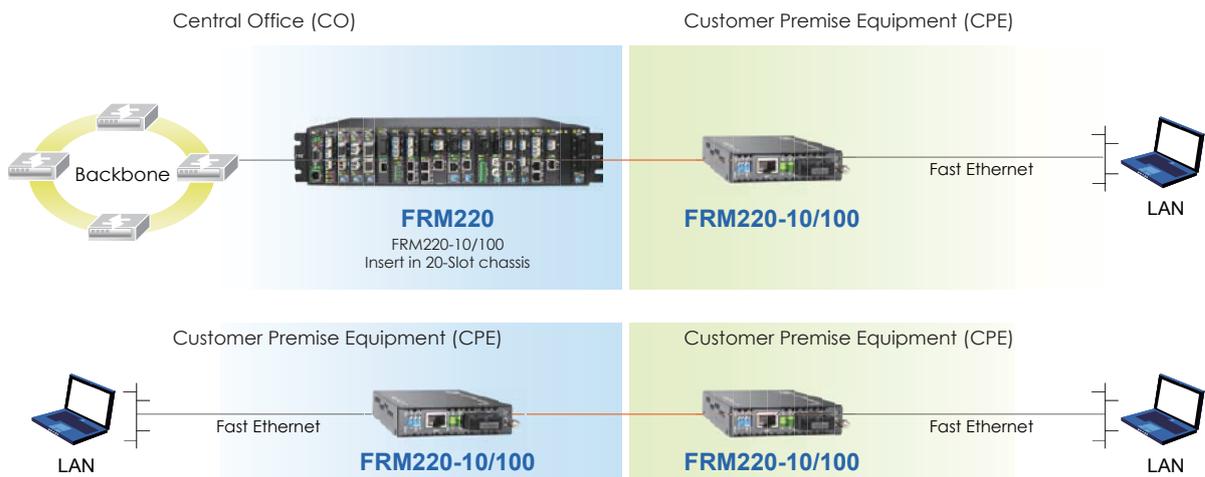

Ordering Information

Model Name	Description
FRM220-10/100	10/100Base-TX to 100Base-FX unmanaged media converter
Connector Type	Connectivity Distance
SC, ST, FC	002: 2km 015: 15km 030: 30km 050: 50km 080: 80km 120: 120km
	20A: WDM 20km A type 20B: WDM 20km B type 40A: WDM 40km A type 40B: WDM 40km B type
	60A: WDM 60km A type 60B: WDM 60km B type 80A: WDM 80km A type 80B: WDM 80km B type

Connector Type Connectivity Distance
FRM220 - 10/100 -
 Example: FRM220 - 10/100 - SC002



FRM220-1000TS

1000Base-T to 1000Base-X SFP Media Converter

The FRM220-1000TS is a transparent Gigabit Ethernet 1000Base-T to 1000Base-SX/LX SFP converter with very low latency. They are managed (when installed in FRM220 with NMC) or non-managed stand-alone media converters, which give you the options to choose from a wide range of industry standard SFP modules with LC connectors. SFPs in multi-mode and single mode types are available as well as BiDi which allows bi-directional transmissions using only a single fiber cable. Because they are completely transparent to Ethernet packets, they are able to support any size frames, including undersized or jumbo packets (9K bytes). LED indicators signal the power status of the converter, UTP port speed, Link, and duplex status, FX port Link and duplex status.


Features

- 1000Base-T to 1000Base-SX/LX
- Network management via terminal or SNMP in FRM220 chassis
- Auto-negotiation or force mode
- Auto MDI/MDIX
- Forward > 9K bytes packets
- Supports Link Fault Pass Through (LFP) function
- Auto Laser Shutdown (ALS)
- Protocol Transparent

Specifications

Optical Interface	Connector	SFP LC	Standard	IEEE 802.3ab										
	Data rate	1000Mbps		Indications	LED (Power, FX-Link, FX Duplex, TX-SPD, TX-Duplex, TX-Link)									
	Duplex mode	Full duplex			Power Input	Card : 12VDC								
	Fiber	MM 50/125µm, 62.5/125µm SM 9/125µm				Standalone : AC, DC options								
	Distance	MM 550m, 2km, SM15/30/50/80/120km WDM 20/40/60km				Power Consumption	< 12W							
	Wavelength	MM 1310nm, SM 1310,1550nm WDM 1310Tx/1550Rx (type A) 1550Tx/1310Rx (type B)					Dimensions	155 x 88 x 23mm (D x W x H)						
Electrical Interface	Connector	RJ45	Weight					120g						
	Data rate	1000Mbps		Temperature				0 ~ 50°C (Operating), -10 ~ 70°C (Storage)						
	Duplex mode	Full duplex			Humidity			10 ~ 90% non-condensing						
	Cable	10Base-T Cat.3, 4, 5, UTP						Certification	CE, FCC, LVD, RoHS					
Standard	Indications	Power Input				Power Consumption			Dimensions	Weight	Temperature	Humidity	Certification	MTBF

Application

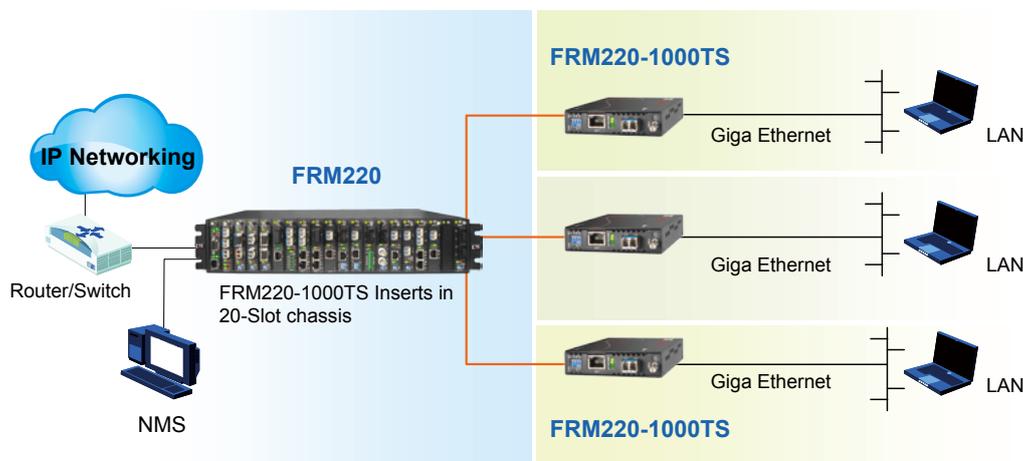

Ordering Information

Model Name	Description
FRM220-1000TS	1000Base-T to 1000Base-X SFP media converter (Optional SFP)



FRM220-1000M

10/100/1000Base-T to 1000Base-X
Web Smart OAM GbE Managed Converter

The FRM220-1000M is an IEEE802.3ah OAM compliant copper to fiber Gigabit Ethernet solution designed to make conversion between 10/100/1000Base-T and 1000Base-X with SC, FC or ST connectors. With SNMP and Web-based management in the FRM220, the network administrator can monitor, configure and control the activity of each 802.3ah series card and remotely connected OAM compliant converter. Converter settings include band-width control, duplex, and speed configuration, VLAN tagging and Q-in-Q support.

Features


- 10/100/1000Base-T to 1000Base-X Converter
- Auto-Cross over for MDI/MDIX in TP port
- Auto-Negotiation or manual mode in TP port
- Supports flow control Enable or Disable
- Supports Jumbo Frame 9K Bite
- Ingress / Egress bandwidth control
- Supports IEEE 802.3ah OAM in-band management
- Firmware upgrade via Web
- Management Password Security
- Dying gasp (remote power failure detection)
- Supports Link Fault Pass-Through (LFPT) Function
- Supports Auto Laser Shutdown (ALS) Function
- Allow IP settings Web or Console management on stand-alone.
- Provide Product information for management
- Online local/remote f/w upgrade
- Supports 16 Tag VLAN Group
- RMON counters (for standalone unit only)

Specifications

Optical Interface	Connector	1x9 (SC)
	Data rate	125/1250Mbps
	Duplex mode	Full duplex
	Fiber	MM 50/125µm, 62.5/125µm SM 9/125µm
	Distance	MM 2km, SM 15/30/50/80/120km WDM 20/40/60/80km
	Wavelength	MM 1310nm, SM 1310,1550nm WDM 1310Tx/1550Rx (type A) 1550Tx/1310Rx (type B)
Electrical Interface	Connector	RJ45
	Data rate	10Mbps, 100Mbps, 1000Mbps
	Duplex mode	Half / Full duplex
	Cable	10Base-T Cat.3, 4, 5, UTP, 100Base-TX Cat.5, 5e or higher

Standards	IEEE 802.3, IEEE 802.3u IEEE 802.3ab, 802.3z, 802.3ah, 802.1Q
Indications	LED (Power, FX-Link, LAN Speed, LAN Link)
Power Input	12VDC
Power Consumption	< 6W
Dimensions	155 x 88 x 23mm (D x W x H)
Weight	120g
Temperature	0 ~ 50°C (Operating), -10 ~ 70°C (Storage)
Humidity	10 ~ 90% non-condensing
Certification	CE, FCC, RoHS compliant
MTBF	65,000 hrs

Application

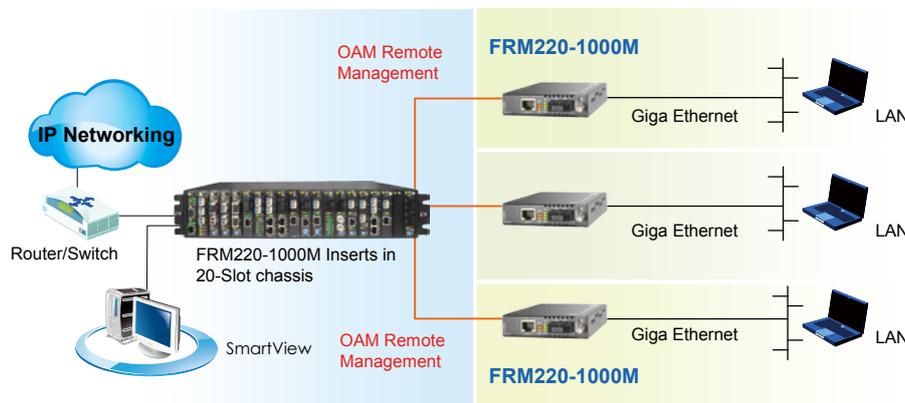

Ordering Information

Model Name	Description
FRM220-1000M	10/100/1000Base-T to 1000Base-X, Web Smart OAM managed media converter
Connector Type	Connectivity Distance
SC	002: 2km 015: 15km 030: 30km 050: 50km 20A: WDM 20km A type 20B: WDM 20km B type 40A: WDM 40km A type 40B: WDM 40km B type

Note: This card may use CH01M to provide console for initial TCP/IP settings, or use CH01 with default IP.



FRM220-1000MS

10/100/1000Base-T to 100/1000Base-X SFP
Web Smart OAM GbE Managed Converter

The FRM220-1000MS is an IEEE802.3ah OAM compliant copper to fiber Gigabit Ethernet solution designed to make conversion between 10/100/1000Base-T and 100/1000Base-X with SFP modules. With SNMP and Web-based management in the FRM220, the network administrator can monitor, configure and control the activity of each 802.3ah series card and remotely connected OAM compliant converter. Converter settings include bandwidth control, duplex, and speed configuration, VLAN tagging, Q-in-Q support and SFP DDMI.

Features


- 1-Port 10/100/1000Base-T to 100/1000Base-X Converter
- Auto-Cross over for MDI/MDIX in TP port
- Auto-Negotiation or manual mode in TP port
- Supports flow control Enable or Disable
- Supports Jumbo Frame 9K Packet
- Ingress / Egress bandwidth control
- Supports 802.3ah-OAM in-band management
- Firmware upgrade via Web (for standalone unit only)
- Management Password Setting (for standalone unit only)
- Dying gasp (remote power failure detection on stand-alone)
- Supports Link Fault Pass-Through (LFPT) Function
- Supports Auto Laser Shutdown (ALS) Function
- Allow IP settings web or console management
- Supports D/D function for SFP fiber transceiver
- Supports 16 Tag VLAN Group
- RMON counters (for standalone unit only)

Specifications

Optical Interface	Connector	SFP LC
	Data rate	125/1250Mbps
	Duplex mode	Full duplex
	Fiber	MM 50/125µm, 62.5/125µm. SM 9/125µm
	Distance	MM 2km, SM 15/30/50/80/120km, WDM 20/40/60/80km
Wavelength	MM	1310nm, SM 1310,1550nm
	WDM	1310Tx/1550Rx (type A) 1550Tx/1310Rx (type B)
Electrical Interface	Connector	RJ45
	Data rate	10Mbps, 100Mbps, 1000Mbps
	Duplex mode	Half / Full duplex
	Cable	10Base-T Cat.3, 4, 5, UTP 100Base-TX Cat.5, 5e or higher

Standards	IEEE 802.3, 802.3u, 802.3ab, 802.3z, 802.3ah, 802.1Q
Indications	LED (Power, FX-Link, LAN Speed, LAN Link)
Power Input	12VDC
Power Consumption	< 6W
Dimensions	155 x 88 x 23mm (D x W x H)
Weight	120g
Temperature	0 ~ 50°C (Operating), -10 ~ 70°C (Storage)
Humidity	10 ~ 90% non-condensing
Certification	CE, FCC, RoHS compliant
MTBF	65,000 hrs

Application

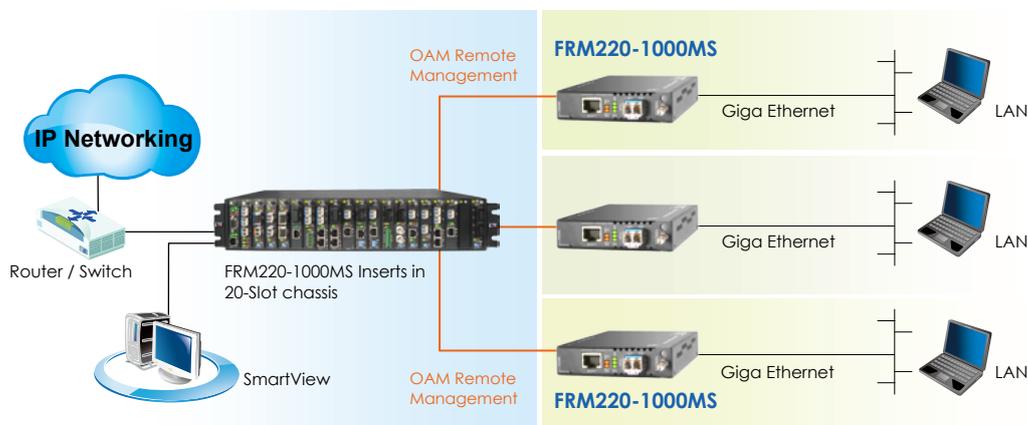

Ordering Information

Model Name	Description
FRM220-1000MS	10/100/1000Base-T to 100/1000Base-X SFP Web smart OAM managed media converter. (Optional SFP)

Note: This card may use CH01M to provide console for initial TCP/IP settings, or use CH01 with default IP.

NEW



FRM220-1000EAS/X-1

10/100/1000Base-T to 100/1000Base-X SFP
OAM/IP Managed GbE Converter

2

Gigabit Ethernet
Converter

The FRM220-1000EAS/X-1 is an IEEE802.3ah OAM compliant copper to fiber Gigabit Ethernet solution designed to make conversion between 10/100/1000Base-T and 100/1000Base-X with SFP. With stand-alone SNMP and Web-based management, the network administrator can monitor, configure and control the activity of each IEEE802.3ah series card and remotely connected OAM compliant converter. By offering IEEE802.3ah OAM in-band management, this converter can also be completely controlled and monitored from a centrally located managed rack. Based on a powerful L2 switch architecture, this converter supports bandwidth control, duplex and speed configuration, VLAN tagging, Q-in-Q, QoS, Spanning tree as well as auto laser shutdown, link fault pass through, OAM loop back and dying gasp.

Features


- 10/100/1000Base-T to 100/1000Base-X SFP
- Supports local / remote IEEE802.3ah OAM/ IP In-band management
- Stand-alone IP Based, Web GUI, Telnet, SNMP management
- Auto-Negotiation or forced mode
- Auto MDI/MDIX
- Supports IEEE 802.1Q Tagging
- Supports Q in Q double tagging
- Forward 10K bytes Jumbo packets (max.)
- Supports Flow control (Pause)
- Supports OAM remote loopback to assist in diagnosing network problems
- Supports remote IP ping function for diagnostic purpose
- Supports bandwidth control
- Supports remote CPE power fail detect (dying gasp)
- Supports Far End Fault Indication (FEFI)
- Supports Link Fault Pass-Through (LFPT)
- Supports RMON counter
- D/D function for supported SFP fiber transceiver
- Auto Laser Shutdown (ALS)
- Online local / remote f/w upgrade
- Default port and IEEE802.1Q Tagging priority QoS

Specifications

Optical Interface	Connector	SFP LC
	Data rate	100/1000Mbps
	Duplex mode	Full duplex
	Fiber	MM 50/125µm, 62.5/125µm. SM 9/125µm
	Distance	MM 550m, 2km, SM 15/30/50/80/120km WDM 20/40/60km
Wavelength	MM	1310nm, SM 1310, 1550nm
	WDM	1310Tx/1550Rx (type A) 1550Tx/1310Rx (type B)
Power Consumption	< 8W	
Dimensions	155 x 88 x 23mm (D x W x H)	
Weight	120g	

Electrical Interface	Connector	RJ45
	Data rate	10Mbps, 100Mbps, 1000Mbps
	Duplex mode	Half / Full duplex
	Cable	10Base-T Cat.3, 4, 5, UTP 100Base-TX Cat.5, 5e or higher 1000Base-T Cat.5, 5e or higher
Standards	IEEE 802.3, IEEE 802.3u, IEEE 802.1Q, IEEE 802.3ab, IEEE 802.3z	
Indications	LED : Power, FX-Link, FEF, TEST, Speed(10,100,1000), FULL	
Power Input	Card	: 12VDC
	Standalone	: AC, DC options
Temperature	0 ~ 50°C (Operating), -10 ~ 70°C (Storage)	
Humidity	10 ~ 90% non-condensing	
Certification	CE, FCC, RoHS compliant	
MTBF	65,000 hrs	

Application

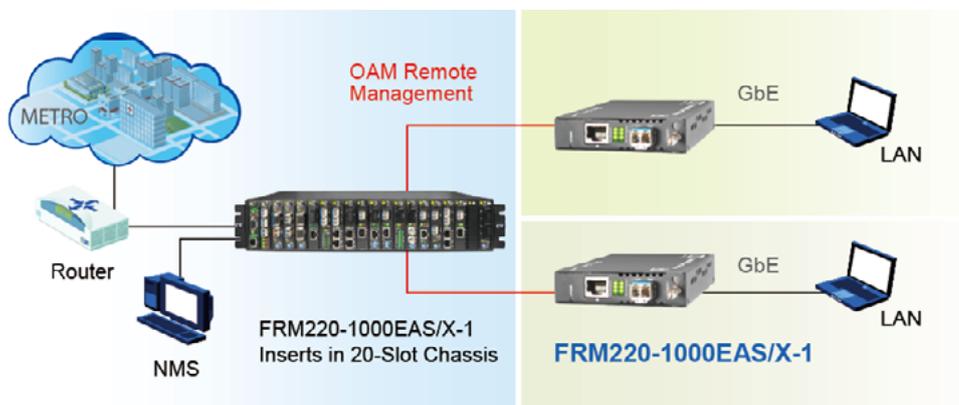

Ordering Information

Model Name	Description
FRM220-1000EAS/X-1	10/100/1000Base-T to 100/1000Base-X with OAM/IP-Based managed GbE Media Converter, (optional SFP)

Note: This card may use CH01M to provide console for initial TCP/IP settings, or use CH01 with default IP.

NEW



FRM220-100AS-1

(AKA **FRM220-100EAS-1**)

**10/100Base-TX to 100Base-FX
OAM/IP FE Managed Converter**

The FRM220-100AS-1 is an IEEE802.3ah OAM compliant copper to fiber Fast Ethernet solution designed to make conversion between 10/100Base-TX and 100Base-FX with SFP. With stand-alone SNMP and Web-based management, the network administrator can monitor, configure and control the activity of each IEEE802.3ah series card and remotely connected OAM compliant converter. By offering IEEE802.3ah OAM in-band management, this converter can also be completely controlled and monitored from a centrally located managed rack. Based on a powerful L2 switch architecture, this converter supports bandwidth control, duplex and speed configuration, VLAN tagging, Q-in-Q, QoS, Spanning tree as well as auto laser shutdown, link fault pass through, OAM loop back and dying gasp.

Features


- 10/100Base-TX to 100Base-FX SFP
- Supports local / remote IEEE802.3ah OAM/ IP In-band management
- Stand-alone IP Based, Web GUI, Telnet, SNMP management
- Auto-Negotiation or forced mode
- Auto MDI/MDIX
- Supports IEEE 802.1Q Tagging
- Supports Q in Q double tagging
- Max. MTU size 10K bytes
- Supports Flow control (Pause)
- Supports OAM remote loopback to assist in diagnosing network problems
- Supports bandwidth control
- Supports remote CPE power fail detect (dying gasp)
- Supports Far End Fault Indication (FEFI)
- Supports Link Fault Pass-Through (LFPT)
- Supports remote loopback
- D/D function for supported SFP fiber transceiver
- Auto Laser Shutdown (ALS)
- Online local / remote f/w upgrade
- Default port and IEEE802.1Q Tagging priority QoS
- SNMP trap and LED alarm for loss of light and loss of signal

Specifications

Optical Interface	Connector	SFP LC
	Data rate	100Mbps
	Duplex mode	Full duplex
	Fiber	MM 50/125µm, 62.5/125µm. SM 9/125µm
	Distance	MM 550m, 2km, SM15/30/50/80/120km WDM 20/40/60km
Wavelength	MM	1310nm, SM 1310, 1550nm
	WDM	1310Tx/1550Rx (type A) 1550Tx/1310Rx (type B)
Power Consumption	< 12W	
Dimensions	155 x 88 x 23mm (D x W x H)	
Weight	120g	
Electrical Interface	Connector	RJ45
	Data rate	10Mbps, 100Mbps
	Duplex mode	Half / Full duplex
	Cable	10Base-T Cat.3, 4, 5, UTP 100Base-TX Cat.5, 5e or higher

Standards	IEEE 802.3, IEEE 802.3u, IEEE 802.1Q, ITU-T G.664
Indications	LED : Power, FX-Link, FEF, TEST, Speed(10,100), FULL
Power Input	Card : 12VDC Standalone : AC, DC options
Temperature	Storage conditions
	Temperature range : -5~+45°C
	Relative Humidity : 5~95% Rh
	Absolute Humidity : 1~25g H2O/m ³
	Operation conditions
Temperature range : -5~+45°C	
Relative Humidity : 5~95% Rh	
Exist conditions for condensation and icing	
Absolute Humidity : 1~29g H2O/m ³	
Certification	CE, FCC, RoHS, EN60950 LVD compliant
MTBF	65,000 hrs

Application

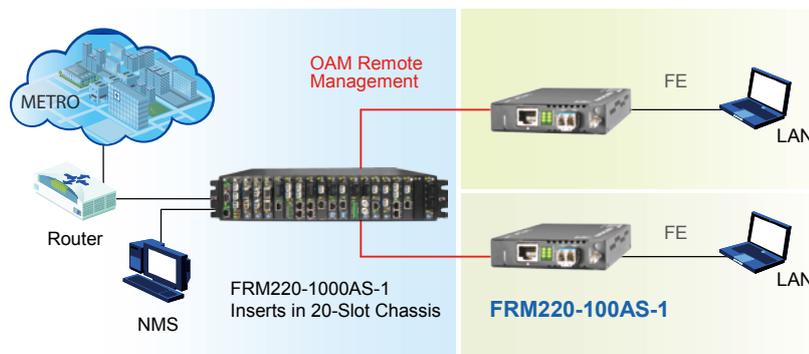

Ordering Information

Model Name	Description
FRM220-100AS-1	10/100Base-TX to 100Base-FX with OAM/IP-Based managed FE Media Converter (optional SFP)

Note: This card may use CH01M to provide console for initial TCP/IP settings, or use CH01 with default IP.



FRM220-10/100i

10/100Base-TX to 100Base-FX In-Band Managed Converter

2
Fast Ethernet
Converter

The FRM220-10/100i is a 10/100Base Ethernet to 100Base-FX fiber slide-in card converter designed for central and remote applications. With advanced features like bandwidth control, this media converter is targeted for customer premises equipment in metro LAN, campus, enterprise and FTTx applications. By offering in-band management, this converter can be completely controlled and monitored from a centrally located managed rack controlling all converter settings including bandwidth control, duplex, and speed configuration. This media converter is completely transparent to Layer 2 and Layer 3 protocols including IEEE 802.1q, VLAN tag, Q in Q, STP, IPX, IP, etc.

Features


- 1-Port 10/100Base-TX to 100Base-FX Converter
- Auto-Negotiation or forced mode
- Supports remote CPE power fail detect (dying gasp)
- Supports Far End Fault Indication (FEFI)
- Supports Link Fault Pass-Through (LFPT)
- Supports Loop Back Test
- Supports RMON counter
- Auto Laser Shutdown (ALS)
- Auto MDI/MDIX
- Forward 2046 bytes (max.) packets in switch mode
- Forward 9K jumbo packets in converter mode
- Supports Q in Q double tagged frame transparent
- Supports IEEE 802.1q Tag VLAN pass thru
- Supports local / remote In-band management (Monitor and Configure) by the SNMP manager.
- Bandwidth control (Nx32Kbps or Nx512Kbps)
- Supports flow control (Pause)
- Fiber Hardware Reset (FHR)
- Online local / remote f/w upgrade

Specifications

Optical Interface	Connector	1x9 (SC, ST, FC)
	Data rate	125Mbps
	Duplex mode	Full duplex
	Fiber	MM 50/125µm, 62.5/125µm SM 9/125µm
	Distance	MM 2km, SM 15/30/50km WDM 20/40km
	Wavelength	MM 1310nm, SM 1310, 1550nm WDM 1310Tx/1550Rx (type A) 1550Tx/1310Rx (type B)
Electrical Interface	Connector	RJ45
	Data rate	10Mbps, 100Mbps
	Duplex mode	Half / Full duplex
	Cable	10Base-T Cat.3, 4, 5, UTP 100Base-TX Cat.5, 5e or higher

Standards	IEEE 802.3, IEEE 802.3u,TS-1000
Indications	LED (Power, FEF, FX-Link, TX-SPD, TX-Duplex, TX-Link)
Power Input	12VDC
Power Consumption	< 6W
Dimensions	155 x 88 x 23mm (D x W x H)
Weight	120g
Temperature	0 ~ 50°C (Operating), -10 ~ 70°C (Storage)
Humidity	10 ~ 90% non-condensing
Certification	CE, FCC, RoHS compliant
MTBF	65,000 hrs

Application

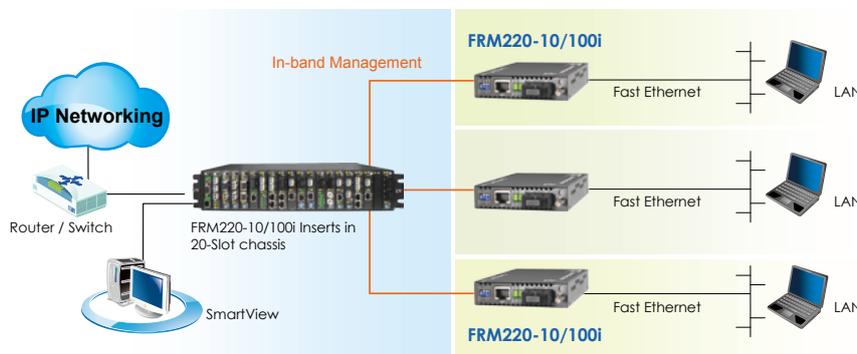

Ordering Information

Model Name	Description
FRM220-10/100i	10/100Base-TX to 100Base-FX In-band managed converter
Connector Type	Connectivity Distance
SC, ST, FC	002: 2km 015: 15km 030: 30km 050: 50km 20A: WDM 20km A type 20B: WDM 20km B type 40A: WDM 40km A type 40B: WDM 40km B type

Connector Type Connectivity Distance
FRM220 – 10/100i – □□□□□□
 Example: FRM220 – 10/100i – SC002

Note: This card must use CH01M, with serial console, to configure standalone settings. When connected as a remote to a managed central chassis, this card supports in-band management and only needs a CH01 chassis.



FRM220-10/100iS

10/100Base-TX to 100Base-FX SFP In-Band Managed Converter

The FRM220-10/100iS is a 10/100Base Ethernet to 100Base-FX fiber slide-in card converter designed for central and remote applications. With advanced features like bandwidth control, this media converter is targeted for customer premises equipment in metro LAN, campus, enterprise and FTTx applications. By offering in-band management, this converter can be completely controlled and monitored from a centrally located managed rack controlling all converter settings including bandwidth control, duplex, and speed configuration. This media converter is completely transparent to Layer 2 and Layer 3 protocols including IEEE 802.1q, VLAN tag, Q in Q, STP, IPX, IP, etc.

Features


- 1-Port 10/100Base-TX to 100Base-FX Converter
- Auto-Negotiation or forced mode
- Supports remote CPE power fail detect (dying gasp)
- Supports Far End Fault Indication (FEFI)
- Supports Link Fault Pass-Through (LFPT)
- Supports Loop Back Test
- Supports RMON counter
- Auto Laser Shutdown (ALS)
- Auto MDI/MDIX
- Forward 2046 bytes (max.) packets in switch mode
- Forward 9K jumbo packets in converter mode
- Supports Q in Q double tagged frame transparent
- Supports IEEE 802.1q Tag VLAN pass thru
- Supports local / remote In-band management (Monitor and Configure) by the SNMP manager.
- Bandwidth control (Nx32K or Nx512K bps)
- Supports flow control (Pause)
- Fiber Hardware Reset (FHR)
- Online local / remote f/w upgrade

Specifications

Optical Interface	Connector	SFP LC
	Data rate	125Mbps
	Duplex mode	Full duplex
	Fiber	MM 50/125µm, 62.5/125µm SM 9/125µm
	Distance	MM 2km, SM 15/30/50km WDM 20/40km
	Wavelength	MM 1310nm, SM 1310, 1550nm WDM 1310Tx/1550Rx (type A) 1550Tx/1310Rx (type B)
Electrical Interface	Connector	RJ45
	Data rate	10Mbps, 100Mbps
	Duplex mode	Half / Full duplex
	Cable	10Base-T Cat.3, 4, 5, UTP 100Base-TX Cat.5, 5e or higher

Standards	IEEE 802.3, IEEE 802.3u, TS-1000
Indications	LED (Power, FEF, FX-Link, TX-SPD, TX-Duplex, TX-Link)
Power Input	12VDC
Power Consumption	< 6W
Dimensions	155 x 88 x 23mm (D x W x H)
Weight	120g
Temperature	0 ~ 50°C (Operating), -10 ~ 70°C (Storage)
Humidity	10 ~ 90% non-condensing
Certification	CE, FCC, RoHS compliant
MTBF	65,000 hrs

Application

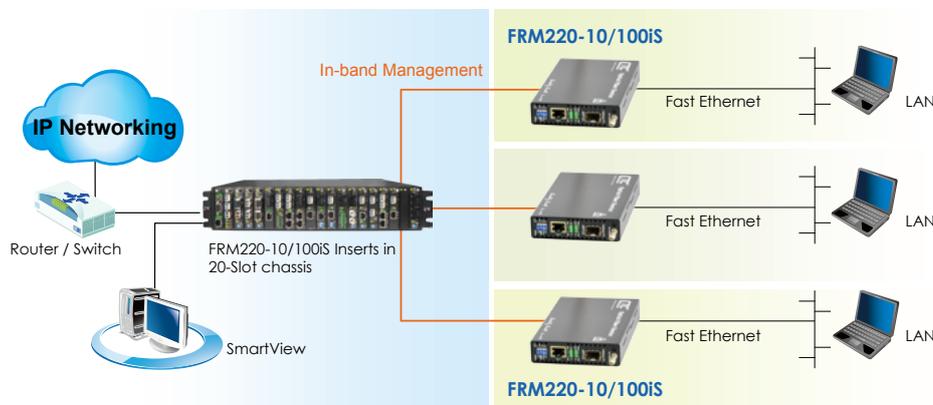

Ordering Information

Model Name	Description
FRM220-10/100iS	10/100Base-TX to 100Base-FX SFP In-band managed converter (Optional SFP)

Note: This card must use CH01M, with serial console, to configure standalone settings. When connected as a remote to a managed central chassis, this card supports in-band management and only needs a CH01 chassis.



FRM220-E1/T1

E1/T1 Fiber Modem

The FRM220-E1/T1 is a fiber media transport for G.703 E1/T1 transmissions. The BNC model provides unbalanced 75 Ohm coaxial E1 connections while the RJ-45 model provides switchable balanced 120 Ohm E1 or 100 Ohm T1 connections over twisted pair wiring. When the FRM220-E1/T1 card is placed in the FRM220 rack with in-band management, the card status, type, version, fiber link status, E1 or T1 link status and alarms for both local card and remote unit can all be displayed. When set for E1 mode, the FRM220-E1/T1 also supports fractional (structured) E1 when connected to a remote FRM220-Data, synchronous data communications converter. In an E1 transmission network where end connection requires synchronous data communication such as V.35 or RS-530 (X.21, RS-449), these units eliminate the need for an extra CSU/DSU. When placed in a single slot chassis and used standalone without management, the card may be configured by DIP switches.

Features

- n-band network Managed via Terminal, web or SNMP in FRM220 chassis
- T1/E1 RJ-45 (USOC RJ-48C) or E1 Coax (BNC) to Fiber converter
- Supports AMI or B8ZS/HDB3 line codes
- T1 supports unframed to FRM220-Data
- E1 supports unframed or fractional (N x 64k) to FRM220-Data
- User selectable E1 or T1 setting
- Electrical and optical Loop back tests
- Standalone RS232 console management via CH01M


Specifications

Optical Interface	Connector	1x9 (SC, ST, FC)
	Data rate	36.864Mbps
	Line coding	Scrambled NRZ
	Bit Error Rate	Less than 10 ⁻¹⁰
	Distance	MM 2km, SM 15/30/50km
		WDM 20/40km
Electrical Interface	Connector	RJ45 E1-120Ω, T1-100 Ω, BNC E1-75 Ω
	Data rate	E1: 2.048Mbps, T1:1.544Mbps
	Line Code	E1 HDB3/AMI, T1: B8ZS/AMI
	Cable type	Cat.3 or higher Twisted-Pair cable
	Standards	E1 ITU-T G.703, G.704, G.706, G.732, G.823 T1 ITU-T G.703, G.704, AT&T, TR-62411, ANSI T1.403

Indications	Power, FX-Link, E1/T1 SIG, Test, SYN, RD, TD, AIS (E1/T1R) Power, FX-Link, E1 SIG, Test(E1B)
Power Input	12VDC
Power Consumption	< 6W
Dimensions	155 x 88 x 23mm (D x W x H)
Weight	120g
Temperature	0 ~ 50°C (Operating), -10 ~ 70°C (Storage)
Humidity	10 ~ 90% non-condensing
Certification	CE, FCC, RoHS compliant
MTBF	65,000 hrs

Application

In-band Managed PDH Fiber Modem

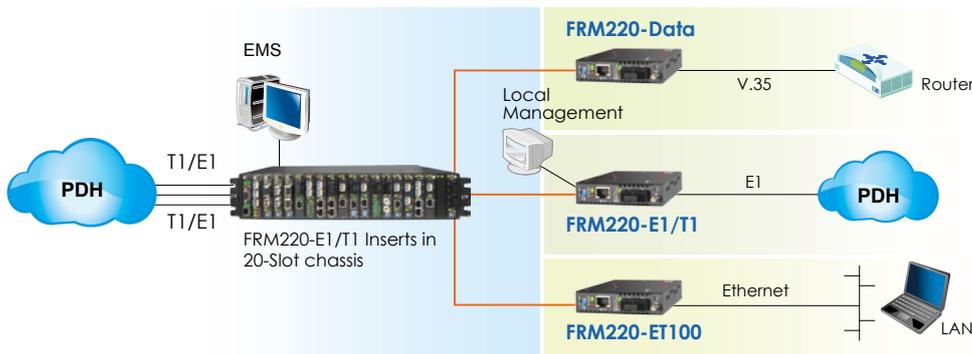

Ordering Information

Model Name	Description
FRM220-E1/T1R	E1/T1 RJ-45 fiber modem
FRM220-E1B	E1 BNC fiber modem
FRM220-E1/T1R-SFP	E1/T1 RJ-45 fiber modem (SFP module not included)
FRM220-E1B-SFP	E1 BNC fiber modem (SFP module not included)
Connector Type	Connectivity Distance
SC, ST, FC (Not Applicable for SFP Type)	002: 2km 015: 15km 030: 30km 050: 50km 20A: WDM 20km A type 20B: WDM 20km B type 40A: WDM 40km A type 40B: WDM 40km B type

Connector Type Connectivity Distance
FRM220 - □□ / □□□ - □□□□□
 Example: FRM220 - E1/T1R - SC002

Note: This card may be set by DIP switch and placed in CH01 chassis, or set by serial console if placed in CH01M chassis. When connected as a remote to a managed central chassis, this card supports in-band management and only needs a CH01 chassis.



FRM220-DATA

Fiber Modem V.35/X.21/RS-530/
RS-449/RS-232 over Fiber

The FRM220-DATA is a fiber modem for high-speed (up to 8.192Mbps) synchronous or low speed synchronous and asynchronous data transmissions (V.35, RS-232, RS-530, X.21 or RS-449) over fiber optical media. When the FRM220-DATA card is placed in the FRM220 rack with SNMP management, in-band management allows viewing the card and remote converter's status, type, version, fiber link status, data link status and alarms. Both card and remote can be configured to enable or disable the port, reset the port, set the data rate, modify the clock mode, and initiate local or far end loop back tests. The FRM220-Data fiber modem may also be paired with the FRM220-E1/T1 for Nx64K transmissions. When placed in a single slot chassis and used standalone without management, the card may be configured by DIP switches.

Features


- Synchronous or Asynchronous data over fiber
- In-band network management via terminal, web or SNMP in FRM220 chassis
- Software selectable interface, V.35, X.21, RS-530, RS-449, RS-232 (sync mode)
- Software selectable DCE or DTE mode
- User selectable data rate n x 64kbps, up to 9Mbps
- Independent clock mode setting, (internal, external, or recovery) for transmit and receive
- Electrical and optical loop back tests
- Compatible with FRM220-E1 on same fiber link for N x 64k
- Standalone RS232 console management via CH01M

Specifications

Optical Interface	Connector	SFP LC
	Data rate	36.864Mbps
	Line coding	Scrambled NRZ
	Bit Error Rate	Less than 10-10
	Distance	MM 2km, 5M 15/30km
	Wavelength	WDM 20/40km 1310nm, 1550nm
Dimensions	155 x 88 x 23mm (D x W x H)	
Weight	130g	
Temperature	0 ~ 50°C (Operating), -10 ~ 70°C (Storage)	
Humidity	10 ~ 90% non-condensing	
Certification	CE, FCC, RoHS compliant	
MTBF	65,000 hrs	

Electrical Interface	Connector	HDB26F w/ adapter cable for V35 X21, RS530, RS449,RS232
	Line Code	NRZ
	Baud Rate	RS-232 up to 384K async V.35/RS-530 up to 9152k sync where n=1 to 143 (64K ~ 9152Kbps)
	Clock source	Internal, Recovery, External
	Standard	ITU-T
Indications	LED (Power, FX Link, RTS, Test , TD, RD, CTS, DCD)	
Power Input	12VDC	
Power Consumption	< 6W	

Application

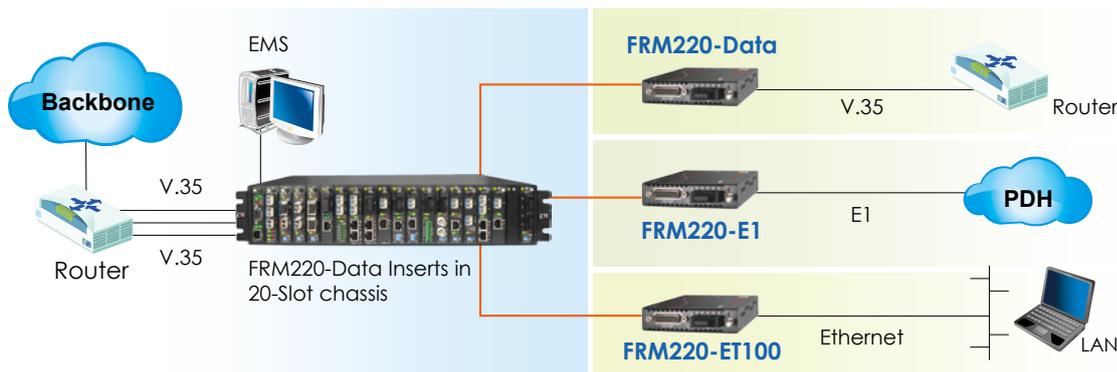

Ordering Information

Model Name	Description
FRM220-V35	V.35 to fiber with V35 cable
FRM220-X21	X.21 to fiber with X.21 cable
FRM220-RS530	RS530 to fiber with RS530 cable
FRM220-RS449	RS449 to fiber with RS449 cable
FRM220-RS232	RS232 to fiber with RS232 cable
FRM220-V35-SFP	V.35 to fiber with V35 cable (SFP module not included)
FRM220-X21-SFP	X.21 to fiber with X.21 cable (SFP module not included)
FRM220-RS530-SFP	RS530 to fiber with RS530 cable (SFP module not included)
FRM220-RS449-SFP	RS449 to fiber with RS449 cable (SFP module not included)
FRM220-RS232-SFP	RS232 to fiber with RS232 cable (SFP module not included)

Connector Type	Connectivity Distance
SC, ST, FC	002: 2km 015: 15km 030: 30km
(Not Applicable for SFP Type)	20A: WDM 20km A type 20B: WDM 20km B type 40A: WDM 40km A type 40B: WDM 40km B type

Interface Type Connector Type Connectivity Distance
FRM220 - □□□□ - □□□□□□
 Example: FRM220 - V35 - SC002

Note: This card may be set by DIP switch and placed in CH01 chassis, or set by serial console if placed in CH01M chassis. When connected as a remote to a managed central chassis, this card supports in-band management and only needs a CH01 chassis.



FRM220-ET100

Fiber Modem Ethernet over E1 Fiber

FRM220-ET100 is a single port Fiber WAN (TDM) card with built-in HDLC Ethernet Bridge for the FRM220 Series. The converter supports Nx64 data rates from 64Kbps up to 2.048Mbps when linked by fiber to FRM220-Data or FRM220-E1/ T1 cards. The clock source may be selected internally or recovered from received fiber signal. The Ethernet port utilizes a single RJ-45 connector. When the FRM220-ET100 card is placed in the FRM220 rack with SNMP management, the management can view the converter card's status, type, version, Ethernet link status and alarms. The card can be configured to enable or disable the port, reset the card, set clocking, data rate and provide digital diagnostic loopbacks. A unique feature of the FRM220-ET100 is the use of a common card design which may either be inserted in the FRM220-CH01 single slot chassis as a stand-alone modem or as a card when placed in the FRM220-CH20 In-band managed rack.


Features

- 1-Port Ethernet to HDLC (fiber) converter
- P2P Fiber link compatible with FRM220-E1/T1 and FRM220-Data
- Clock source (internal or external)
- Nx64k data rate (64kbps~2048kbps)
- Ethernet encapsulated with ISO 13239 standard HDLC
- Loop Back with integral BERT & LED indicators
- Firmware upgradeable, when placed in managed FRM220 chassis
- Interface connectors, RJ-45 for 10/100 Base-Tx
- Fixed optical for SC or ST, 2km(MM) to 120km(SM)

Specifications

TDM (fiber) Interface	Connector	1x9 (SC, ST, FC)	Indications	PWR, TD/RD Act, Test, Sys, Alarm, Error			
	Data rate	64~2048kb/s(nx64)		Power Input	12VDC		
	Distance	MM 2km, SM 15/30/50km WDM 20/40km			Power Consumption	< 6W	
	Wavelength	MM 1310nm, SM 1310, 1550nm				Dimensions	155 x 88 x 23mm (D x W x H)
		WDM 1310Tx/1550Rx (type A) 1550Tx/1310Rx (type B)					Weight
Ethernet Interface	Standards	IEEE 802.3u, IEEE 802.3	Temperature				
	Data rate	10Mbps, 100Mbps		Humidity			
	Duplex mode	Half / Full duplex			Certifications		
	Connector	RJ-45				MTBF	
Tests	E1 Loops	Remote Loop back					

Application

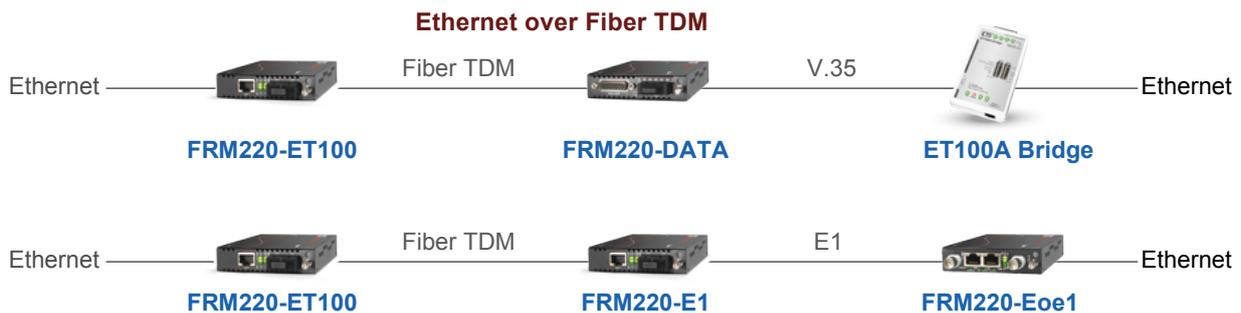

Ordering Information

Model Name	Description
FRM220-ET100	10/100Base-TX to E1 fiber modem
Connector Type	Connectivity Distance
SC, ST, FC	002: 2km 015: 15km 030: 30km 050: 50km 20A: WDM 20km A type 20B: WDM 20km B type 40A: WDM 40km A type 40B: WDM 40km B type

Connector Type Connectivity Distance
FRM220 – ET100 –
 Example: FRM220 – ET100 – SC002

Note: This card may be set by DIP switch and placed in CH01 chassis, or set by serial console if placed in CH01M chassis. When connected as a remote to a managed central chassis, this card supports in-band management and only needs a CH01 chassis.



FRM220-DS3/E3

DS3/E3 over Fiber

The FRM220-DS3/E3 is fiber modem that works in pairs to transparently extend DS3, E3 or STS-1 transmissions over optical fiber. By utilizing pluggable SFP transceivers, these converters may be easily deployed on multimode or single mode fiber, at a distance up to 120km, or over a single core fiber using BiDi (WDM) SFP modules. The DS3/E3 connections utilize industry standard BNC connections for transmit and receive via coaxial cables. When the FRM220-DS3/E3 card is used standalone in a single slot chassis, DIP switches may be used for configuration and loopback control. When placed in a single slot chassis with console port, an easy to maneuver user menu is available via terminal to configure, monitor, and run diagnostic loop back functions. The EOC (embedded operations channel) allows in-band management to control the remotely connected modem over a working fiber link. When the FRM220-DS3/E3 card is placed in the FRM220 rack with SNMP management, the management can configure and view the local and remote converter cards' status, type, version, fiber link status and alarms.

Features


- In-band network Managed via Terminal, web or SNMP in FRM220 chassis
- DS3/E3 Coax (BNC) to Fiber SFP fiber modem
- Supports AIS (Alarm Indication Signal)
- User selectable E3 or DS3 setting
- Electrical and optical Loop back tests
- Standalone RS232 console management via CH01M

Specifications


Optical Interface	Connector	SFP : LC (Uses standard 100Base-X/OC-3 SFP)
	Data Rate	DS3/T3 = 44.7 Mbps; E3 = 34.4 Mbps
Line Coding	Distance	MM 2km, SM 15/30/50/80/120km, WDM 20/40/60/80km
	Wavelength	1310nm, 1550nm, CWDM 1471nm ~ 1611nm
Dimensions	155 x 88 x 23mm (D x W x H)	
Weight	120g	
Temperature	0 ~ 50°C (Operating), -10 ~ 70°C (Storage)	
Certification	CE, FCC, RoHS compliant	

Electrical Interface	Connector	75 ohm Coax, TX output min: +2.5dBm max : +9.1dBm RX input min: -9.7dBm, max +10.5dBm
	Standards	ANSI, ITU-TS, ETSI, AT&T, G.703, G.921 & G.955
	Indications	Power, Coax link, coax loop-back, AIS on coax link; FX link, fiber loop-back ,AIS on FX link
Power Input	12VDC	
Power Consumption	< 6W	

Application

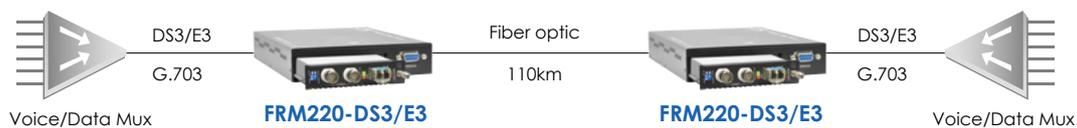

Integrate Voice & Data on Network

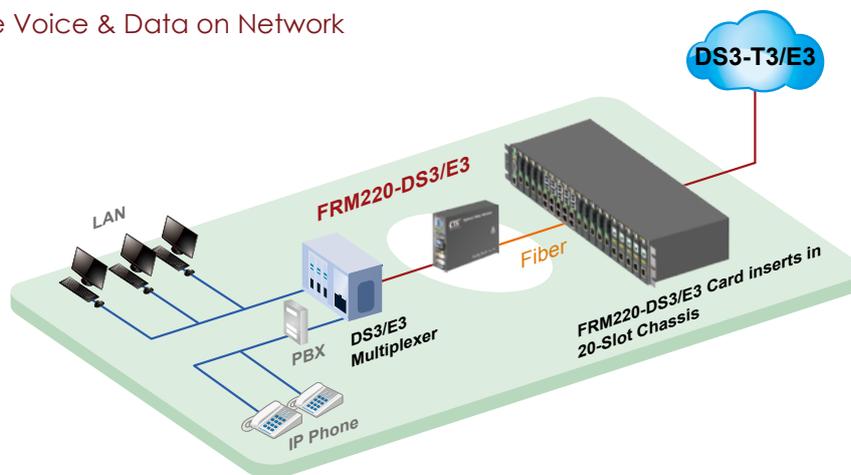

Ordering Information

Model Name	Description
FRM220-DS3/E3	DS3/E3 Coax (BNC) to Fiber SFP fiber media converter

Note: This card must use CH01M, with serial console, to configure standalone settings. When connected as a remote to a managed central chassis, this card supports in-band management and only needs a CH01 chassis.



FRM220-Serial

RS232/485 over Fiber

The FRM220-Serial provides a fiber modem solution to extend asynchronous RS-232 or RS-485 transmission distance up to 2km over multimode fiber or up to 120km over single mode fiber. The converter is equipped with multiple interface circuits for connection to RS-232 or RS485 (2 or 4 wire, full or half duplex). The FRM220-Serial secures data transmission over EMI resistant fiber at speeds up to 256kbps for RS-232 or up to 1024kbps for RS485. When the FRM220-Serial/485 card is placed in the FRM220 rack with SNMP management, in-band management allows configuring and viewing the card and remote converter's status, type, version, fiber link status, data link status and alarms. When placed in a single slot chassis and used standalone without management, the card may be configured by DIP switches.

Features


- Extend asynchronous serial transmission up to 120km over fiber
- In-band network management via terminal, Web or SNMP in FRM220-CH20 chassis
- Software selectable data interface for RS-232/ 485
- Software selectable three or five wires RS-232
- Speeds up to 256kbps for RS-232 (Async. mode)
- Speeds up to 1Mbps for RS-485
- Standalone RS232 console management via CH01M
- Software selectable two wires (half duplex) or four wires (full duplex) RS-485

Specifications

Optical Interface	Connector	SFP LC
	Data rate	36.864Mbps
	Line coding	Scrambled NRZ
	Bit Error Rate	Less than 10-10
	Fiber	MM 62.2/125µm, 50/125µm SM 9/125µm
	Distance	MM 2km, SM 15/30/50km WDM 20/40km
	Wavelength	MM 1310nm, SM 1310, 1550nm WDM 1310Tx/1550Rx (type A) 1550Tx/1310Rx (type B)
Standards	EIA/TIA RS-485, RS-232	
LEDs	Power, FX Link, DI, DO, Test	
Power Input	12VDC	

Electrical Interface	Connector	6 pins Terminal block
	Data Signal Formats	RS-485 2-wire RS-232 RTS/CTS 5-wire RS-232 3-wire
	Baud Rate	RS-422, RS-485 up to 1024kbps RS-232 up to 256kbps
	Bit Error Rate	Less than 10-10
	Power Consumption	< 6W
Dimensions	155 x 88 x 23mm (D x W x H)	
Weight	130g	
Temperature	0 ~ 50°C (Operating), -10 ~ 70°C (Storage)	
Humidity	10 ~ 90% non-condensing	
Certification	CE, FCC, RoHS compliant	
MTBF	65,000 hrs	

Application

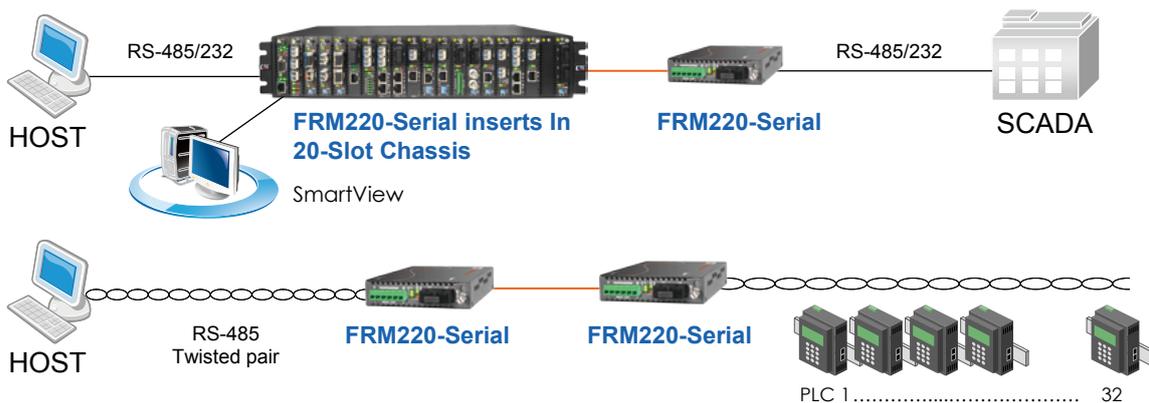

Ordering Information

Model Name	Description
FRM220-Serial	RS-232/485 fiber converter
FRM220-Serial-SFP	RS-232/485 fiber converter (SFP module not included)
Connector Type	Connectivity Distance

SC, ST, FC (Not Applicable for SFP Type) 002: 2km 015: 15km 030: 30km 050: 50km
20A: WDM 20km A type 20B: WDM 20km B type 40A: WDM 40km A type 40B: WDM 40km B type

Connector Type Connectivity Distance
FRM220 – Serial –
 Example: FRM220 – E1/T1R – SC002

Note: This card may be set by DIP switch and placed in CH01 chassis, or set by serial console if placed in CH01M chassis. When connected as a remote to a managed central chassis, this card supports in-band management and only needs a CH01 chassis.

NEW



FRM220-FXO-4 FRM220-FXS-4

**4x FXO over Fiber
4x FXS over Fiber**

FRM220-FXO/FXS-4 are 4 channel POTS (Plain Old Telephone System) over fiber converter/extender. The four POTS connection uses standard RJ-11C modular connectors for each copper pair connection. A pair of FRM220-FXO/FXS-4 is required to implement an end to end system. FXO type unit connects to a telephone line (PSTN) or PBX station line and has ability to detect ringing voltages and to act as a telephone. FXS type unit is the reciprocal unit and has ability to act as PSTN and connects to a telephone device. Two FXS cards may be connected back-to-back to provide a private "hot line". When the FRM220-FXO/FXS-4 cards are placed in the FRM220 rack with SNMP management, in-band management allows configuring and viewing the card and remote converter's status, type, version, fiber link status, on hook status and alarms. When placed in a single slot chassis and used standalone without management, the card may be configured by DIP switch.

Features

- Extend telephone voice transmission **up to 120km** over fiber
- Network management via terminal, web or SNMP in FRM220 chassis
- Supports telephone voice transmission
- Supports caller ID Pass-Through
- Supports FXS to FXS hot line

Specifications

Optical Interface	Connector	SFP-LC
	Fiber	MM 62.2/125µm, 50/125µm, SM 9/125µm Rate: 155Mbps
	Distance	MM 2km, SM 15/30/50km, WDM 20/40km
	Wavelength	MM 1310nm, SM 1310, 1550nm WDM 1310Tx/1550Rx (type A) 1550Tx/1310Rx (type B)
Indications	LED (Power, FX Link, Phone Act, Test)	
Power Input	12VDC	
Power Consumption	< 6W (FRM220-FXO-4) < 12W (FRM220-FXS-4)	
Dimensions	155 x 88 x 23mm (D x W x H)	
Weight	120g	
Temperature	0 ~ 50°C (Operating), -10 ~ 70°C (Storage)	
Humidity	10 ~ 90% non-condensing	
Certification	CE, FCC, RoHS compliant	
MTBF	65,000 hrs	

Electrical Interface	Connector	RJ-11
	FXO modle	Impedance : 600 ohms Coding : 16 bits liner Loop Current : 10~100mA Ring Frequency : Acceptable 20 ~50Hz Insertion Loss: 0.0 ± 1.0dB at 1000Hz Impedance : 600 ohms
	FXS modle	Coding : 16 bits liner Dial: DTMF and Dial Pulse Battery Source: 48VDC ± 4V Ringing Waveform : Sine wave Ringing Frequency : 20/25/30/35/40/45/50 Hz selectable Ring Cadence: FXS to FXS: On / 1 sec, Off / 2 sec FXO to FXS; Reproduces the cadence detected by FXO Insertion Loss 0.0 ± 1.0dB at 1000Hz REN: 4.0B(Ring Equivalence Number)

Application

Figure 1 : Automatic Ring down hotline


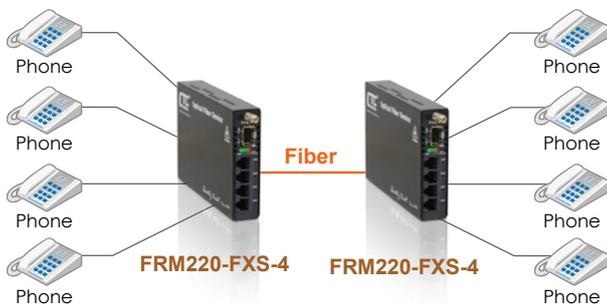


Figure 2 : Voice transmission from 2km to 120km over fiber

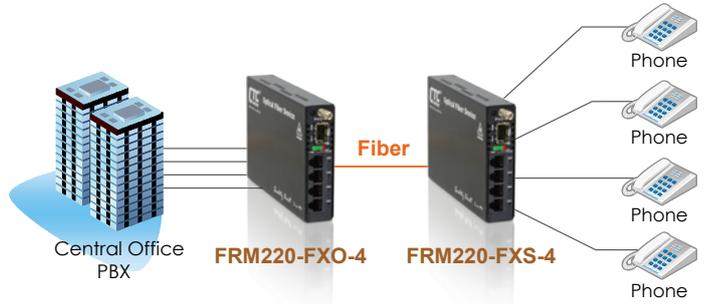

Ordering Information

Model Name	Description
FRM220-FXO-4	4-port FXO fiber converter SFP-LC
FRM220-FXS-4	4-port FXS fiber converter SFP-LC
Connector Type	Connectivity Distance
SC, ST, FC	002: 2km 015: 15km 030: 30km 050: 50km 20A: WDM 20km A type 20B: WDM 20km B type 40A: WDM 40km A type 40B: WDM 40km B type

Connector Type Connectivity Distance
FRM220 – FXO-4 – □□□□□□
 Example: FRM220 – FXO-4 – SC002

Note: This card may be set by DIP switch and placed in CH01 standalone chassis. When connected as a remote to a managed central chassis, this card supports in-band management.



FRM220-FXO/FXS

1ch POTS over Fiber Media Converter

FRM220-FXO/FXS is a POTS (Plain Old Telephone System) over fiber converter/extender. The POTS connection uses a standard RJ-11C modular connector for one copper pair connection. A pair of FRM220-FXO/FXS is required to implement an end to end system. FXO mode connects to a telephone line (PSTN) or PBX station line and has ability to detect ringing voltages and to act as a telephone. FXS mode is the reciprocal unit and has ability to act as PSTN and connects to a telephone device. When the FRM220-FXO/FXS card is placed in the FRM220 rack with SNMP management, in-band management allows configuring and viewing the card and remote converter's status, type, version, fiber link status, on hook status and alarms. Both card and remote can be configured to enable or disable the port, reset the port and set the FXO or FXS mode. When configured in an FXS to FXS fashion, a private "hot line" or direct line is created. When placed in a single slot chassis and used standalone without management, the card may be configured by DIP switch.

Features


- Extend telephone voice transmission up to 120km over fiber
- Network management via terminal, web or SNMP in FRM220 chassis
- Supports caller ID Pass-Through
- Selectable FXO or FXS mode
- Supports FXS to FXS hot line

Specifications

Optical Interface	Connector	1x9 (SC)
	Fiber	MM 62.2/125μm, 50/125μm, SM 9/125μm Rate: 155Mbps
	Distance	MM 2km, SM 15/30/50km, WDM 20/40km
	Wavelength	MM 1310nm, SM 1310, 1550nm WDM 1310Tx/1550Rx (type A) 1550Tx/1310Rx (type B)
Indications	LED (Power, FX Link, Phone Act, Test)	
Power Input	12VDC	
Power Consumption	< 6W	
Dimensions	155 x 88 x 23mm (D x W x H)	
Weight	120g	
Temperature	0 ~ 50°C (Operating), -10 ~ 70°C (Storage)	
Humidity	10 ~ 90% non-condensing	
Certification	CE, FCC, RoHS compliant	
MTBF	65,000 hrs	

Electrical Interface	Connector	RJ-11
	FXO mode	Impedance : 600 ohms Coding : 16 bits liner Loop Current : 10~100mA Ring Frequency : Acceptable 20 ~50Hz Insertion Loss: 0.0 ± 1.0dB at 1000Hz Impedance : 600 ohms
	FXS mode	Coding : 16 bits liner Dial: DTMF and Dial Pulse Battery Source: 48VDC ± 4V Ringing Waveform : Sine wave Ringing Frequency : 20/25/30/35/40/45/50 Hz selectable Ring Cadence: FXS to FXS : On / 1 sec, Off / 2 sec FXO to FXS; Reproduces the cadence detected by FXO Insertion Loss 0.0 ± 1.0dB at 1000Hz REN: 4.0B(Ring Equivalence Number)

Application

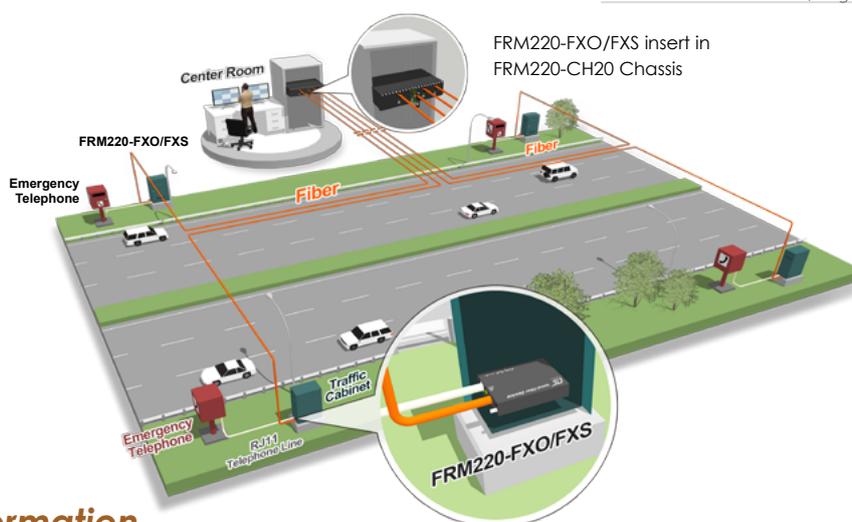

Ordering Information

Model Name	Description
FRM220-FXO/FXS	FXO / FXS fiber converter
Connector Type	Connectivity Distance
SC, ST, FC	002: 2km 015: 15km 030: 30km 050: 50km 20A: WDM 20km A type 20B: WDM 20km B type 40A: WDM 40km A type 40B: WDM 40km B type

Note: This card may be set by DIP switch and placed in CH01 standard chassis, When connected as a remote to a managed central chassis, this card supports in-band management.



FRM220A-Eoe1

Ethernet Bridge over E1

- HDLC
- MTU 1522bytes
- Framed / Unframed E1

The FRM220A-Eoe1 is an Ethernet over E1 Bridge for cost-effective connection of 10/100Base-TX or 100Base-FX LANs over a single E1 transport. By using standard HDLC encapsulation, the FRM220A-Eoe1 is able to transmit up to a 2M bits Ethernet over an E1 link. The FRM220A-Eoe1 supports an E1 attenuation of up to 43 dB on twisted pair or coax cable, which provides an approximate operating range up to 2km (using 22AWG). The FRM220A-Eoe1 fully meets E1 specifications including ITU-T G.704 and G.823. The FRM220A-Eoe1 features diagnostic capabilities for performing remote loopback. The operator at either end of the line may test both the FRM220A-Eoe1 and the line in the digital loopback mode. The Ethernet copper interface supports auto-negotiation and auto MDI/MDIX, allowing plug-and-play Ethernet connection without any additional configuration. When placed in FRM220A system, the Ethernet may be aggregated to the chassis's built in Ethernet switch. When placed in a single slot chassis and used standalone without management, the card may be configured by DIP switch.

Features


- Connects one Fast Ethernet over E1 links (64k~2048Kbps)
- Built-in HDLC bridge operates at WAN rate
- Auto-Negotiation
- Unbalanced E1/BNC or balanced E1/RJ45
- Fully compatible with FRM220A and FRM220 chassis
- SNMP management with FRM220A and FRM220 chassis
- LED Alarm indication
- Standalone RS232 console management via CH01M

Specifications

E1 Interface	Framing	Framed / Unframed
	MTU	1522bytes (Max.)
	Standard	ITU-T G.703/G.704/G.706 & G.732, G.823
	Bit rate	2.048Mbps± 50ppm
	Line code	HDB3
	Clock setting	Internal OSC or recovery clock
	Receive level	-43dB
	Line impedance	75 ohm (BNC) / 120 ohm (RJ45)
	Jitter Performance	Complies with ITU-T G.823
	Pulse shape	Complies with ITU-T G.703
	Pulse amplitude	Nominal 2.37V ± 10%
	Delay Variance	220ms
	Connector	RJ-45, BNC
	Diagnostics	Digital remote loopback

Ethernet Interface	Standards	IEEE 802.3, 802.3u
	Data rate	10/100Base-TX, Half/Full duplex
	Connector	RJ-45 10/100Base-TX
Indications	Power, ALM, E1 signal loss, E1 Alarm (AIS, LOF, RAI, LOMF), LAN link /ACT, 10/100M, SD (100Base-FX)	
Power Input	12VDC	
Power Consumption	< 6W	
Dimensions	155 x 88 x 24mm (D x W x H)	
Weight	130g	
Temperature	0 ~ 50°C (Operating), -10 ~ 70°C (Storage)	
Humidity	10 ~ 90% RH (non-condensing)	
Certifications	CE, FCC, RoHS compliant	
MTBF	65,000 hrs	

Application

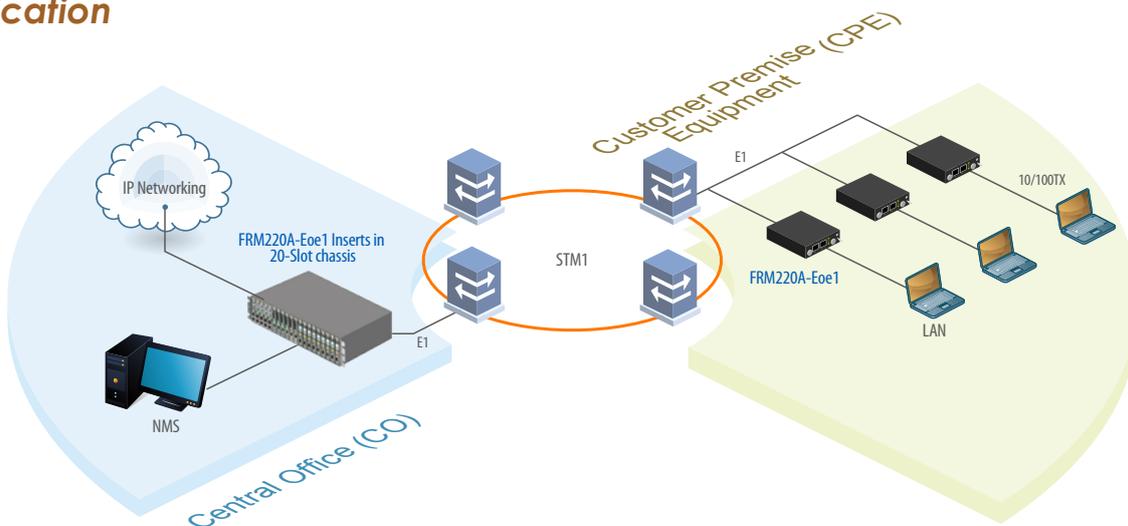

Ordering Information

Model Name	Description
FRM220A-Eoe1	10/100Base-TX to E1 HDLC bridge

Note: This card may be set by DIP switch and placed in CH01 chassis, or set by serial console if placed in CH01M chassis. When connected as a remote to a managed central chassis, this card supports in-band management and only needs a CH01 chassis.



FRM220A-Eoe1/G

Ethernet Bridge over E1 (GFP)

- HDLC & GFP
- MTU 2046bytes
- Unframed E1

The FRM220A-Eoe1/G is an Ethernet over E1 Bridge for cost-effective connection of 10/100Base-TX or 100Base-FX LANs over a single E1 transport. By using GFP (Generic Framing Procedure) or standard HDLC encapsulation, the FRM220A-Eoe1/G is able to transmit up to a 2M bits Ethernet over an E1 link. The FRM220A-Eoe1/G supports an E1 attenuation of up to 43 dB on twisted pair or coax cable, which provides an approximate operating range up to 2km (using 22AWG). The FRM220A-Eoe1/G fully meets E1 specifications including ITU-T G.704 and G.823. The Ethernet copper interface supports auto-negotiation and auto MDI/MDIX, allowing plug-and-play Ethernet connection without any additional configuration. When placed in FRM220A system, the Ethernet may be aggregated to the chassis's built in Ethernet switch. When placed in a single slot chassis and used standalone without management, the card may be configured by serial terminal.

Features


- Connects one Fast Ethernet over E1 links (2.048Mbps)
- Built-in GFP bridge operates at WAN rate
- Auto-Negotiation
- Unbalanced E1/BNC or balanced E1/RJ45
- Fully compatible with FRM220A and FRM220 chassis
- SNMP management with FRM220A and FRM220 chassis
- LED Alarm indication
- Standalone RS232 console management via CH01M

Specifications

E1 Interface	Framing	Unframed
	MTU	2046bytes
	Connector	RJ45 10/100Base-TX
	Standard	ITU-T G.703/G.704/G.706 & G.732, G.823
	Bit rate	2.048Mbps± 50ppm
	Line code	HDB3
	Clock setting	Internal OSC or recovery clock
	Receive level	-43dB
	Line impedance	75 ohm (BNC) / 120 ohm (RJ-45)
	Jitter	
	Performance	Complies with ITU-T G.823
	Pulse Mask	Complies with ITU-T G.703
	Pulse amplitude	Nominal 2.37V ± 10%
	Delay Variance	220ms
Connector	RJ-45, BNC	

Ethernet Interface	Diagnostics	Digital remote loopback
	Standards	IEEE 802.3, 802.3u
	Data rate	10/100Base-TX, Half/Full duplex Encapsulation GFP (G.7041)
Indications	Power, ALM, E1 signal loss, E1 Alarm (AIS, LOF, RAI, LOMF), LAN link /ACT, 10/100M, SD (100Base-FX)	
Power Input	12VDC	
Power Consumption	< 6W	
Dimensions	155 x 88 x 24 mm (D x W x H)	
Weight	DC12 : 280g AC/DC 48/AD : 580g	
Temperature	0 ~ 50°C (Operating), -10 ~ 70°C (Storage)	
Humidity	10 ~ 90% RH (non-condensing)	
Certifications	CE, FCC, RoHS compliant	
MTBF	65,000 hrs	

Application

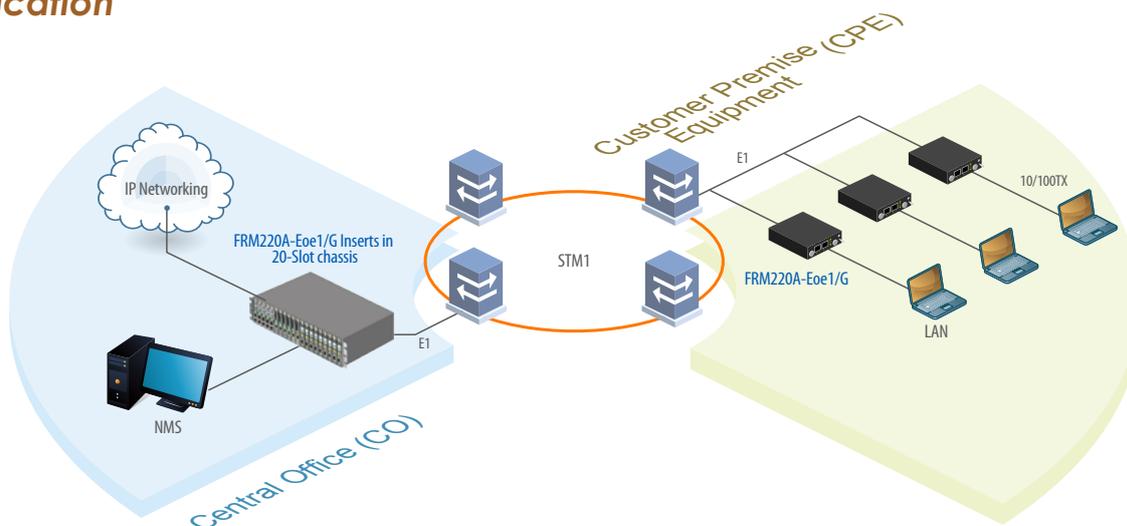

Ordering Information

Model Name	Description
FRM220A-Eoe1/G	10/100Base-TX to E1 GFP bridge operates at WAN

Note: This card may be set by DIP switch and placed in CH01 chassis, or set by serial console if placed in CH01M chassis. When connected as a remote to a managed central chassis, this card supports in-band management and only needs a CH01 chassis.



FRM220A-iMux

Ethernet over Bonded E1 NTU

The FRM220A-iMux is an E1 inverse multiplexer capable of bundling 4E1/ 8E1/16E1 lines for cost-effective connection of 10/100Base-TX LANs over multiple E1 transports. The FRM220A- iMux transmits 7.93Mbps (iMUX4)/ 15.87Mbps(iMUX8)/ 31.74Mbps(iMUX16) Ethernet bridge channel (GFP-F encapsulated) over multiple E1 links. The FRM220A-iMux bridges the gap between E1 and E3, allowing bridges to operate at faster rates. It also provides high speed access to SDH/SONET backbones where the only access services available are E1 lines. The FRM220A-iMux supports E1 attenuation of up to 43 dB on twisted pair or coax cable. This provides an approximate operating range up to 2km (using 22AWG). The FRM220A-iMUX fully comply the E1 specifications including ITU-T G.703 and G.823. The FRM220A-iMux features diagnostic capabilities for performing remote loopback. The operator at either end of the line may test both FRM220A-iMux NTU and the line in the digital loopback mode. The Ethernet copper interface supports auto-negotiation and auto MDI/MDIX, allowing plug-and-play Ethernet connection without any additional configuration.

Features


- The FRM220- iMUX connects one Fast Ethernet over 1-4 E1 links (1.984Mbps to 7.93Mbps) for iMUX4, over 1- 8 E1 links (1.984Mbps to 15.87Mbps) for iMUX8, over 1- 16 E1 links (1.984Mbps to 31.74Mbps) for iMUX16
- Built-in GFP bridge operates at WAN rate
- Maximum 220ms delay variance between E1 link
- Unbalanced E1/BNC or balanced E1/RJ45
- Fully compatible with FRM220A chassis
- SNMP management with FRM220A chassis
- LED Alarm indication & Auto-Negotiation
- Standalone RS232 console management via CH01M for iMUX4/iMUX8, CH02M for iMUX16

Specifications

E1 Interface	Framing	CCS+CRC (Framed)
	Standard	ITU-T G.703/G.704/G.706 & G.732, G.823
	Bit rate	2.048Mbps± 50ppm (up to 5E1)
	Line code	HDB3
	Clock setting	Internal OSC or recovery clock
	Receive level	-43dB
	Line impedance	75 ohm (BNC) / 120 ohm (RJ45)
	Jitter Performance	Complies with ITU-T G.823
	Pulse Mask	Complies with ITU-T G.703
	Pulse amplitude	Nominal 2.37V ± 10%
	Delay Variance	220ms
	Connector	RJ45, BNC
	Diagnostics	Digital remote loopback
	Ethernet Interface	Standards
Ethernet Interface	Data rate	10/100Base-TX, Half/Full duplex
	Connector	RJ45 10/100Base-TX Power, ALM, E1 signal loss
Indications	Power, ALM, E1 signal loss, E1 Alarm(AIS, LOF, RAI, LOMF), LAN link /ACT, 10/100M, SD (100Base-FX)	
Power Input	12VDC	
Power Consumption	< 12W	

Dimensions	140 x 88 x 42mm (D x W x H)
Weight	130g
Temperature	0 ~ 50°C (Operating), -10 ~ 70°C (Storage)
Humidity	10 ~ 90% RH (non-condensing)
Certifications	CE, FCC, RoHS compliant
MTBF	65,000 hrs

Application

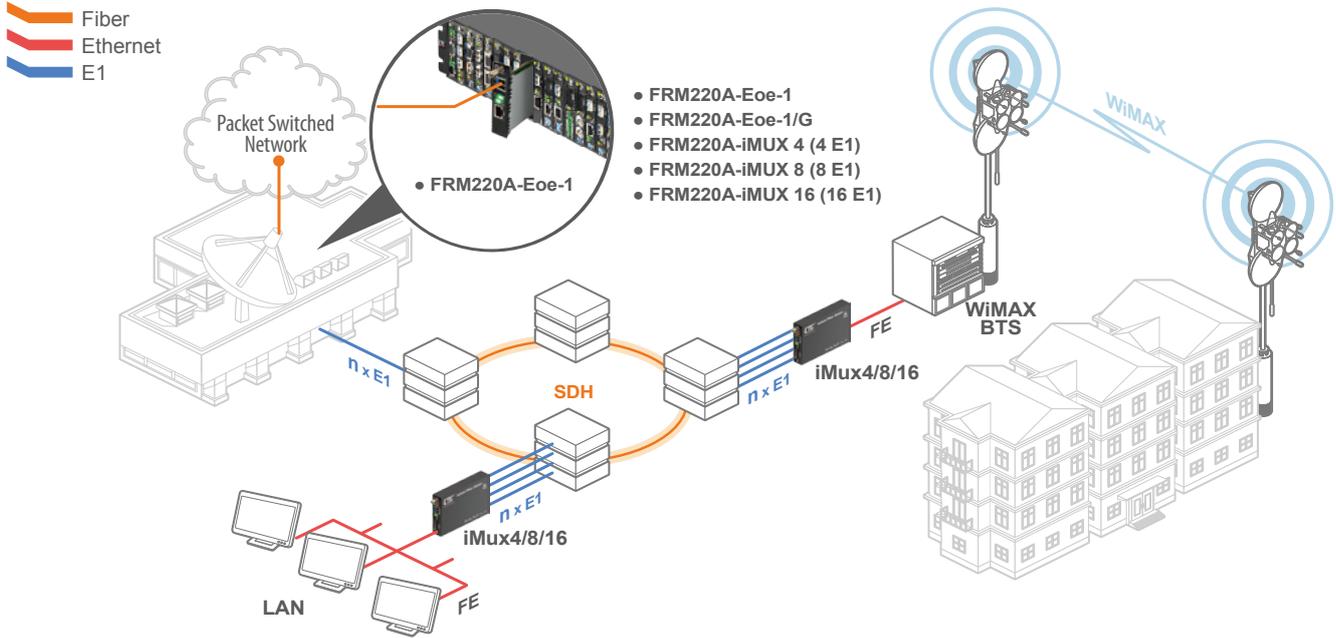

Ordering Information

Model Name	Description
FRM220A-iMux16T-R	10/100Base-TX to 16 E1 mux card with 16E1 RJ45 cable
FRM220A-iMux16T-B	10/100Base-TX to 16 E1 mux card with 16E1 BNC cable
FRM220A-iMux8T-R	10/100Base-TX to 8 E1 mux card with 8 E1 RJ45 cable
FRM220A-iMux8T-B	10/100Base-TX to 8 E1 mux card with 8 E1 BNC cable
FRM220A-iMux4T-R	10/100Base-TX to 4 E1 mux card with 4E1 RJ45 cable
FRM220A-iMux4T-B	10/100Base-TX to 4 E1 mux card with 4E1 BNC cable

FRM220A – iMux16T –

Example: FRM220A – iMux16T – R

Note: This card may be locally configured by its own console when placed in CH02M with fan. When connected as a remote to a managed central chassis, this card supports in-band management and only needs a CH02 chassis.

Cable Type



RJ45 Cable



BNC Cable

NEW



FRM220-GFOM08 8X E1/T1 + GbE Fiber Multiplexer

The FRM220-GFOM08 is an 8 channel E1/T1 fiber multiplexer with an additional Gigabit Ethernet trunk, plus order wire and clear channel RS-232, constructed as a two slot wide card for the FRM220 series. When the FRM220-GFOM08 card is placed in the FRM220 rack with NMC, the management can view the converter card's status, type, version, fiber link status and alarms. The card can be configured to enable or disable the port, reset the port, and provide local or remote diagnostic loopback. The 1+1 redundant optical aggregate of this multiplexer employs industry standard pluggable optics (SFP) operating at 1.25Mbps data rates. The SFP modules can be chosen to support single-mode, multi-mode, single fiber bi-directional or Coarse and Dense Wave Division Multiplexing (CWDM).

Features

- 8 channels unframed E1/T1 (transparent)
- 10/100/1000Base-T Ethernet
- Auto MDI/MDIX & Auto-Negotiation or Force Mode
- Supports flow control 802.3x & 9K jumbo packets
- Supports link fault Pass-Through for Ethernet
- One clear channel RS232 up to 250Kbps(Async)
- 1+1 fiber protection, less than 50ms
- Supports Digital Diagnostics Monitoring Interface (DDMI) SFP
- AIS on signal loss on E1/T1 and fiber port
- Loopback test on E1/T1, RS232, fiber ports
- Supports local or remote In-band management (Monitor or Configure status) by SNMP manager and console port
- Supports Order wire Ear / Microphone port
- Supports On-Line F/W upgrade & Dying Gasp


Specifications

E1/T1 ports	Framing	Unframed (transparent)
	Bit Rate	E1:2.048 Mb/s , T1: 1.544Mb/s
	Line Code	E1:AMI/HDB3, T1: AMI/B8ZS
	Line Impedance	E1: Unbalanced 75 ohms (BNC)
		T1: Balanced 100 ohms (RJ-45)
	Receiver sensitivity	Short haul
	"Pulse" Amplitude	Nominal 2.37V+/-10% for 75 ohms Nominal 3.00V+/-10% for 120 ohms
	"Zero" Amplitude	+/-0.3V
	Internal Timing	+/-30 ppm
	Jitter Performance	According to ITU-T G.823
Performance monitoring	According to ITU-T G.821	
Standards	ITU-T G.703, G.704, G.706 and G.732	
Interface Connectors	RJ-45	
E1/T1 ports	Test Loops	LLB (Local Loop Back) NELB (Near End Loop Back)

E1/T1 ports	Test Loops	RLB (Remote Loop Back) RRLB (Request Remote Loop Back)
	Fiber	Connector SFP LC Data Rate 1.25 Gbps
Ethernet	Interface Type	10/100/1000Base-T
	Connector	RJ-45
	Standards	IEEE 802.3, 802.3u, 802.3ab
	Duplex modes	full/half
Indications	FX1 Link, FX2 link, E1/T1 Mode/Link/Loopback test, Order wire phone indicator, LAN Link/Speed.	
Power Input	12VDC	
Power Consumption	< 12W	
Dimensions	140 x 88 x 42mm (D x W x H)	
Weight	200g	
Temperature	0 ~ 50°C (Operating), -10 ~ 70°C (Storage)	
Humidity	10 ~ 90% RH (non-condensing)	
Certifications	CE, FCC, RoHS compliant	

Application

Managed 8E1/T1 + Gigabit Ethernet Fiber Optical Multiplexer

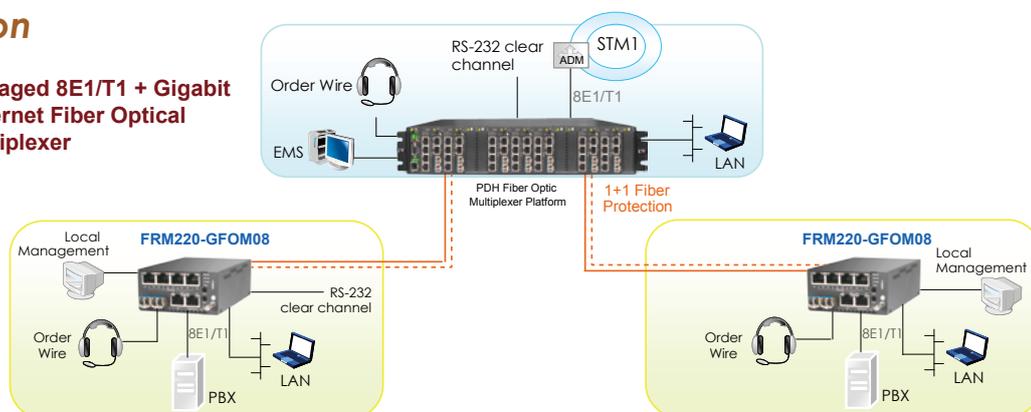

Ordering Information

Model Name	Description
FRM220-GFOM08-SR	8x E1/T1 RJ45 and 1000Mbps Ethernet Fiber Mux with 4x2E1 RJ45 cable, optional SFP module (Model : SFS-70xx-xx)
FRM220-GFOM08-SB	8x E1 BNC and 1000Mbps Ethernet Fiber Mux with 4x2E1 BNC cable, optional SFP module (Model : SFS-70xx-xx)



2E1 RJ45 cable

Note: This card may be locally configured by its own console when placed in CH02M with fan. When connected as a remote to a managed central chassis, this card supports in-band management and only needs a CH02M chassis.



FRM220-GFOM04

4X E1/T1 + GbE Fiber Multiplexer

2

Gigabit Fiber Multiplexer

The FRM220-GFOM04 is a 4 channel E1/T1 fiber multiplexer with an additional Gigabit Ethernet trunk, plus order wire and clear channel RS-232, constructed as a two slot wide card for the FRM220 series. When the FRM220-GFOM04 card is placed in the FRM220 rack with NMC, the management can view the converter card's status, type, version, fiber link status and alarms. The card can be configured to enable or disable the port, reset the port, and provide local or remote diagnostic loopback. The 1+1 redundant optical aggregate of this multiplexer employs industry standard pluggable optics (SFP) operating at 1.25Mbps data rates. The SFP modules can be chosen to support single-mode, multi-mode, single fiber bi-directional or Coarse and Dense Wave Division Multiplexing (CWDM and DWDM).

Features


- 4 channels unframed E1/T1 (transparent)
- 10/100/1000Base-T Ethernet
- Auto MDI/MDIX & Auto-Negotiation or Force Mode
- Supports flow control 802.3x & 9K jumbo packets
- Supports link fault Pass-Through for Ethernet
- One clear channel RS232 up to 250Kbps(Async)
- 1+1 fiber protection, less than 50ms
- Supports Digital Diagnostics Monitoring Interface (DDMI) SFP
- AIS on signal loss on E1/T1 and fiber port
- Loopback test on E1/T1, RS232, fiber ports
- Supports local or remote In-band management (Monitor or Configure status) by SNMP manager and console port
- Supports Order wire Ear / Microphone port
- Supports On-Line F/W upgrade & Dying Gasp

Specifications

E1/T1 ports	Framing	Unframed (transparent)	E1/T1 ports	Test Loops	RLB (Remote Loop Back) RRLB (Request Remote Loop Back)		
	Bit Rate	E1:2.048 Mb/s, T1: 1.544Mb/s		Fiber	Connector	SFP LC	
	Line Code	E1:AMI/HDB3, T1: AMI/B8ZS			Data Rate	1.25 Gbps	
	Line Impedance	E1: Unbalanced 75 ohms (BNC) E1: Balanced 120 ohms (RJ-45) T1: Balanced 100 ohms (RJ-45)		Ethernet	Interface Type	10/100/1000Base-T	
	Receiver sensitivity	Short haul			Connector	RJ-45	
	"Pulse" Amplitude	Nominal 2.37V+/-10% for 75 ohms Nominal 3.00V+/-10% for 120 ohms			Standards	IEEE 802.3, 802.3u, 802.3ab	
	"Zero" Amplitude	+/-0.3V		Duplex modes	full/half	Indications	FX1 Link, FX2 link, E1/T1 Mode/Link/Loopback test, Order wire phone indicator, LAN Link/Speed.
	Internal Timing	+/-30 ppm		Power Input	12VDC		
	Jitter Performance	According to ITU-T G.823			Power Consumption		< 12W
	Performance monitoring	According to ITU-T G.821		Dimensions		140 x 88 x 42mm (D x W x H)	
	Standards	ITU-T G.703, G.704, G.706 and G.732			Weight	200g	
	Interface Connectors	RJ-45		Temperature		0 ~ 50°C (Operating), -10 ~ 70°C (Storage)	
	E1/T1 ports	Test Loops			LLB (Local Loop Back) NELB (Near End Loop Back)	Humidity	10 ~ 90% RH (non-condensing)
			Certifications	CE, FCC, RoHS compliant			

Application

Managed 4E1/T1 + Gigabit Ethernet Fiber Optical Multiplexer

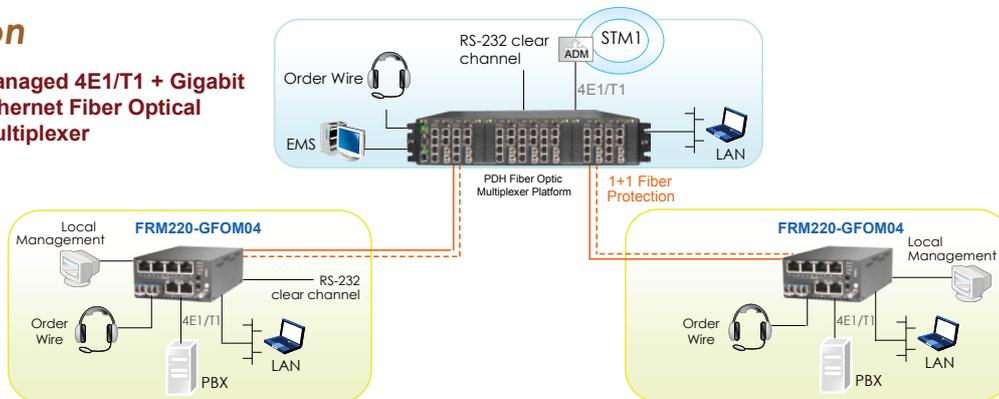

Ordering Information

Model Name	Description
FRM220-GFOM04-SR	4x E1/T1 RJ-45 and 10/100/1000Base-T Ethernet Fiber Optic Multiplexer (optional SFP module)
FRM220-GFOM04-SB	4x E1 BNC and 10/100/1000Base-T Ethernet Fiber Optic Multiplexer (optional SFP module)

FRM220 – GFOM04 –
 Example: FRM220 – GFOM04 – SR

Note: This card may be locally configured by its own console when placed in CH02M with fan. When connected as a remote to a managed central chassis, this card supports in-band management and only needs a CH02M chassis.



FRM220-FOM04

4X E1/T1 + FE Fiber Multiplexer

The FRM220-FOM04 is a 4 channel E1/T1 fiber multiplexer with an additional wire speed 100M Ethernet trunk, plus order wire and clear channel RS-232, constructed as a two slot wide card for the FRM220 series. When the FRM220-FOM04 card is placed in the FRM220 rack with NMC, the management can view the converter card's status, type, version, fiber link status and alarms. The card can be configured to enable or disable the port, reset the port, and provide local or remote diagnostic loopback. The 1+1 redundant optical aggregate of this multiplexer employs industry standard pluggable optics (SFP) operating at OC3/STM-1 data rates (155M). The SFP modules can be chosen to support single-mode, multi-mode, single fiber bi-directional or Coarse and Dense Wave Division Multiplexing (CWDM and DWDM).

Features

- 4 channels unframed E1/T1 (transparent)
- 10/100Base-TX Ethernet (100M wirespeed)
- Auto MDI/MDIX & Auto-Negotiation or Force Mode
- Supports flow control 802.3x & 9K jumbo packets
- Supports link fault Pass-Through for Ethernet
- One clear channel RS232 up to 250Kbps(Async)
- 1+1 fiber protection, less than 50ms
- Supports Digital Diagnostics Monitoring Interface (DDMI) SFP
- AIS on signal loss on E1/T1 and fiber port
- Loopback test on E1/T1, RS232, fiber ports
- Supports local or remote In-band management (Monitor or Configure status) by SNMP manager and console port
- Supports Order wire Ear / Microphone port
- Supports On-Line F/W upgrade & Dying Gasp


Specifications

E1/T1 ports	Framing	Unframed (transparent)
	Bit Rate	E1:2.048 Mb/s , T1: 1.544Mb/s
	Line Code	E1:AMI/HDB3, T1: AMI/B8ZS
	Line Impedance	E1: Unbalanced 75 ohms (BNC cable) E1: Balanced 120 ohms (RJ-45) T1: Balanced 100 ohms (RJ-45)
	Receiver sensitivity	Short haul
	"Pulse" Amplitude	Nominal 2.37V+/-10% for 75 ohms Nominal 3.00V+/-10% for 120 ohms
	"Zero" Amplitude	+/-0.3V
	Internal Timing	+/-30 ppm
	Jitter Performance	According to ITU-T G.823
	Performance monitoring	According to ITU-T G.821
	Standards	ITU-T G.703, G.704, G.706 and G.732
	Interface Connectors	RJ-45
	E1/T1 ports	Test Loops

E1/T1 ports	Test Loops	RLB (Remote Loop Back) RRLB (Request Remote Loop Back)
	Fiber	Connector SFP LC Data Rate 155 Mbps
Ethernet	Interface Type	10/100Base-TX
	Connector	RJ-45
	Standards	IEEE 802.3, 802.3u
	Duplex modes	full/half
Indications	FX1 Link, FX2 link, E1/T1 Mode/Link/Loopback test, Order wire phone indicator, LAN Link/Speed.	
Power Input	12VDC	
Power Consumption	< 7W	
Dimensions	140 x 88 x 42mm (D x W x H)	
Weight	200g	
Temperature	0 ~ 50°C (Operating), -10 ~ 70°C (Storage)	
Humidity	10 ~ 90% RH (non-condensing)	
Certifications	CE, FCC, RoHS compliant	

Application

Managed 4E1/T1 + Fast Ethernet Fiber Optical Multiplexer

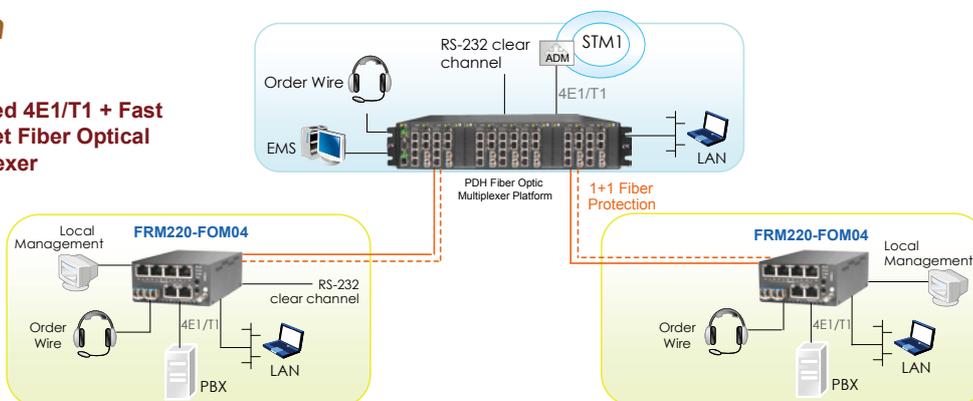

Ordering Information

Model Name	Description
FRM220-FOM04-SR	4 x E1/T1 RJ-45 and 100Mbps Ethernet Fiber Optic Multiplexer(optional SFP module)
FRM220-FOM04-SB	4x E1 BNC and 100Mbps Ethernet Fiber Optic Multiplexer(optional SFP module)

FRM220 – FOM04 –
Example: FRM220 – FOM04 – SR

Note: This card may be locally configured by its own console when placed in CH02M with fan. When connected as a remote to a managed central chassis, this card supports in-band management and only needs a CH02M chassis.



FRM220-FOM01

E1/T1 + FE Fiber Multiplexer

The FRM220-FOM01 is a single channel E1/T1 fiber multiplexer with an additional wire speed 100M Ethernet trunk, plus clear channel RS-232, for placement the FRM220 series. When the FRM220-FOM01 card is placed in the FRM220 rack with NMC, the management can view the converter card's status, type, version, fiber link status and alarms. The card can be configured to enable or disable the port, reset the port, and provide local or remote diagnostic loopback. The optical aggregate of this multiplexer employs either a fixed transceiver or industry standard pluggable optics (SFP) operating at OC3/STM-1 data rates (155M). The SFP modules can be chosen to support single-mode, multi-mode, single fiber bi-directional or Coarse and Dense Wave Division Multiplexing (CWDM and DWDM).

Features

- 1 channel unframed E1/T1 (transparent)
- 10/100Base-TX Ethernet (100M wirespeed)
- Auto MDI/MDIX & Auto-Negotiation or Force Mode
- Supports flow control & 9K jumbo packets
- Supports link fault Pass-Through for Ethernet
- Supports Digital Diagnostics Monitoring Interface (DDMI) SFP
- Loopback test on E1/T1, fiber ports
- Supports local or remote In-band management by SNMP manager
- Local management by console port via FRM220-CH01M chassis
- Supports On-Line F/W upgrade & Dying Gasp


Specifications

E1/T1 ports	Framing	Unframed (transparent)
	Bit Rate	E1:2.048 Mb/s, T1: 1.544Mb/s
	Line Code	E1:AMI/HDB3, T1: AMI/B8ZS
	Line Impedance	E1: Unbalanced 75 ohms (BNC) E1: Balanced 120 ohms (RJ-45) T1: Balanced 100 ohms (RJ-45)
	Receiver sensitivity	Short haul
	"Pulse" Amplitude	Nominal 2.37V+/-10% for 75 ohms Nominal 3.00V+/-10% for 120 ohms +/-0.3V
	"Zero" Amplitude	w/external clock card option
	Internal Timing	+/-30 ppm
	Jitter Performance	According to ITU-T G.823
	Performance monitoring	According to ITU-T G.821
	Standards	ITU-T G.703, G.704, G.706 and G.732

E1/T1 ports	Interface Connectors	RJ-45
	Test Loops	LLB (Local Loop Back) RLB (Remote Loop Back)
Fiber	Connector	SFP LC
	Data Rate	155 Mbps
Ethernet	Interface Type	10/100Base-TX
	Connector	RJ-45
	Standards	IEEE 802.3, 802.3u
	Duplex modes	full/half
Indications	Power FX Link, E1/T1 Mode/Link/Loopback test, LAN Link/Speed	
Power Input	12VDC	
Power Consumption	< 4W	
Dimensions	140 x 88 x 23mm (D x W x H)	
Weight	130g	
Temperature	0 ~ 50°C (Operating), -10 ~ 70°C (Storage)	
Humidity	10 ~ 90% RH (non-condensing)	
Certifications	CE, FCC, RoHS compliant	

Application

Managed E1/T1 + Fast Ethernet Fiber Optical Multiplexer

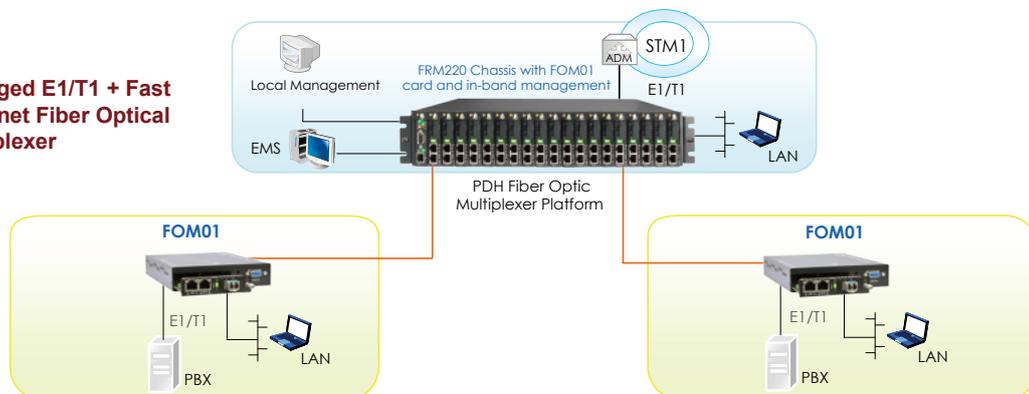

Ordering Information

Model Name	Description
FRM220-FOM01-SR	E1/T1 RJ-45 and 100Mbps Ethernet Fiber Optic Multiplexer (optional SFP module)
FRM220-FOM01-SB	E1 BNC and 100Mbps Ethernet Fiber Optic Multiplexer (optional SFP module)

Connector Type Connectivity Distance

FMC220 – FOM01 – –

Example: **FMC220 – FOM01 – SR – SC002**

Note: This card must use CH01M with serial console, to configure standalone settings. When connected as a remote to a managed central chassis, this card supports in-band management and only needs a CH01 chassis.



FRM220-FTEC

E1/T1 Cross Rate Converter

The FRM220-FTEC is a T1 (US Standard) /E1 (European Standard) converter and timeslot cross connect which enables conversion between one T1 signal and one E1 signal. T1 and E1 signals with framing employ u-Law and A-Law compander encoding principles respectively and encode those analog (voice) signals into 64kbits digital data. The T1 interface supports D4(SF) or ESF frame formats with B8ZS or AMI line code. The E1 interface supports CCS (PCM31) or CAS (PCM30) framing without CRC-4 and framing with CRC-4. The line coding is HDB3.

Tests and diagnostics can easily be performed from the local console interface or via Web based management of the FRM220. Diagnostics include T1 local/remote and E1 local/remote loop back. When placed in a single slot chassis and used standalone without management, the card may be configured by DIP switches.

Features

- Converts between T1 and E1 data and signaling
- Enable equipment to operate at T1 and E1 rates
- Supports G.802 Annex B (T1 over E1)
- Configures A-law/ μ -law and signaling conversion
- Transparent conversion at 64kpbs timeslot level
- Controlled slip for buffer over or under flow
- 24 time slots of T1 Nx64 can be inserted into E1 Nx64, 30/CAS or 31/CCS timeslots

Specifications

E1 Interface	Framing	CAS/PCM30 or CCS/PCM31 selectable	LEDs	PWR, Sys, Test, T1/E1								
	Bit rate	2.048Mbps		Standard	ITU-T G.703, G.704, G.706, G.823, G.824, ANSI T1.403							
	Line Code	HDB3			Power	12VDC						
	Line	75 ohm (BNC) / 120 ohm (RJ-45)				Power Consumption	< 6W					
	Impedance	Voice channel sample rule A-Law					Dimensions	155 x 88 x 24mm (D x W x H)				
	CRC check	CRC-4 enable/disable						Weight	130g			
	Pulse amplitude	Nominal 2.37V \pm 10% for 75ohm Nominal 3.00V \pm 10% for 120ohm							Temperature	0 ~ 50°C (Operating), -10 ~ 70°C (Storage)		
	Zero amplitude	\pm 0.1V								Humidity	10 ~ 90% non-condensing	
	Connector	RJ-45									Certification	CE, FCC, RoHS compliant
	T1 Interface	Framing										D4, ESF selectable
Bit rate		1.544Mbps										
Line Code		B8ZS / AMI										
Equalization		0 ~ 655 feet settable Voice channel sample rule μ -Law										
CRC check		CRC-6 when ESF										
Line Impedance		100 ohms										
Transmit Pulse level		3.0V \pm 10%,										
Receive signal level		0 ~ -10dB										
Connector		RJ-45										

Application



Ordering Information

Model Name	Description
FRM220-FTEC	E1/T1 Cross rate converter

Note: This card must use CH01M, with serial console, to configure standalone settings. For standalone SNMP management, place this card in CH02/NMC chassis.



FRM220-E1/DATA

E1 to Data

The FRM220-E1/Data is a single port G.703/704 Fractional E1 DSU/CSU card for the FRM220/220A Series Platform Media Converter Rack. The converter supports Unframed, PCM31, PCM31+CRC4, PCM30, and PCM30+CRC4 framing modes. The clock source may be selected internally, recovered from received E1 signal, externally from the Data port or transparent. The data port interface utilizes a single hi-density 26pin connector. Cable solutions are provided for RS-530/449, X.21, V.35 and RS-232. The unit can recognize the cable type attached and automatically self-configure the interface circuits. Choosing from one of two model types, the E1 connection is either unbalanced 75 ohm with two BNC connectors or balanced 120 ohm with one RJ-45 connector. When the FRM220-E1/Data card is placed in the FRM220 rack with SNMP management, the management can view the converter card's status, type, version, E1 link status and alarms. The card can be configured to enable or disable the port, reset the card, set clocking, frame mode, interface type and provide analog or digital diagnostic loopbacks. A unique feature of the FRM220-E1/Data is the use of a common card design which may either be inserted in the FRM220-CH01 single slot chassis as a stand-alone modem or as a card when placed in the FRM220-CH20 in-band managed rack

Features

- Supports Fractional E1 and Unframed E1 services with V.35/X21/RS530 adapter cable
- I/O connectors all located on front panel
- Multiple clock source selection and remote loopback
- (Internal or External: E1 recovery, DTE or DCE)
- Unbalanced E1/BNC or balanced E1/RJ45
- Fully compatible with FRM220-CH20 and FRM220A chassis
- SNMP management with FRM220-CH20 chassis
- LED Alarm indication
- Standalone RS232 console management via CH01M

Specifications

E1 Interface	Framing	Framed/Unframed
Standards	ITU-T G.703/G.704/G.706 & G.732, G.823	
Bit rate	2.048Mbps± 50ppm	
Line code	HDB3	
Clock setting	Internal OSC or recovery clock	
Receive level	-43dB	
Line impedance	75 ohm (BNC) / 120 ohm (RJ45)	
Jitter	Complies with ITU-T G.823	
Performance		
Pulse Mask	Complies with ITU-T G.703	
Pulse amplitude	Nominal 2.37V ± 10%	
Delay Variance	8ms	
Connector	BNC / RJ-45	
Diagnostics	Digital remote loopback	

Serial Interface	Standards	ITU-T, E1A
Data rate	Nx56 / Nx64	
Connector	HDB26F w/ adapter cable for Data	
LEDs	Power, TD, RD, RTS, DCD, TX Clock loss, Signal loss, Sync loss, Alarm, test error	
Power	12VDC	
Power Consumption	< 6W	
Dimensions	155 x 88 x 24mm (D x W x H)	
Weight	130g	
Temperature	0 ~ 50°C (Operating), -10 ~ 70 °C (Storage)	
Humidity	10 ~ 90% RH (non-condensing)	
Certifications	CE, FCC, RoHS compliant	
MTBF	65,000 hrs	

Application

Managed E1 Access Unit



Ordering Information

Model Name	Description
FRM220- E1/V35-R	V35 to framed E1 RJ-45 with V35 cable
FRM220- E1/V35-B	V35 to framed E1 BNC with V35 cable
FRM220- E1/X21-R	X21 to framed E1 RJ-45 with X21 cable
FRM220- E1/X21-B	X21 to framed E1 BNC with X21 cable
FRM220- E1/RS530-R	RS530 to framed E1 RJ-45 with RS530 cable
FRM220- E1/RS530-B	RS530 to framed E1 BNC with RS530 cable
FRM220- E1/RS449-R	RS449 to framed E1 RJ-45 with RS449 cable
FRM220- E1/RS449-B	RS449 to framed E1 BNC with RS449 cable
FRM220- E1/RS232-R	RS232 to framed E1 RJ-45 with RS232 cable
FRM220- E1/RS232-B	RS232 to framed E1 BNC with RS232 cable

FRM220 - □□ / □□□ - □
Example: FRM220 - E1/V35 - R

Note: This card may be set by DIP switch and placed in CH01 chassis, or set by serial console if placed in CH01M chassis. For standalone SNMP management, place this card in CH02/NMC chassis.