



FRM220-ET100

Fiber Modem Ethernet over E1 Fiber

FRM220-ET100 is a single port Fiber WAN (TDM) card with built-in HDLC Ethernet Bridge for the FRM220 Series. The converter supports Nx64 data rates from 64Kbps up to 2.048Mbps when linked by fiber to FRM220-Data or FRM220-E1/ T1 cards. The clock source may be selected internally or recovered from received fiber signal. The Ethernet port utilizes a single RJ-45 connector. When the FRM220-ET100 card is placed in the FRM220 rack with SNMP management, the management can view the converter card's status, type, version, Ethernet link status and alarms. The card can be configured to enable or disable the port, reset the card, set clocking, data rate and provide digital diagnostic loopbacks. A unique feature of the FRM220-ET100 is the use of a common card design which may either be inserted in the FRM220-CH01 single slot chassis as a stand-alone modem or as a card when placed in the FRM220-CH20 In-band managed rack.

Features


- 1-Port Ethernet to HDLC (fiber) converter
- P2P Fiber link compatible with FRM220-E1/T1 and FRM220-Data
- Clock source (internal or external)
- Nx64k data rate (64kbps~2048kbps)
- Ethernet encapsulated with ISO 13239 standard HDLC
- Loop Back with integral BERT & LED indicators
- Firmware upgradeable, when placed in managed FRM220 chassis
- Interface connectors, RJ-45 for 10/100 Base-Tx
- Fixed optical for SC or ST, 2km(MM) to 120km(SM)

Specifications

TDM (fiber) Interface	Connector	1x9 (SC, ST, FC)
	Data rate	64~2048kb/s(nx64)
	Distance	MM 2km, SM 15/30/50km WDM 20/40km
	Wavelength	MM 1310nm, SM 1310, 1550nm WDM 1310Tx/1550Rx (type A) 1550Tx/1310Rx (type B)
Ethernet Interface	Standards	IEEE 802.3u, IEEE 802.3
	Data rate	10Mbps, 100Mbps
	Duplex mode	Half / Full duplex
	Connector	RJ-45
Tests	E1 Loops	Remote Loop back

Indications	PWR, TD/RD Act, Test, Sys, Alarm, Error
Power Input	12VDC
Power Consumption	< 5W
Dimensions	155 x 88 x 23mm (D x W x H)
Weight	130g
Temperature	0 ~ 50°C (Operating), -10 ~ 70°C (Storage)
Humidity	10 ~ 90% RH (non-condensing)
Certifications	CE, FCC, RoHS compliant
MTBF	75,000 hrs

Application

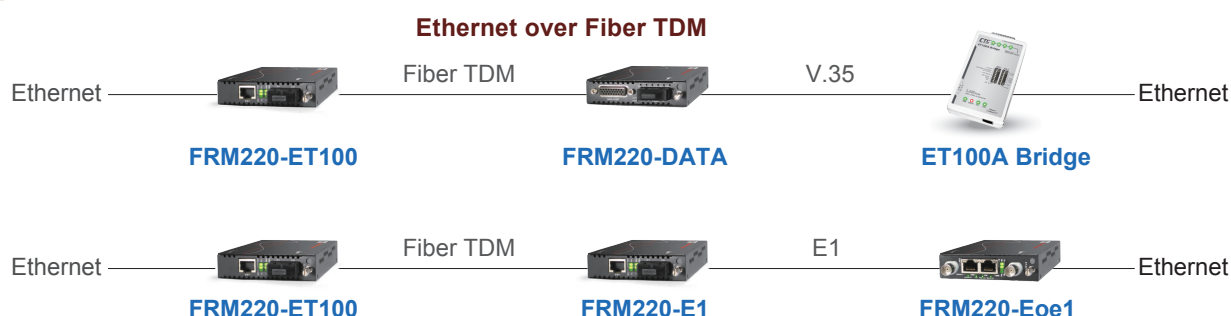

Ordering Information

Model Name	Description
FRM220-ET100	10/100Base-TX to E1 fiber modem

Connector Type	Connectivity Distance
SC, ST, FC	002: 2km 015: 15km 030: 30km 050: 50km 20A: WDM 20km A type 20B: WDM 20km B type 40A: WDM 40km A type 40B: WDM 40km B type

Connector Type Connectivity Distance

FRM220 – ET100 –

Example: **FRM220 – ET100 – SC002**

Note: This card may be set by DIP switch and placed in CH01 chassis, or set by serial console if placed in CH01M chassis.
When connected as a remote to a managed central chassis, this card supports in-band management and only needs a CH01 chassis.