


# GSW3216M1

16-Port 10/100/1000Base-T + 2-Port Gbe(SFP) L2 Managed Switch

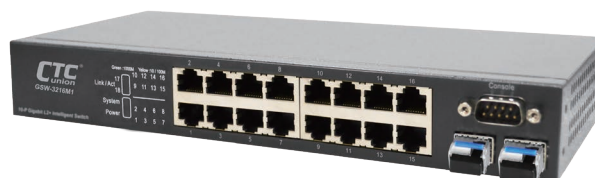


GSW-3216M1 is a cost-effect, high performance, managed L2 Ethernet with 16 x 10/100/1000Base-T ports and 2 x Gigabit Ethernet 1000Base-X ports. This switch supports remote management by SNMP, HTTP and Telnet interfaces along with local management by console interface. GSW-3216M1 supports many L2 switch management functions, including 802.1Q VLAN, 802.1x Port Security, Rate Control, Port Configuration, Port Mirroring, Port Statistics, QoS functions, Spanning tree and more.

## Features

- 16 \* RJ45 ports, with 10/100/1000Mbps, Full/Half duplex auto-negotiation and Auto-MDIX functions
- 2\* Dual Speed SFP sockets, port 17 and port 18
- CISCO-like command line interface, IPv6 management
- 8 priority queues are supported on each port for QoS application
- Port-based VLAN, 802.1Q VLAN, Voice VLAN and Q-in-Q (double tagging) function
- Protected Port and LoopBack Detection function
- IEEE 802.1x security function, and VLAN assignment, Guest VLAN functions
- Static Mac address access limit and Dynamic Mac address number on port
- IEEE802.1d & 802.1w & 802.1s (spanning tree)
- IP Multicast with IGMP snooping / query / fast leave / filtering / group limited /MVR
- DHCP Client / DHCP Option 82 Relay / DHCP Snooping function
- ACL function for L2 ~ L4 packet control, Ingress/Egress rate control on port
- Broadcast/Multicast/Unicast storm control
- ARP inspection / IP source guard, RMON 1,2,3,9
- SFP Transceiver DDMI function / Dual Speed SFP Ports (100/1000Mbps)
- Remote port configuration setting and statistics monitoring
- Text configuration download and upload
- IEEE 802.3az power management / FANless / Green Ethernet

## Application

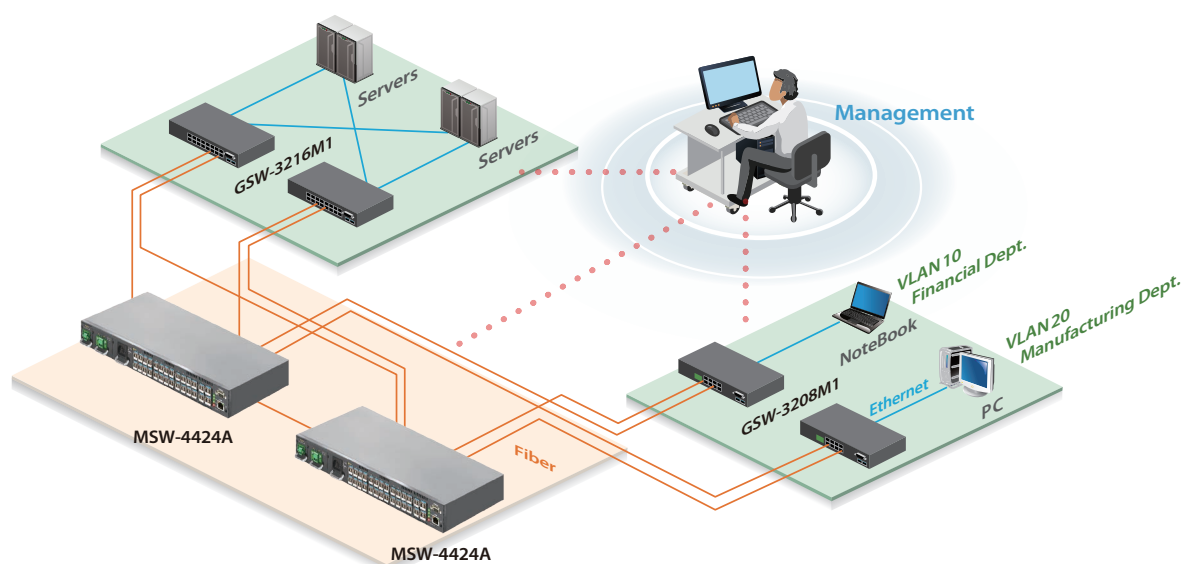

## Specifications

System	
<b>10/100/1000 Base-T</b>	16
<b>100/1G SFP Slot</b>	2
<b>Packet buffer</b>	512KB
<b>MAC Table size</b>	8K
<b>Max Packet size</b>	9600 Bytes
<b>Switching capability</b>	14880pps at 10Mbps 148810pps at 100Mbps 1488095pps at 1Gbps with 64bytes packets.
<b>Switch capacity</b>	36Gbps
<b>Forwarding Rate</b>	26.7Mpps
<b>FAN Design</b>	FAN less
<b>Console port</b>	D-Sub 9
<b>19" Rack-Mount</b>	Yes, with kits (optional)
<b>SFP DDMI</b>	Yes
<b>Dimensions</b>	117 x 250 x 37 mm(D x W x H)
<b>Environmental Temperature</b>	Operating : 0 ~ 50°C Storage : -40 ~ 70°C
<b>Humidity</b>	10% ~ 90% (non-condensing)
<b>LED Display</b>	Per Port : Link/Act (Green: Gigabit, Yellow:10/100M) Per Device : Power and System
<b>Power Consumption</b>	14 Watt Max.
<b>Power Input</b>	AC Power input (100V~240V)

### LED

<b>Power</b>	Lights(Green)	System is receiving power
<b>System</b>	Lights(Green)	System is ready
<b>Link / Act</b>	Lights	Link is ready 1000Mbps : Green 10/100Mbps : Amber
	Flashing	Data packets being received or sent

Software	
<b>Port Control</b>	Port speed, duplex mode, and flow control Port frame size (jumbo frames), Maximum ingress frame size (9600 bytes) Port state (administrative status) Port status (link monitoring) Port statistics (MIB counters) Port VeriPHY (cable diagnostics), Power Control
<b>L2 Switching</b>	Auto MAC address learning/aging and MAC addresses (static) IEEE 802.1Q static VLAN, Voice VLAN, Port isolation, Port Based VLAN, IEEE 802.1ad Provider Bridge IEEE 802.1D STP/802.1w RSTP/802.1s MSTP IEEE 802.3ad Link Aggregation, static and LACP BPDU guard and restricted role, BPDU transparency DHCP client, DHCP snooping, DHCP option 82 relay ARP inspection, Port mirroring, IP MAC binding
<b>Layer 2 Multicast</b>	IGMP v2, v3 snooping, (1024 groups) IGMP throttling, filtering, and leave proxy MVR
<b>QoS</b>	8 Priority Queues per Port Port Based priority, Scheduler priority, QoS Control List Storm control for UC, MC, and BC Policing and shaping per port and per queue Ingress Policing : (100-1000000 when the "Unit" is "kbps" or "fps" and 1-3300 when the "Unit" is "Mbps" or "kfps") Egress Shaping : (100-1000000 when the "Unit" is "kbps", and 1-3300 when the "Unit" is "Mbps") DiffServ (RF 2474) remarking, Tag remarking
<b>Security</b>	Port-based 802.1X, Single 802.1X, Multiple 802.1X MAC-based authentication, VLAN assignment, QoS assignment, Guest VLAN, RADIUS accounting, MAC address limit TACACS+, Web and CLI authentication and authorization Authorization (3 levels) ACLs for filtering(256 entries), policing, and port copy IP source guard
<b>Synchronization</b>	NTPv4 Client
<b>Power Saving</b>	ActiPHY, PerfectReach, Ethernet Energy Efficient power management(EEE)
<b>SFP DDMI</b>	Yes
<b>Management</b>	HTTP server, CLI console port, Telnet, Management access filtering, SSHv2 and HTTPS IPv6 Management, System Syslog Software download through Web, SNMPv1/v2c/v3 Agent RMON Group 1, 2, 3, and 9 IEEE 802.1AB-2005 Link Layer Discovery, LLDP Text Configuration download or upload, sFlow, Daylight Saving

## Ordering Information

Model Name	Description
GSW-3216M1	16x 10/100/1000Base-T + 2x GbE(SFP) L2 Switch, AC power supply
GSW-3216M1-DC48	16x 10/100/1000Base-T + 2x GbE(SFP) L2 Switch, DC 48V power supply

**GSW – 3216M1** –   
Example: **GSW – 3216M1 – DC48**