

IMC-100-PH12

10/100Base-T to 100Base-FX with PoE+ (PSE) Fiber Converter



IMC-100-PH12 is a family of non-managed Ethernet media converters that support conversion between electrical 10/100Base-T and optical 100Base-FX Ethernet and as PSE (Power Source Equipment) provide PoE+ power over Ethernet. Housed in rugged DIN rail or wall mountable enclosures, these converters are designed for harsh environments, such as industrial networking, intelligent transportation systems (ITS) and are also suitable for many military and utility market applications where environmental conditions exceed commercial product specifications.

Features

- Conversion between 10/100Base-T and 100Base-FX SC or ST Fiber interface
- 12/24/48VDC (9.6~57VDC) redundant dual input power, and built-in power booster
- Constant and regulated PoE output voltage at 55VDC
- Provides IEEE802.3at PoE output (30Watts)
- Support Remote PD reset by fiber port link down
- Support LFP (Link Loss Forward)
- IP30 rugged metal housing
- Wide operating temperature -20~75°C (IMC-100-PHE12)
- UL60950-1, CE, FCC, Railway traffic EN50121-4 certification
- Industrial grade EMS,EMI EN61000-6-2, EN61000-6-4 certification
- Supports Jumbo frame 9K bytes packet

Specifications

Standard	IEEE802.3 10Base-T IEEE802.3u 100Base-TX IEEE802.3u 100Base-FX IEEE802.3x Flow Control and Back pressure IEEE802.3at Power over Ethernet+, PoE+ IEEE802.3af Power over Ethernet, PoE IEEE802.1q Tag VLAN
RJ45 Ports	10/100Base-TX
Fiber Ports	100Base-FX with SC or ST connector
Data Process Architecture	Store and Forward mode or Pass Through mode (Set by DIP SW)
Jumbo Frame	9K bytes
Fiber Parameters	Fiber Cable (Multi-mode): 50/125um, 62.5/125um Fiber Cable (Single-mode): 9/125um Wavelength: 1310nm (Multi-mode/Single-mode) Available Distance: 2KM (Multi-mode), 30KM (Single-mode), 50KM(Single-mode)
Link Fault Pass Through (LFPT)	TX- Fiber: If TX port link down, the media converter will force Fiber port to link down Fiber-TX: If Fiber port link down, the media converter will force TX port to link down
DIP Switch	ON: Disable Alarm For Power Loss OFF: Enable Alarm For Power Loss ON: Disable Alarm For Port Link-Failure OFF: Enable Alarm For Port Link-Failure ON: LFP Enable, OFF: LFP Disable Data process Architecture : ON : Pass through mode OFF : Store and Forward Switch mode PoE Output OFF: Enable PoE output ON: Disable PoE output Remote PD reset Off : Disable Remote PD reset On: Enable Remote PD reset by fiber port link down
Fiber Connector	Fiber: SC / ST (Multi-mode, 2KM), SC / ST (Single-mode, 30KM, 50KM)
RJ45 Connector and Pin Assignment	RJ-45 Socket: CAT-3/5 (10/100Mbps) Twisted Pair cable Auto MDI/MDI-X and Auto-Negotiation Function Support RJ-45 Port support IEEE 802.3at/af End-Span, Alternative A mode. PoE (V+): RJ-45 pin 1, 2. PoE (V-): RJ-45 pin 3, 6. Data (1,2,3,6)

LED	Per Unit :Power 1 (Green), Power 2 (Green), Fault (Amber) Fiber LNK/ACT (Green): ON: Connected to network OFF: Not connected to network BLK: Receive /Transmit Data Fiber Speed :Green : 100 Base- X RJ-45 Port: Speed: 10 (OFF), 100 (Green) LNK/ACT for RJ45(Green): ON: Connected to network OFF: Not connected to network BLK: Networking is active PoE States (Green) Flash: PoE Fault (Over-load or short) ON: PoE normal working, OFF: PoE No Power output																				
Reverse Polarity Protection	Present for Power Input																				
Overload Current Protection	Present																				
Power Supply	12/24/48VDC (9.6~57VDC), Redundant power with polarity reverse protect function and removable terminal block																				
Power Consumption	<table border="1"> <thead> <tr> <th>Input Volt</th> <th>Total Power consumption (W)</th> <th>Device Power consumption (W)</th> <th>PoE Budget (W)</th> <th>Boost Efficiency</th> </tr> </thead> <tbody> <tr> <td>12 VDC</td> <td>3.4</td> <td>3.5</td> <td>30</td> <td>98.4%</td> </tr> <tr> <td>24 VDC</td> <td>34.4</td> <td>4.1</td> <td>30</td> <td>99.0%</td> </tr> <tr> <td>48 VDC</td> <td>34.9</td> <td>4.3</td> <td>30</td> <td>98.0%</td> </tr> </tbody> </table>	Input Volt	Total Power consumption (W)	Device Power consumption (W)	PoE Budget (W)	Boost Efficiency	12 VDC	3.4	3.5	30	98.4%	24 VDC	34.4	4.1	30	99.0%	48 VDC	34.9	4.3	30	98.0%
Input Volt	Total Power consumption (W)	Device Power consumption (W)	PoE Budget (W)	Boost Efficiency																	
12 VDC	3.4	3.5	30	98.4%																	
24 VDC	34.4	4.1	30	99.0%																	
48 VDC	34.9	4.3	30	98.0%																	
Alarm Relay Contact	Relay outputs with current carrying capacity of 1 A @24VDC																				
Removable Terminal Block	Provide 2 redundant power, alarm relay contact, 6 Pin																				
Operating Humidity	5%~95% (Non-condensing)																				
Operating Temperature	-10°C~60°C (IMC-100-PH12) -20°C~75°C (IMC-100-PHE12)																				
Storage Temperature	-40°C~85°C																				
Housing	Rugged Metal, IP30 Protection																				
Dimensions	106 x 62.5 x 134.8 mm (D x W x H)																				
Weight	655g																				
Installation	DIN Rail mounting or wall mounting																				

Specifications & design are subject to change without prior notice. Please visit CTC Union website for more details.

Specifications

Certifications

EMC	CE
EMI	FCC Part 15 Subpart B Class A, CE EN 55022 Class A
Rail Way Traffic	EN50121-4
Immunity for Heavy Industrial environment	EN 61000-6-2
Emission for Heavy industrial environment	EN 61000-6-4
EMS (Electromagnetic Susceptibility) Protection level	EN61000-4-2 (ESD) Level 3, Criteria B EN61000-4-3 (RS) Level 3, Criteria A EN61000-4-4 (EFT) Level 3, Criteria A EN61000-4-5 (Surge) Level 3, Criteria B EN61000-4-6 (CS) Level 3, Criteria A EN61000-4-8 (PFMF) Field strength 300A/m Criteria A

Safety	UL60950-1 (pending)
Shock	IEC 60068-2-27
Freefall	IEC 60068-2-32
Vibration	IEC 60068-2-6
MTBF	419,822hrs
Warranty	5 years

Application


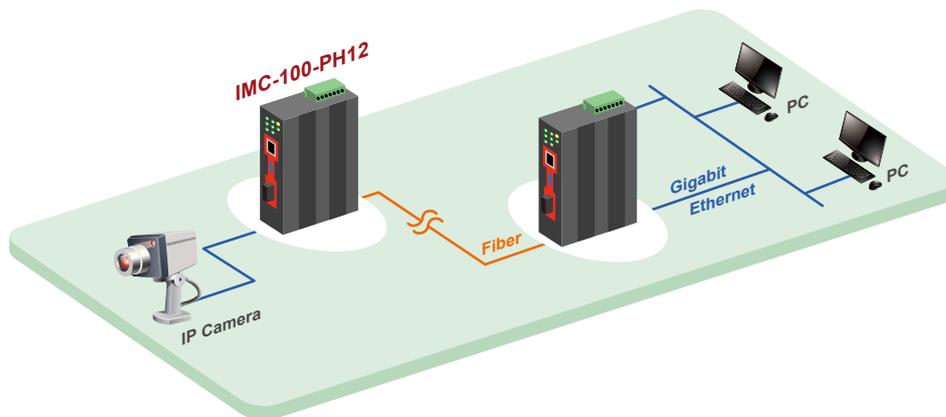


Figure : IMC-100-PH12 Industrial PoE Transmission

Dimensions

IMC-100-PHE12

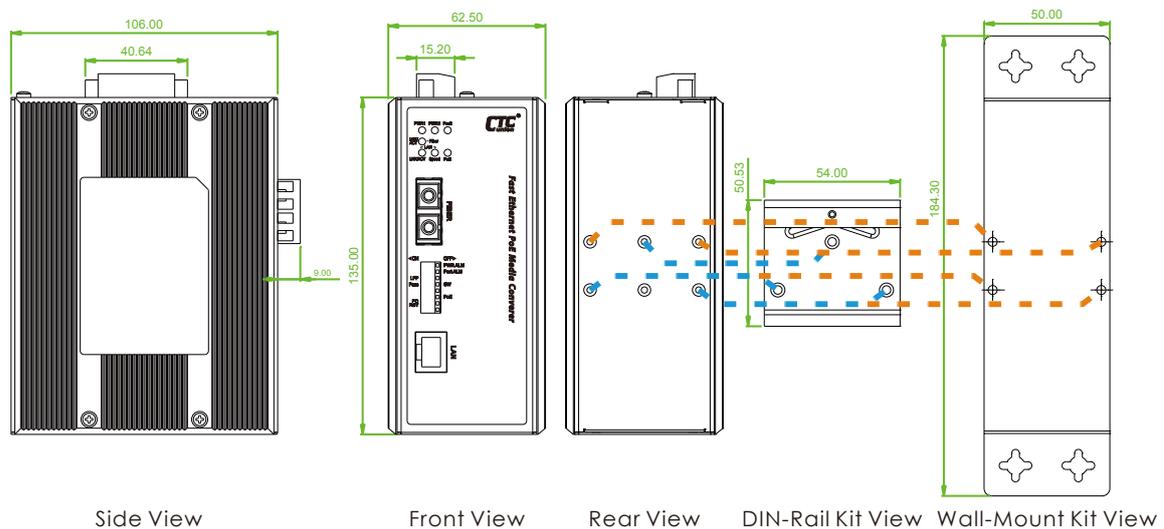

Ordering Information

Model Name	Description
IMC-100-PH12	10/100Base-T to 100Base-FX with PoE+ (PSE) Fiber Converter (30W, 12V Booster) (-10~60°C)
IMC-100-PHE12	10/100Base-T to 10/100Base-FX with PoE+ (PSE) Fiber Converter (30W, 12V Booster) (-20~75°C)

Fiber Connector Type	Connectivity Distance
SC, ST	002: 2km (M/M) 030: 30km (S/M) 050: 50km (S/M) 020A: WDM 20km A Type (TX:1310nm) 020B: WDM 20km B Type (TX:1550nm)

Temperature Connector Type Connectivity Distance

IMC-100 -PH 12 - [] [] [] [] [] []

Example: IMC-100 - PHE12 - SC002