

NEW



IMC-100C

10/100Base-TX to 100Base-FX Fiber Converter

IMC-100C is a compact size of Fast Ethernet non-managed industrial media converters that support conversion between electrical 10/100Base-TX and optical 100Base-FX Ethernet. Simple DIP switch settings allow configuring fiber port to half or full duplex, enabling LFPT (Link Fault Pass Through), and selecting Switch Mode (store & forward) or Converter Mode (Jumbo frame Pass-through). Housed in rugged DIN rail or wall mountable enclosures, these converters are designed for harsh environments, such as industrial networking and intelligent transportation systems (ITS) and are also suitable for many military and utility market applications where environmental conditions exceed commercial product specifications.

Features

- DC input power 12/24/48VDC (9.6 ~ 60VDC) or 24VAC (18~36VAC)
- IP30 rugged metal housing, compact size and fanless
- Wide operating temperature -40 ~ 75°C (IMC-100C-E)
- CE, FCC, railway traffic EN50121-4 certification
- Industrial Grade EMS, EMI, EN61000-6-2, EN61000-6-4 certified
- Store-and-Forward mode and Pass Through mode (set by DIP SW)
- Support LFPT (Link Fault Pass Through)
- Conversion between 10/100Base-TX and 100Base-FX cable interface
- Provide a 4 pin DIP-Switch to set functions

Specifications

Standard	IEEE 802.3 10Base-T 10Mbit/s Ethernet IEEE 802.3u 100Base-TX, 100Base-FX, Fast Ethernet IEEE 802.3x Flow Control	Power Supply	12/24/48VDC (9.6~60VDC) or 24VAC (18~36VAC), polarity reverse protect function and removable terminal block
RJ45 Ports	10/100Base-TX	Removable Terminal Block	Provide for 1x DC input power (2 Pin)
Fiber Ports	100Base-FX (SC/ST connectors)	Operating Humidity	5% ~ 95% (Non-condensing)
Switch Architecture	Store and Forward in Switch mode Supports 1024 MAC addresses in Switch mode	Operating Temperature	-10 ~ 60°C (IMC-100C) -40 ~ 75°C (IMC-100C-E)
Ethernet Packet length	2046Byte (Max) in Switch mode	Storage Temperature	-40 ~ 85°C
Jumbo Frame	9K bytes in Pass through (Converter mode)	Housing	IP30 rugged metal housing ,compact size and fanless
Fiber Parameters	Fiber Cable (Multi-mode): 50/125um,62.5/125um Fiber Cable (Single-mode): 9/125um Wavelength: 1310nm (Multi-mode/Single-mode) Available distance: 2KM (Multi-mode) 30KM (Single-mode) 50KM (Single-mode)	Dimensions	70 x 30 x 103 mm (D x W x H)
Link Fault Pass Through (LFPT)	TX- Fiber: If TX port link down, the media converter will force Fiber port to link down Fiber-TX: If Fiber port link down, the media converter will force TX port to link down	Weight	215g
DIP Switch	Force Fiber port Duplex OFF: Full Duplex ON: Half Duplex LFPT: ON: Enables LFPT (Link Fault Pass through) OFF: Disables LFPT Architecture: OFF: Switching mode ON: Pass through Converter mode	Installation	DIN Rail mounting, Wall Mounting (Optional)
Connector	Fiber: SC (Multi-mode, 2km), SC (Single-mode, 30km, 50KM) ST (Multi-mode, 2km), ST (Single-mode, 30km, 50KM) RJ-45 Socket: CAT-3/5 (10/100Mbps) Twisted Pair cable Auto MDI/MDI-X and Auto-Negotiation Function Support	MTBF	319,971Hours (MIL-HDBK-217)
LED	PWR (Green): ON: Power active / OFF: Power is inactive Fiber (Green): LNK/Act (Green) : Link & Active Dup (Green) : Fiber port Full or Half duplex LAN:100 (Green): 100M Link & Active 10 (Green): 10M Link & Active	Warranty	5 years
Reserve Polarity Protection	Present	Certifications	
Overload Current Protection	Present	EMC	CE
		EMI	FCC Part 15 Subpart B Class A, CE EN 55022 Class A
		Railway Traffic	EN50121-4
		Immunity for Heavy Industrial environmentc	EN 61000-6-2
		Emission for Heavy industrial environment	EN 61000-6-4
		EMS (Electromagnetic Susceptibility) Protection level	EN61000-4-2 (ESD) Level 3, Criteria B EN61000-4-3 (RS) Level 3, Criteria A EN61000-4-4 (EFT) Level 3, Criteria A EN61000-4-5 (Surge) Level 3, Criteria B EN61000-4-6 (CS) Level 3, Criteria A EN61000-4-8 (PFMF) Field strength 300A/m Criteria A
		Railway Traffic	EN 50121-4
		Shock	IEC 60068-2-27
		Freelfall	IEC 60068-2-32
		Vibration	IEC 60068-2-6

Application


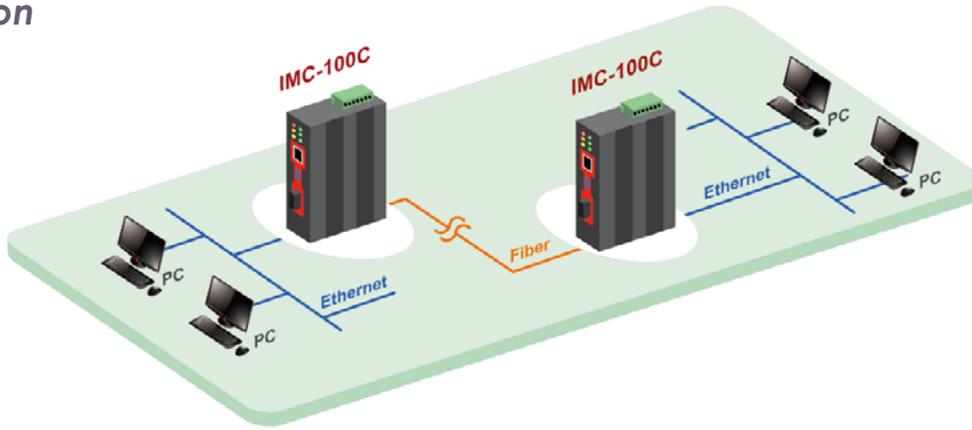


Figure : IMC-100C Media Converter Transmission


Dimensions

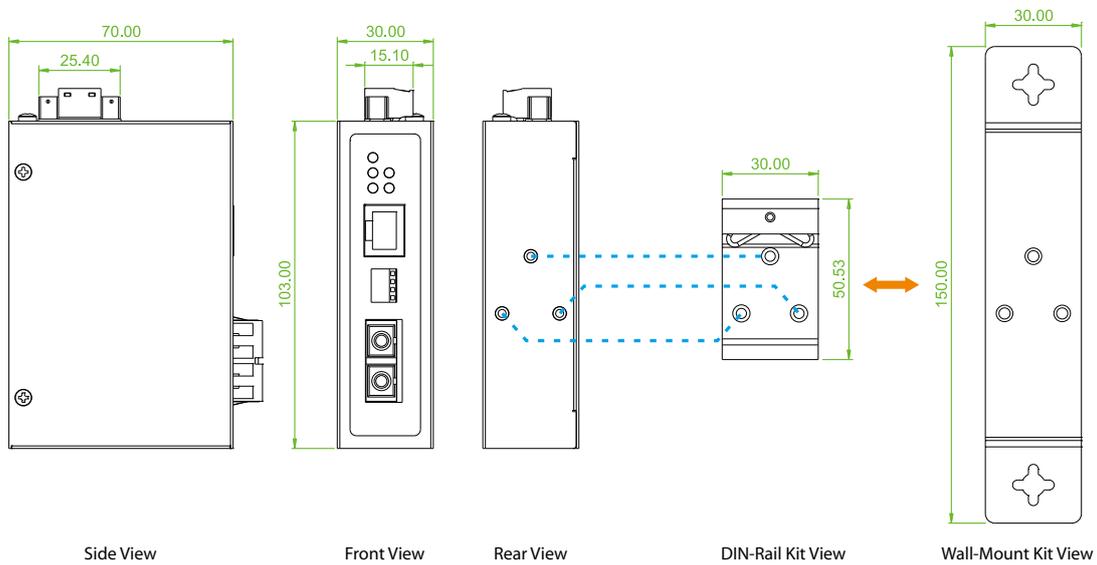

Ordering Information

Model Name	UTP		Fiber		Certification			Operating Temperature	
	10/100Base-TX		100Base-FX		Railway EN50121-4	EN61000-6-2 EN61000-6-4	CE		FCC
IMC-100C	1		1 SC		V	V	V	V	-10~60 C
IMC-100C-E	1		1 SC		V	V	V	V	-40~75 C

Model Naming Rule

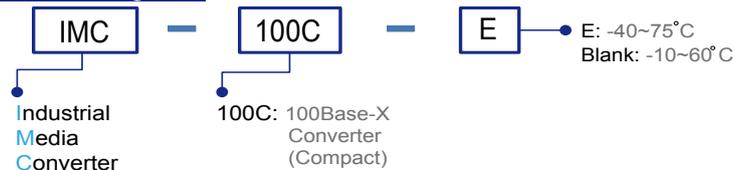

Connector Type	Connectivity Distance
SC, ST	002:2km (M/M) 030:30km (S/M) 050:50km (S/M)
	020A: WDM 20km A type (TX:1310nm)
	020B: WDM 20km B type (TX: 1550nm)

Accessories

DR-4524	Industrial Power, Input 85 ~ 264VAC, Output 24VDC, 48W, -10 ~ +50°C
MDR-40-24	Industrial Power, Input 85 ~ 264VAC, Output 24VDC, 40W, -20 ~ +70°C
IND-WMK03	Wall Mount kit for Industrial product (Compact, 150x 30mm)

Example: **IMC - 100C - E - SC002**