



FMC-10/100i

10/100Base-TX to 100Base-FX In-Band Managed Media Converter

The FMC-10/100i family are Fast Ethernet 10/100Base-TX to 100Base-FX In-band managed media converters, which give you the options to choose from the most popular fiber cabling connectors, ST, SC or FC. With advanced features like bandwidth control, this media converter is targeted for customer premises equipment in metro LAN, campus, enterprise and FTTx applications. By offering in-band management, this converter can be completely controlled and monitored from a centrally located managed rack controlling all converter settings including band-width control, duplex, and speed configuration. This media converter is completely transparent to Layer 2 and Layer 3 protocols including IEEE 802.1q, VLAN tag, Q in Q, STP, IPX, IP, etc.


Features

- 10/100Base-TX to 100Base-FX Converter
- Auto-Negotiation or forced mode
- Auto MDI/MDIX
- Forward 2046 bytes (Max.) packets in switch mode
- Forward 9K jumbo packets in converter mode
- Supports Q in Q double tagged frame transparent
- Supports IEEE 802.1q Tag VLAN pass thru
- Supports local / remote In-band management (Monitor and Configure) by the SNMP manager with FRM220-10/100i
- Bandwidth control (Nx32K or Nx512Kbps)
- Supports flow control (Pause)
- Supports remote CPE power fail detect (dying gasp)
- Supports Far End Fault Indication (FEFI)
- Supports Link Fault Pass-Through (LFPT)
- Supports Loop Back Test
- Supports RMON counter
- Auto Laser Shutdown (ALS)
- Fiber Hardware Reset (FHR)
- Online local / remote f/w upgrade

Specifications

Optical Interface	Connector	1x9 (SC, ST, FC)	Electrical Interface	Connector	RJ-45
	Data rate	125Mbps		Data rate	10Mbps, 100Mbps
	Duplex mode	Full duplex		Duplex mode	Half / Full duplex
	Fiber	MM 62.2/125µm, 50/125µm. SM 9/125µm		Cable	10Base-T Cat.3, 4, 5, UTP 100Base-TX Cat.5, 5e
	Distance	MM 2km, SM 15/30km WDM 20/40km		Distance	100 meters
	Wavelength	MM 1310nm, SM 1310,1550nm WDM 1310Tx/1550Rx (Type A) 1550Tx/1310Rx (Type B)		Power Consumption	< 3W
Standards	IEEE 802.3, IEEE 802.3u	Temperature	0 ~ 50°C (Operating), -10 ~ 70°C (Storage)		
Power Input	Adapter Type : DC 12V	Humidity	10 ~ 90% non-condensing		
	Power Built-in Type : AC 100 ~ 240V	Dimensions (D x W x H)	Adapter Type : 108 x 73.4 x 23mm Power Built-in Type : 135 x 73.4 x 23mm		
	Power Built-in Type : DC 18 ~ 60V	Weight	Adapter Type : 120g Power Built-in Type : 140g		
LEDs	Power, FX Link, TX SPD, TX Link, TX Duplex, FEF	Certification	CE, FCC, RoHS compliant		
		MTBF	65,000 hrs		

Application

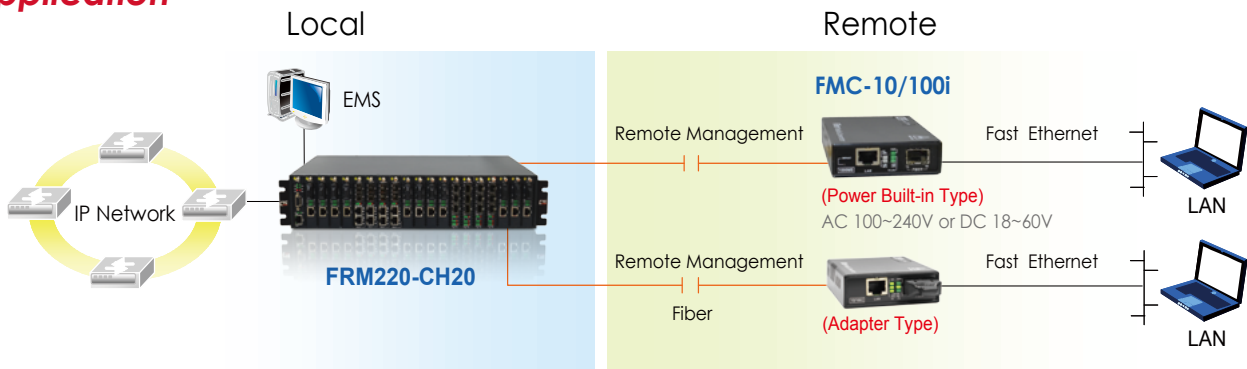

Ordering Information

Model Name	Description
FMC-10/100i	10/100Base-TX to 100Base-FX In-band managed Media Converter Adapter Type
FMC-10/100i-AC, DC	10/100Base-TX to 100Base-FX In-band managed Media Converter with AC or DC Power
Connector Type	Connectivity Distance
SC, ST, FC	002: 2km 015: 15km 030: 30km 20A: WDM 20km A type 20B: WDM 20km B type 40A: WDM 40km A type 40B: WDM 40km B type

Power Type
FMC - 10/100i -
 Example: FMC - 10/100i - DC

Specifications & design are subject to change without prior notice. Please visit CTC Union website for more details.