

Preliminary



ICS-G24S4X

Industrial 24x100/1000Base-X SFP with 4x Combo, and 4x 10GbE SFP+ Core Switch

ICS-G24S2X

Industrial 24x100/1000Base-X SFP with 4x Combo, and 2x 10GbE SFP+ Core Switch

6 Industrial Core Switch

ICS-G24S4X & ICS-G24S2X are Ethernet Core Switches that are equipped with 24 Gigabit SFP ports with 4 combo ports plus 2 or 4 10G SFP+ ports. ICS series models are all fanless with redundant isolated power supplies (2 AC, 2 DC, AC + DC) and can be mounted in 19 inch standard rack. They not only offer various layer 2 management functions (IGMP, VLAN, QoS, Security, IPv6, bandwidth control, port mirroring, cable diagnostic and Green Ethernet) but also support u-Ring redundancy protocol that can establish 14 independent rings for flexible applications, especially employed in backbone infrastructure. ICS switches can also be managed centrally and conveniently by CTC Union's SmartView Element Management System and mass configured by SmartConfig. Housed in rugged rack mountable enclosures, ICS Series complies with many industrial-grade standards and are ideal for deployments in harsh environments to deliver mission-critical network services. Additionally, with high port density and Gigabit or 10 Gigabit high-speed feature on each port, ICS-G24S4X & ICS-G24S2X are a reliable and scalable solution for core layer or backbone applications.

Features

- 24x 100/1000Base-X SFP with 4xCombo (SFP+RJ-45) and 4x 10GBase-X SFP+ (ICS-G24S4X)
- 24x 100/1000Base-X SFP with 4xCombo (SFP+RJ-45) and 2x 10GBase-X SFP+ (ICS-G24S2X)
- UL60950-1, CE, FCC, Rail Traffic EN50121-4 certified
- Redundancy isolated low voltage 24/48VDC, or/and isolated High voltage AC (110/240 VAC) power inputs
- Industrial Grade EMS, EMI, EN61000-6-2, EN61000-6-4 certified
- Cable diagnostic, Measuring cable normal or broken point distance
- Supports Green Ethernet IEEE802.3az EEE (Energy Efficient Ethernet), management to optimize the power consumption
- STP, RSTP, MSTP, ITU-T G.8032 Ethernet Ring Protection Switching (ERPS) for redundant cabling
- Provides 14 instances that each can support u-Ring, u-Chain or Sub-Ring type for flexible uses (see Figure 3). Supports up to 14 rings in one device (see Figure 1).
- u-Ring for Redundant Cabling, recovery time<10ms in 250 devices
- DHCP client/Relay/Snooping/Snooping option 82/Relay option 82
- QoS, Traffic classification QoS, CoS, bandwidth control for Ingress

- and Egress, Storm Control, DiffServ
- IEEE802.1q VLAN, MAC based VLAN, IP subnet based VLAN, Protocol based VLAN, VLAN translation, GVRP, MVR
- Dynamic IEEE 802.3ad LACP Link Aggregation, Static Link Aggregation
- IGMP snooping V1/V2/V3, IGMP Filtering/ Throttling, IGMP query, IGMP proxy reporting, MLD snooping V1/V2
- Security: Port based and MAC based IEEE802.1X, RADIUS, ACL, TACACS+, HTTP/HTTPS, SSL/SSH v2
- Software upgrade via TFTP and HTTP, redundant firmware to avoid in case of upgrade failure
- Supports IEEE1588 PTP V2 for precise time synchronization to operate in Master, Boundary, Slave mode by each port
- RMON, MIB II, Port mirroring, Event syslog, DNS, NTP/SNTP, IEEE802.1ab LLDP
- Supports IPv6 Telnet server /ICMP v6
- CLI/Web based management, SNMP v1/v2c/v3, Telnet server for management
- Provides SmartConfig for quick and easy mass configuration
- Supports SmartView for Centralized Management

Specifications

Standard	IEEE 802.3	10Base-T 10Mbit/s Ethernet
	IEEE 802.3u	100Base-TX, 100Base-FX, Fast Ethernet
	IEEE 802.3ab	1000Base-T Gbit/s Ethernet over twisted pair
	IEEE 802.3z	1000Base-X Gbit/s Ethernet over Fiber-Optic
	IEEE802.3ae	10 Gbit/s Ethernet over fiber
	IEEE 802.1d	STP (Spanning Tree Protocol)
	IEEE 802.1w	RSTP (Rapid Spanning Tree Protocol)
	IEEE 802.1s	MSTP (Multiple Spanning Tree Protocol)
	ITU-T G.8032 / Y.1344	ERPS (Ethernet Ring Protection Switching)
	IEEE 802.1Q	Virtual LANs (VLAN)
	IEEE 802.1X	Port based and MAC based Network Access Control, Authentication
	IEEE 802.3ad	Link aggregation for parallel links with LACP(Link Aggregation Control Protocol)
	IEEE 802.3x	Flow control for Full Duplex
	IEEE 802.1ad	Stacked VLANs, Q-in-Q
	IEEE 802.1p	LAN Layer 2 QoS/CoS Protocol for Traffic Prioritization
	IEEE 802.1ab	Link Layer Discovery Protocol (LLDP)
	IEEE 802.3az	EEE (Energy Efficient Ethernet)
VLAN ID	4094	IEEE802.1Q VLAN VID
Switch Architecture	Back-plane (Switching Fabric): 128Gbps (ICS-G24S4X)	88Gbps (ICS-G24S2X)
Data Processing	Store and Forward	
Flow Control	IEEE 802.3x for full duplex mode Back pressure for half duplex mode	

Network Connector	24x 100/1000Base-X SFP with 4x GbE Combo (UTP/SFP)+ 4x 10GBase-X SFP+ (ICS-G24S4X) 24x 100/1000Base-X SFP with 4x GbE Combo (UTP/SFP)+ 2x 10GBase-X SFP+ (ICS-G24S2X) RJ-45 UTP port support 10/100/1000Base-T(X) , Auto negotiation speed,Auto MDI/MDI-X function GbE port SFP support dual speed (100M/1000M) with DDMI 10GbE port SFP+ support dual speed (1000M/10G) with DDMI
Console	RS-232 (RJ-45)
Network Cable	UTP/STP above Cat. 5e cable EIA/TIA-568 100-ohm (100m)
Protocols	CSMA/CD
Timing synchronization	ITU-T G.8262 SyncEthernet (-SE model) IEEE 1588 PTP v2
Reverse Polarity Protection	Present
Overload Current Protection	Present
CPU Watch Dog	Present
Power Supply	Redundant 2x Isolated Low Voltage DC Input power (-DD model) Redundant 1x isolated Low Voltage DC and 1x High Voltage AC input power (-AD model) Redundant 2x isolated High Voltage AC input power (-AA model) Low Voltage DC: Isolated 24/48V (18~60VDC), Removable Terminal Block High voltage AC: isolated 110/240VAC (88VAC~264VAC)
Power Consumption	TBD

LED	Per unit: Power 1 (Green), Power 2 (Green), Act /Alarm (Green/Red), Ring Master (Green) Per RJ-45 port: 10/100 Link/Active (Green) 1000 Link/Active (Yellow) SFP (P1~24) Fiber Per port: 100Base-X Link/Active (Green) 1000Base-X Link/Active (Yellow) SFP+ (P25~P28) Fiber Per port: 1000Base-X Link/Active (Amber) 10GBase-X Link/Active (Blue)
Jumbo Frame	10K
MAC Address Table	32K
Memory Buffer	4M Bytes for packet buffer
Warning Message	System Syslog, SMTP/ e-mail event message, alarm relay
Alarm Relay Contact	Relay outputs with current carrying capacity of 1 A @24VDC, 2-Pin removable terminal block
Operating Temperature	-10 ~ 60°C
Operating Humidity	5% to 95% (Non-condensing)
Storage Temperature	-40 ~ 85°C
Housing	Rugged Metal, IP30 Protection, Fanless
Dimensions	250 x 440 x 44 mm (D x W x H)
Weight	TBD

Software Specifications

Topology	
VLAN	IEEE 802.1q VLAN, up to 4094 802.1Q VLAN VID IEEE 802.1q VLAN, up to 4094 Groups IEEE 802.1ad Q-in-Q MAC-based VLAN, up to 256 entries IP Subnet-based VLAN, up to 128 entries Protocol-based VLAN (Ethernet, SNAP, LLC), up to 128 entries VLAN Translation, up to 256 entries GVRP (GARP VLAN Registration Protocol) MVR (Multicast VLAN Registration)
Link Aggregation (Port Trunk)	Static (Hash with SA, DA, IP, TCP/UDP port), up to 5 trunk group Dynamic (IEEE 802.3ad LACP), up to 5 trunk group
Spanning Tree	IEEE802.1d STP IEEE802.1w RSTP IEEE802.1s MSTP
Multiple u-Ring	up to 14 instances that each supports u-Ring, u-Chain or Sub-Ring type for flexible uses, and maximum up to 14 Rings. Recovery time <10ms The maximum number of devices allowed in a Ring supported ring is 250.
Loop Protection	Present
ITU-T G.8032 / Y.1344 ERPS (Ethernet Ring Protection)	Recovery time <50ms Single Ring, Sub-Ring, Multiple ring topology network
QoS Features	
Class of Service	IEEE802.1p 8 active priorities queues for per port
Traffic Classification QoS	IEEE802.1p based CoS IP Precedence based CoS IP DSCP based CoS QCL(QoS Control List): Frame Type, Source/Destination MAC, VLAN ID, PCP, DEI QCE(QoS Control Entry): Protocol, Source IP, IP Fragment, DSCP, TCP/UDP port number
Bandwidth Control for Ingress	Rate in steps :1 kbps / Mbps / fps / kfps Range : 100 kbps to 1Gbps / 1fps to 3300kfps Rate Unit : bit or frame
Bandwidth Control for Egress	Rate in steps : 1 kbps / Mbps Range : 100 kbps to 1Gbps Rate Unit : bit Per queue / Per port shaper
DiffServ (RF 2474) Remarking	
Storm Control	for Unicast, Broadcast, Multicast
IP Multicasting Features	
IGMP / MLD Snooping	IGMP Snooping v1, v2, v3 / MLD Snooping v1, v2 Port Filtering Profile Throttling, Fast Leave Maximum Multicast Group : up to 1022 entries Query / Static Router Port

Installation Mounting	19" rack mount
MTBF	TBD
Warranty	5 years
Certification	
EMC	CE
EMI (Electromagnetic Interference)	FCC Part 15 Subpart B Class A, CE EN55022 Class A
Railway Traffic	EN50121-4
Immunity for Heavy Industrial Environment	EN61000-6-2
Emission for Heavy Industrial Environment	EN61000-6-4
EMS (Electromagnetic Susceptibility) Protection Level	EN61000-4-2 (ESD) Level 3, Criteria B EN61000-4-3 (RS) Level 3, Criteria A EN61000-4-4 (Burst) Level 3, Criteria A EN61000-4-5 (Surge) Level 3, Criteria B EN61000-4-6 (CS) Level 3, Criteria A EN61000-4-8 (PFMF, Magnetic Field) Field Strength: 300A/m, Criteria A
Safety	UL60950-1
Shock	IEC 60068-2-27
Freefall	IEC 60068-2-32
Vibration	IEC 60068-2-6

Security Features	
IEEE 802.1X	Port-Based MAC-Based
ACL	Number of rules : up to 256 entries for L2 / L3 / L4
RADIUS authentication & accounting	
TACACS+ authentication & accounting, TACACS+ 3.0	
HTTPS, HTTP	
SSL / SSH v2	
User Name Password Authentication	Local Authentication
Authentication	Remote Authentication (via RADIUS / TACACS+)
Management Interface Access Filtering	Web, Telnet / SSH , CLI RS-232 console
Management Features	
CLI	Cisco® like CLI
Web Based Management	
Telnet	Server
SNMP	V1, V2c, V3
SW & Configuration Upgrade	TFTP, HTTP Redundant firmware in case of upgrade failure
RMON	RMON I (1, 2, 3, 9 group), RMON II
MIB	RFC1213 MIB II, Private MIB
DHCP	Client, Relay, Snooping Snooping option 82 Relay option 82
IP Source Guard	
Port Mirroring	
Event Syslog	Syslog server (RFC3164) (Support 1 server)
Warning Message	System syslog, e-mail, alarm relay
DNS	Client, Proxy
IEEE1588 PTP V2	Master, Boundary, Slave Operating mode Operating in each port of these switch
NTP / SNTP	
LLDP (IEEE 802.1ab)	Link Layer Discovery Protocol LLDP-MED
IPv6 Features	
IPv6 Management	Telnet Server/ICMP v6
SNMP over IPv6	
HTTP over IPv6	
SSH over IPv6	
IPv6 Telnet Support	
IPv6 NTP / SNTP Support	
IPv6 TFTP Support	
IPv6 QoS	
IPv6 ACL	Number of rules: up to 256 entries L2 / L3 / L4

Application

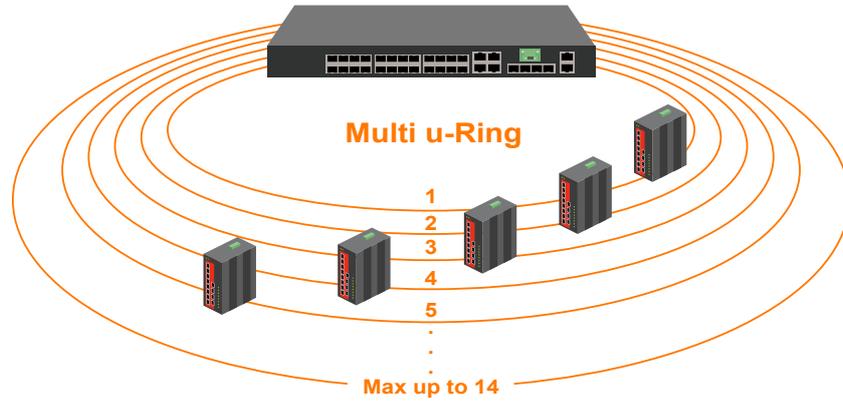


Figure 1 : Multiple Rings

u-Ring Configuration Auto-refresh Refresh

Delete	Instance	Type	Master	East		West	
				Port	Edge	Port	Edge
Delete	1	u-Ring	<input type="checkbox"/>	1		2	
Delete	2	u-Ring	<input type="checkbox"/>	4		3	
Delete	3	u-Ring	<input type="checkbox"/>	10		11	
...							
Delete	12	u-Chain	<input type="checkbox"/>	16	<input type="checkbox"/>	9	<input type="checkbox"/>
Delete	13	Sub-Ring	<input type="checkbox"/>	21			
Delete	14	u-Ring	<input type="checkbox"/>	28		8	

Add New Instance

Save Reset

Figure 2 : User-Friendly Configuration In Web Interface

Figure 3 : u-Ring Type


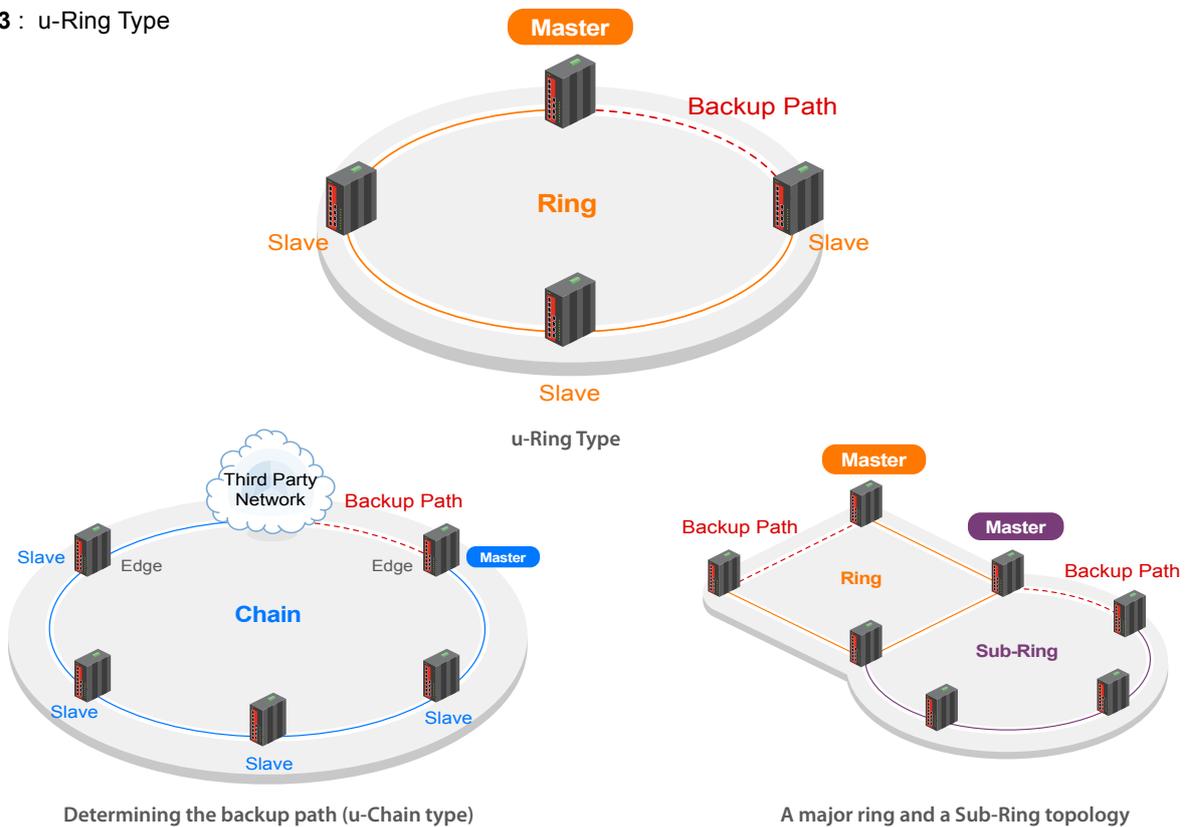



Figure 4 : Ring Configuration Example

Ring Configuration Type


- u-Ring
- Sub-Ring

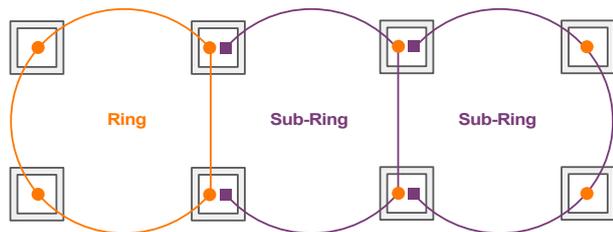


Ring Configuration Type

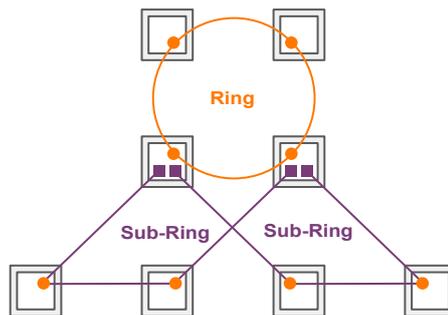

Combination of a ring and two Sub-Ring

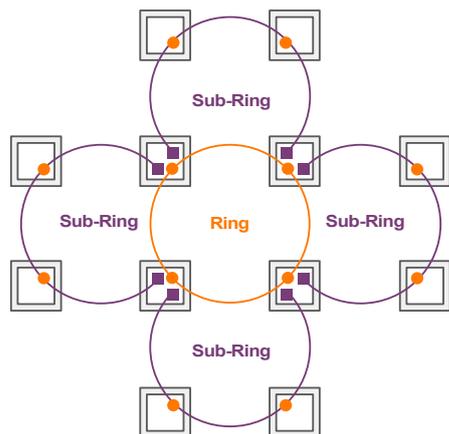

Combination of a ring and four Sub-Ring

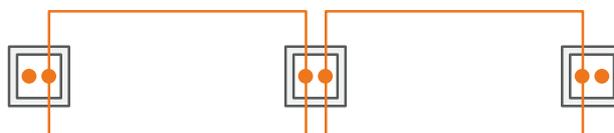


Cable Redundancy

Ordering Information

Model Name	Managed	Total Port	GbE Port		10GbE	Input Power		Certification			
			100/1000 Base-X SFP	10/100/1000 Base-T UTP or 100/1000Base-X SFP		DC (Low Volt) isolated 24/48VDC	AC (High Volt) 110/240V AC	Safety UL60950-1	EN50121-4	EN61000-6-2 EN61000-6-4	CE FCC
ICS-G24S4X-AA	V	28	20	4 Combo	4		2	V	V	V	V
ICS-G24S4X-DD	V	28	20	4 Combo	4	1	1	V	V	V	V
ICS-G24S4X-AD	V	28	20	4 Combo	4	2		V	V	V	V
ICS-G24S2X-AA	V	26	20	4 Combo	2		2	V	V	V	V
ICS-G24S2X-DD	V	26	20	4 Combo	2	1	1	V	V	V	V
ICS-G24S2X-AD	V	26	20	4 Combo	2	2	2	V	V	V	V

Model Naming Rule

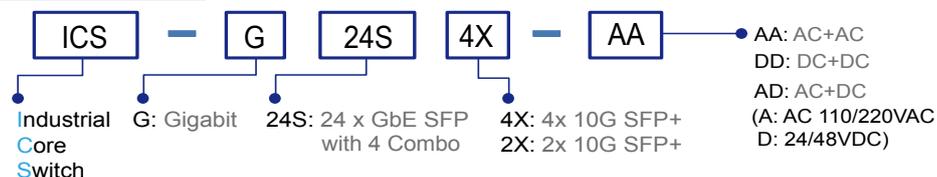

Optional Accessories

DR-120-24	Industrial Power, Input 88 ~ 132VAC / 176 ~ 264VAC, Output 24VDC, 120W, -10 ~ +60°C
DRP-240-48	Industrial Power, Input 85 ~ 264VAC, Output 48VDC, 240W, -10 ~ +70°C