

**NEW**



# IFS-500C

## 5x10/100Base-TX Switch



The IFS-500C is 5 ports 10/100Base-TX Ethernet unmanaged Fast Ethernet switches, that provide stable and reliable Ethernet transmission. Housed in rugged DIN rail or wall mountable enclosures, these switches are designed for harsh environments, such as industrial networking, intelligent transportation systems (ITS) and are also suitable for many military and utility market applications where environmental conditions exceed commercial product specifications. Standard operating temperature range models (-10 to 60°C) and wide operating temperature range models (-40 to 75°C) fulfill the special needs of industrial automation applications.

### Features

- Wide range input power 12/24/48VDC (9.6~60VDC), or AC24V (18~36VAC)
- IP30 rugged metal housing and Fanless
- Compact size for easy installation
- Wide operating temperature -40 ~ 75°C (-E model)
- Provides broadcast storm protection
- Very low power consumption
- Supports flow control
- CE, FCC, and EN50121-4 for railway traffic certification
- Industrial grade EMS, EMI, EN61000-6-2, EN61000-6-4 certified

### Specifications

<b>IEEE Standard</b>	IEEE 802.3 10Base-T Ethernet IEEE 802.3u 100Base-TX and 100Base-FX Fast Ethernet IEEE 802.3x Flow Control and Back Pressure								
<b>Switch Architecture</b>	Back-plane (Switching Fabric) : 1.0 Gbps								
<b>Data Processing</b>	Store and Forward								
<b>Transfer Rate</b>	14,880pps for Ethernet port 148,800pps for Fast Ethernet port								
<b>Flow Control</b>	IEEE 802.3x flow control, back pressure flow control								
<b>Provides Broadcast Storm Protection</b>	Present								
<b>MAC Address Table</b>	1K								
<b>Packet Buffer Size</b>	448Kbits								
<b>Network Connector</b>	5x RJ-45 RJ-45 Port: Auto MDI/MDI-X function, 10/100Base-TX auto negotiation speed, Full/Half duplex								
<b>Network Cable</b>	10Base-T: 2-pair UTP/STP Cat. 5 cable EIA/TIA-568 100-ohm (100m) 100Base-TX: 2-pair UTP/STP Cat. 5 cable EIA/TIA-568 100-ohm (100m)								
<b>Protocol</b>	CSMA/CD								
<b>LED</b>	Per unit: Power (Green) RJ-45 Per port: Link/Active (Green), Speed 100 (Yellow)								
<b>Reverse Polarity Protection</b>	For DC input power protection								
<b>Overload Current Protection</b>	Present								
<b>Power Supply</b>	DC 12/24/48V (9.6~60VDC) or AC 24V (18~36VAC) input power (Removable Terminal Block)								
<b>Power Consumption</b>	<table border="1"> <thead> <tr> <th>Input Voltage</th> <th>Power Consumption(Watt)</th> </tr> </thead> <tbody> <tr> <td>DC 12V</td> <td>0.9W</td> </tr> <tr> <td>DC 24V</td> <td>1.2W</td> </tr> <tr> <td>DC 48V</td> <td>2W</td> </tr> </tbody> </table>	Input Voltage	Power Consumption(Watt)	DC 12V	0.9W	DC 24V	1.2W	DC 48V	2W
Input Voltage	Power Consumption(Watt)								
DC 12V	0.9W								
DC 24V	1.2W								
DC 48V	2W								
<b>Removable Terminal Block</b>	Provide for input power (2 Pin)								
<b>Operating Temperature</b>	-10 ~ 60°C (IFS-500C) -40 ~ 75°C (IFS-500C-E)								

<b>Operating Humidity</b>	5% to 95% (Non-condensing)
<b>Storage Temperature</b>	-40 ~ 85°C
<b>Housing</b>	Rugged Metal, IP30 Protection and Fanless
<b>Dimensions</b>	70 x 30 x 103 mm (D x W x H)
<b>Weight</b>	220g
<b>Installation Mounting</b>	DIN Rail mounting, or wall mounting (optional)
<b>MTBF</b>	1,013,759 Hours (MIL-HDBK-217)
<b>Warranty</b>	5 years
<b>Certification</b>	
<b>EMC/EMS</b>	CE
<b>EMI (Electromagnetic Interference)</b>	FCC Part 15 Subpart B Class A, CE EN55022 Class A
<b>Railway Traffic</b>	EN50121-4
<b>Immunity for Heavy Industrial Environment</b>	EN61000-6-2
<b>Emission for Heavy Industrial Environment</b>	EN61000-6-4
<b>EMS</b>	EN61000-4-2 (ESD) Level 3, Criteria B EN61000-4-3 (RS) Level 3, Criteria A EN61000-4-4 (Burst) Level 3, Criteria A EN61000-4-5 (Surge) Level 3, Criteria B EN61000-4-6 (CS) Level 3, Criteria A EN61000-4-8 (PFMF, Magnetic Field) Field Strength: 300A/m, Criteria A
<b>Shock</b>	IEC 60068-2-27
<b>Freefall</b>	IEC 60068-2-32
<b>Vibration</b>	IEC 60068-2-6

2 Compact Industrial Unmanaged FE Switch

## Application


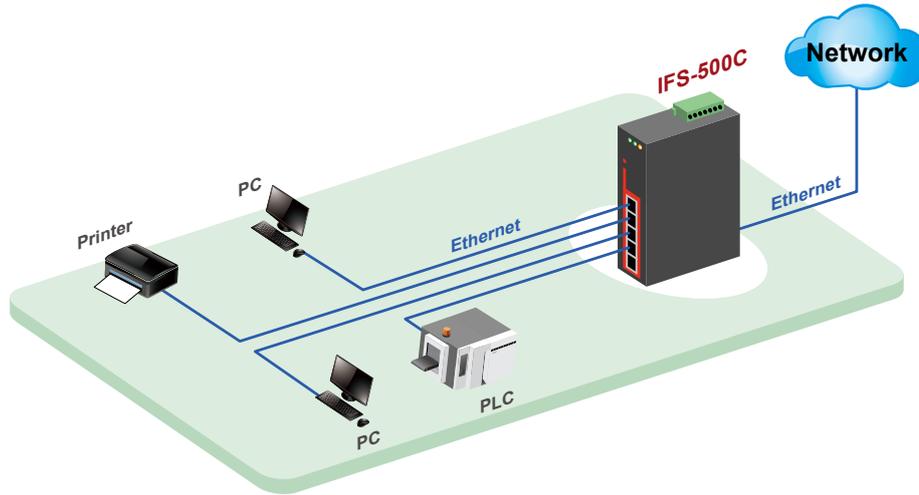


Figure : IFS-500C Fast Ethernet Switch Transmission

## Ordering Information

Model Name	Total Port	UTP Port		Certification			Operating Temperature
		10/100Base-TX	Railway EN50121-4	EN61000-6-2 EN61000-6-4	CE	FCC	
IFS-500C	5	5	V	V	V	V	-10~60 C
IFS-500C-E	5	5	V	V	V	V	-40~75 C

### Model Naming Rule

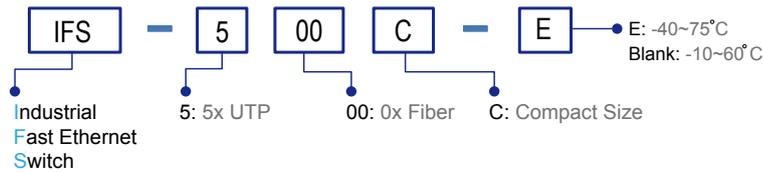

### Accessories

<b>DR-4524</b>	Industrial Power, Input 85 ~ 264VAC, Output 24VDC, 48W, -10 ~ +50°C
<b>MDR-40-24</b>	Industrial Power, Input 85 ~ 264VAC, Output 24VDC, 40W, -20 ~ +70°C
<b>IND-WMK03</b>	Wall Mount kit for Industrial product (Compact, 150x 30mm)