



IGS-402SM-4PH24

4x10/100/1000Base-T + 2x100/1000Base-X SFP
with 4xPoE+

IGS-803SM-8PH24

8x10/100/1000Base-T + 3x100/1000Base-X SFP
with 8xPoE+

The series models are managed industrial grade Gigabit PoE (Power over Ethernet) switches with 4/8 ports 10/100/1000Base-T PoE ports and 2/3 ports Fast/Gigabit Ethernet SFP ports that provide stable and reliable Ethernet transmission. With dual power input design, the series models can provide redundancy mechanism for critical applications that need always-on connections. These switches can also operate either at standard operating temperature range (-10 to 60°C) or at wide operating temperature range (-40 to 75°C) so as to fulfill the special needs of industrial automation applications. Housed in rugged DIN rail or wall mountable IP-30 enclosures, these switches are perfect choices for harsh environments, such as industrial networking, intelligent transportation systems (ITS) and are also suitable for many military and utility market applications where environmental conditions exceed commercial product specifications.

Apart from specially-designed outlook and hardware features, the Ethernet switches also support a wide variety of management functions, including STP/RSTP/MSTP/ITU-T G.8032 Ring and multiple u-Ring for redundant cabling, advanced PoE management functions such as PoE device auto-checking and auto reset, PoE power on/off weekly scheduling, layer 2 Ethernet IGMP, VLAN, QoS, Security, IPv6, bandwidth control, port mirroring, cable diagnostics and Green Ethernet. Additionally, these switches can work with CTC Union's proprietary SmartView that offers user-friendly and centralized network management platform and provides to network administrators to monitor and configure these connected switches remotely.

Features

- 4x10/100/1000Base-T RJ-45 + 2x100/1000Base-X SFP with 4xPoE+, total 120W power budget (IGS-402SM-4PH24)
- 8x10/100/1000Base-T RJ-45 + 3x100/1000Base-X SFP with 8xPoE+, total 180W power budget (IGS-803SM-8PH24)
- 24/48VDC redundant dual input power with built-in very high efficiency booster (94~97%) to rise up 55 VDC for PoE output
- Constant and regulated PoE output voltage at 55VDC
- Provides 4/8 port IEEE802.3af / 802.3at PoE output (30W per Port)
- Advanced PoE Management, PoE PD Failure Auto Checking and auto reset when PD fail, PoE port on/off weekly scheduling, PoE configuration for power planning
- UL60950-1, CE, FCC, Rail Traffic EN50121-4 certified
- Industrial grade EMS, EMI, EN61000-6-2, EN61000-6-4 certified
- Cable diagnostics, Measuring cable OK or broken point distance
- Supports Green Ethernet IEEE802.3az EEE (Energy Efficient Ethernet) management to optimize power consumption
- STP, RSTP, MSTP, ITU-T G.8032 Ethernet Ring Protection Switching (ERPS) for redundant cabling
- Provides 5 ring instances that each can support u-Ring, u-Chain or Sub-Ring type for flexible uses (Figure 3). Supports up to 5 rings in one device (Figure 2).
- u-Ring for Redundant Cabling, recovery time < 10ms in 250 devices
- DHCP client/Relay/Snooping/Snooping option 82/Relay option 82
- QoS, Traffic classification QoS, CoS, bandwidth control for Ingress and Egress, Storm Control, DiffServ
- IEEE802.1q VLAN, MAC based VLAN, IP subnet based VLAN, Protocol based VLAN, VLAN translation, GVRP, MVR
- Dynamic IEEE 802.3ad LACP Link Aggregation, Static Link Aggregation
- IGMP snooping V1/V2/V3, IGMP Filtering/Throttling, IGMP query, IGMP proxy reporting, MLD snooping V1/V2
- Flexibility security: Port based and MAC based IEEE802.1X, RADIUS, ACL, TACACS+, HTTP/HTTPS, SSL/SSH v2
- Software upgrade via TFTP and HTTP, redundant firmware to avoid upgrade failure
- Support IEEE1588 PTP V2 for precise time synchronization to operate in Master, Boundary, Slave mode by each port
- RMON, MIB II, Port mirroring, Event syslog, DNS, NTP/SNTP, IEEE802.1ab LLDP
- Supports IPv6 Telnet server/ICMP v6
- CLI, Web based management, SNMP v1/v2c/v3, Telnet server for management
- Provides SmartConfig for quick and easy mass configuration
- Supports SmartView for centralized management

Specifications

Standard	IEEE 802.3	10Base-T 10Mbit/s Ethernet
	IEEE 802.3u	100Base-TX, 100Base-FX, Fast Ethernet
	IEEE 802.3ab	1000Base-T Gbit/s Ethernet over twisted pair
	IEEE 802.3z	1000Base-X Gbit/s Ethernet over Fiber-Optic
	IEEE 802.3af	PoE (Power over Ethernet)
	IEEE 802.3at	PoE+ (Power over Ethernet enhancements)
	IEEE 802.1d	STP (Spanning Tree Protocol)
	IEEE 802.1w	RSTP (Rapid Spanning Tree Protocol)
	IEEE 802.1s	MSTP (Multiple Spanning Tree Protocol)
	ITU-T G.8032 / Y.1344	ERPS (Ethernet Ring Protection Switching)
	IEEE 802.1Q	Virtual LANs (VLAN)
	IEEE 802.1X	Port based and MAC based Network Access Control, Authentication
	IEEE 802.3ad	Link aggregation for parallel links with LACP (Link Aggregation Control Protocol)
	IEEE 802.3x	Flow control for Full Duplex
	IEEE 802.1ad	Stacked VLANs, Q-in-Q
	IEEE 802.1p	LAN Layer 2 QoS/CoS Protocol for Traffic Prioritization
	IEEE 802.1ab	Link Layer Discovery Protocol (LLDP)
	IEEE 802.3az	EEE (Energy Efficient Ethernet)
Switch Architecture	Back-plane (Switching Fabric): 12Gbps (IGS-402SM-4PH24) 22Gbps (IGS-803SM-8PH24)	
Data Processing	Store and Forward	
Flow Control	IEEE 802.3x for full duplex mode Back pressure for half duplex mode	
Network Connector	4x 10/100/1000Base-T RJ-45 + 2x 100/1000Base-X SFP connector (IGS-402SM-4PH24) 8x 10/100/1000Base-T RJ-45 + 3x 100/1000Base-X SFP connector (IGS-803SM-8PH24) RJ-45 UTP port support Auto negotiation speed, Auto MDI/MDI-X function, SFP port support 100/1000 dual speed with DDMI	
Console	RS-232 (RJ-45)	
PoE RJ-45 Pin Assignment	4x IEEE 802.3af / IEEE 802.3at PoE+ (IGS-402SM-4PH24) 8x IEEE 802.3af / IEEE 802.3at PoE+ (IGS-803SM-8PH24) End-Span, Alternative A mode. Positive (V+): RJ-45 pin 1, 2. Negative (V-): RJ-45 pin 3, 6. Data (1,2,3,6,4,5,7,8)	
Network Cable	UTP/STP above Cat. 5e cable EIA/TIA-568 100-ohm (100m)	
Protocols	CSMA/CD	
Reverse Polarity Protection	Present	

Operating Humidity	5% to 95% (Non-condensing)
Storage Temperature	-40 ~ 85°C
Housing	Rugged Metal, IP30 Protection, Fanless
Dimensions	106 x 62.5 x 135 mm (D x W x H) (IGS-402SM-4PH24) 106 x 72 x 152 mm (D x W x H) (IGS-803SM-8PH24)
Weight	0.715kg (IGS-402SM-4PH24) 0.96kg (IGS-803SM-8PH24)
Installation Mounting	DIN Rail mounting or wall mounting
MTBF	276,161Hrs (IGS-402SM-4PH24) 311,376Hrs (IGS-803SM-8PH24) (MIL-HDBK-217)
Warranty	5 years
Certification	
EMC	CE
EMI (Electromagnetic Interference)	FCC Part 15 Subpart B Class A, CE EN55022 Class A
Railway Traffic	EN50121-4
Immunity for Heavy Industrial Environment	EN61000-6-2
Emission for Heavy Industrial Environment	EN61000-6-4
EMS (Electromagnetic Susceptibility)	EN61000-4-2 (ESD) Level 3, Criteria B EN61000-4-3 (RS) Level 3, Criteria A EN61000-4-4 (Burst) Level 3, Criteria A EN61000-4-5 (Surge) Level 3, Criteria B EN61000-4-6 (CS) Level 3, Criteria A EN61000-4-8 (PFMF, Magnetic Field) Field Strength: 300A/m, Criteria A
Protection Level	
Safety	UL60950-1
Shock	IEC 60068-2-27
Freefall	IEC 60068-2-32
Vibration	IEC 60068-2-6

Topology	
VLAN	IEEE 802.1q VLAN, up to 4094 802.1Q VLAN VID IEEE 802.1q VLAN, up to 4094 Groups IEEE 802.1ad Q-in-Q MAC-based VLAN, up to 256 entries IP Subnet-based VLAN, up to 128 entries Protocol-based VLAN (Ethernet, SNAP, LLC), up to 128 entries VLAN Translation, up to 256 entries GVRP (GARP VLAN Registration Protocol) MVR (Multicast VLAN Registration)
Link Aggregation (Port Trunk)	Static (Hash with SA, DA, IP, TCP/UDP port), up to 5 trunk group Dynamic (IEEE 802.3ad LACP), up to 5 trunk group
Spanning Tree	IEEE802.1d STP IEEE802.1w RSTP IEEE802.1s MSTP
Multiple u-Ring	up to 5 instances that each supports u-Ring, u-Chain or Sub-Ring type for flexible uses, and maximum up to 5 Rings (Figure 2,3,4,5). Recovery time <10ms The maximum number of devices allowed in a Ring supported ring is 250.
Loop Protection	Present
ITU-T G.8032 / Y.1344 ERPS (Ethernet Ring Protection)	Recovery time <50ms Single Ring, Sub-Ring, Multiple ring topology network
QoS Features	
Class of Service	IEEE802.1p 8 active priorities queues for per port
Traffic Classification QoS	IEEE802.1p based CoS IP Precedence based CoS IP DSCP based CoS QCL(QoS Control List): Frame Type, Source/Destination MAC, VLAN ID, PCP, DEI QCE(QoS Control Entry): Protocol, Source IP, IP Fragment, DSCP, TCP/UDP port number
Bandwidth Control for Ingress	Rate in steps :1 kbps / Mbps / fps / kfps Range : 100 kbps to 1Gbps / 1fps to 3300kfps Rate Unit : bit or frame

Bandwidth Control for Egress	Rate in steps : 1 kbps / Mbps Range : 100 kbps to 1Gbps Rate Unit : bit Per queue / Per port shaper
DiffServ (RF 2474) Remarking	
Storm Control	for Unicast, Broadcast, Multicast
IP Multicasting Features	
IGMP / MLD Snooping	IGMP Snooping v1, v2, v3 / MLD Snooping v1, v2 Port Filtering Profile Throttling Fast Leave Maximum Multicast Group : up to 1022 entries Query / Static Router Port
Security Features	
IEEE 802.1X	Port-Based MAC-Based
ACL	Number of rules : up to 256 entries for L2 / L3 / L4
RADIUS authentication & accounting	
TACACS+ authentication & accounting, TACACS+ 3.0	
HTTPS, HTTP	
SSL / SSH v2	
User Name	Local Authentication
Password Authentication	Remote Authentication (via RADIUS / TACACS+)
Management Interface Access Filtering	Web, Telnet / SSH , CLI RS-232 console
Management Features	
CLI	Cisco® like CLI
Web Based Management	
Telnet	Server
SNMP	V1, V2c, V3
SW & Configuration Upgrade	TFTP, HTTP
RMON	Redundant firmware in case of upgrade failure
MIB	RMON I (1, 2, 3, 9 group), RMON II RFC1213 MIB II Private MIB

DHCP	Client
	Relay
	Snooping
	Snooping option 82
	Relay option 82
IP Source Guard	
Port Mirroring	
Event Syslog	Syslog server (RFC3164) (Support 1 server)
Warning Message	System syslog, e-mail, alarm relay
DNS	Client, Proxy
IEEE1588 PTP V2	Master, Boundary, Slave Operating mode Operating in each port of these switch
NTP / SNTP	
LLDP (IEEE 802.1ab)	Link Layer Discovery Protocol
	LLDP-MED
IPv6 Features	
IPv6 Management	Telnet Server/ICMP v6
SNMP over IPv6	
HTTP over IPv6	
SSH over IPv6	
IPv6 Telnet Support	
IPv6 NTP / SNTP Support	

IPv6 TFTP Support	
IPv6 QoS	
IPv6 ACL	Number of rules: up to 256 entries
	L2 / L3 / L4
Others Features	
Green Ethernet	Supports IEEE802.3az EEE (Energy Efficient Ethernet) Management to optimize the power consumption
	Determine the cable length and lowering the power for ports with short cables
Green Ethernet	
Cable Diagnostic	Lower the power for a port when there is no link
	LED Power Management :Adjustment LEDs intensity
Cable Diagnostic	
Advanced PoE Management	Measuring cable normal or broken point distance
	PoE PD failure auto checking ,and auto reset when PD fail
PoE port on/off weekly scheduling	
PoE Configuration	
PoE Enable/Disable	
Power limit by classification	
Power limit by management	
Total PoE Power budget limitation (maximum 120W for IGS-402SM-4PH24 ,180W for IGS-803SM-8PH24)	
Power feeding priority	

Application

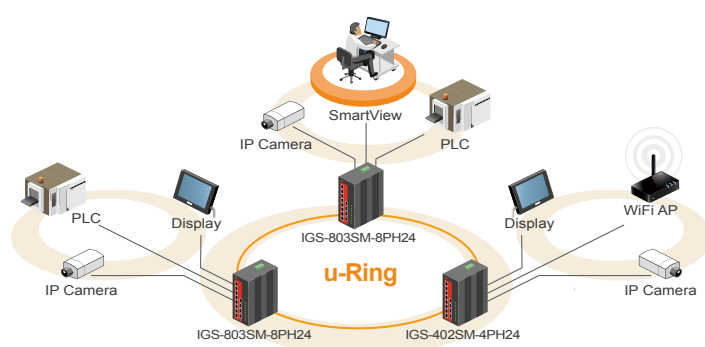


Figure 1 : Application Example

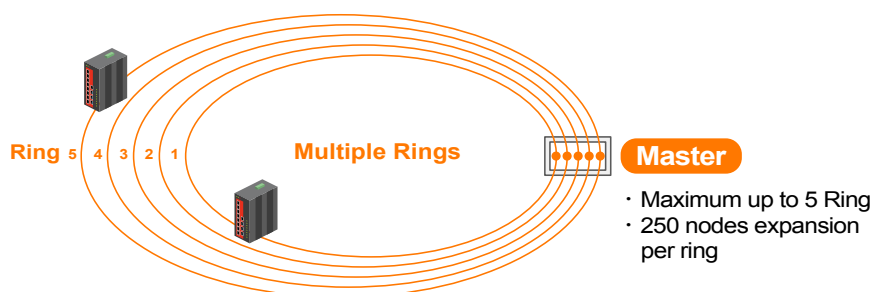


Figure 2 : Multiple Ring

u-Ring Configuration

Auto-refresh ☐ Refresh

Delete	Instance	Type	Master	East		West	
				Port	Edge	Port	Edge
Delete	1	u-Ring	☐	1		2	
Delete	2	u-Ring	☐	4		3	
Delete	3	u-Ring	☐	10 (Fiber2)		11 (Fiber3)	
Delete	4	Sub-Ring	☐	6			
Delete	5	u-Chain	☐	5	☐	9 (Fiber1)	☐

Add New Instance

Save Reset

Figure 3 : Friendly to set u-Ring configuration in Web

Figure 4 : u-Ring Type


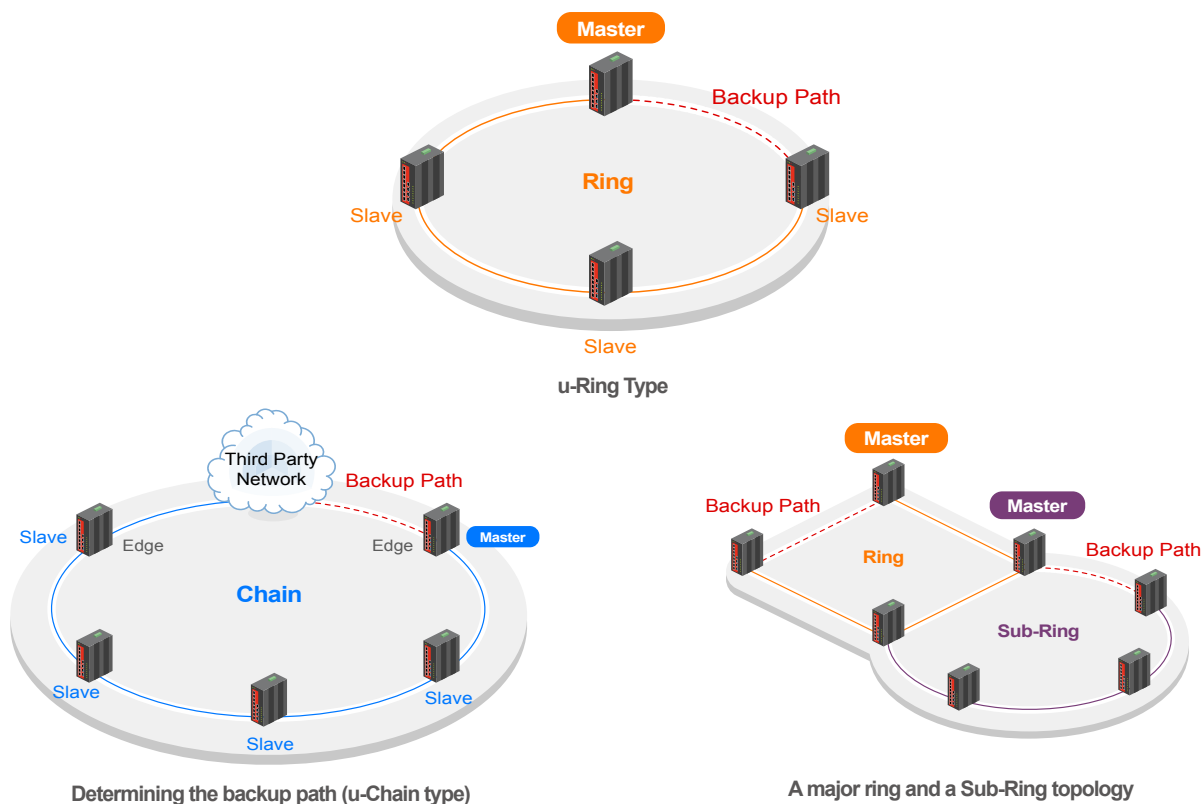



Figure 5 : Ring Configuration Example

Ring Configuration Type


- u-Ring
- Sub-Ring

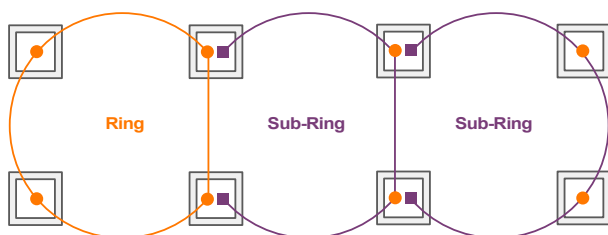


Ring Configuration Type

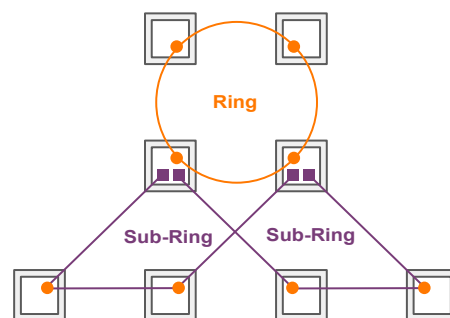

Combination of a ring and two Sub-Ring

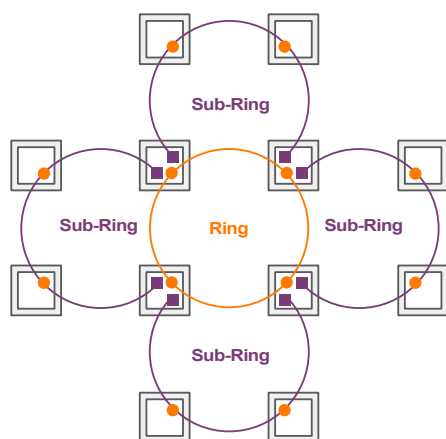


Combination of a ring and four Sub-Ring

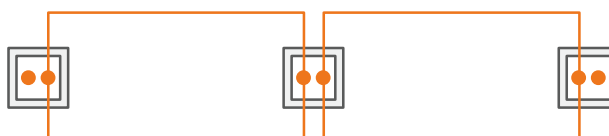


Cable Redundancy

Dimensions

IGS-402SM-4PH24

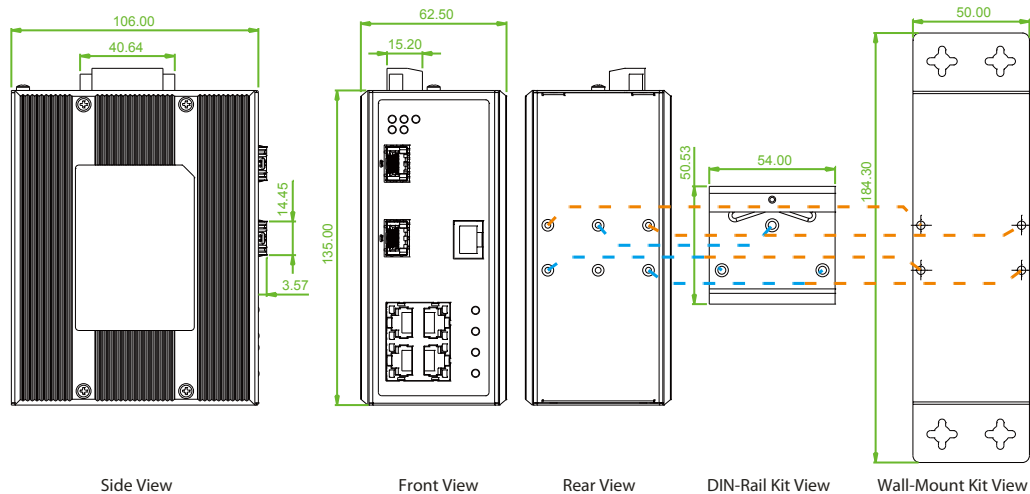


IGS-803SM-8PH24

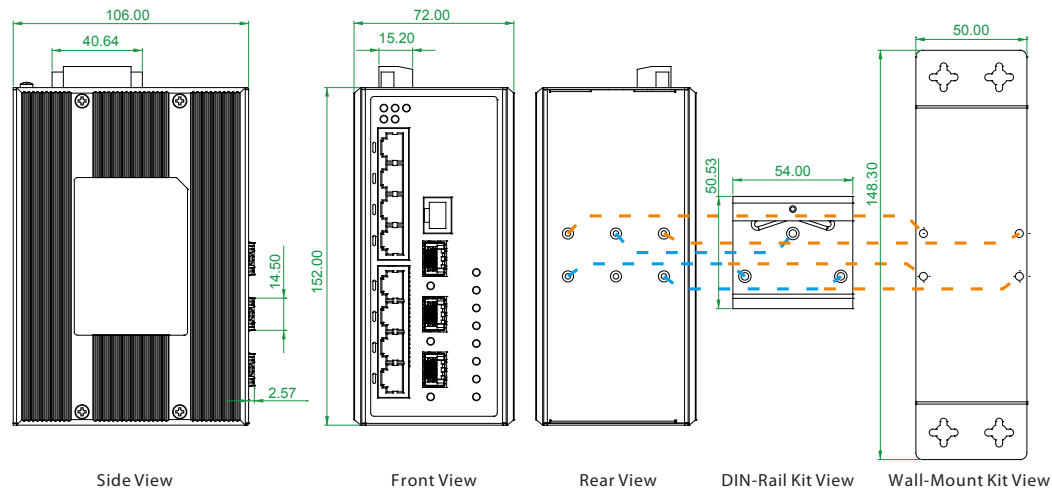

Ordering Information

Model Name	Managed	Total Port	UTP	Fiber	PoE Port		Certification				Operating Temperature
			10/100/1000 Base-T	100/1000 Base-X	IEEE 802.3at	Power Budget	Railway EN50121-4	Safety UL60950-1	EN61000-6-2	EN61000-6-4	
IGS-402SM-4PH24	V	6	4	2 SFP	4	120W	V	V	V	V	-10~60 °C
IGS-402SM-4PHE24	V	6	4	2 SFP	4	120W	V	V	V	V	-40~75 °C
IGS-803SM-8PH24	V	11	8	3 SFP	8	180W	V	V	V	V	-10~60 °C
IGS-803SM-8PHE24	V	11	8	3 SFP	8	180W	V	V	V	V	-40~75 °C

Model Naming Rule

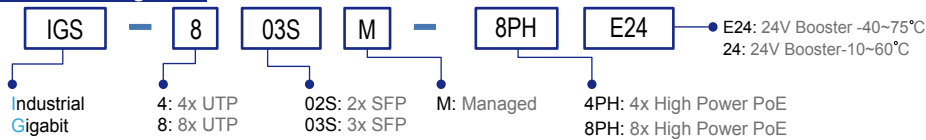

Accessories

DR-120-24	Industrial Power, Input 88 ~ 132VAC / 176 ~ 264VAC, Output 24VDC, 120W, -10 ~ +60°C
DRP-240-48	Industrial Power, Input 85 ~ 264VAC, Output 48VDC, 240W, -10 ~ +70°C
SFP Transceiver	Compatible, Reliable, 5-year Warranty

SFP Naming Rule

