

# EN50155 Managed Ethernet Switch



## ITP-G802SM

8x 100/1000Base-T + 2x100/1000Base-X SFP Managed Ethernet Switch

## ITP-G800M

8x 100/1000Base-T Managed Ethernet Switch

ITP-G802SM series are managed industrial grade Gigabit switches with 8 10/100/1000Base-T ports and/or 2 Gigabit/Fast Ethernet SFP ports that provide stable and reliable Ethernet transmission. The ITP-G802SM series provide advanced Ethernet functions that include STP/RSTP/MSTP/ITU-T G.8032 ERPS and multiple  $\mu$ -Ring for redundant cabling, layer 2 Ethernet IGMP, VLAN, QoS, Security, IPv6, bandwidth control, port mirroring, cable diagnostic and Green Ethernet.

Housed in rugged DIN rail or wall mountable enclosures, these switches are designed for the harshest environments. Specifically, ITP-G802SM series switches use M12 connectors to ensure water tight, robust connections and to guarantee reliable connections against environmental disturbances, such as vibration and shock. ITP-G802SM series are compliant with EN 50155, covering power input voltage, surge, EFT, ESD, vibration, shock, thus making the switches suitable for industrial applications, such as vehicle, rolling stock, ship, vessel.

ITP-G802SM series are IP67 rated to protect against dust and water submersion. They are particularly used in environments with extreme temperature, high humidity, oil, dust and in outdoor environments requiring water-proof applications such as IP surveillance, city security. ITP-G802SM series can also work with CTC Management platform SmartView™ to provide convenient, real-time and centralized device management.

### Feature

- 8x 10/100/1000Base-T M12 and 2x 100/1000Base-X SFP Fiber (Total 10 Port) (ITP-G802SM)
- 8x 10/100/1000Base-T M12 (Total 8 port) (ITP-G800M)
- M12 and M23 connector against vibration and shock
- IP67 grade housing for against water, dust, and oil (Figure 3)
- Redundant and wide input range voltage, Low voltage (12/24/48VDC) and High Voltage (110/220VDC or 110/220VAC)
- UL60950-1, CE, FCC, Rail Traffic EN50155, EN50121-4 certified
- Industrial Grade EMS, EMI, EN61000-6-2, EN61000-6-4 certified
- Cable diagnostic, Measuring cable OK or broken point distance
- Supports Green Ethernet IEEE802.3az EEE (Energy Efficient Ethernet) management to optimize the power consumption
- STP, RSTP, MSTP, ITU-T G.8032 Ethernet Protection Ring (EPR) for redundant cabling
- Provide up to 5 instances that each supports  $\mu$ -Ring, u-Chain or Sub-Ring type for flexible uses (Figure 5)
- $\mu$ -Ring for Redundant Cabling, recovery time < 10ms in 250 maximum devices
- DHCP Server/Client/Relay/Snooping/Snooping option 82/Relay option 82
- QoS, Traffic classification QoS, CoS, bandwidth control for Ingress and Egress, Storm Control, DiffServ
- IEEE802.1q VLAN, MAC based VLAN, IP subnet based VLAN, Protocol based VLAN, VLAN translation, GVRP, MVR
- Dynamic IEEE 802.3ad LACP Link Aggregation, Static Link Aggregation
- IGMP snooping V1/V2/V3, IGMP Filtering/ Throttling, IGMP query, IGMP proxy reporting, MLD snooping V1/V2
- Security : Port based and MAC based IEEE802.1X, RADIUS, ACL, TACACS+, HTTP/HTTPS, SSL/SSH v2
- Software upgrade via TFTP and HTTP, redundant firmware to avoid in case of upgrade failure
- Support IEEE1588 PTP V2 for precise time synchronization to operate in Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master, Slave mode by each port
- RMON, MIB II, Port mirroring, Event syslog, DNS, NTP IEEE802.1ab LLDP
- Support 5 operating mode in each port: Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master, Slave
- Supports IPv6 Telnet server /ICMP v6
- CLI, Web based management, SNMP v1/v2c/v3, Telnet server for management
- Provides SmartConfig for quick and easy mass configuration tool (Figure 7)
- Supports SmartView for Centralized Management (Figure 8)
- Supporting Central EMS for management of up to 50 SmartView Server, and maximum up to 25,000 device (Figure 9)

### Specifications

<b>Standard</b>	IEEE 802.3	10Base-T 10Mbit/s Ethernet	<b>Switch Architecture</b>	Back-plane (Switching Fabric):		
	IEEE 802.3u	100Base-TX, 100Base-FX, Fast Ethernet		20Gbps (ITP-G802SM) 16Gbps (ITP-G800M)		
	IEEE 802.3ab	1000Base-T Gbit/s Ethernet over twisted pair		(Full wire-speed)		
	IEEE 802.3z	1000Base-X Gbit/s Ethernet over Fiber-Optic		<b>Data Processing</b>	Store and Forward	
	IEEE 802.1d	STP (Spanning Tree Protocol)		<b>Flow Control</b>	IEEE 802.3x for full duplex mode Back pressure for half duplex mode	
	IEEE 802.1w	RSTP (Rapid Spanning Tree Protocol)		<b>Network Connector</b>	8x M12 (8-Pin, Female, A-Code) 10/100/1000Base-T auto negotiation speed, Auto MDI/MDI-X function, Full/Half duplex	
	IEEE 802.1s	MSTP (Multiple Spanning Tree Protocol)			Water proof Fiber Cable Gland support for 2 X 100/1000 Base-X SFP slot, with DDMI (for ITP-G802SM)	
	ITU-T G.8032 / Y.1344	ERPS (Ethernet Ring Protection Switching)		<b>Console</b>	RS-232 (5-pin A-Code M12 male)	
	IEEE 802.1Q	Virtual LANs (VLAN)		<b>Network Cable</b>	UTP/STP above Cat. 5e cable EIA/TIA-568 100-ohm (100m)	
	IEEE 802.1X	Port based and MAC based Network Access Control, Authentication		<b>Protocols</b>	CSMA/CD	
	IEEE 802.3ad	Link aggregation for parallel links with LACP(Link Aggregation Control Protocol)		<b>Reverse Polarity Protection</b>	Present	
	IEEE 802.3x	Flow control for Full Duplex		<b>Overload Current Protection</b>	Present	
	IEEE 802.1ad	Stacked VLANs, Q-in-Q		<b>CPU Watch Dog</b>	Present	
	<b>Standard</b>	IEEE 802.1p		LAN Layer 2 QoS/CoS Protocol for Traffic Prioritization	<b>LED</b>	Per unit: Power 1 (Green), Power 2 (Green), Fault (Amber), CPU Act (Green), Ring Master (Yellow)
		IEEE 802.1ab		Link Layer Discovery Protocol (LLDP)	Per UTP port: 10/100 Link/Active (Green) 1000 Link/Active (Amber)	
		IEEE 802.3az		EEE (Energy Efficient Ethernet)	SFP Fiber Per port: Link/Active (Green)	
<b>VLAN ID</b>	4094	IEEE802.1Q VLAN VID				

<b>Jumbo Frame</b>	9.6KB																														
<b>MAC Address Table</b>	8K																														
<b>Memory Buffer</b>	256K Bytes for packet buffer																														
<b>Power Supply</b>	Provides 1x M23 (5-Pin, male) for redundant dual input, optional Low (L) or High (H) voltage. Low voltage (L): 12/24/48V (8.4~60VDC) High voltage (H): 110/220VDC (88~300VDC), or 110/220VAC (88~264VAC)																														
<b>Power Consumption</b>	<table border="1"> <thead> <tr> <th></th> <th>ITP-G802SM-LL</th> <th>ITP-G802SM-HL</th> <th>ITP-G800M-LL</th> <th>TP-G800M-HL</th> </tr> </thead> <tbody> <tr> <td>12VDC</td> <td>8.5W</td> <td>9.9W</td> <td>7.6W</td> <td>9.4W</td> </tr> <tr> <td>24VDC</td> <td>9.2W</td> <td>10.3W</td> <td>8.9W</td> <td>9.6W</td> </tr> <tr> <td>48VDC</td> <td>11W</td> <td>11.6W</td> <td>10.6W</td> <td>11.1W</td> </tr> <tr> <td>110 VAC/VDC</td> <td></td> <td>9.9W</td> <td></td> <td>8.6W</td> </tr> <tr> <td>220 VAC/VDC</td> <td></td> <td>9.9W</td> <td></td> <td>8.6W</td> </tr> </tbody> </table>		ITP-G802SM-LL	ITP-G802SM-HL	ITP-G800M-LL	TP-G800M-HL	12VDC	8.5W	9.9W	7.6W	9.4W	24VDC	9.2W	10.3W	8.9W	9.6W	48VDC	11W	11.6W	10.6W	11.1W	110 VAC/VDC		9.9W		8.6W	220 VAC/VDC		9.9W		8.6W
		ITP-G802SM-LL	ITP-G802SM-HL	ITP-G800M-LL	TP-G800M-HL																										
	12VDC	8.5W	9.9W	7.6W	9.4W																										
	24VDC	9.2W	10.3W	8.9W	9.6W																										
	48VDC	11W	11.6W	10.6W	11.1W																										
110 VAC/VDC		9.9W		8.6W																											
220 VAC/VDC		9.9W		8.6W																											
<b>Warning Message</b>	System Syslog, SMTP/ e-mail event message, alarm relay																														
<b>Alarm Relay Contact</b>	5-pin A-code M12 male Relay outputs with current carrying capacity of 1 A @24VDC																														
<b>Operating Temperature</b>	-10 ~ 60°C (ITP-G802SM, ITP-G800M) -40 ~ 75°C (ITP-G802SM-E, ITP-G800M-E)																														
<b>Operating Humidity</b>	5% to 95% (Non-condensing)																														
<b>Storage Temperature</b>	-40 ~ 85°C																														
<b>Housing</b>	Rugged Metal, Fanless, IP67 grade housing for against water, dust, and oil (Figure 3)																														
<b>Dimensions</b>	70x240x168mm (D x W x H)																														
<b>Weight</b>	2.645kg (ITP-G802SM-LL) 2.82kg (ITP-G802SM-HL) 2.53kg (ITP-G800M-LL) 2.705g (ITP-G800M-HL)																														
<b>Installation Mounting</b>	Wall mounting, or DIN Rail mounting (Optional)																														

## Software Specifications

<b>Topology</b>	
<b>VLAN</b>	IEEE 802.1q VLAN, up to 4094 802.1Q VLAN VID IEEE 802.1q VLAN, up to 4094 Groups IEEE 802.1ad Q-in-Q MAC-based VLAN, up to 256 entries IP Subnet-based VLAN, up to 128 entries Protocol-based VLAN (Ethernt, SNAP, LLC), up to 128 entries VLAN Translation, up to 256 entries GVRP (GARP VLAN Registration Protocol) MVR ( Multicast VLAN Registration )
<b>Link Aggregation (Port Trunk)</b>	Static (Hash with SA, DA, IP, TCP/UDP port), up to 5 trunk group Dynamic (IEEE 802.3ad LACP), up to 5 trunk group
<b>Spanning Tree</b>	IEEE802.1d STP, IEEE802.1w RSTP, IEEE802.1s MSTP
<b>Multiple μ-Ring</b>	up to 5 instances that each supports μ-Ring, u-Chain or Sub-Ring type for flexible uses, and maximum up to 5 Rings. Recovery time <10ms The maximum number of devices allowed in a Ring supported ring is 250.
<b>Loop Protection</b>	Present
<b>ITU-T G.8032 / Y.1344 ERPS (Ethernet Ring Protection )</b>	Recovery time <50ms Single Ring, Sub-Ring, Multiple ring topology network
<b>QoS Feature</b>	
<b>Class of Service</b>	IEEE802.1p 8 active priorities queues for per port
<b>Traffic Classification QoS</b>	IEEE802.1p based CoS IP Precedence based CoS IP DSCP based CoS QCL(QoS Control List): Frame Type, Source/Destination MAC, VLAN ID, PCP, DEI QCE(QoS Control Entry): Protocol, Source IP, IP Fragment, DSCP, TCP/UDP port number
<b>Bandwidth Control for Ingress</b>	Rate in steps :1 kbps / Mbps / fps / kfps Range : 100 kbps to 1Gbps / 1fps to 3300kfps Rate Unit : bit or frame
<b>Bandwidth Control for Egress</b>	Rate in steps : 1 kbps / Mbps Range : 100 kbps to 1Gbps Rate Unit : bit Per queue / Per port shaper
<b>DiffServ (RF 2474) Remarking</b>	
<b>Storm Control</b>	for Unicast, Broadcast, Multicast
<b>IP Multicasting Feature</b>	
<b>IGMP / MLD Snooping</b>	IGMP Snooping v1, v2, v3 / MLD Snooping v1, v2 Port Filtering Profile, Throttling

<b>MTBF</b>	215,292 Hours (ITP-G802SM-LL) 188,971 Hours (ITP-G802SM-HL) 233,294 Hours (ITP-G800M-LL) 202,701 Hours (ITP-G800M-HL) (MIL-HDBK-217)
<b>Warranty</b>	5 years
<b>Certification</b>	
<b>EMC</b>	CE
<b>EMI (Electromagnetic Interference)</b>	FCC Part 15 Subpart B Class A, CE EN55022 Class A
<b>Railway Traffic</b>	EN50155, EN50121-4
<b>Immunity for Heavy Industrial Environment</b>	EN61000-6-2
<b>Emission for Heavy Industrial Environment</b>	EN61000-6-4
<b>EMS (Electromagnetic Susceptibility) Protection Level</b>	EN61000-4-2 (ESD) Level 3, Criteria B EN61000-4-3 (RS) Level 3, Criteria A EN61000-4-4 (Burst) Level 3, Criteria A EN61000-4-5 (Surge) Level 3, Criteria B EN61000-4-6 (CS) Level 3, Criteria A EN61000-4-8 (PFMF, Magnetic Field) Field Strength: 300A/m, Criteria A
<b>Safety</b>	UL60950-1
<b>Shock</b>	IEC-61373
<b>Freefall</b>	IEC 60068-2-32
<b>Vibration</b>	IEC-61373

<b>IGMP / MLD Snooping</b>	Fast Leave Maximum Multicast Group : up to 1022 entries Query / Static Router Port
<b>Security Features</b>	
<b>IEEE 802.1X</b>	Port-Based, MAC-Based
<b>ACL</b>	Number of rules : up to 256 entries for L2 / L3 / L4
<b>RADIUS authentication &amp; accounting</b>	
<b>TACACS+ authentication &amp; accounting, TACACS+ 3.0</b>	
<b>HTTPS, HTTP</b>	
<b>SSL / SSH v2</b>	
<b>User Name Password Authentication</b>	Local Authentication Remote Authentication (via RADIUS / TACACS+)
<b>Management Interface Access Filtering</b>	
<b>Management Features</b>	
<b>CLI</b>	Cisco® like CLI
<b>Web Based Management</b>	
<b>Telnet</b>	Server
<b>SNMP</b>	V1, V2c, V3
<b>SW &amp; Configuration Upgrade</b>	TFTP, HTTP Redundant firmware in case of upgrade failure
<b>RMON</b>	RMON I (1, 2, 3, 9 group), RMON II
<b>MIB II</b>	RFC 1213
<b>UPnP</b>	
<b>DHCP</b>	Server, Client, Relay, Snooping Snooping option 82, Relay option 82
<b>IP Source Guard</b>	
<b>Port Mirroring</b>	
<b>Event Syslog</b>	Syslog server (RFC3164) (Support 1 server )
<b>Warning Message</b>	System syslog, e-mail, alarm relay
<b>DNS</b>	Client, Proxy
<b>IEEE1588 PTP V2</b>	Support 5 operating mode in each port : Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master, Slave
<b>NTP</b>	
<b>LLDP (IEEE 802.1ab)</b>	Link Layer Discovery Protocol LLDP-MED


# EN50155 Managed Ethernet Switch

IPv6 Features	
IPv6 Management	Telnet Server/ICMP v6
SNMP over IPv6	
HTTP over IPv6	
SSH over IPv6	
IPv6 Telnet Support	
IPv6 NTP Support	
IPv6 TFTP Support	
IPv6 QoS	

IPv6 ACL	Number of rules: up to 256 entries L2 / L3 / L4
Others Features	
Green Ethernet	Supports IEEE802.3az EEE (Energy Efficient Ethernet) Management to optimize the power consumption Determine the cable length and lowering the power for ports with short cables
Green Ethernet	Lower the power for a port when there is no link LED Power Management :Adjustment LEDs intensity
Cable Diagnostic	Measuring cable OK or broken point distance

## Application

► Figure 1 : ITP Series in Onboard Application

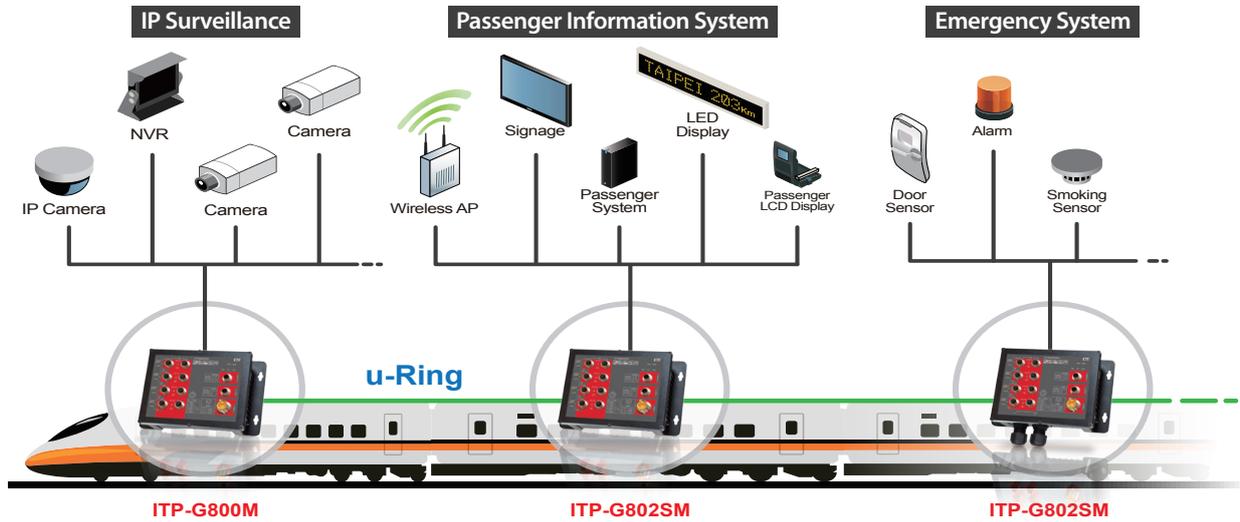

► Figure 2 : ITP Series for Industrial Automation




► Figure 3 : IP67 Waterproof



► Figure 4 : An illustration of  $\mu$ -Ring instances configured in Web interface

u-Ring Configuration								Auto-refresh <input type="checkbox"/>	Refresh
Delete	Instance	Type	Master	East		West			
				Port	Edge	Port	Edge		
Delete	1	u-Ring	<input type="checkbox"/>	1		2			
Delete	2	u-Ring	<input type="checkbox"/>	4		3			
Delete	3	u-Ring	<input type="checkbox"/>	10 (Fiber2)		11 (Fiber3)			
Delete	4	Sub-Ring	<input type="checkbox"/>	6					
Delete	5	u-Chain	<input type="checkbox"/>	5	<input type="checkbox"/>	9 (Fiber1)	<input type="checkbox"/>		





► Figure 5 :  $\mu$ -Ring Typ

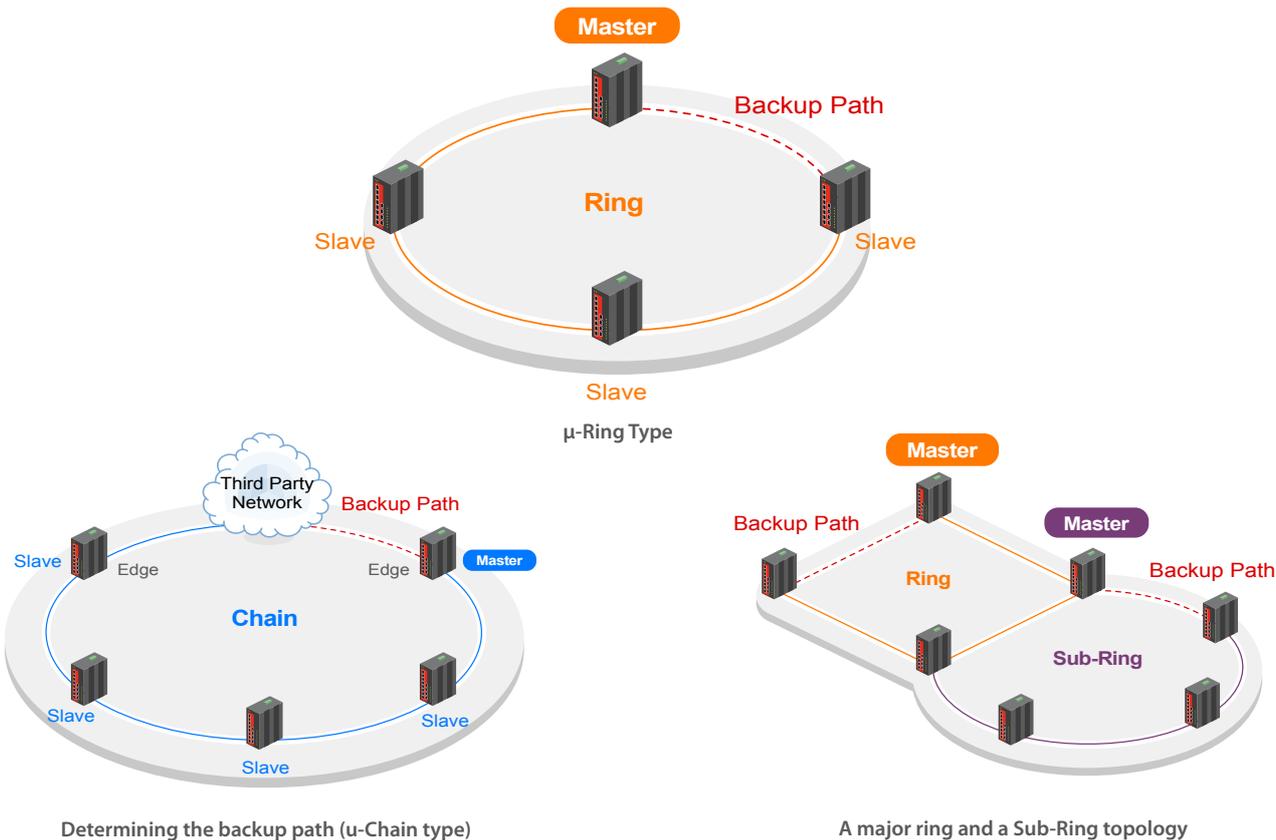


► Figure 6 : Ring Configuration Example

Ring Configuration Type


- u-Ring
- Sub-Ring

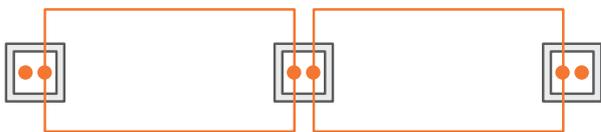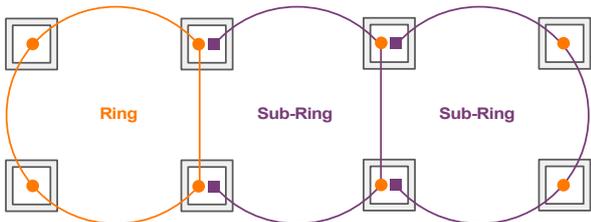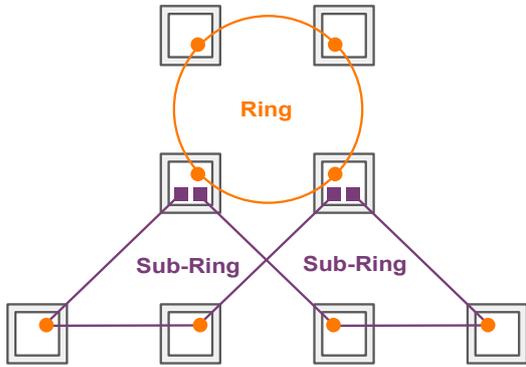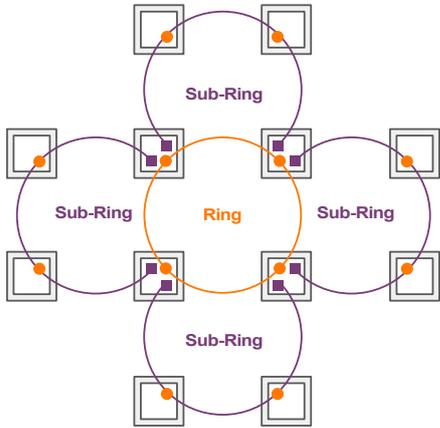


► **Figure 7 :** SmartConfig™ is a convenient configuration tool for mass deployment of switch products

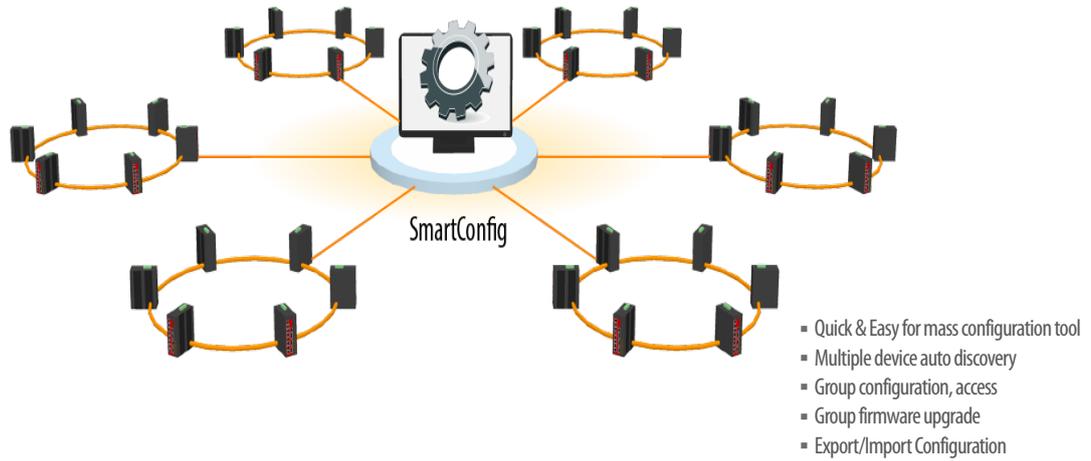

► **Figure 8 :** SmartView™

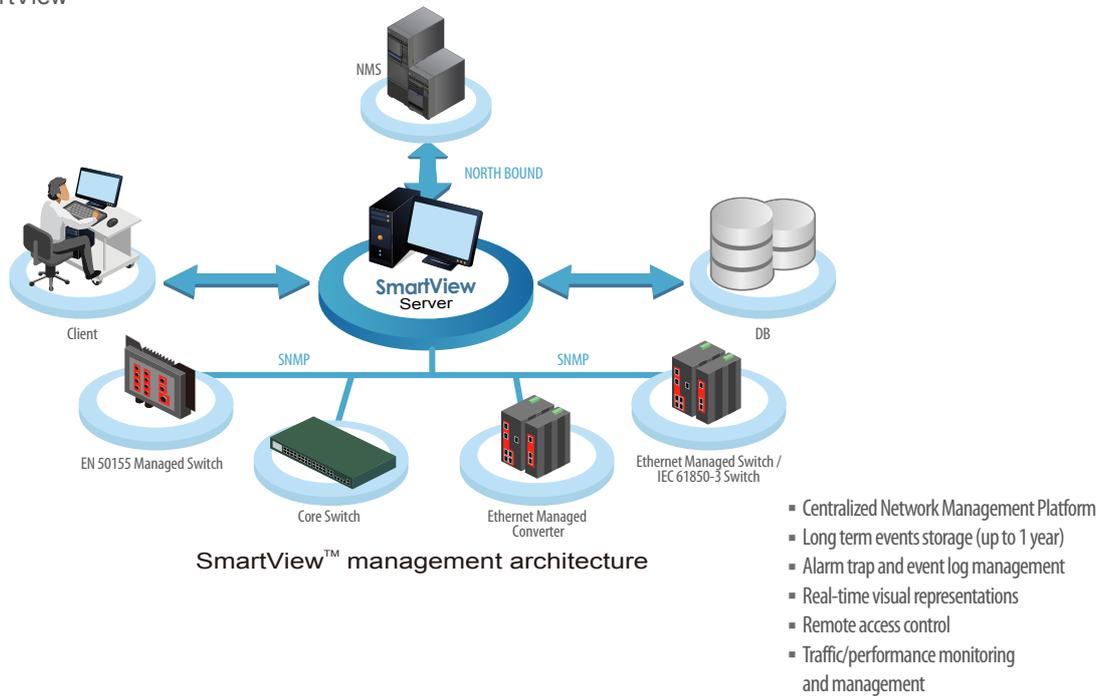


► **Figure 9 :** Central EMS allows central management of up to 50 SmartView™ servers

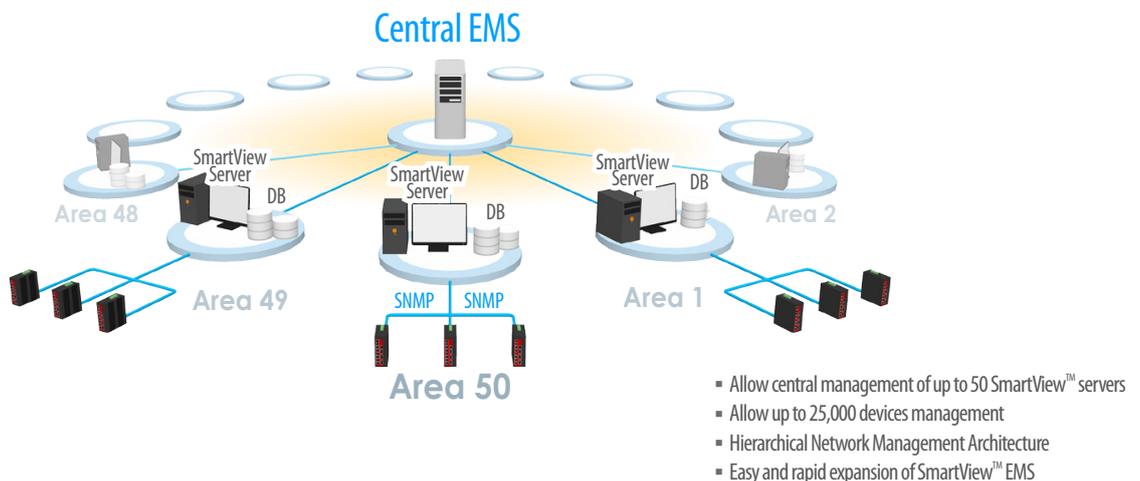


Dimensions

▶ ITP-G802SM

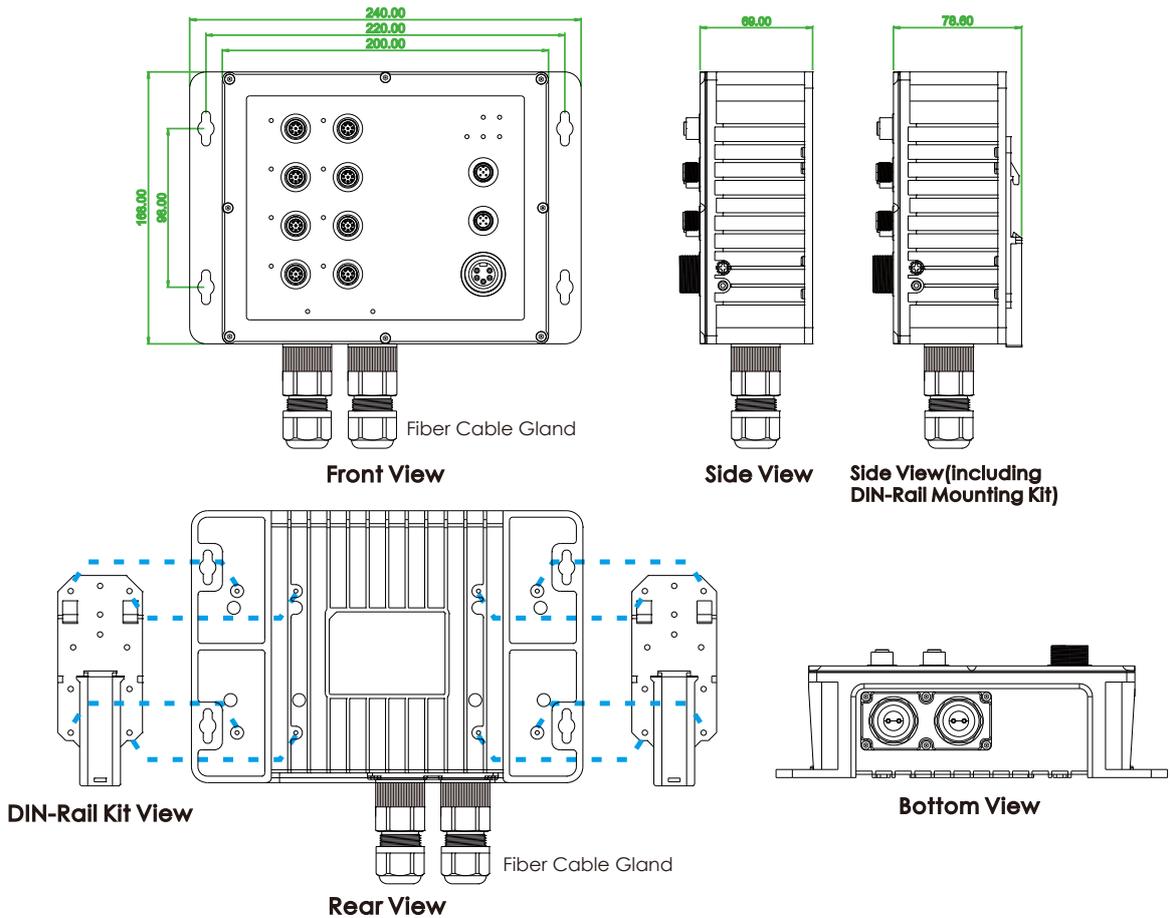


▶ ITP-G800M

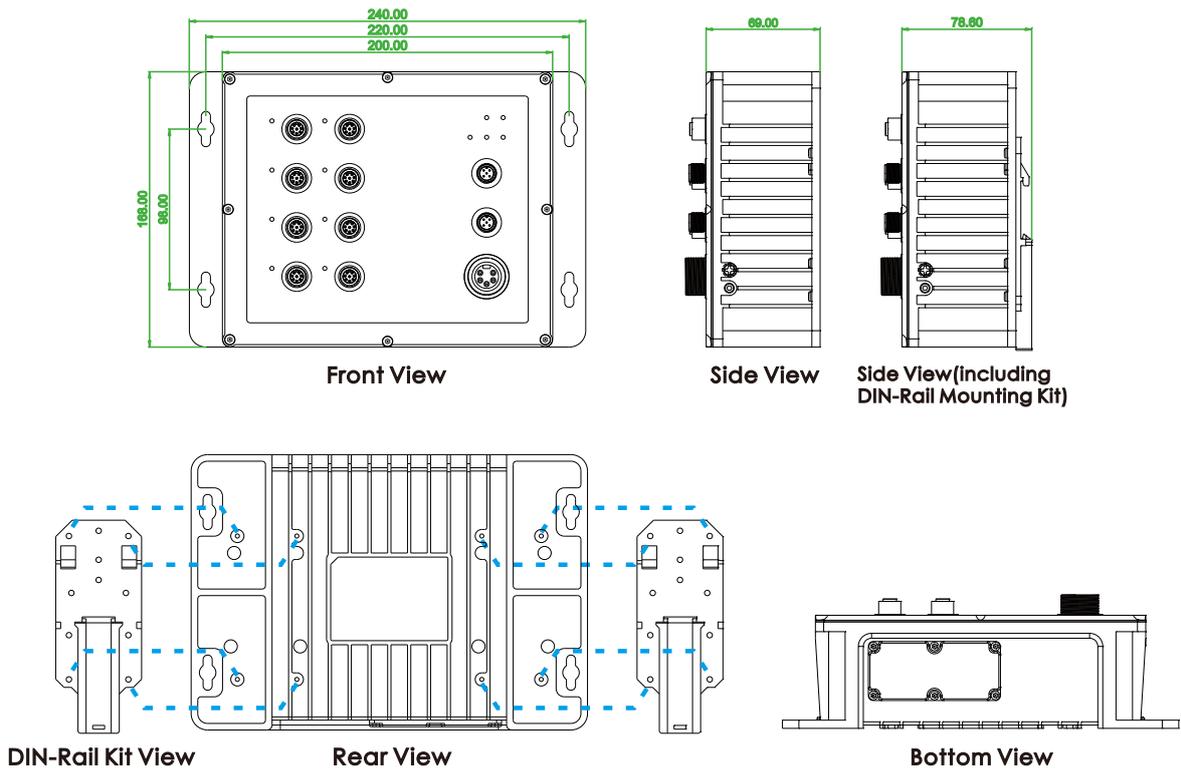

## Ordering Information

Model Name	Managed	IP67	Total Port	UTP Port		Fiber Port		Power Supply		Certification			Shock Vibration	Operating Temperature
				10/100/1000 Base-T	100/1000 Base-X	Low Volt 12/24/48VDC (8.4~60VDC)	High Volt 110/220 VDC 110/220 VAC	EN50155 EN50121-4	UL60950-1	EN61000-6-2 EN61000-6-4	CE FCC	IEC61373		
ITP-G802SM-LL	V	V	10	8	2 SFP	2	—	V	Plan	V	V	V	-10~60 C	
ITP-G802SM-HL	V	V	10	8	2 SFP	1	1	V	Plan	V	V	V	-10~60 C	
ITP-G802SM-ELL	V	V	10	8	2 SFP	2	—	V	Plan	V	V	V	-40~75 C	
ITP-G802SM-EHL	V	V	10	8	2 SFP	1	1	V	Plan	V	V	V	-40~75 C	
ITP-G800M-LL	V	V	8	8	—	2	—	V	Plan	V	V	V	-10~60 C	
ITP-G800M-HL	V	V	8	8	—	1	1	V	Plan	V	V	V	-10~60 C	
ITP-G800M-ELL	V	V	8	8	—	2	—	V	Plan	V	V	V	-40~75 C	
ITP-G800M-EHL	V	V	8	8	—	1	1	V	Plan	V	V	V	-40~75 C	

### Model Naming Rule

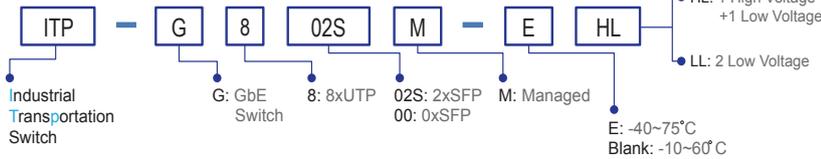

## Optional Accessories

### Industrial Power Supply


DR-4524	Industrial Power supply, Input 85 ~ 264VAC, Output 24VDC, 48W, -10 ~ +50°C
MDR-40-24	Industrial Power supply, Input 85 ~ 264VAC, Output 24VDC, 40W, -20 ~ +70°C

### Industrial SFP Transceiver

(The ISFP series of industrial grade SFP modules have been fully tested with the ITP-G802SM for guaranteed compatibility and performance. The best performance can be guaranteed even in mission-critical applications.) (Please see CTC Union's Industrial SFP datasheet for more details and more items.)

ISFP-M7000-85-D(E)	Industrial SFP GbE 1000Base-SX, M/M, 500 meter, wave length 850nm, 7.5dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-S7020-31-D(E)	Industrial SFP 1000Base-LX, S/M, 20km, wave length 1310nm, 15dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-T7100-00-(E)	Industrial SFP 1000Base-T UTP 100meter, -10~70°C (-40~85°C)
ISFP-M5002-31-D(E)	Industrial SFP 155M 100Base-FX, MM, 2km, wave length 1310nm, 12dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-S5030-31-D(E)	Industrial SFP 155M 100Base-FX, SM, 30km, 1310nm, 19dB, LC, DDMI, -10~70°C (-40~85°C)

### SFP Naming Rule

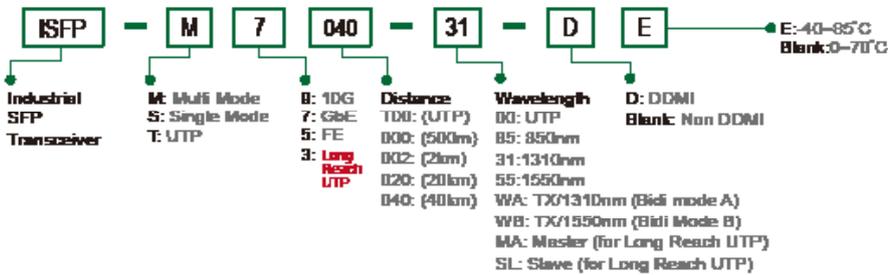

## Optional Cable/Connector & Din-Rail Kit

### P/N: CAB-M12AM8-RJ45

M12 A-code Male (8-Pin) to RJ-45, AWG 24, IP67, 1 meter



For GbE UTP

### P/N: CAB-M12AF5-OPEN

M12 A-code Female (5-Pin) to open wire, AWG 22, IP67, 1 meter



For Alarm

### P/N: CAB-M23F5-OPEN

M23 Female (5-Pin) to open wire, (AWG 16), IP67, 1 meter



For Power

### P/N: M12A-M8

M12 A-code Male (8-Pin) connector, IP67



For GbE UTP

### P/N: M12A-F5

M12 A-code Female (5-Pin) connector, IP67



For Alarm

### P/N: IND-DNK04

Din Rail Kit for Industrial, Wide: 52mm



(130 X52mm / 4 Screws) (2pcs/set)

## Package List

- ITP-G802SM or ITP-G800M device
- Protective caps for UTP port and Console, Alarm port
- Fiber Cable Gland for SFP port x2 set (for ITP-G802SM)
- Console cable (M12 to DB9)
- CD (SmartConfig, Manual)
- Quickly installation guide