

# IEC 61850-3 Managed GbE Switch



## IPS-G803SM

8x 100/1000Base-T+ 3x 100/1000Base-X  
SFP Managed Switch

This series of managed industrial grade gigabit Ethernet switches is designed to meet the demands of power substation systems and is fully compliant with the requirement of IEC 61850-3 and IEEE 1613. The switch provide a variety of redundant functions to increase the reliability of your communications system, including redundant and isolated power supplies (24/48 VDC) and 110/220 VDC/VAC. The managed Ethernet functions include STP/RSTP/MSTP/ITU-T G.8032 ERPS and multiple  $\mu$ -Ring for redundant cabling, layer 2 Ethernet IGMP, VLAN, QoS, Security, IPv6, bandwidth control, port mirroring, cable diagnostic and Green Ethernet. Housed in rugged DIN rail or wall mountable enclosures, these switches are designed for harsh environments, such as power substation networking. The series product can be managed centrally and conveniently by CTC Union's SmartView™ Element Management System or other third party SNMP managers.

### Feature

- 8x 10/100/1000Base-T RJ-45 and 3x 100/1000Base-X SFP Fiber
- UL60950-1, CE, FCC, and EN50121-4, certification
- IEC 61850-3, IEEE1613 certified for power substation
- Redundancy isolated low voltage 24/48VDC, or/and isolated High voltage AC/DC (110/220 VAC/VDC) power inputs
- Wide Operating Temperature -40~85°C
- DIN Rail mounting or wall mounting
- IP30 rugged metal housing, Fanless
- Cable diagnostic, Measuring cable normal or broken point distance
- Support GOOSE Message that complies with IEC61850 standard to achieve zero packet loss
- Supports IEEE1588 PTP V2 for precise time synchronization to operate in Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master, Slave mode by each port
- Supports Green Ethernet IEEE802.3az EEE (Energy Efficient Ethernet) Management to optimize the power consumption
- STP, RSTP, MSTP, ITU-T G.8032 Ethernet Ring Protection Switching (ERPS), and  $\mu$ -Ring for cabling redundant
- Provides 5 instances that each can support  $\mu$ -Ring, u-Chain or Sub-Ring type for flexible uses (see Figure 7). Supports up to 5 rings in one device (see Figure 5).
- $\mu$ -Ring for Redundant Ethernet Ring, recovery time<10ms in 250 units
- QoS, Traffic classification QoS, CoS, bandwidth control for Ingress and Egress, Storm Control, DiffServ
- IEEE802.1Q VLAN, MAC based VLAN, IP subnet based VLAN, Protocol based VLAN, VLAN translation, GVRP, MVR
- Dynamic IEEE 802.3ad LACP Link Aggregation, Static Link Aggregation
- IGMP snooping V1/V2/V3, IGMP Filtering/ Throttling, IGMP query, IGMP proxy reporting, MLD snooping V1/V2
- Security : Port based and Mac based IEEE802.1X, RADIUS, ACL, TACACS+, HTTP/HTTPS, SSL/SSH v2
- Software upgrade via TFTP and HTTP, redundant firmware to avoid in case of upgrade failure
- Supports DHCP Server / Client /Relay/Snooping/Snooping option 82/Relay option 82
- Supports RMON, MIB II, Private MIB, Port mirroring, Event syslog, DNS, NTP/SNTP, IEEE802.1ab LLDP
- Supports IPv6 Telnet server /ICMP v6
- CLI, Web based management, SNMP v1/v2c/v3, Telnet server for management
- Provides SmartConfig for quick and easy mass configuration tool (Figure 4)
- Supports SmartView for Centralized Management (Figure 2)
- Supporting Central EMS for management of upto 50 SmartView Server ,and maximum upto 25,000 device (Figure 3)

### Specifications

<b>IEEE Standard</b>	IEEE 802.3 10Base-T 10Mbit/s Ethernet	<b>MAC Address Table</b> 8K
	IEEE 802.3u 100Base-TX, 100Base-FX, Fast Ethernet	
	IEEE 802.3ab 1000Base-T Gbit/s Ethernet over twisted pair	
	IEEE 802.3z 1000Base-X Gbit/s Ethernet over Fiber-Optic	
	IEEE 802.1d STP (Spanning Tree Protocol)	
	IEEE 802.1w RSTP (Rapid Spanning Tree Protocol)	
	IEEE 802.1s MSTP (Multiple Spanning Tree Protocol)	
	IEEE 802.1Q for VLAN Tagging	
	IEEE 802.1X Port based and MAC based Network Access Control, Authentication	
	IEEE802.3ac Max frame size extended to 1522Bytes	
	IEEE 802.3ad Link aggregation for parallel links with LACP(Link Aggregation Control Protocol)	
	IEEE802.3x Flow Control and Back Pressure	
	ITU-T G.8032/ Y.1344 ERPS (Ethernet Ring Protection Switching)	
	IEEE 802.1ad Stacked VLANs, Q-in-Q	
	IEEE 802.1p LAN Layer 2 QoS/CoS Protocol for Traffic Prioritization	
	IEEE 802.1ab Link Layer Discovery Protocol (LLDP)	
	IEEE 802.3az EEE (Energy Efficient Ethernet)	
<b>Switch Architecture</b> Back-plane (Switching Fabric): 22 Gbps Full wire-speed	<b>Memory Buffer</b> 512K Bytes for packet buffer	
<b>Data Processing</b> Store and Forward	<b>Network Connector</b> 8x 10/100/1000Base-T RJ-45 auto negotiation speed Auto MDI/MDI-X function, Full/Half duplex 3x 100/1000Base-X dual speed mode SFP slot, with DDMI	
<b>Flow Control:</b> IEEE 802.3x flow control, back pressure flow control	<b>Console</b> RS-232 (RJ-45)	
<b>Jumbo Frame</b> 9.6KB	<b>Network Cable</b> UTP/STP above Cat. 5e cable EIA/TIA-568 100-ohm (100m)	
<b>IEEE802.3ac</b> Max frame size extended to 1522Bytes (allow Q-tag in packet)	<b>Protocols</b> CSMA/CD	
	<b>LED</b> Per unit : Power 1 (Green), Power 2 (Green), Fault (Amber) (-LL model) Per unit : Power 1 (Green), Power 2 (Green), Power 3(Green), Fault (Amber) (-HL model) Per RJ-45 port :10/100Link/Act: Green, 1000Link/Act: Amber SFP Fiber Per port : Link/Active (Green)	
	<b>Reverse Polarity Protection</b> Present for Power Input	
	<b>Overload Current Protection</b> Present	
	<b>CPU Watch Dog</b> Present	
	<b>Power Input</b> Redundant 2x Isolated Low Voltage DC Input power (-LL model) Redundant 2x isolated Low Voltage DC and 1 High Voltage AC/DC input power (-HL model) Isolated Low Voltage DC : Isolated 24/48V (18~72VDC), Removable Terminal Block High voltage AC/DC : isolated 110/220VAC (88VAC~264VAC) or 110/220VDC (85~300VDC), Removable Terminal Block	

<b>Power consumption</b>	<b>Input Voltage</b>	<b>IPS-G803SM</b>
	110VAC	9.3 W
	220VAC	9.2 W
	24VDC	9.6 W
	48VDC	11.1 W
<b>Alarm Relay Contact</b>	Relay outputs with current carrying capacity of 1 A @24VDC	
<b>Removable Terminal Block</b>	Provide 2 redundant low volt power, alarm relay contact (6 Pin) (-LL model)	
	Provide 2 redundant low volt power, alarm relay contact (6 Pin) , and High volt Power (2 Pin) (-HL model)	
<b>Operating Temperature</b>	-40°C~85°C	
<b>Operating Humidity</b>	5% to 95% (Non-condensing)	
<b>Storage Temperature</b>	-40°C~85°C	
<b>Housing</b>	Rugged Metal, IP30 Protection, Fanless	
<b>Dimension</b>	106 x 82 x 152mm (D x W x H)	
<b>Weight</b>	0.885kg (IPS-G803SM-LL)	1.085kg (IPS-G803SM-HL)

## Software Specifications

<b>Topology</b>		
<b>VLAN</b>	IEEE 802.1q VLAN, up to 4094 ID IEEE 802.1q VLAN, up to 4094 Groups IEEE 802.1ad Q-in-Q MAC-based VLAN, up to 256 entries IP Subnet-based VLAN, up to 128 entries Protocol-based VLAN (Ethernet, SNAP, LLC), up to 128 entries VLAN Translation, up to 256 entries MVR (Multiple VLAN Registration) GVRP (GARP VLAN Registration Protocol)	
<b>Link Aggregation (Port Trunk)</b>	Static (Hash with SA, DA, IP, TCP/UDP port), up to 5 trunk group Dynamic (IEEE 802.3ad LACP), up to 5 trunk group	
<b>Spanning Tree</b>	IEEE802.1d STP, IEEE802.1w RSTP, IEEE802.1s MSTP	
<b>Multiple μ-Ring</b>	up to 5 instances that each supports μ-Ring, u-Chain or Sub-Ring type for flexible uses, and maximum up to 5 Rings (see Figure 5, 6, 7, 8) Recovery time <10ms Maximum 250 devices in a Ring	
<b>Loop Protection</b>	Present	
<b>ITU-T G.8032 / Y.1344 ERPS (Ethernet Ring Protection)</b>	Convergence time <50ms Single Ring, Sub-Ring, Multiple ring topology network	
<b>QoS Feature</b>		
<b>Class of Service</b>	IEEE802.1p 8 active priorities queues for per port	
<b>GOOSE Message</b>	Complies with IEC61850 standard to achieve zero packet loss	
<b>Traffic Classification QoS</b>	IEEE802.1p based CoS	
	IP Precedence based CoS	
	IP DSCP based CoS	
	QCL(QoS Control List): Frame Type, Source/Destination MAC, VLAN ID, PCP, DEI QCE(QoS Control Entry): Protocol, Source IP, IP Fragment, DSCP, TCP/UDP port number	
<b>Bandwidth Control for Ingress</b>	Rate in steps : 1 kbps / Mbps / fps / kfps Range : 100 kbps to 1Gbps / 1fps to 3300kfps Rate Unit : bit or frame	
<b>Bandwidth Control for Egress</b>	Rate in steps : 1 kbps / Mbps Range : 100 kbps to 1Gbps Rate Unit : bit Per queue / Per port shaper	
<b>DiffServ (RF 2474) Remarking</b>		
<b>Storm Control</b>	for Unicast, Broadcast, Multicast	
<b>IP Multicasting Feature</b>		
<b>IGMP / MLD Snooping</b>	IGMP Snooping v1, v2, v3 / MLD Snooping v1, v2 support 1022 IGMP groups Port Filtering Profile Throttling Fast Leave Maximum Multicast Group : up to 1022 entries Query / Static Router Port	

<b>Installation mounting</b>	DIN Rail mounting or wall mounting
<b>Warranty</b>	5 years
<b>Certification</b>	
<b>EMC/EMS</b>	CE, FCC
<b>EMI</b>	FCC Part 15 Subpart B Class A EN 55022 Class A
<b>EMS</b>	EN61000-4-2 (ESD) Level 4, Criteria B EN61000-4-3 (RS) Level 4, Criteria A EN61000-4-4 (EFT) Level 4, Criteria A EN61000-4-5 (Surge) Level 4, Criteria B EN61000-4-6 (CS) Level 4, Criteria A EN61000-4-8 (Magnetic Field) Level 5, Criteria A
<b>Safety</b>	UL60950-1
<b>Power Substation</b>	IEC 61850-3, IEEE 1613
<b>Railway Traffic</b>	EN50121-4
<b>Freefall</b>	IEC 60068-2-32
<b>Vibration</b>	IEC 60068-2-6

<b>Security Features</b>	
<b>IEEE 802.1X</b>	Port-Based MAC-Based
<b>ACL</b>	Number of rules : up to 256 entries for L2 / L3 / L4
<b>RADIUS authentication &amp; accounting</b>	
<b>TACACS+ authentication &amp; accounting, TACACS+ 3.0</b>	
<b>HTTPS, HTTP</b>	
<b>SSL / SSH v2</b>	
<b>User Name Password Authentication</b>	Local Authentication Remote Authentication (via RADIUS/ TACACS+)
<b>Management Interface Access Filtering</b>	Web, Telnet / SSH , CLI RS-232 console
<b>Management Features</b>	
<b>CLI</b>	Cisco® like CLI
<b>Web Based Management</b>	
<b>Telnet</b>	Server
<b>SNMP</b>	V1, V2c, V3
<b>SW &amp; Configuration Upgrade</b>	TFTP, HTTP Redundant firmware in case of upgrade failure
<b>RMON</b>	RMON 1 (1, 2, 3, 9 group), RMON II
<b>MIB</b>	MIB II RFC1213, Private MIB
<b>UPnP</b>	
<b>DHCP</b>	Server Client Relay Snooping Snooping option 82 Relay option 82
<b>IP Source Guard</b>	
<b>Port Mirroring</b>	
<b>Event Syslog</b>	Syslog server (RFC3164) (Support 1 server)
<b>Warning Message</b>	System Syslog, SMTP/ e-mail event message, alarm relay
<b>DNS</b>	Client, Proxy
<b>IEEE1588 PTP V2</b>	Support 5 operating mode in each port : Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master, Slave
<b>NTP /SNTP</b>	
<b>LLDP (IEEE 802.1ab)</b>	Link Layer Discovery Protocol LLDP-MED
<b>IPv6 Features</b>	
<b>IPv6 Management</b>	Telnet Server/ICMP v6
<b>SNMP over IPv6</b>	
<b>HTTP over IPv6</b>	
<b>SSH over IPv6</b>	
<b>IPv6 Telnet Support</b>	
<b>IPv6 NTP / SNTP Support</b>	
<b>IPv6 TFTP Support</b>	


# IEC 61850-3 Managed GbE Switch

IPv6 QoS	
IPv6 ACL	Number of rules: up to 256 entries L2 / L3 / L4
<b>Others Features</b>	
Green Ethernet	Supports IEEE802.3az EEE (Energy Efficient Ethernet) Management to optimize the power consumption Determine the cable length and lowering the power for ports with short cables


Green Ethernet	Lower the power for a port when there is no link LED Power Management: Adjustment LEDs intensity
Cable Diagnostic	Measuring cable is normal or broken point distance

## Application

► **Figure 1 : IPS-Series in Power Substation Application**

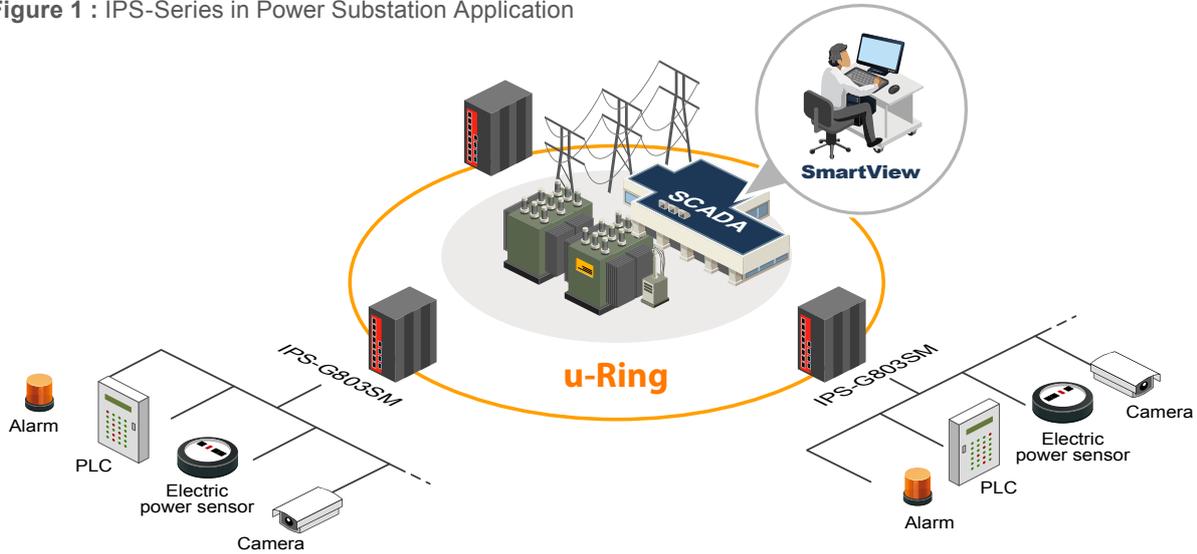


► **Figure 2 : SmartView™**

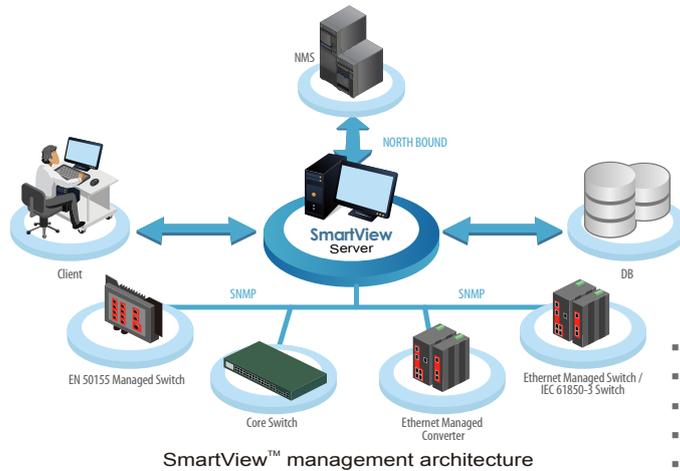


- Centralized Network Management Platform
- Long term events storage (up to 1 year)
- Alarm trap and event log management
- Real-time visual representations
- Remote access control
- Traffic/performance monitoring and management

► **Figure 3 : Central EMS allows central management of up to 50 SmartView™ servers**

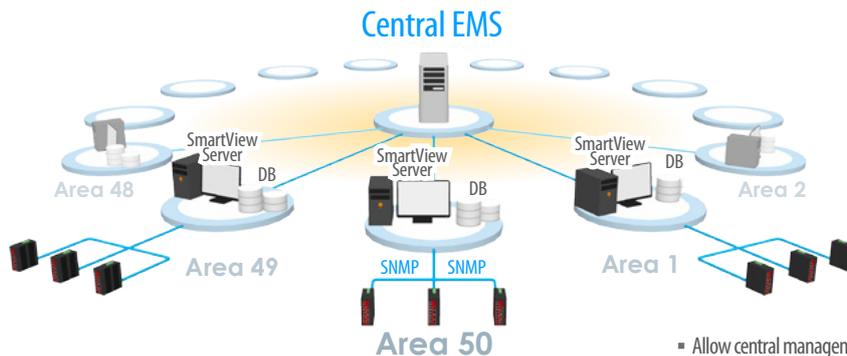


- Allow central management of up to 50 SmartView™ servers
- Allow up to 25,000 devices management
- Hierarchical Network Management Architecture
- Easy and rapid expansion of SmartView™ EMS

► **Figure 4 :** SmartConfig™ is a convenient configuration tool for mass deployment of switch products

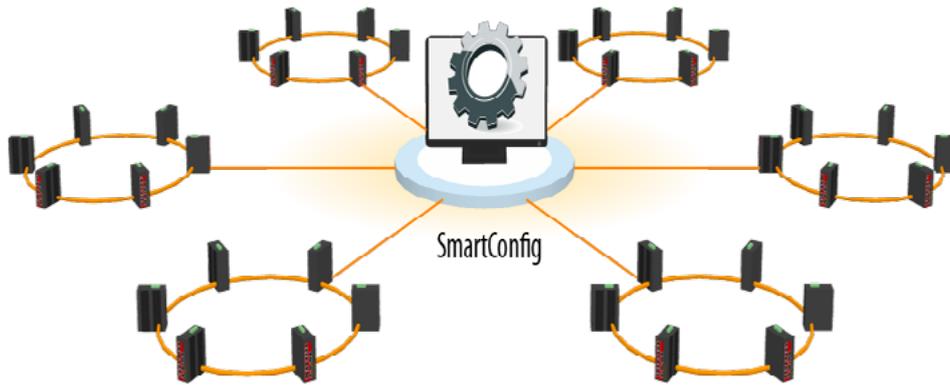

- Quick & Easy for mass configuration tool
- Multiple device auto discovery
- Group configuration, access
- Group firmware upgrade
- Export/Import Configuration

► **Figure 5 :** Multiple  $\mu$ -Ring

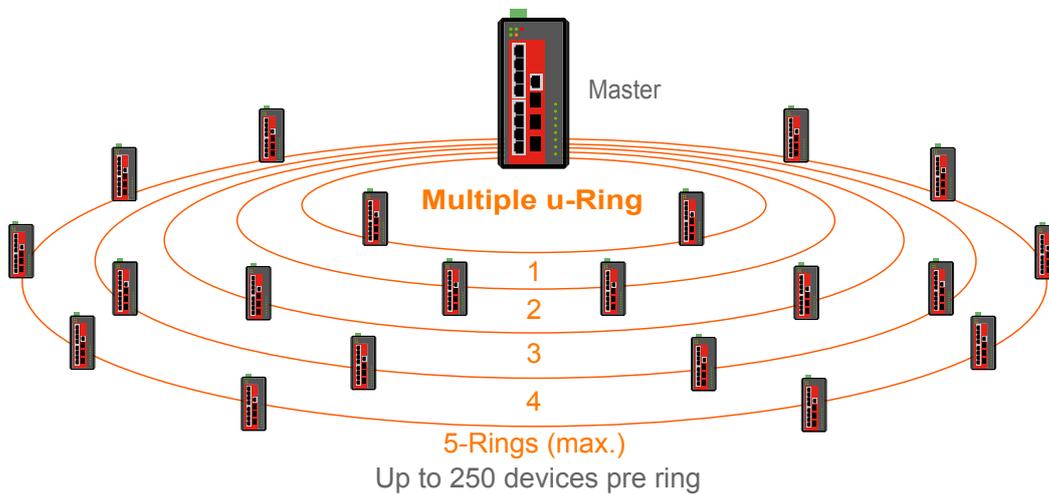

► **Figure 6 :** User-Friendly Configuration In Web Interface


**u-Ring Configuration** Auto-refresh  Refresh

Delete	Instance	Type	Master	East		West	
				Port	Edge	Port	Edge
Delete	1	u-Ring	<input type="checkbox"/>	1		2	
Delete	2	u-Ring	<input type="checkbox"/>	4		3	
Delete	3	u-Ring	<input type="checkbox"/>	10 (Fiber2)		11 (Fiber3)	
Delete	4	Sub-Ring	<input type="checkbox"/>	6			
Delete	5	u-Chain	<input type="checkbox"/>	5	<input type="checkbox"/>	9 (Fiber1)	<input type="checkbox"/>

Add New Instance

Save Reset


► **Figure 7 :  $\mu$ -Ring Type**

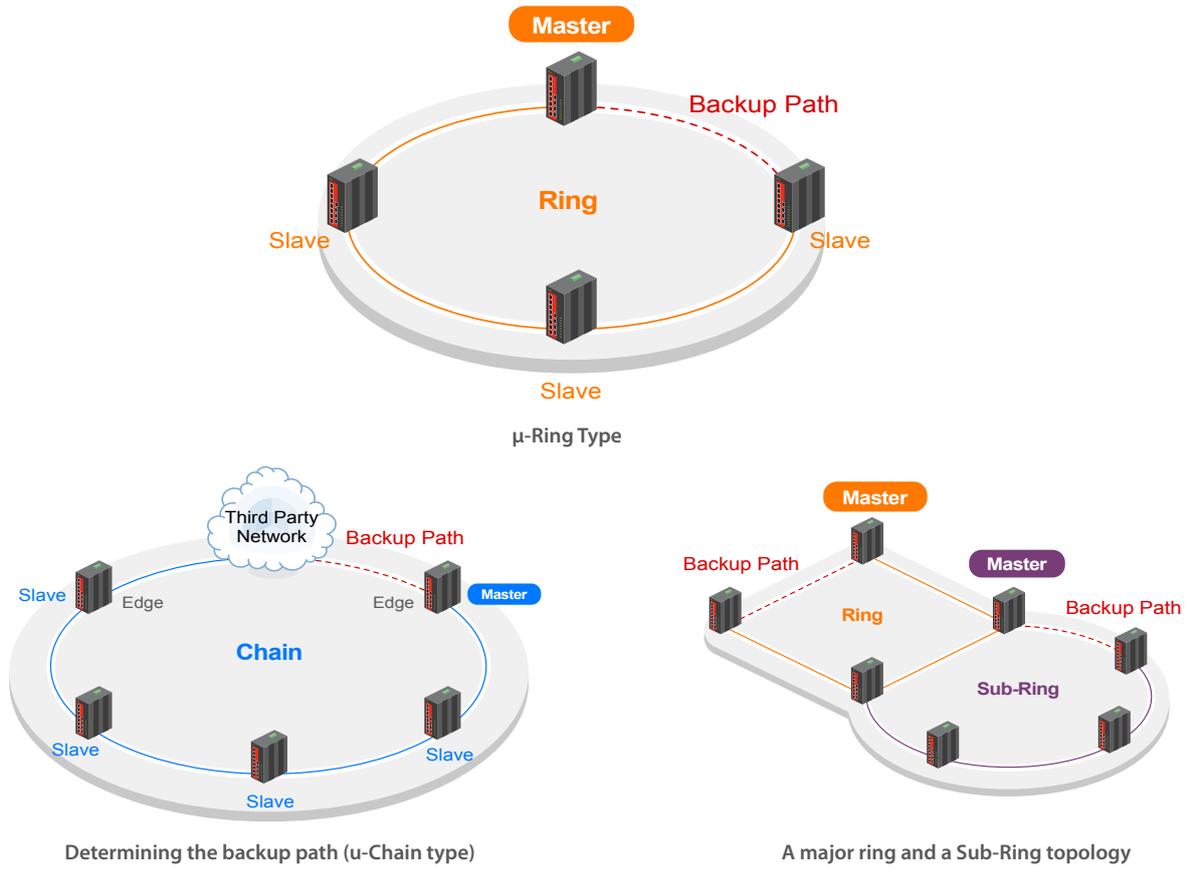


► **Figure 8 : Ring Configuration Example**

Ring Configuration Type

- u-Ring
- Sub-Ring

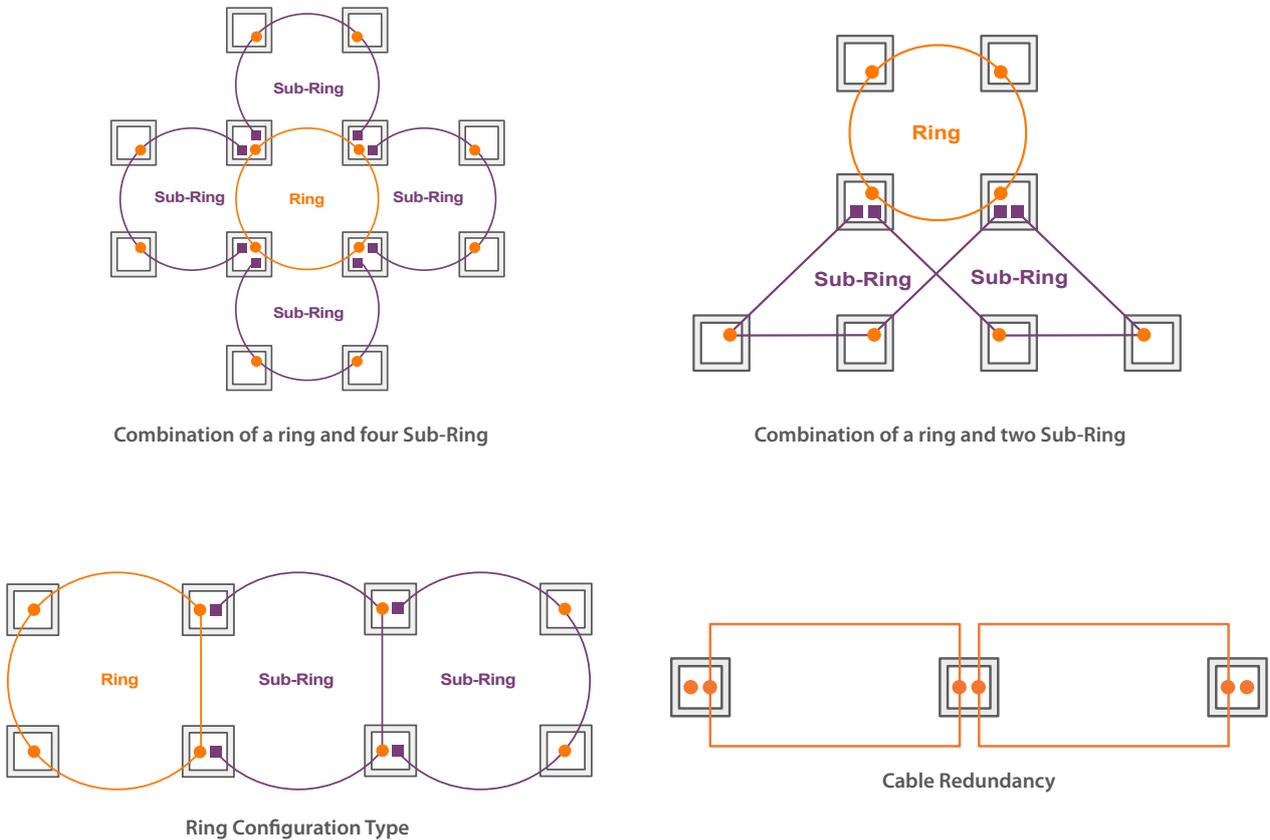


## Dimensions

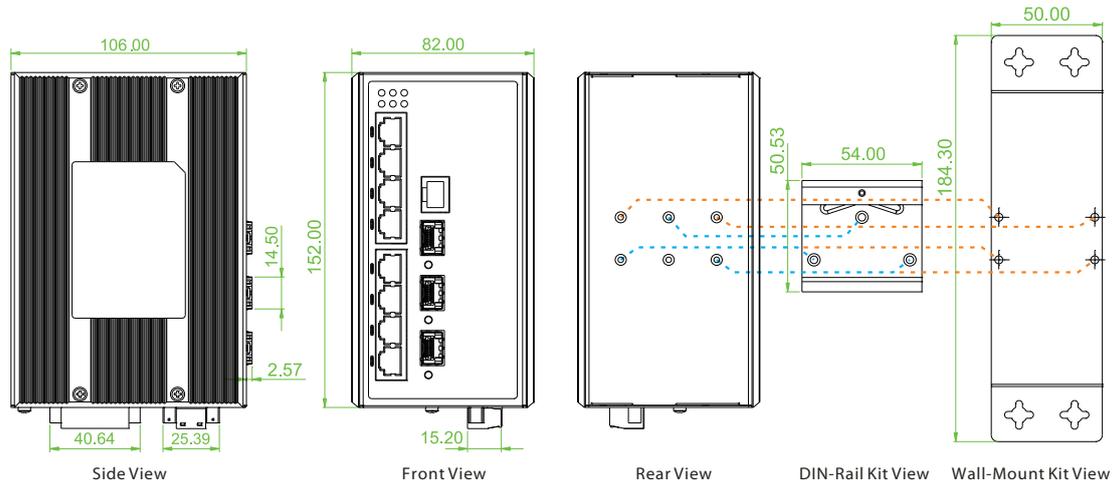

## Ordering Information

Model Name	Managed	Total Port	UTP Port	Fiber	Input Power		Certification			
			10/100/1000 Base-T	100/1000 Base-X	Low Voltage isolated 24/48 VDC	High Voltage 110/220V DC/AC	IEC61850-3	EN50121-4	Safety UL60950-1	CE, FCC
IPS-G803SM-LL	V	11	8	3 SFP	2	—	V	V	V	V
IPS-G803SM-HL	V	11	8	3 SFP	2	1	V	V	V	V

### Model Naming Rule

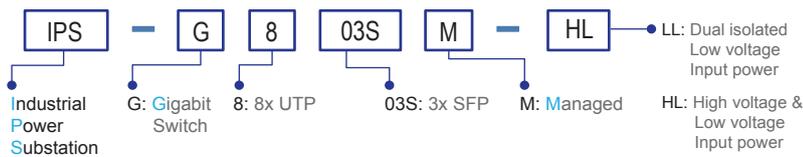

## Optional Accessories

### Industrial Power Supply


DR-4524	Industrial Power, Input 85 ~ 264VAC, Output 24VDC, 48W, -10 ~ +50°C
MDR-40-24	Industrial Power, Input 85 ~ 264VAC, Output 24VDC, 40W, -20 ~ +70°C

### Industrial SFP Transceiver

(The ISFP series of industrial grade SFP modules have been fully tested with the IPS-G803SM for guaranteed compatibility and performance. The best performance can be guaranteed even in mission-critical applications.)  
(Please see CTC Union's Industrial SFP datasheet for more detail and more items.)

ISFP-M7000-85-D(E)	Industrial SFP GbE 1000Base-SX, M/M, 500 meter, wave length 850nm, 7.5dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-S7020-31-D(E)	Industrial SFP 1000Base-LX, S/M, 20km, wave length 1310nm, 15dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-T7T00-00-(E)	Industrial SFP 1000Base-T UTP 100meter, -10~70°C (-40~85°C)
ISFP-M5002-31-D(E)	Industrial SFP 155M 100Base-FX, MM, 2km, wave length 1310nm, 12dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-S5030-31-D(E)	Industrial SFP 155M 100Base-FX, SM, 30km, 1310nm, 19dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-T3T00-MA-(E)	Industrial SFP 100Mbps, long reach UTP (2 wire) (500meter), Master, -10~70°C (-40~85°C)
ISFP-T3T00-SL-(E)	Industrial SFP 100Mbps, long reach UTP (2 wire) (500meter), Slave, -10~70°C (-40~85°C)

### SFP Naming Rule

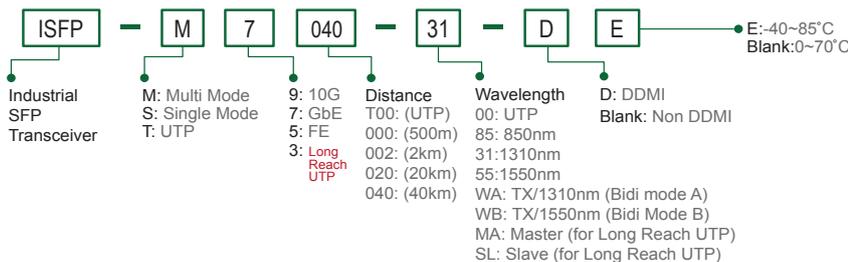

## Package List

- IPS-G803SM device
- Console cable (RJ-45 to DB9)
- CD (SmartConfig, MIB file, Manual)
- Quickly installation guide
- Din Rail with screws
- Wall mount bracket with screws
- Terminal block
- Protective caps for SFP ports