



FRM220A-1002ES

2x 10/100/1000Base-T +
2x 100/1000Base-X SFP GbE Switch

The FRM220A-1002ES is a dual copper and dual fiber Gigabit Ethernet switch designed to make conversion between 10/100/1000Base-T and 100/1000Base-SX/LX with SFP connector. With SNMP and Web-based management in the FRM220 or FRM220A chassis the network administrator can monitor, configure and control the activity of each FRM220A-1002ES switch card locally via the chassis management. Based on a powerful L2 switch architecture, this converter supports bandwidth control, duplex and speed configuration, VLAN tagging, Q-in-Q, QoS, jumbo frames as well as auto laser shutdown, and link fault pass through. When placed stand-alone, this card may only be managed via local serial console when placed in a CH01M single slot type chassis.


Feature

- 2-Port 10/100/1000Base-T and 2-Port 100/1000Base-X Switch
- Auto-Cross over for MDI/MDIX in TP port
- Auto-Negotiation or manual mode in TP port
- Supports flow control Enable or Disable
- Supports Jumbo Frame 10K Bytes
- Supports 16 Tag VLAN Group
- Supports Double VLAN tag (Q-in-Q)
- Supports Bandwidth control
- Supports Loop Back Test
- Supports Link Fault Pass-Through (LFPT) Function
- Supports Auto Laser Shutdown (ALS) Function
- Supports local management on FRM220A rack management.
- Console management on stand-alone.
- Supports D/D function for SFP fiber transceiver
- Provide Product information for management
- Supports the local management (Monitor or Configure status) by the SNMP manager.
- Supports FRM220A for Ethernet Aggregation

Specifications

Optical Interface	Connector	SFP LC	Certification	FCC Part 15 Class A, CE Mark		
	Data rate	125Mbps, 1250Mbps		Electrical Interface	Connector	RJ45
	Duplex mode	Full duplex			Data rate	10Mbps, 100Mbps, 1000Mbps
	Fiber	MM 50/125µm, 62.5/125µm SM 9/125µm		Cable	10Base-T Cat.3, 4, 5, UTP 100Base-TX Cat.5, 5e or higher 1000Base-X Cat.5e or higher	
	Distance	MM 2km, SM 15/30/50/80/120km WDM 20/40/60/80km		Power	12VDC	
	Wavelength	MM 1310nm, SM 1310,1550nm WDM 1310Tx/1550Rx (type A) 1550Tx/1310Rx (type B)		Power Consumption	< 12W	
Standards	IEEE 802.3, IEEE 802.3u, 802.3z, 802.3ab, 802.1Q, 802.3X, 802.1ad			Dimensions	Card: 155 x 20.8 x 88mm (DxWxH)	
Indications	PWR, LNK1, LNK2, TEST, LAN Link, LAN SPEED			Weight	130g	
			Temperature	0~50°C (Operating), -10~70°C (Storage)		
			Humidity	0 ~ 95% non-condensing		

Application

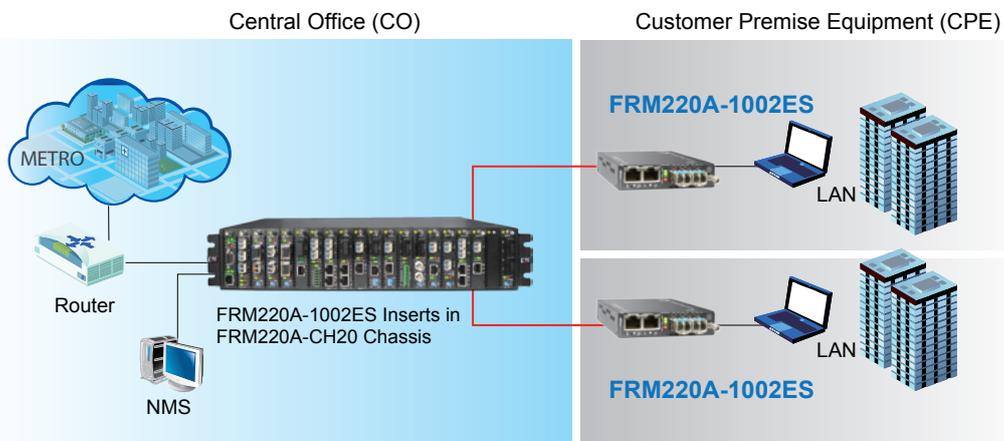

Ordering Information

Model Name	Description
FRM220A-1002ES	2-Port 10/100/1000Base-T and 2-Port 100/1000Base-SX/LX SFP GE Manage Switch (Optional SFP)

Note: Note: This card must use CH01M with serial console, to configure standalone settings.