



# FRM220A-Eoe1

## Ethernet Bridge over E1

- HDLC
- MTU 1522bytes
- Framed / Unframed E1

The FRM220A-Eoe1 is an Ethernet over E1 Bridge for cost-effective connection of 10/100Base-TX or 100Base-FX LANs over a single E1 transport. By using standard HDLC encapsulation, the FRM220A-Eoe1 is able to transmit up to a 2M bits Ethernet over an E1 link. The FRM220A-Eoe1 supports an E1 attenuation of up to 43 dB on twisted pair or coax cable, which provides an approximate operating range up to 2km (using 22AWG). The FRM220A-Eoe1 fully meets E1 specifications including ITU-T G.703 and G.823. The FRM220A-Eoe1 features diagnostic capabilities for performing remote loopback. The operator at either end of the line may test both the FRM220A-Eoe1 and the line in the digital loopback mode. The Ethernet copper interface supports auto-negotiation and auto MDI/MDIX, allowing plug-and-play Ethernet connection without any additional configuration. When placed in FRM220A system, the Ethernet may be aggregated to the chassis's built in Ethernet switch. When placed in a single slot chassis and used standalone without management, the card may be configured by DIP switch.

### Feature


- Connects one Fast Ethernet over E1 links (64k~2048Kbps)
- Built-in HDLC bridge operates at WAN rate
- Auto-Negotiation
- Unbalanced E1/BNC or balanced E1/RJ45
- Fully compatible with FRM220A and FRM220 chassis
- SNMP management with FRM220A and FRM220 chassis
- LED Alarm indication
- Standalone RS232 console management via CH01M

### Specifications

<b>E1 Interface</b>	Framing	Framed / Unframed
	MTU	1522bytes (Max.)
	Standard	ITU-T G.703/G.704/G.706 & G.732, G.823
	Bit rate	2.048Mbps± 50ppm
	Line code	HDB3
	Clock setting	Internal OSC or recovery clock
	Receive level	-43dB
	Line impedance	75 ohm (BNC) / 120 ohm (RJ45)
	Jitter Performance	Complies with ITU-T G.823
	Pulse shape	Complies with ITU-T G.703
	Pulse amplitude	Nominal 2.37V ± 10%
	Delay Variance	220ms
	Connector	RJ-45, BNC
	Diagnostics	Digital remote loopback

<b>Ethernet Interface</b>	Standards	IEEE 802.3, 802.3u
	Data rate	10/100Base-TX, Half/Full duplex
	Connector	RJ-45 10/100Base-TX
<b>Indications</b>	Power, ALM, E1 signal loss, E1 Alarm (AIS, LOF, RAI, LOMF), LAN link /ACT, 10/100M, SD (100Base-FX)	
<b>Power Input</b>	12VDC	
<b>Power Consumption</b>	< 6W	
<b>Dimensions</b>	155 x 88 x 24mm (D x W x H)	
<b>Weight</b>	130g	
<b>Temperature</b>	0 ~ 50°C (Operating), -10 ~ 70°C (Storage)	
<b>Humidity</b>	10 ~ 90% RH (non-condensing)	
<b>Certifications</b>	CE, FCC, RoHS compliant	
<b>MTBF</b>	65,000 hrs	

### Application

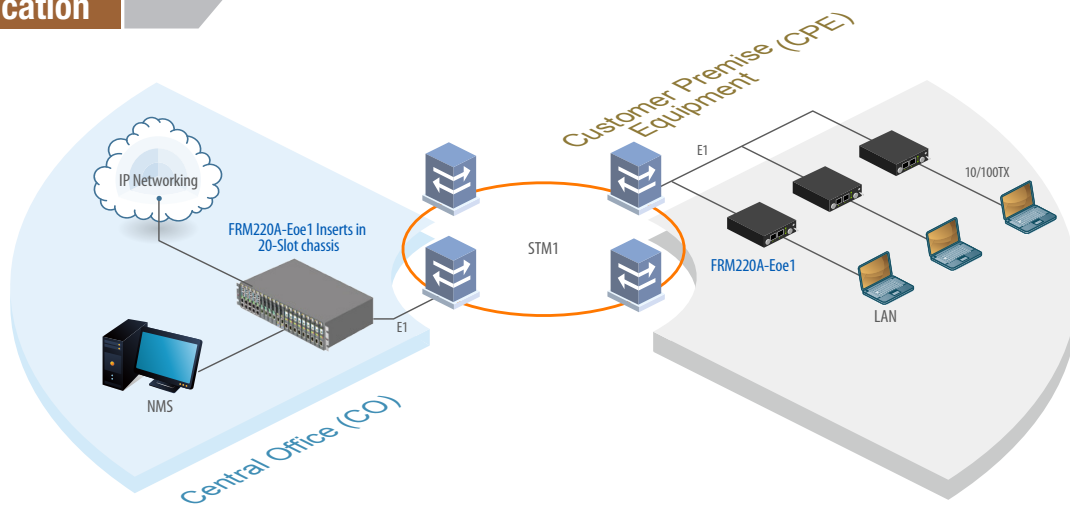

### Ordering Information

Model Name	Description
FRM220A-Eoe1	10/100Base-TX to E1 HDLC bridge

**Note:** This card may be set by DIP switch and placed in CH01 chassis, or set by serial console if placed in CH01M chassis. When connected as a remote to a managed central chassis, this card supports in-band management and only needs a CH01 chassis.