



## FMC-1001S

### 10/100/1000Base-T to 100/1000Base-X SFP Media Converter

The FMC-1001S family are Gigabit Ethernet 10/100/1000Base-T to 100/1000Base-X non-managed stand-alone media converters, which give you the fiber cabling connectors, LC with SFP module. Pluggable SFP are available in both multi-mode and single mode types as well as BiDi which allows bi-directional transmissions using only a single fiber cable. Auto-negotiation will automatically tailor to convert full-duplex signals, according to IEEE802.3u standards. LED indicators signal the power status of the converter, UTP port speed and Link status FX port speed and Link status.


### Feature

- 10/100/1000Base-T to 100/1000Base-X Converter
- Auto-Negotiation
- Auto MDI/MDIX
- Forward 2048 bytes (Max.) packets in switch mode (copper & fiber port in different speed)
- Forward 9k bytes in connector mode (fiber & copper port at the same speed)
- Provides DIP switch to set function
- Supports Q in Q double tagged frame transparent
- Supports IEEE 802.1Q Tag VLAN pass thru
- Concentrated into FMC-CH17 chassis

### Specifications

<b>Optical Interface</b>	Connector	SFP LC	<b>Standards</b>	IEEE 802.3, 802.3u, 802.3x, 802.3Z, 802.3ab	
	Data rate	1.25G		<b>Indications</b>	LED (Power, FX Link, FX SPD, TX SPD, TX Link)
	Duplex mode	Full duplex			<b>Power Input</b>
	Fiber	MM 50/125µm, 62.5/125µm SM 9/125µm		Power Built-in Type : AC 100 ~ 240V	
	Distance	MM 2km, SM 15/30km WDM 20/40km		Power Built-in Type: DC 18 ~ 60V	
	Wavelength	MM 1310nm, SM 1310,1550nm WDM 1310Tx/1550Rx (Type A) 1550Tx/1310Rx (Type B)		<b>Power Consumption</b>	< 3W
	<b>Electrical Interface</b>	Connector			RJ-45
Data rate		10Mbps, 100Mbps, 1000Mbps	Power Built-in Type : 135 x 23 x 73.4mm		
Duplex mode		Full duplex	<b>Weight</b>	Adapter Type : 120g	
Cable		100Base-TX Cat.5, 5e or higher 1000Base-T Cat.5, 5e or higher		Power Built-in Type : 140g	
<b>DIP Switch</b>	Fiber Speed	100M/1000M	<b>Temperature</b>	0 ~ 50°C (Operating), -10 ~ 70°C (Storage)	
	LFP Fiber	Enable/Disable		<b>Humidity</b>	10 ~ 90% non-condensing
	LFP Copper	Enable/Disable	<b>Certification</b>		CE, FCC
	Flow Control	On/Off		<b>MTBF</b>	65,000 hrs

### Application

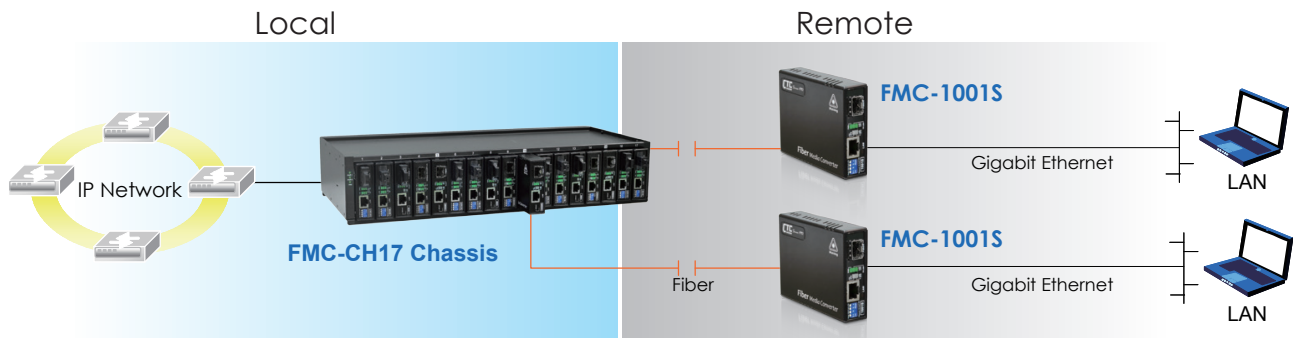

### Ordering Information

Model Name	Description
FMC-1001S	10/100/1000Base-T to 100/1000Base-X SFP Non-managed Media Converter Adapter Type