



IFC-100PD

10/100Base-TX to 100Base-FX PoE PD Media Converter

The IFC-100PD is Power over Ethernet 10/100Base-TX to 100Base-FX non-managed PD(Power Device) Fiber converter, which give you the options to choose from the most popular fiber cabling connectors, ST, SC, FC. Both multi-mode and single mode converter models are available as well as BiDi which allows bi-directional transmissions using only a single fiber cable. With Power over Ethernet (PoE) feature, IFC-100PD takes power supply over Ethernet cable from PoE Ethernet Switch and may work without external power adapter. When auto-negotiation is selected, these units will automatically tailor themselves to convert both half-duplex and full-duplex signals, according to IEEE802.3u standards. LED indicators signal the power status of the converter, UTP port speed, Link, and duplex status, FX port Link and duplex status. The stand-alone converter may also be concentrated into either the FMC-CH08 or FMC-CH17 non-managed chassis.


Feature

- 10/100Base-TX to 100Base-FX Converter
- Auto-Negotiation or forced mode
- Auto MDI/MDIX
- Forward 1600 bytes (Max.) packets
- Supports Q in Q double tagged frame transparent
- Supports IEEE 802.1Q Tag VLAN pass thru
- Supports flow control (Pause)
- Supports Link Fault Pass-Through (LFPT)
- Forward 9K jumbo packets in converter mode
- Supports IEEE802.3af Power over Ethernet

Specifications

Optical Interface	Connector	1x9 (SC, ST, FC)	Standards	IEEE 802.3, IEEE 802.3u, IEEE 802.3af	
	Data rate	125Mbps		Indications	LED (Power, FX Link, TX SPD, TX Link, TX Duplex, FEF)
	Duplex mode	Full duplex			Power Input
	Fiber	MM 50/125µm, 62.5/125µm SM 9/125µm		Power Consumption	
	Distance	MM 2km, SM 15/30/50/80/120km WDM 20/40/60/80km			Dimensions
	Wavelength	WDM 1310Tx/1550Rx (type A) 1550Tx/1310Rx (type B) 1550Tx/1310Rx (type B)		Weight	
	Electrical Interface	Connector			RJ-45
Data rate		10Mbps, 100Mbps	Humidity	10 ~ 90% non-condensing	
Duplex mode		Half / Full duplex		Certification	CE, FCC
Cable		10Base-T Cat.3, 4, 5, UTP, 100Base-TX Cat.5, 5e or higher 1000Base-T Cat 5, 5e or higher	MTBF		65,000 hrs
PD Input Power		48VDC			

Application

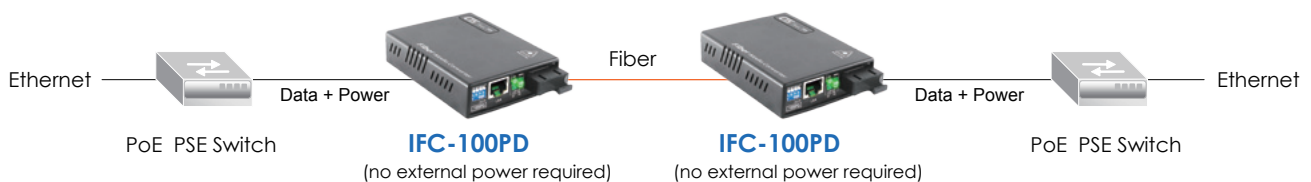

Ordering Information

Model Name	Description
IFC-100PD	10/100Base-TX to 100Base-FX PoE PD media converter
Connector Type	Connectivity Distance
SC,ST,FC	002: 2km 015: 15km 030: 30km 050: 50km 20A: WDM 20km A type 20B: WDM 20km B type 40A: WDM 40km A type 40B: WDM 40km B type

Connector Type Connectivity Distance
IFC - 100PD - □□□□□□
 Example: IFC - 100PD - SC002