



# ICR-4103 <sup>NEW</sup>

## 4G LTE + 3x 10/100Base-T(X) Router



The ICR-4103 series are high-performance industrial grade 4G-LTE cellular routers. It is designed to offer the fast connectivity over cellular network for industrial applications. ICR-4103's Ethernet ports can allow up to 3 Ethernet devices link to the cellular network, provides dual SIM cards and 1 Ethernet WAN port can automatic re-connecting and auto-switching for offering the cellular network redundancy to ensure uninterrupted connectivity. The ICR-4103 cellular router is integrated with WAN, LAN, SIM, VPN, Firewall, built-in DI/DO and Serial port services. In addition, ICR-4103 uses the highest level of industrial grade design for connected in the most demanding environments, is ideal solution for Industrial Internet of Things (IIoT) and M2M(Machine-to-Machine)applications, such as remote control and monitoring, bus ticketing collection system, CCTV, SCADA, digital signage, kiosk and intelligent traffic systems.

### Features

- Supports multi-band connectivity with FDD 4G LTE/ TDD 4G LTE/ 3G WCDMA/2G GSM/ LTE Cat4
- 2 SIM card, 4G LTE antenna, 1x WAN (10/100Base-TX) + 3x LAN (10/100Base-TX UTP), 2x DI + 1x DO, 3x Serial port (2x RS232, 1x RS485)
- GPS, GNSS to get your location on earth, and obtains map information using Google Map (Optional)
- Highly reliable and secure for mission-critical cellular communications
- Provide flexible options to configure LAN/ WAN ports
- Built-in dual SIM for network redundancy / failover/ roaming over/ back up
- Integrated dual detachable antenna against radio interference
- 4G LTE and WAN port for seamless connection and redundancy
- Supports 3x Serial port (1x RS484, 2x RS232) for IoT and automation application, ModBus RTU and ModBus/TCP gateway, MQTT
- Supports Routing/Firewall, NAT, Virtual Server, DMZ, Port filtering, MAC Filter, URL Filter, IP Filter, VLAN, Static Routing and RIP 1 & 2, VRRP , OSPF V2 & V3
- Supports VPN, OpenVPN, IPSec (3DES, AES128, AES196, AES256, MD5, SHA-1, SHA256)
- IPv6/IPv4 dual stack and all applications are IPv6 ready
- Supports DHCP server and client, PPPoE, Static IP, SNTP, DNS Proxy, DDNS, QoS, Virtual Com, UPnP
- Supports Alarm message : DO, SNMP Trap, E-mail
- Supports SNMP, TR069, Web, Telnet, CLI for management
- Supports dual Image firmware upgrade by Web
- CE, FCC, Rail Traffic EN50121-4 certified
- Heavy industrial grade EMS, EMI, EN61000-6-2, EN61000-6-4 certified
- Rugged metal, IP30 protection & Fanless design
- Wide operating temperature -40 ~ 75°C

### Specifications

<b>Standard</b>	Cellular MobilComm standard: (Please see order information for optional band) 4G LTE: FDD-LTE, TDD-LTE 3G: WCDMA 2G: GSM/EDGE GPS: GNSS IEEE 802.3 10Base-T 10Mbit/s Ethernet IEEE 802.3u 100Base-TX Fast Ethernet IEEE 802.1Q Virtual LANs (VLAN) IEEE 802.3x Flow control for Full Duplex	<b>Power consumption</b>	7W
<b>Connector</b>	<b>Cellular MobilComm and WAN:</b> Built-in dual SIM card for network redundancy / failover/ roaming over/ back up 2 SMA (female) connector for Antenna (Please see order information for optional band) 1 SMA(female) connector for GNSS GPS Antenna (Antenna Optional) 1x 10/100Base-TX RJ45 for WAN port <b>LAN:</b> 3x 10/100Base-TX RJ45 <b>Serial:</b> 1x RS485 and 2x RS232 (one of RS232 could be configured for console) <b>Programmable DI/DO:</b> 2xDI and 1x DO	<b>LED</b>	System status (Green) VPN (Green) Cell signal Strong / Weak, 2 LED (Green)
<b>LTE data rate</b>	Cat 4 ,Max download 150Mbps, Max upload 50 Mbps	<b>DIP SW for RS485 port</b>	DIP 1 Pull Low : OFF: Disable, ON: Enable DIP 2 Pull High : OFF: Disable, ON: Enable DIP 3 120 ohm terminal resistor : OFF: Disable, ON: Enable
<b>Removable terminal block</b>	Provides for Power input, DO, DI1, DI2, COM2 (RS232), COM3 (RS485)	<b>Alarm message</b>	DO for alarm message, with current capacity of 500mA/50VDC maximum SNMP trap, E-mail, SMS, Alarm trigger by DI, VPN or WAN disconnection
<b>Power Supply</b>	Input 12/24 VDC (8.4~30VDC), removable terminal block	<b>Operation Temperature</b>	-40~75°C
		<b>Housing</b>	Rugged Metal, Fanless , IP30 grade housing protection
		<b>Dimensions (D x W x H)</b>	106 x 62.5 x 135mm
		<b>Weight</b>	TBD
		<b>Installation</b>	Mounting Wall mounting, or DIN Rail mounting (Optional)
		<b>MTBF</b>	TBD (MIL-HDBK-217)
		<b>Warranty</b>	5 years

## Software Specifications

<b>Network Protocols</b>	IPv4, IPv6, IPv4/IPv6 dual stack, DHCP server and client, DNS Proxy, PPPoE, Static IP, SNTP, VRRP, OSPF V2, OSPF V3, MQTT	<b>Others</b>	DDNS, UPnP, QoS Virtual Com for serial COM port
<b>Modbus TCP, Modbus RTU</b>	Gateway between Ethernet and COM3 (RS485) port	<b>Alarm message Management</b>	Sent by DO, SMS, SNMP Trap, E-mail Web GUI for remote and local management CLI Dual Image firmware upgrade by Web GUI Syslog monitor SNMP TR069: TR098 model Remote management via Telnet, SSH v2, HTTPS Local management via Telnet, SSH v2, HTTP/HTTPS
<b>Routing/Firewall</b>	NAT, Virtual Server, DMZ, Port filtering, MAC Filter, URL Filter, IP Filter, VLAN, Static Routing and RIP 1, RIP 2		
<b>VPN</b>	OpenVPN, IPSec (3DES, AES128, AES196, AES256, MD5, SHA-1, SHA256)		
<b>MobilComm Connectivity</b>	Two SIM for failover/ roaming over/ back up Seamless multi WAN connections switch (2x SIM and 1x Ethernet WAN)		

## Application

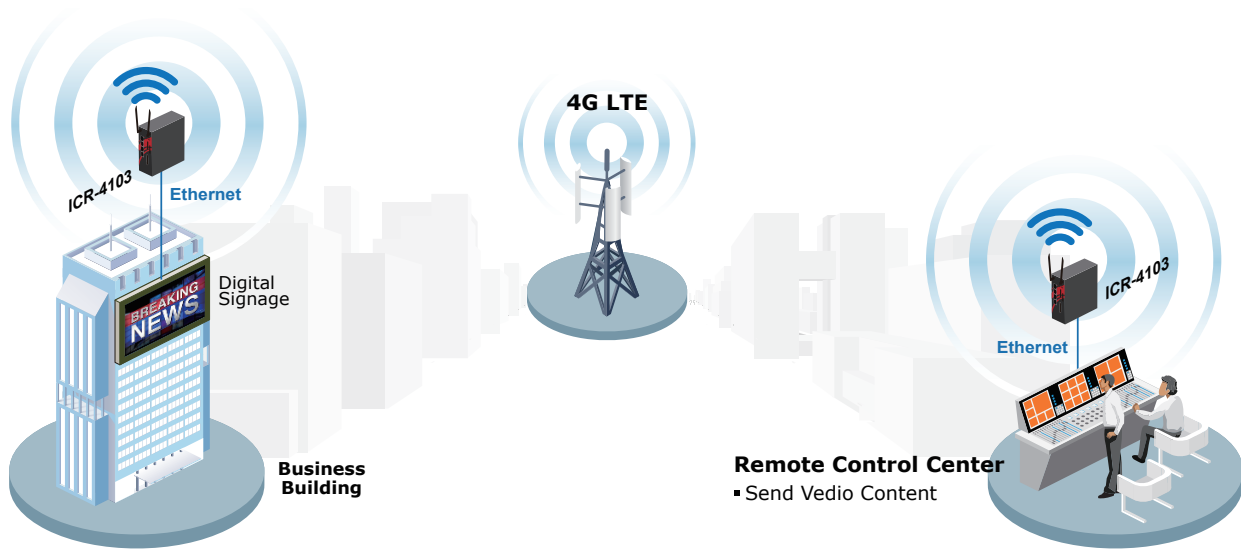


Figure 1 : Application for Outdoor Digital Signage


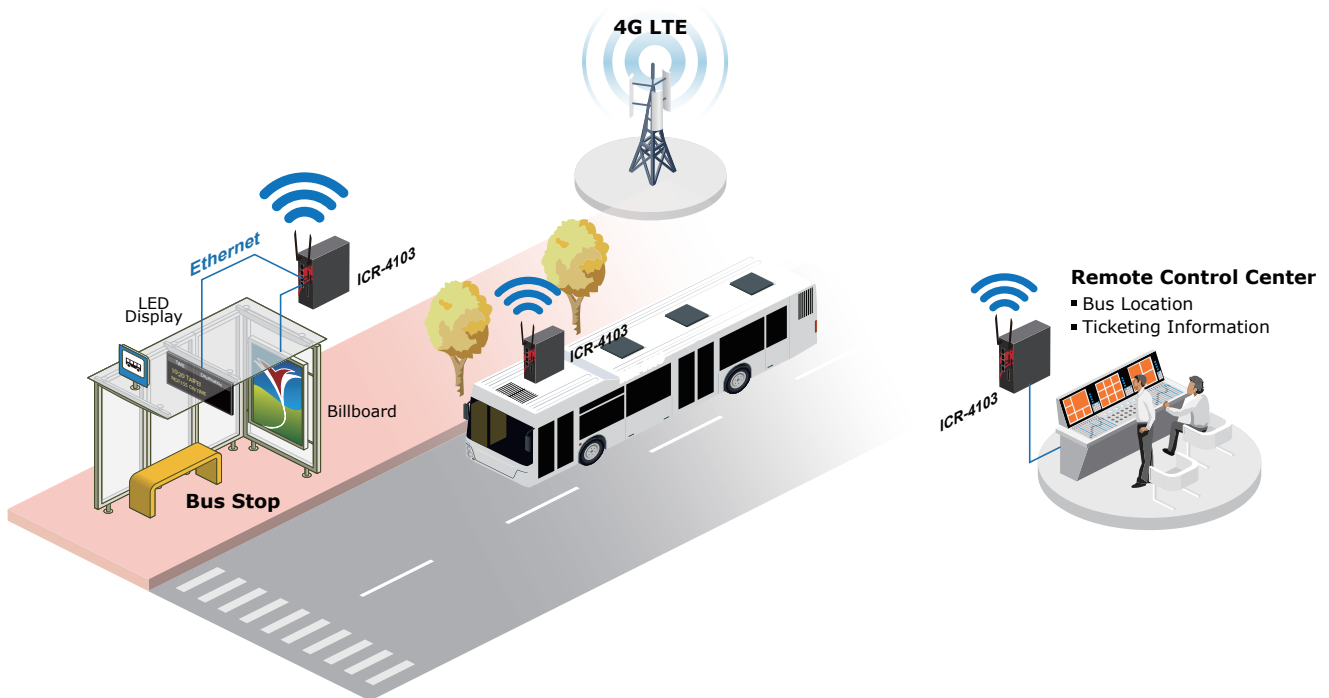


Figure 2 : Application for Transportation/Bus Communication


## Dimensions

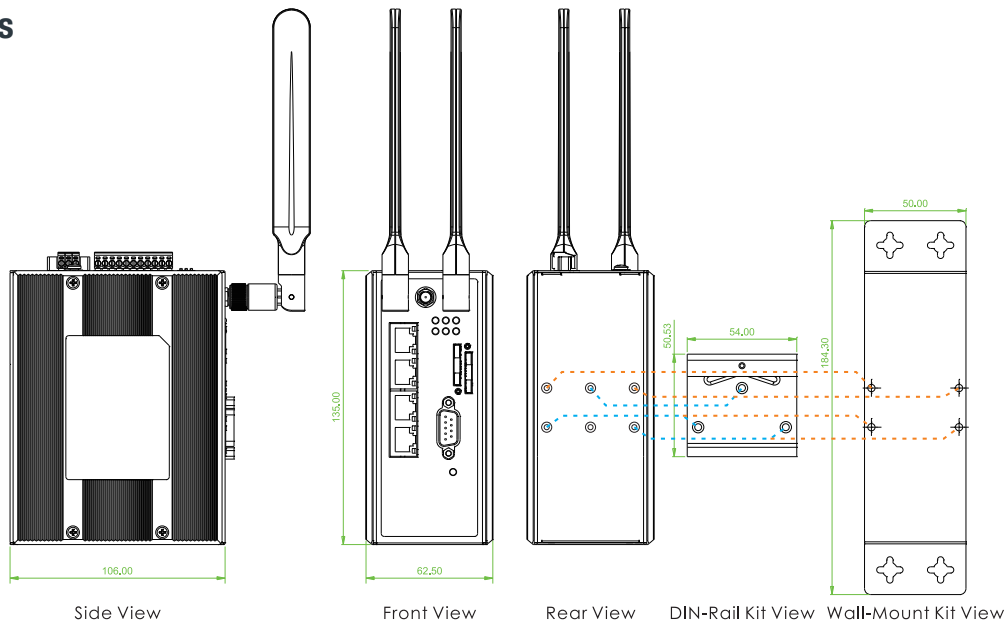

## Ordering Information

ModelName	Managed	WAN			Local Port			Certification		
		Cellular MobilComm band (2 SIM for Redundant)	10/100Base-TX	10/100Base-TX	RS232	RS485 (ModBus)	Railway EN50121-4	EN61000-6-2 EN61000-6-4	CE, FCC	
ICR-4103-EU	V	see Region code table EU	1	3	2	1	V	V	V	
ICR-4103-A	V	see Region code table A	1	3	2	1	V	V	V	
ICR-4103-AU	V	see Region code table AU	1	3	2	1	V	V	V	
ICR-4103-J	V	see Region code table J	1	3	2	1	V	V	V	

### Model Naming Rule

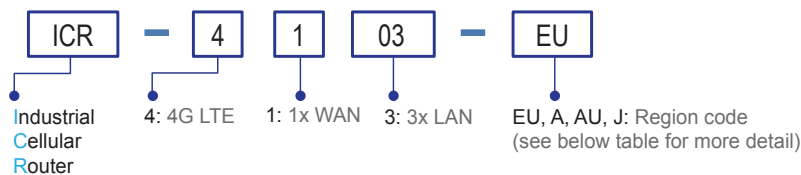

## MobilComm region Code Optional

Region Code	4G LTE		3G	2G	Region
	FDD LTE	TDD LTE	WCDMA	GSM / EDGE	
<b>EU</b>	B1(2100) , B3(1800), B5(850), B7(2600), B8(900), B20(800)	B38(2600), B40(2300), B41(2500)	B1(2100), B5(850), B8(900)	B3(1800), B8(900)	Europe, Africa, Middle East, Korea, Thailand, India
<b>A</b>	B2(1900), B4(1700), B12(700)		B2(1900), B4(1700), B5(850)		USA (AT&T, T-Mobile)
<b>AU</b>	B1(2100), B2(1900), B3(1800), B4(1700), B5(850), B7(2600), B8(900), B28(700)	B40(2300)	B1(2100), B2(1900), B5(850), B8(900)	B2(1900) , B3(1800), B5(850), B8(900)	ANZ, South America, Taiwan
<b>J</b>	B1(2100), B3(1800), B8(900), B18(850), B19(850), B26(850)	B41(2500)	B1(2100), B6(850), B8(900), B19(850)		Japan

## Optional Accessories

### Antenna accessories

ANT-BASE-01	Antennas Base with Magnetic, SMF (Female) connector, 1 meter extension
ANT-GPS-01	GNSS Antennas for GPS

### Wall mount kit accessories

IND-WMK02	Wall Mount kit for Industrial product (Wide) (184 x 50mm)
-----------	---