

NEW



FMC-1001

10/100/1000Base-T to 100/1000Base-X Media Converter

The FMC-1001 family are Gigabit Ethernet 10/100/1000Base-T to 100/1000Base-X non-managed stand-alone media converters with SC connector. Both multi-mode and single mode converters are available as well as BiDi which allows bi-directional transmissions using only a single fiber cable. Auto-negotiation will automatically tailor to convert full-duplex signals, according to IEEE802.3u standards. LED indicators signal the power status of the converter, UTP port speed and Link status FX port speed and Link status.

Features


- 10/100/1000Base-T to 100/1000Base-X Converter
- Auto-Negotiation
- Auto MDI/MDIX
- Forward 2048 bytes (Max.) packets in switch mode (copper & fiber port in different speed)
- Forward 9k bytes in connector mode (fiber & copper port at the same speed)
- Provides DIP switch to set function
- Supports Q in Q double tagged frame transparent
- Supports IEEE 802.1Q Tag VLAN pass thru
- Concentrated into FMC-CH17 chassis

Specifications

| | | |
|-----------------------------|--------------|---|
| Optical Interface | Connector | SC |
| | Data rate | 1.25G |
| | Duplex mode | Full duplex |
| | Fiber | MM 50/125µm, 62.5/125µm SM 9/125µm |
| | Distance | MM 550m, SM 20/40km WDM 20/40km |
| | Wavelength | MM 1310nm, SM 1310,1550nm WDM 1310Tx/1550Rx (Type A) 1550Tx/1310Rx (Type B) |
| Electrical Interface | Connector | RJ-45 |
| | Data rate | 10Mbps, 100Mbps, 1000Mbps |
| | Duplex mode | Full duplex |
| | Cable | 100Base-TX Cat.5, 5e or higher 1000Base-T Cat.5, 5e or higher |
| DIP Switch | Fiber Speed | 100M/1000M |
| | LFP Fiber | Enable/Disable |
| | LFP Copper | Enable/Disable |
| | Flow Control | On/Off |

| | |
|-------------------------------|---|
| Standards | IEEE 802.3, 802.3u, 802.3x, 802.3Z, 802.3ab |
| Indications | LED (Power, FX Link, FX SPD, TX SPD, TX Link) |
| Power Input | Adapter Type: DC 12V Power Built-in Type : AC 100 ~ 240V Power Built-in Type: DC 18 ~ 60V |
| Power Consumption | < 3W |
| Dimensions (D x W x H) | Adapter Type: 108 x 23 x 73.4mm Power Built-in Type : 135 x 23 x 73.4mm |
| Weight | Adapter Type : 120g Power Built-in Type : 140g |
| Temperature | 0 ~ 50°C (Operating), -10 ~ 70°C (Storage) |
| Humidity | 10 ~ 90% non-condensing |
| Certification | CE, FCC |
| MTBF | 65,000 hrs |

Application

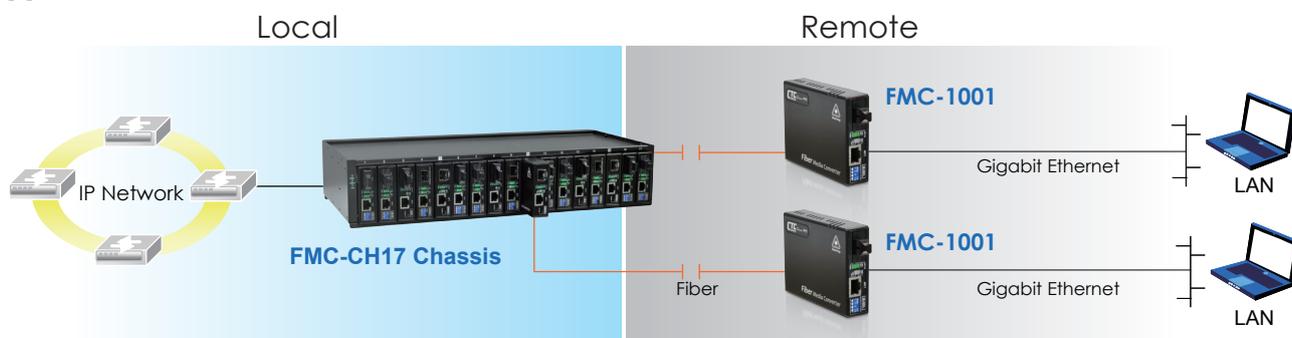

Ordering Information

| Model Name | Description |
|-----------------|--|
| FMC-1001 | 10/100/1000Base-T to 100/1000Base-X Non-managed Media Converter Adapter Type |
| SC | 001: 550m 020: 20km 040: 40km 20A: WDM 20km A type 20B: WDM 20km B type 40A: WDM 40km A type 40B: WDM 40km B type |