



IPS-803GSM

8x 10/100Base-TX + 3x 100/1000Base-X SFP
Managed Switch



IPS-803GSM is a managed industrial grade Ethernet switch that is designed to meet the demands of power substation systems and is fully compliant with the requirement of IEC 61850-3 and IEEE 1613. The switch provide a variety of redundant functions to increase the reliability of your communications system, including redundant and isolated power supplies (24/48 VDC) and 110/220 VDC/VAC). The managed Ethernet functions include STP/RSTP/MSTP/ITU-T G.8032 ERPS and multiple μ-Ring for redundant cabling, layer 2 Ethernet IGMP, VLAN, QoS, ACL, Security, IPv6, bandwidth control, port mirroring, cable diagnostic and Green Ethernet. Housed in rugged DIN rail or wall mountable enclosures, these switches are designed for harsh environments, such as power substation networking (See Figure). The series product can be managed centrally and conveniently by CTC Union's SmartView™ Element Management System or other third party SNMP managers.

Features

- 8x 10/100Base-TX RJ-45 and 3x 100/1000Base-X SFP Fiber
- UL60950-1, CE, FCC, and EN50121-4, certification
- IEC 61850-3, IEEE1613 certified for power substation
- Heavy industrial grade EMS, EMI, EN61000-6-2, EN61000-6-4 certified
- Redundancy isolated low voltage 24/48VDC, or/and isolated High voltage AC/DC (110/220 VAC/VDC) power inputs
- Supports negative power input with isolated RS-232 console port (for example in telecom system)
- Wide Operating Temperature -40~85°C
- DIN Rail mounting or wall mounting
- IP30 rugged metal housing, Fanless
- Cable diagnostic, Measuring cable normal or broken point distance
- Support GOOSE Message that complies with IEC61850 standard to achieve zero packet loss
- Supports IEEE1588 PTP V2 for precise time synchronization to operate in Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master, Slave mode by each port
- Supports Green Ethernet IEEE802.3az EEE (Energy Efficient Ethernet) Management to optimize the power consumption
- STP, RSTP, MSTP, ITU-T G.8032 Ethernet Ring Protection Switching (ERPS), and μ-Ring for cabling redundant
- Provides 5 instances that each can support μ-Ring, μ-Chain or Sub-Ring type for flexible uses. Supports up to 5 rings in one device (Please see CTC Union μ-Ring white paper for more details and more topology application)
- μ-Ring for Redundant Ethernet Ring, recovery time<10ms in 250 units
- QoS, Traffic classification QoS, CoS, bandwidth control for Ingress and Egress, Storm Control, DiffServ
- IEEE802.1Q VLAN, MAC based VLAN, IP subnet based VLAN, Protocol based VLAN, VLAN translation, GVRP, MVR
- Dynamic IEEE 802.3ad LACP Link Aggregation, Static Link Aggregation
- IGMP snooping V1/V2/V3, IGMP Filtering/ Throttling, IGMP query, IGMP proxy reporting, MLD snooping V1/V2
- Security : Port based and Mac based IEEE802.1X, RADIUS, ACL, TACACS+, HTTP/HTTPS, SSL/SSH v2
- Software upgrade via TFTP and HTTP, redundant firmware to avoid in case of upgrade failure
- Supports DHCP Server / Client /Relay/Snooping/Snooping option 82/Relay option 82
- Supports RMON, MIB II, Private MIB, Port mirroring, Event syslog, DNS, NTP/SNTP, IEEE802.1ab LLDP
- Supports IPv6 Telnet server /ICMP v6
- CLI, Web based management, SNMP v1/v2c/v3, Telnet server for management
- Provides SmartConfig for quick and easy mass configuration tool (Please see Catalog chapter 1- Software Management for more details)
- Supports SmartView for Centralized Management (Please see Catalog chapter 1- Software Management for more details)
- Supporting Central EMS for management of upto 50 SmartView Server, and maximum upto 25,000 device (Please see Catalog chapter 1- Software Management for more details)

Specifications

Standard	IEEE 802.3 10Base-T 10Mbit/s Ethernet IEEE 802.3u 100Base-TX, 100Base-FX, Fast Ethernet IEEE 802.3z 1000Base-X Gbit/s Ethernet over Fiber-Optic IEEE 802.1d STP (Spanning Tree Protocol) IEEE 802.1w RSTP (Rapid Spanning Tree Protocol) IEEE 802.1s MSTP (Multiple Spanning Tree Protocol) IEEE 802.1Q for VLAN Tagging IEEE 802.1X Port based and MAC based Network Access Control, Authentication IEEE802.3ac Max frame size extended to 1522Bytes IEEE 802.3ad Link aggregation for parallel links with LACP(Link Aggregation Control Protocol)	Standard	IEEE802.3x Flow Control and Back Pressure ITU-T G.8032/ Y.1344 ERPS (Ethernet Ring Protection Switching) IEEE 802.1ad Stacked VLANs, Q-in-Q IEEE 802.1p LAN Layer 2 QoS/CoS Protocol for Traffic Prioritization IEEE 802.1ab Link Layer Discovery Protocol (LLDP) IEEE 802.3az EEE (Energy Efficient Ethernet)
Switch Architecture	Back-plane (Switching Fabric): 7.6 Gbps Full wire-speed	Switch Architecture	Back-plane (Switching Fabric): 7.6 Gbps Full wire-speed
Data Processing	Store and Forward	Data Processing	Store and Forward
Flow Control:	IEEE 802.3x flow control, back pressure flow control	Flow Control:	IEEE 802.3x flow control, back pressure flow control

Jumbo Frame	9.6KB										
IEEE802.3ac	Max frame size extended to 1522Bytes (allow Q-tag in packet)										
MAC Address Table	8K										
Memory Buffer	512K Bytes for packet buffer										
Network Connector	8x 10/100Base-TX RJ-45 auto negotiation speed Auto MDI/MDI-X function, Full/Half duplex 3x 100/1000Base-X dual speed mode SFP slot, with DDMI										
Console	RS-232 (RJ-45) Isolated RS-232 port grounding for negative power system, or telecom application										
Network Cable	UTP/STP above Cat. 5e cable EIA/TIA-568 100-ohm (100m)										
Protocols	CSMA/CD										
LED	Per unit : Power 1 (Green), Power 2 (Green), Fault (Amber) (-LL model) Per unit : Power 1 (Green), Power 2 (Green), Power 3(Green), Fault (Amber) (-HL model) Per RJ-45 port :10/100Link/Act: Green SFP Fiber Per port : Link/Active (Green)										
Reverse Polarity Protection	Supported for Power Input										
Overload Current Protection	Supported										
CPU Watch Dog	Supported										
Power Input	Redundant 2x Isolated Low Voltage DC Input power (-LL model) Redundant 2x isolated Low Voltage DC and 1 High Voltage AC/DC input power (-HL model) Isolated Low Voltage DC : Isolated 24/48V (18~72VDC), Removable Terminal Block High voltage AC/DC : isolated 110/220VAC (88VAC~264VAC) or 110/220VDC (85~300VDC), Removable Terminal Block Supports negative voltage input power for Telecom										
Power consumption	<table border="1"> <thead> <tr> <th>Input Voltage</th> <th>IPS-803GSM</th> </tr> </thead> <tbody> <tr> <td>110VAC</td> <td>7.3 W</td> </tr> <tr> <td>220VAC</td> <td>7 W</td> </tr> <tr> <td>24VDC</td> <td>8W</td> </tr> <tr> <td>48VDC</td> <td>9.2 W</td> </tr> </tbody> </table>	Input Voltage	IPS-803GSM	110VAC	7.3 W	220VAC	7 W	24VDC	8W	48VDC	9.2 W
Input Voltage	IPS-803GSM										
110VAC	7.3 W										
220VAC	7 W										
24VDC	8W										
48VDC	9.2 W										
Alarm Relay Contact	Relay outputs with current carrying capacity of 1 A @24VDC										

Software Specifications

Topology	
VLAN	IEEE 802.1q VLAN, up to 4094 ID IEEE 802.1q VLAN, up to 4094 Groups IEEE 802.1ad Q-in-Q MAC-based VLAN, up to 256 entries IP Subnet-based VLAN, up to 128 entries Protocol-based VLAN (Ethernet, SNAP, LLC), up to 128 entries VLAN Translation, up to 256 entries MVR (Multiple VLAN Registration) GVRP (GARP VLAN Registration Protocol)
Link Aggregation (Port Trunk)	Static (Hash with SA, DA, IP, TCP/UDP port), up to 5 trunk group Dynamic (IEEE 802.3ad LACP), up to 5 trunk group
Spanning Tree	IEEE802.1d STP, IEEE802.1w RSTP, IEEE802.1s MSTP
Multiple u-Ring	up to 5 instances that each supports u-Ring, u-Chain or Sub-Ring type for flexible uses, and maximum up to 5 Rings Recovery time <10ms Maximum 250 devices in a Ring (Please see CTC Union u-Ring white paper for more details and more topology application)
Loop Protection	Supported
ITU-T G.8032 / Y.1344 ERPS (Ethernet Ring Protection)	Convergence time <50ms Single Ring, Sub-Ring, Multiple ring topology network
QoS Feature	
Class of Service	IEEE802.1p 8 active priorities queues for per port
GOOSE Message	Complies with IEC61850 standard to achieve zero packet loss
Traffic Classification QoS	IEEE802.1p based CoS IP Precedence based CoS IP DSCP based CoS

Removable Terminal Block	Provide 2 redundant low volt power, alarm relay contact (6 Pin) (-LL model) Provide 2 redundant low volt power, alarm relay contact (6 Pin) , and High volt Power (2 Pin) (-HL model)
Operating Temperature	-40°C ~ 85°C
Operating Humidity	5% to 95% (Non-condensing)
Storage Temperature	-40°C ~ 85°C
Housing	Rugged Metal, IP30 Protection, Fanless
Dimension	106 x 82 x 152mm (D x W x H)
Weight	0.885kg (IPS-803GSM-LL) 1.085kg (IPS-803GSM-HL)
Installation mounting	DIN Rail mounting, or wall mounting (Optional)
MTBF	535,335 Hours (IPS-803GSM-LL) 143,943 Hours (IPS-803GSM-HL) (MIL-HDBK-217)
Warranty	5 years
Certification	
EMC/EMS	CE, FCC
EMI	FCC Part 15 Subpart B Class A EN 55022 Class A
EMS (Electromagnetic Susceptibility) Protection Level	EN61000-4-2 (ESD) Level 4, Criteria B EN61000-4-3 (RS) Level 4, Criteria A EN61000-4-4 (EFT) Level 4, Criteria A EN61000-4-5 (Surge) Level 4, Criteria B EN61000-4-6 (CS) Level 4, Criteria A EN61000-4-8 (Magnetic Field) Level 5, Criteria A
Safety	UL60950-1
Power Substation	IEC 61850-3, IEEE 1613
Immunity for Heavy Industrial Environment	EN61000-6-2
Emission for Heavy Industrial Environment	EN61000-6-4
Railway Traffic	EN50121-4
Freefall	IEC 60068-2-32
Vibration	IEC 60068-2-6


Traffic Classification QoS	QCL(QoS Control List): Frame Type, Source/Destination MAC, VLAN ID, PCP, DEI QCE(QoS Control Entry): Protocol, Source IP, IP Fragment, DSCP, TCP/UDP port number
Bandwidth Control for Ingress	Rate in steps : 1 kbps / Mbps / fps / kfps Range : 100 kbps to 1Gbps / 1fps to 3300kfps Rate Unit : bit or frame
Bandwidth Control for Egress	Rate in steps : 1 kbps / Mbps Range : 100 kbps to 1Gbps Rate Unit : bit Per queue / Per port shaper
DiffServ (RF 2474) Remarking	
Storm Control	for Unicast, Broadcast, Multicast
IP Multicasting Feature	
IGMP / MLD Snooping	IGMP Snooping v1, v2, v3 / MLD Snooping v1, v2 support 1022 IGMP groups Port Filtering Profile
IGMP / MLD Snooping	Throttling Fast Leave Maximum Multicast Group : up to 1022 entries Query / Static Router Port
Security Features	
IEEE 802.1X	Port-Based MAC-Based
ACL	Number of rules : up to 256 entries for L2 / L3 / L4 L2 : Mac address SA/DA/VLAN L3 : IP address SA/DA, Subnet L4 : TCP/UDP
RADIUS authentication & accounting	
TACACS+ authentication & accounting, TACACS+ 3.0	
HTTPS, HTTP	Supported

SSL / SSH v2	Supported
User Name	Local Authentication
Password	Remote Authentication (via RADIUS/ TACACS+)
Authentication	
Management Interface Access	Web, Telnet / SSH , CLI RS-232 console
Filtering	
Management Features	
CLI	Cisco® like CLI
Web Based Management	
Telnet	Server
SNMP	V1, V2c, V3
SW & Configuration Upgrade	TFTP, HTTP
	Redundant firmware in case of upgrade failure
RMON	RMON I (1, 2, 3, 9 group), RMON II
MIB	MIB II RFC1213, Private MIB
UPnP	Supported
DHCP	Server
	Client
	Relay
	Snooping
	Snooping option 82
	Relay option 82
IP Source Guard	Supported
Port Mirroring	Supported
Event Syslog	Syslog server (RFC3164) (Support 1 server)
Warning Message	System Syslog, SMTP/ e-mail event message, alarm relay
DNS	Client, Proxy


IEEE1588 PTP V2	Support 5 operating mode in each port : Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master, Slave
NTP /SNTP	Client
LLDP (IEEE 802.1ab)	Link Layer Discovery Protocol LLDP-MED
IPv6 Features	
IPv6 Management	Telnet Server/ICMP v6
SNMP over IPv6	Supported
HTTP over IPv6	Supported
SSH over IPv6	Supported
IPv6 Telnet	Supported
IPv6 NTP / SNTP	Client
IPv6 TFTP	Supported
IPv6 QoS	Supported
IPv6 ACL	Number of rules: up to 256 entries for L2 / L3 / L4 L2 : Mac address SA/DA/VLAN L3: IP address SA/DA, Subnet L4: TCP/UDP
Others Features	
Green Ethernet	Supports IEEE802.3az EEE (Energy Efficient Ethernet) Management to optimize the power consumption Determine the cable length and lowering the power for ports with short cables
Green Ethernet	Lower the power for a port when there is no link LED Power Management: Adjustment LEDs intensity
Cable Diagnostic	Measuring UTP cable is normal or broken point distance

Application

Figure : IPS-Series in Power Substation Application

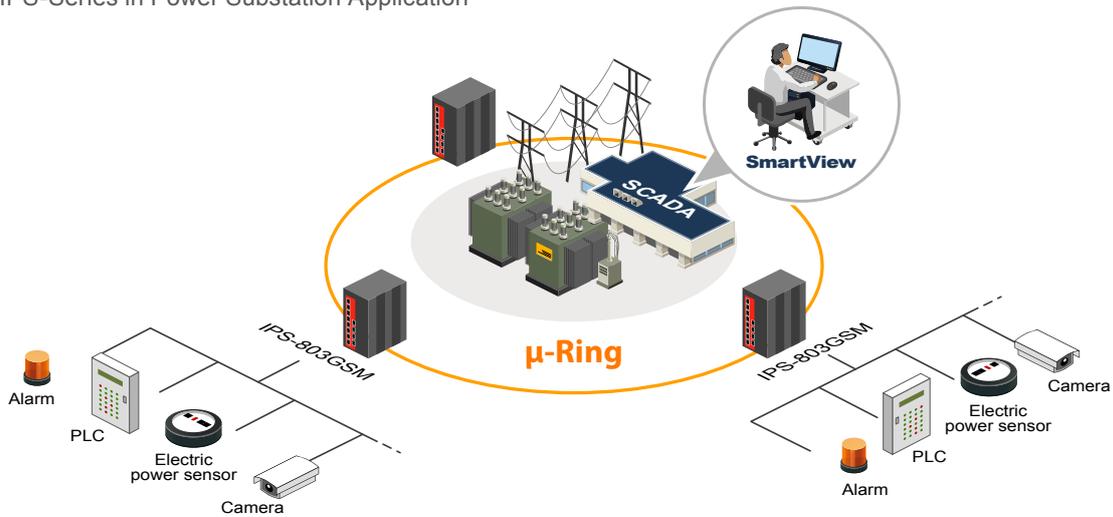


Dimensions

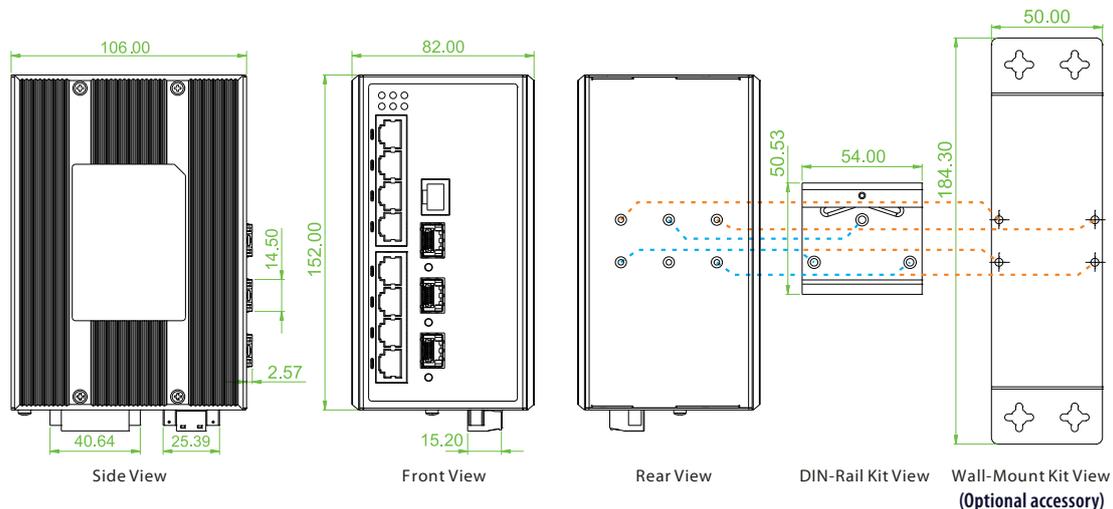

Ordering Information

Model Name	Managed	Total Port	RJ45 UTP port	Fiber	Redundant Input Power		Certification					
			10/100Base-TX	100/1000 Base-X	Low Voltage 24/48, -48VDC	High Voltage 110/220V DC/AC	IEC61850-3 IEEE1613	Railway EN50121-4	Safety UL60950-1	Safety UL60950-1	CE, FCC	
IPS-803GSM-LL	V	11	8	3 SFP	2			V	V	V	V	V
IPS-803GSM-HL	V	11	8	3 SFP	2	1		V	V	V	V	V

Model Naming Rule

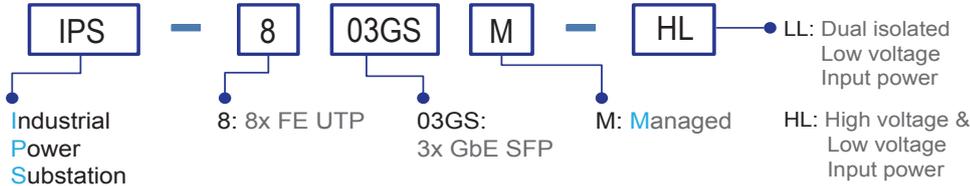

Package List

- IPS-803GSM device
- Console cable (RJ45 to DB9)
- CD (SmartConfig, MIB file, Manual)
- Quickly installation guide
- Din Rail with Screws
- Terminal blocks
- Protective caps for SFP ports

Optional Accessories

Wall mount kit

IND-WMK02	Wall Mount kit for Industrial product (Wide) (184 x 50mm)
-----------	---

Industrial SFP Transceiver

The ISFP series of industrial grade SFP modules have been fully tested with the IPS-803GSM for guaranteed compatibility and performance. The best performance can be guaranteed even in mission-critical applications. (Please see CTC Union's Industrial SFP datasheet for more detail and more items.)

ISFP-M7000-85-D(E)	Industrial SFP GbE 1000Base-SX, M/M, 500 meter, wave length 850nm, 7.5dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-S7020-31-D(E)	Industrial SFP 1000Base-LX, S/M, 20km, wave length 1310nm, 15dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-T7T00-00-(E)	Industrial SFP 1000Base-T UTP 100meter, -10~70°C (-40~85°C)
ISFP-M5002-31-D(E)	Industrial SFP 155M 100Base-FX, MM, 2km, wave length 1310nm, 12dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-S5030-31-D(E)	Industrial SFP 155M 100Base-FX, SM, 30km, 1310nm, 19dB, LC, DDMI, -10~70°C (-40~85°C)

SFP Naming Rule

