



CTC UNION TECHNOLOGIES CO., LTD.

8F/9F, No.60, Zhouzi St. Neihu, Taipei 114, Taiwan,
Vienna Technology Center (NeiHu Technology Park)
TEL : +886 2 2659-1021 FAX : +886 2 2659-0237
sales@ctcu.com

www.ctcu.com



2018 Industrial Product Catalog

CTC UNION TECHNOLOGIES



Your Reliable Supplier

2018

INDUSTRIAL
PRODUCT CATALOG



© Copyright 2018 CTC UNION TECHNOLOGIES CO., LTD.
CTC UNION and the CTC UNION logo are trademarks of CTC UNION TECHNOLOGIES CO., LTD. All rights reserved. All other trademarks are the property of their respective owners.
Specifications & design are subject to change without prior notice. Please visit CTC UNION website for more details.
2018 V3.0



ISO 9001
ISO 14001



Since 1993
www.ctcu.com

About CTC Union

Since 1993



CTC Union Technologies Co. Ltd., founded in 1993, proactively designs and manufactures telecommunications, data communications and industrial networking products for a global market. With technologies based on Ethernet and Optical transmission, CTC Union can effectively meet the requirements of voice and data carriers, enterprises, as well as industrial grade Ethernet users.

Using the latest technologies, CTC Union has stormed into the "Industrial Ethernet" marketplace with a wide range of rugged Ethernet products for public utilities, transportation and power substation deployment. With a heavy focus on reliability, certifications and new standards, this proactive thinking will allow CTC Union to continue developing solutions for today and tomorrow's industrial markets.

CTC Union's global alliance is a network of worldwide branch offices, partners and distributors on every continent. By forming partnerships with major telecom operators, Internet Service providers, and value-added resellers, CTC Union reduces costs and improves services for customers. This alliance covers Europe, Asia, the Middle East, Africa, plus North and South America. This global partnership receives direct engineering and technical support from our company headquarters, located in Taipei, Taiwan.



Environmental Policy

As a socially responsible manufacturer, CTC Union is concerned with the environment and has taken active measures to reduce carbon emissions and eliminate hazardous materials in their products. None of CTC Union products use chlorofluorocarbons (CFC) in their production process and since 2007 all electronics use non-lead soldering according to RoHS 2.0 and WEEE directives.

Our Mission & Vision

- Provide innovative last-mile optical access solutions for telecommunication markets.
- Provide customers with "on time" solutions, quick and effective customer support, and valuable products with extended service life.
- To be a trusted partner; providing creative connectivity products and solutions.
- To be a leading data transmission solution provider that meets our customer's needs.

2018 Table of Contents



Reliable Industrial Ethernet Products.....6

Chapter 1 Management Software

SmartView™ EMS
SmartConfig™

1-2
1-11

Chapter 2 Industrial 10G Core Switches

NEW 24x 10/100/1000Base-T(X) + 4x 100/1000Base-X SFP + 4x 1G/2.5G/10G SFP+ L3 Core Switch.....	ICS-RG24044X	2-1
NEW 24x 10/100/1000Base-T(X)+ 4x 100/1000Base-X SFP + 4 x 10GBase-X SFP+ Core Switch.....	ICS-G24044X	2-1
NEW 24x 10/100/1000Base-T(X) + 4x 100/1000Base-X SFP + 4x 10GBase-X SFP+ with 24x PoE Core Switch.....	ICS-G24044X-24PH	2-5
24x 100/1000Base-X SFP with 4x Combo (RJ45, SFP) + 4x 10GBase-X SFP+ Core Switch.....	ICS-G2454X	2-9
24x 100/1000Base-X SFP with 4x Combo (RJ45, SFP) + 2x 10GBase-X SFP+ Core Switch.....	ICS-G2452X	2-9

Chapter 3 Industrial SyncE Managed Switches

16x 10/100/1000Base-T + 8x100/1000Base-X SFP Managed Switch with SyncE & IEEE 1588v2.....	IGS-1608SM-SE	3-1
8x 10/100/1000Base-T + 4x100/1000Base-X SFP Managed Switch with SyncE & IEEE 1588v2.....	IGS-8045SM-SE	3-1

Chapter 4 4G LTE Router/Gateway

NEW 4G LTE + 3x 10/100Base-TX Router.....	ICR-4103	4-1
NEW 4G LTE, WiFi ac/b/g/n 2T2R Gateway.....	ICR-W403	4-4

Chapter 5 EN50155 Railway Ethernet Switches (IP67)

EN50155 Product Highlight.....5-1

Managed PoE Switches

NEW 8x10/100/1000Base-T(X) + 2x100/1000Base-X SFP with 8x PoE+ Managed Ethernet Switch (180W, 24/48VDC).....	ITP-G802SM-8PH24	5-3
NEW 10x10/100/1000Base-T(X) with 8x PoE+ Managed Ethernet Switch (180W, 24/48VDC).....	ITP-G802TM-8PH24	5-3
22x 10/100Base-TX + 4x 10/100/1000Base-T with 16x PoE+ Managed Ethernet Switch (120W, 24,48,72,110VDC).....	ITP-2204GTM-16PH	5-9
12x 10/100Base-TX + 4x 10/100/1000Base-T with 12x PoE+ Managed Ethernet Switch (120W, 24,48,72,110VDC).....	ITP-1204GTM-12PH	5-9
8x 10/100Base-TX + 2x 100/1000Base-X SFP with 8x PoE+ Managed Ethernet Switch (180W, 24/48VDC).....	ITP-802GSM-8PH24	5-13
8x 10/100Base-TX + 2x 10/100/1000Base-T with 8x PoE+ Managed Ethernet Switch (180W, 24/48VDC).....	ITP-802GTM-8PH24	5-13

Unmanaged PoE Switch

8x 10/100Base-TX with 8x PoE+ Ethernet Switch (180W, 24/48VDC).....	ITP-800-8PH24	5-19
---	---------------	------

Managed Ethernet Switches

8x 10/100/1000Base-T(X) + 2x 100/1000Base-X SFP Managed Ethernet Switch.....	ITP-G802SM	5-22
8x 10/100/1000Base-T(X) + 2x 10/100/1000Base-T Managed Ethernet Switch.....	ITP-G802TM	5-22
NEW 22x 10/100Base-TX + 4x 10/100/1000Base-T Managed Ethernet Switch.....	ITP-2204GTM	5-27
NEW 12x 10/100Base-TX + 4x 10/100/1000Base-T Managed Ethernet Switch.....	ITP-1204GTM	5-27
8x 10/100Base-TX + 2x 100/1000Base-X SFP Managed Ethernet Switch.....	ITP-802GSM	5-31
8x 10/100Base-TX + 2 x10/100/1000Base-T Managed Ethernet Switch.....	ITP-802GTM	5-31

Unmanaged Ethernet Switches

8x 10/100Base-TX Ethernet Switch.....	ITP-800	5-36
5x 10/100Base-TX Ethernet Switch.....	ITP-500	5-36

2018 Table of Contents

Chapter 6 Industrial PoE Switches & Converters

PoE Series Product Highlight.....	6-1
Managed PoE Switches	
NEW 24x 10/100/1000Base-T(X) + 8x 100/1000Base-X SFP with 24x PoE+ Switch (400W, Rackmount).....	IGS-2408SM-24PH 6-3
16x 10/100/1000Base-T(X) + 8x 100/1000Base-X SFP with 8x PoE+ Managed Switch (240W, ±48VDC).....	IGS-1608SM-8PH 6-7
8x 10/100/1000Base-T(X) + 3x 100/1000Base-X SFP with 8x PoE+ Managed Switch (180W, 24/48V, -48VDC).....	IGS+803SM-8PH24 6-7
8x 10/100/1000Base-T(X) + 3x 100/1000Base-X SFP with 8x PoE+ Managed Switch (240W, ±48VDC).....	IGS+803SM-8PH 6-7
4x 10/100/1000Base-T(X) + 2x 100/1000Base-X SFP with 4x PoE++ (60W) Managed Switch (240w, ±48VDC).....	IGS-402SM-4PU 6-7
8x 10/100/1000Base-T(X) + 1x FE/GbE SFP + 2x FE/GbE/2.5G SFP with 8x PoE+ Managed Switch.....	IGS-803SM-8PH24 6-13
4x 10/100/1000Base-T(X) + 1x FE/GbE SFP + 1x FE/GbE/2.5G SFP with 4x PoE+ Managed Switch.....	IGS-402SM-4PH24 6-13
16x 10/100Base-TX + 8x 100/1000Base-X SFP with 8x PoE+ Managed Switch (240W, ±48VDC).....	IFS-1608GSM-8PH 6-18
NEW 8x 10/100Base-T+ 3x 100/1000Base-X SFP with 8x PoE+ Managed Switch (180W, 24/48V, -48VDC).....	IFS+803GSM-8PH24 6-18
4x 10/100Base-TX + 2x 100/1000Base-X SFP with 4x PoE++ (60W) Managed Switch (240W, ±48VDC).....	IFS-402GSM-4PU 6-18
8x 10/100Base-TX + 3x 100/1000Base-X SFP with 8x PoE+ Managed Switch.....	IFS-803GSM-8PH24 6-24
4x 10/100Base-TX + 2x 100/1000Base-X SFP with 4x PoE+ Managed Switch.....	IFS-402GSM-4PH24 6-24
Unmanaged PoE Switches	
6x 10/100/1000Base-T with 4x PoE+ Ethernet Switch (120W, 24/48VDC).....	IGS-600-4PH24 6-29
4x 10/100/1000Base-T+ 2x 100/1000Base-X SFP with 4x PoE+ Ethernet Switch (120W, 24/48VDC).....	IGS-402S-4PH24 6-29
4x 10/100/1000Base-T+ 2x 1000Base-SX/LX Fiber with 4x PoE+ Ethernet Switch (120W, 24/48VDC).....	IGS-402F-4PH24 6-29
NEW 4x 10/100/1000Base-T+ 2x 100/1000Base-X SFP with 4x PoE++ (60W) Managed Switch (240W, 48VDC).....	IGS-402S-4PU 6-29
16x 10/100Base-TX + 2x 1000Base-X SFP Slot with 8x PoE+ Switch (240W).....	IFS-1602GS-8PH 6-33
8x 10/100Base-TX + 2x 1000Base-X SFP with 8x PoE+ Switch (240W, 48VDC).....	IFS-802GS-8PH 6-33
Managed PoE Converter	
10/100/1000Base-T to 100/1000Base-X SFP with PoE+ PSE Managed Fiber Converter (30W, 12/24/48VDC).....	IMC-1000MS-PH12 6-36
Unmanaged PoE Converters	
10/100/1000Base-T to 100/1000Base-X SFP with PoE+/PSE Fiber Converter (30W, 12/24/48VDC).....	IMC-1000S-PH12 6-40
10/100Base-TX to 100Base-FX with PoE+/PSE Fiber Converter (30W, 12/24/48VDC).....	IMC-100-PH12 6-43

Chapter 7 Industrial Ethernet Switches & Converters

Managed Ethernet Switches

NEW 24x 10/100/1000Base-T(X) + 8x 100/1000Base-X SFP L3 Switch.....	IGS-R2408SM 7-1
NEW 24x 10/100/1000Base-T+ 8x 100/1000Base-X SFP Switch (Rackmount).....	IGS-2408SM 7-1
NEW 28x 100/1000Base-X SFP with 4x GbE Combo Managed Switch (Rackmount).....	IGS-S2804TM 7-5
NEW 16x 10/100/1000Base-T+ 4x 100/1000Base-X SFP Managed Ethernet Switch.....	IGS-1604SM 7-9
8x 10/100/1000Base-T+ 12x 100/1000Base-X SFP Managed Ethernet Switch.....	IGS-812SM 7-9
8x 10/100/1000Base-T+ 3x 100/1000Base-X SFP Managed Ethernet Switch.....	IGS+803SM 7-13
4x 10/100/1000Base-T+ 4x 100/1000Base-X SFP Managed Ethernet Switch.....	IGS+404SM 7-13
8x 10/100/1000Base-T+ 1x FE/GbE SFP + 2x FE/GbE/2.5G SFP Managed Switch.....	IGS-803SM 7-17
4x 10/100/1000Base-T+ 2x FE/GbE SFP + 2x FE/GbE/2.5G SFP Managed Switch.....	IGS-404SM 7-17
NEW 8x 10/100Base-T+ 3x 100/1000Base-X SFP Managed Ethernet Switch.....	IFS+803GSM 7-21
16x 10/100Base-TX + 4x 100/1000Base-X SFP Managed Switch.....	IFS-1604GSM 7-25
8x 10/100Base-TX + 3x 100/1000Base-X SFP Managed Switch.....	IFS-803GSM 7-25
4x 10/100Base-TX + 2x 100/1000Base-X SFP Managed Switch.....	IFS-402GSM 7-25

2018 Table of Contents



Unmanaged Ethernet Switches

8x 10/100/1000Base-T Gigabit Ethernet Switch.....	IGS-800	7-29
5x 10/100/1000Base-T+ 1x 100/1000Base-X SFP Gigabit Ethernet Switch.....	IGS-501S	7-29
5x 10/100/1000Base-T Gigabit Ethernet Switch.....	IGS-500	7-29
4x 10/100/1000Base-T+ 2x 100/1000Base-X SFP Gigabit Ethernet Switch.....	IGS-402S	7-32
4x 10/100/1000Base-T+ 2x 1000Base-SX/LX Gigabit Ethernet Switch.....	IGS-402F	7-32
16x 10/100Base-TX + 2x 1000Base-X SFP Switch.....	IFS-1602GS	7-35
8x 10/100Base-TX + 2x 1000Base-X SFP Fast Ethernet Switch.....	IFS-802GS	7-35
8x 10/100Base-TX Fast Ethernet Switch.....	IFS-800	7-35
4x 10/100Base-TX+ 2x 100Base-FX Fast Ethernet Switch.....	IFS-402F	7-35
4x 10/100Base-TX+ 1x 100Base-FX Fast Ethernet Switch.....	IFS-401F	7-35
5x 10/100Base-TX Fast Ethernet Switch (Compact Size).....	IFS-500C	7-39

Managed Media Converter

10/100/1000Base-T to 100/1000Base-X SFP Managed Fiber Converter.....	IMC-1000MS	7-41
--	------------	------

Unmanaged Media Converters

10/100/1000Base-T to 100/1000Base-X SFP Fiber Converter (Compact Size).....	IMC-1000CS	7-45
10/100/1000Base-T to 100/1000Base-X SFP Fiber Converter (Compact Size).....	IMC-1000C	7-45
10/100/1000Base-T to 100/1000Base-X SFP Fiber Converter.....	IMC-1000S	7-48
10/100Base-TX to 100Base-FX Fiber Converter (Compact Size).....	IMC-100C	7-51
10/100Base-TX to 100Base-FX Fiber Converter.....	IMC-100	7-53

Fiber Bypass Switch

NEW Optical Bypass Switch.....	IBP-202	7-55
---------------------------------------	---------	------

Chapter 8 Serial Connectivity Series

FieldBus Fiber Converters

NEW PROFIBUS to Daisy Chain Fiber Converter.....	IFC-FDC-PRO	8-1
NEW PROFIBUS to Fiber Converter.....	IFC-Serial-PRO	8-1
NEW CAN Bus to Fiber Converter.....	IFC-Serial-CAN	8-5
RS-232/422/485 Daisy Chain Fiber Converter.....	IFC-FDC	8-8
RS-232/422/485 Fiber Converter.....	IFC-Serial	8-8

IP Device Server

IP Device Server.....	STE100A-232	8-12
RS485/232 Serial Server.....	STE100A-Serial	8-12

Chapter 9 LAN Extenders & Injectors

PoE LAN Extender

Long Reach PoE Extenders (Phone line and Coaxial Cable).....	IEXT224-4PH	9-1
--	-------------	-----

LAN Extender

NEW Industrial 1 port LAN Extender.....	IEXT211	9-4
--	---------	-----

PoE Injectors

Gigabit Ethernet PoE+ Injector IEEE802.3at/af, 15.4/30/36/60/72W (24/48VDC).....	INJ-IG60-24	9-6
Gigabit Ethernet PoE+ Injector IEEE802.3at/af, 15.4/30/36/60W (48VDC).....	INJ-IG01-PH	9-9
Gigabit Ethernet IEEE802.3af/at High Power PoE Injector.....	INJ-G30	9-11

2018 Table of Contents



Chapter 10 IEC 61850-3 Substation Ethernet Switches

IEC 61850-3 Product Highlight.....		10-1
IEC 61850-3 8x 10/100/1000Base-T+ 3x 100/1000Base-X SFP Managed Switch.....IPS-G803SM		10-2
IEC 61850-3 8x 10/100Base-TX+ 3x 100/1000Base-X SFP Managed Switch.....IPS-803GSM		10-6

Chapter 11 SFP Transceivers

10G SFP+.....	10G SFP	11-1
1.25G 1000Base-X, 1.25G 1000Base-T SFP.....	GbE SFP	11-1
155Mbps 100Base-FX SFP.....	FE SFP	11-1

Chapter 12 Power Supplies

Industrial Power Supply, Input 85 ~ 264VAC, Output 48VDC, 240W, -20 ~ +70°C.....	NDR-240-48	12-1
Industrial Power Supply, Input 88 ~ 264VAC, Output 48VDC, 120W, -20 ~ +70°C.....	NDR-120-48	12-1
Industrial Power Supply, Input 88 ~ 264VAC, Output 24VDC, 120W, -20 ~ +70°C.....	NDR-120-24	12-1
Industrial Power Supply, Input 85 ~ 264VAC, Output 24VDC, 48W, -10 ~ +50°C.....	DR-4524	12-1
Industrial Power Supply, Input 85 ~ 264VAC, Output 24VDC, 40W, -20 ~ +70°C.....	MDR-40-24	12-1
Industrial Power Supply, Input 85 ~ 264VAC, Output 24VDC, 20W, -20 ~ +70°C.....	MDR-20-24	12-1

APPENDIX

Selection Table.....	209
----------------------	-----




Reliable Industrial Ethernet Products

- *EMC Certified for Industrial Standards*
- *Flexible μ -Ring Redundant Cabling*
- *4KV Surge Protection*
- *High MTBF*
- *Long Life Parts*
- *Rigorous Standards*
- *Strict Quality Checks in Factory*
- *5 Years Warranty*
- *Fan-less and Rugged Design*


Industrial network switches, designed and manufactured by CTC Union, deliver high performance and reliable solutions in fields such as automation, railway transmission, power substation and so on. The products have passed strict tests and are certified to UL60950-1 safety standards, railway traffic EN50121-4 & EN50155 and EN61000-6-2 & EN61000-6-4 standards. With wide operating temperatures, IP30 rugged housings, and redundant wide range power inputs features, CTC Union's industrial networking devices are able to provide uninterrupted and stable services for mission-critical projects especially carried out in harsh environments. SmartView™ centralized management, friendly and flexible u-Ring redundancy and real-time alarm notifications make CTC Union's industrial networking devices even more resilient in connecting your network. To demonstrate confidence in our products, we offer a 5-Year warranty on industrial networking products to our customers.

Converging Network Architectures of CTC Union's Industrial Products


Core Layer

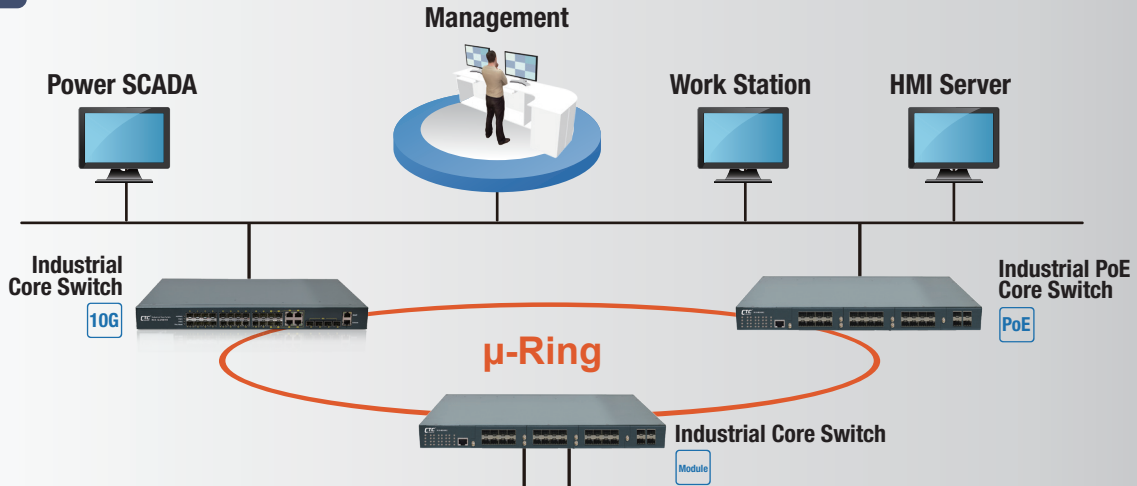

Aggregation Layer

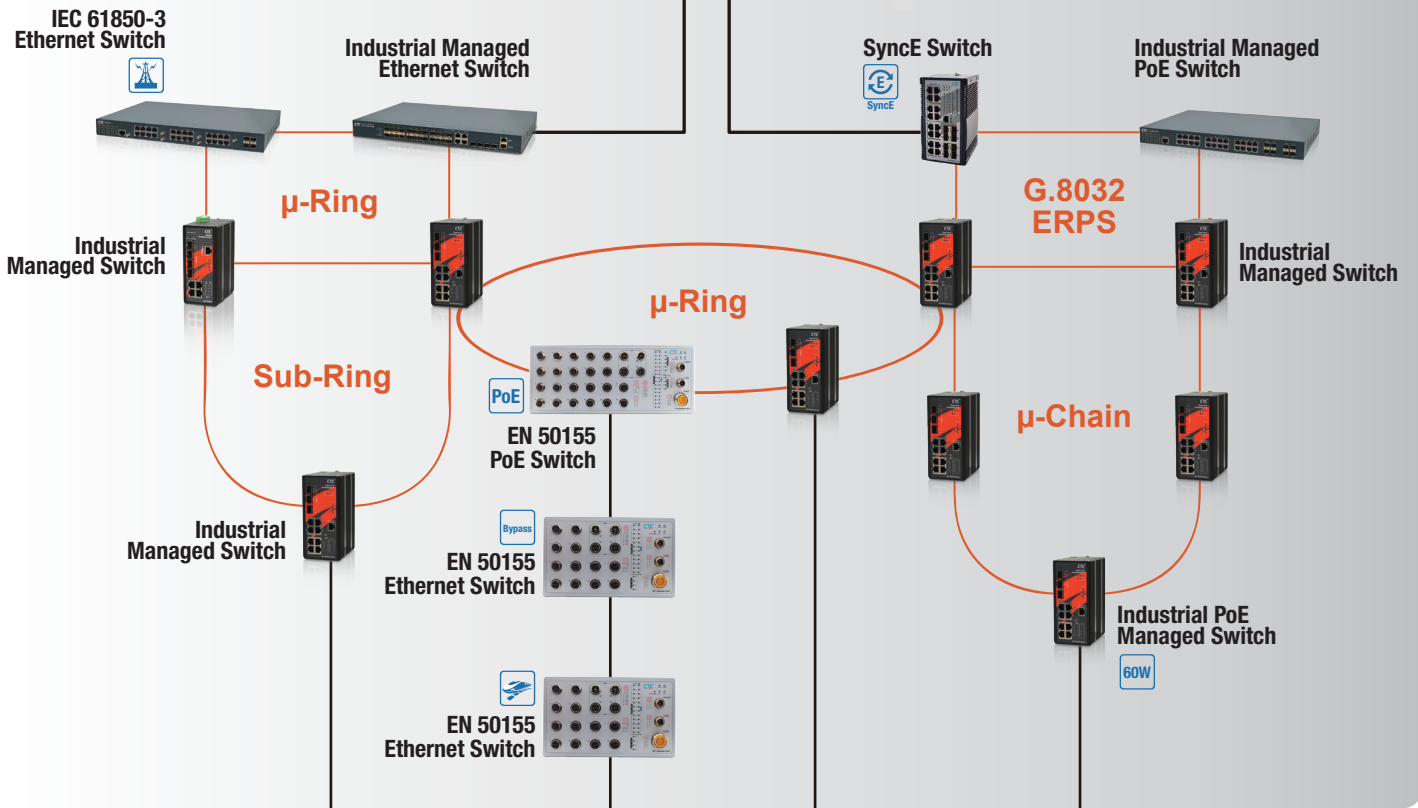

Access Layer

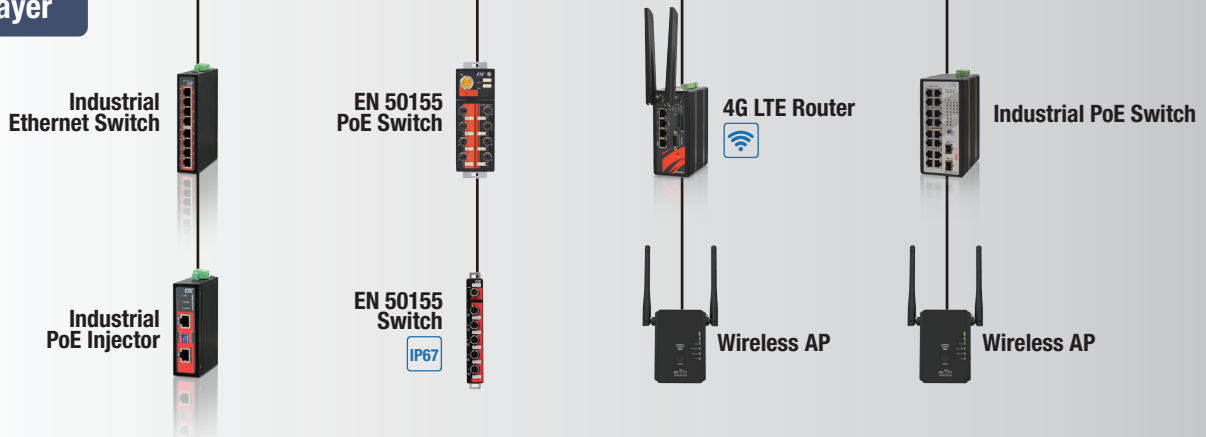

Industrial Product Category



Reliability Elements

Redundant Ring

- u-Ring
- ITU-T G.8032
- 802.1d STP
- 802.1w RSTP
- 802.1s MSTP

Certification

- CE/FCC
- **UL60950-1**
- EN50155
- EN50121-4
- IEC-61850-3
- **EN61000-6-2**
- EN61000-6-4
- NEMA TS2

EMS Industrial Grade

- EN 61000-4-2 ESD Level 3
- **EN 61000-4-3 RS Level 3**
- EN 61000-4-4 EFT Level 3
- **EN 61000-4-5 Surge Level 3**
- EN 61000-4-6 CS Level 3

Temperature

- Wide Temperature Models Available

Rugged Mechanical

- **Vibration** IEC 600068-2-6
- **Free Fall** IEC 600068-2-32
- **Shock** IEC 600068-2-27

High MTBF & 5 Years Warranty

- Industrial Grade Component
- Fanless

Key Certifications

To reduce risks of electric shocks, fire, energy related hazards, heat related hazards, mechanical hazards, radiation, and chemical hazards for operator, layman or service personnel.

For car and motorcycle spare parts and security products, noise and emissions, are required to act in accordance with the EU.

For trackside and railway applications.

For Heavy Industrial Environment application.

For traffic control.

For rolling stock, vehicle and moving machine applications.

For power substation applications.

Brief Comparison between general CE & EN50121-4

	CE Compliant	EN50121-4 Compliant (Trackside)
Surge		
Signal L-E	1kV	2kV
Signal L-L	N/A	2kV
DC Power L-E	0.5kV	2kV
DC Power L-L	0.5kV	2kV
ESD (Contact)	4kV	6kV
Radio frequency magnetic field	10V/m	20V/m
EFT (fast transient)	0.5kV Criteria B*	2kV Criteria A*
Power magnetic field	10 A/meter	300 A/meter
Pulse magnetic field	N/A	300 A/meter



* Criteria A: During the test storage devices shall maintain normal operation both in read/write and in stand-by conditions.

* Criteria B: During and after the test failures which can be recovered by read and write retries are permissible (temporary delay in processing caused by this process is acceptable).


Advance 4KV Surge Protection for PoE & UTP



■ Negative Power System

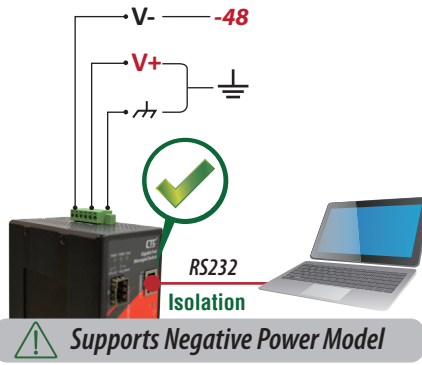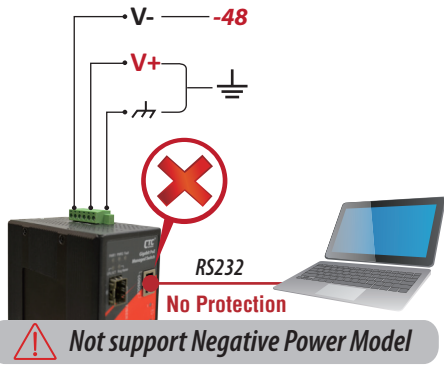

■ Reverse Polarity Protection

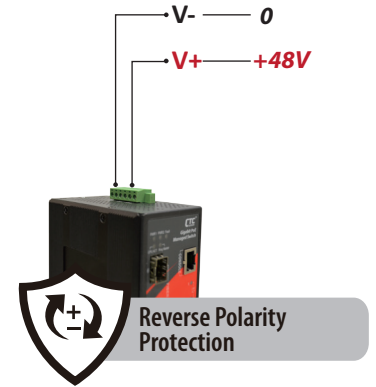

■ Rugged & Fanless Design with Wide Operating Temperature



- Fan-less
- Rugged housing
- Wide temperature (-40°C~75°C)


Suitable for harsh environments like railways, roadside, factory, warehouse, dock, parking lot, electrical poles,...

■ 5-Year Warranty and Long MTBF



- Specially-chosen parts such as industrial-grade IC, PCB, capacitor, transformers, screws and specially-installed method for heat-sink.
- High MTBF and Long life parts
- Rigorous standards in our lab and various strict quality checks in factory
- Fan-less


■ UTP Cable Diagnostics

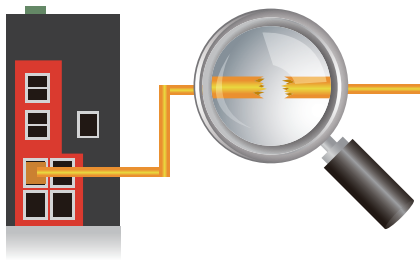

- The feature is useful in troubleshooting Ethernet UTP cabling problems especially for Ethernet cables buried or hidden underground.
- The diagnostic results reveal cable states (shorts or open connections), the length of cable and distances to the faults.


■ SmartView™ for central management

- Visual representations
- Fault, Configuration, Accounting, Performance and Security monitoring and management.
- Alarm trap and event log management
- Long term event storage (over 1 year)

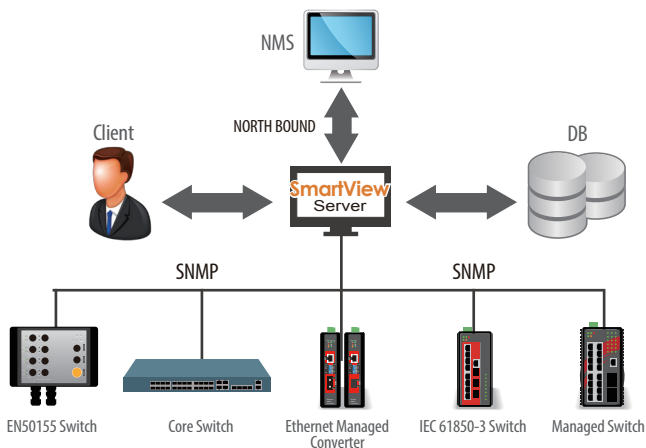


■ SmartConfig™ for quick & easy mass configuration

- A convenient configuration tool
- Multiple device auto discovery
- IP Address Assignment
- Group configuration, access
- Group firmware upgrade
- Export/Import Configuration

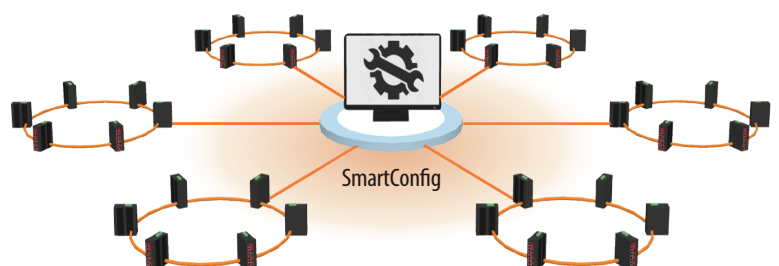

μ-Ring Network Redundancy

The μ-Ring is a proprietary redundancy protocol developed by CTC Union that supports flexible ring topologies.

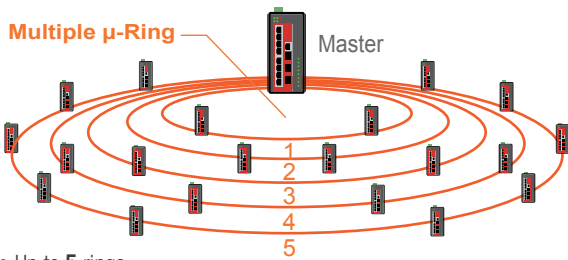


- Up to **5** rings
- Up to **250** devices in a ring
- μ-Ring, μ-Chain, Sub-Ring for different applications
- Recovery time < 10ms
- User Friendly configuration GUI

Friendly μ-Ring configuration

Delete	Instance	Type	Master	East		West	
				Port	Edge	Port	Edge
Delete	1	u-Ring	<input type="checkbox"/>	1		2	
Delete	2	u-Ring	<input type="checkbox"/>	4		3	
Delete	3	u-Ring	<input type="checkbox"/>	10 (Fiber2)		11 (Fiber3)	
Delete	4	Sub-Ring	<input type="checkbox"/>	6			
Delete	5	u-Chain	<input type="checkbox"/>	5	<input type="checkbox"/>	9 (Fiber1)	<input type="checkbox"/>


μ-Chain topology

- Benefit: Mix CTC and third party device in a ring topology

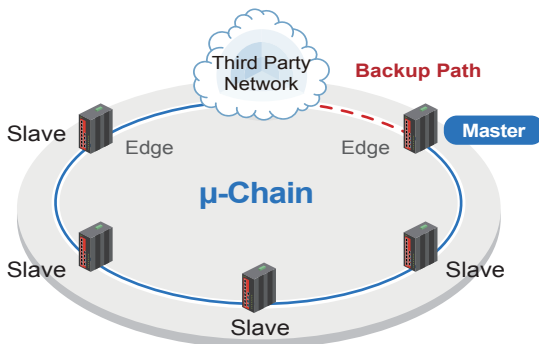

Sub-Ring topology

- Benefit: 1. Device redundancy (A & B)
2. Cable redundancy

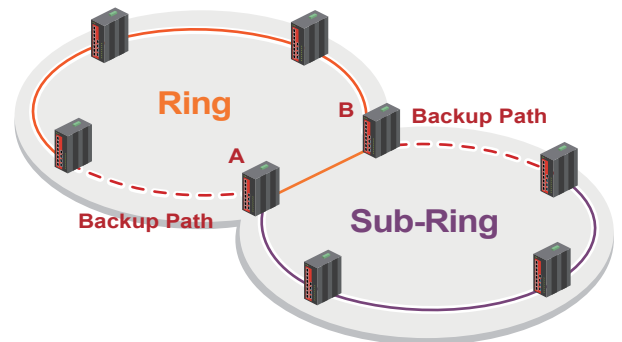

Supports Standard ITU G.8032 ERPS, MSTP, RSTP, STP for Network Redundancy


Other than the proprietary μ-Ring redundancy protocol, standard ring redundancy protocols such as ITU G.8032 ERPS, STP, RSTP and MSTP are also supported. Among standard redundancy protocols, G.8032 ERPS, achieves the fastest recovery time (<50ms) over others.

IEEE1588 PTP v2

Ethernet equipment has become a widely accepted commodity as it replaces traditional and expensive legacy technology. The multitude of nodes needed to be synchronized as precisely as possible over the network are ever increasing. IEEE1588 PTP V2 is a packet based network protocol that carries time stamps in Ethernet format. The applications requiring this technology fall within the major markets for smart grids and telecommunication networks.

Supports 5 operating mode

- Ordinary-Boundary
- Peer to Peer Transparent Clock
- End to End Transparent Clock
- Master
- Slave

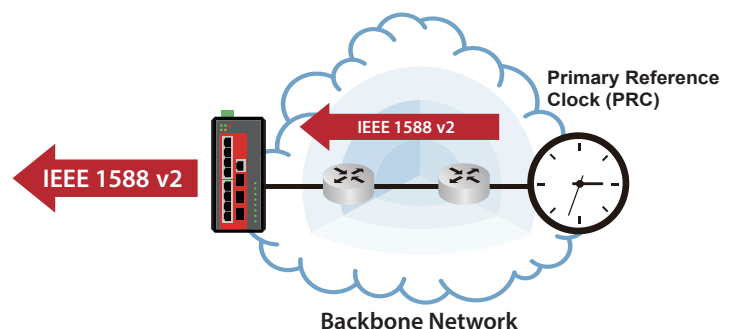



SmartView™ EMS

- **F**ault, **C**onfiguration, **A**ccounting, **P**erformance & **S**ecurity Management (FCAPS)

Central EMS

- Expand EMS platform up to 50 SmartView™ and 25,000 devices management

SmartConfig™

- Tool for quick & easy mass configuration



Management Software


- Centralized Device Management
- Quick & Easy Mass Configuration
- Quick Troubleshooting
- Easy, User-Friendly Operation Interface

CTC Union's Industrial Network Management System is a comprehensive management tool, including **SmartView™ Element Management System (EMS)** and **SmartConfig™**. Whether it is for monitoring, configuration, maintenance, or troubleshooting, the management software has a tool for every task.


SmartView™ EMS

(Element Management System)

- Main Functions (**FCAPS**):
 - Fault Management
 - Configuration Management
 - Accounting Management
 - Performance Management
 - Security Management
- Remote access control for efficient configuration
- Traffic / Performance monitoring and management
- Alarm Trap and event log management
- Auto Discovery and Device Viewer
- Allow up to 25 administrators to login

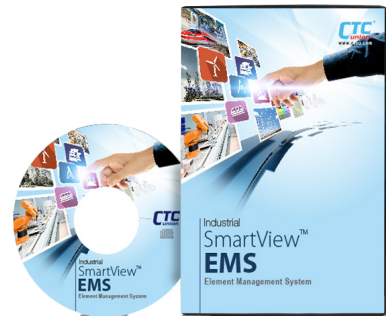

Polled Network Elements

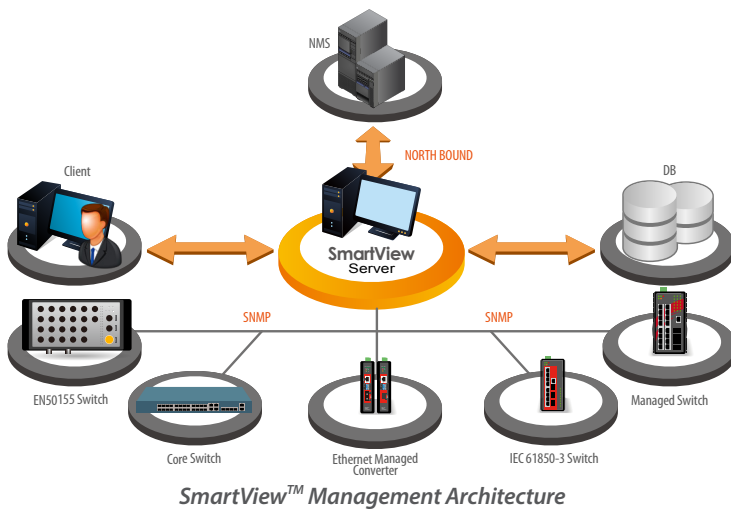

Network Scheme Diagram

- User-Friendly Operation Interface
- Robust Client / Server architecture
- Network Monitoring and Management
- Database for persistent event storage
- Security Access Management

• Agents

The server handles connections with the network devices using SNMP protocol and is responsible for communicating of requests from management clients. SmartView™ Server collects information data from specific SNMP agents, stores the information into a persistent database and updates that information to the management clients.

• Microsoft® SQL Server for Persistent Storage

SQL Server is the place where SmartView™ stores collected data, such as alarms, traps and user actions, for long term retrieval. SmartView™ requires Microsoft® SQL Server and is compatible with SQL 2008 Server, SQL 2008 Express, SQL 2014 Server and SQL 2014 Express. (The EMS installer will install the free version Microsoft® SQL 2008 Express or SQL 2014 Express under Windows 10 by default).

• SmartView™ Server

The server handles connection with the network devices using SNMP protocol, and is responsible for communication of requests from management clients. SmartView™ Server collects the information data from specific SNMP agents, stores the information into a persistent database and updates that information to the management clients.

• Workstation-Clients

Management clients are provided with the JAVA applet GUI to monitor and control the agents at far end. They also receive the Alarm and Traps from the corresponding SNMP Agents. Multiple workstations are allowed, with a maximum of 25 concurrent logged in users.

Features at a Glance

- Fault Management

Trap Collection

All traps will be stored in SQL database. When an SNMP agent experiences an abnormal condition it will send an SNMP trap message to SmartView™ which then receives the message, and records it in the database. Depending on preset conditions, SmartView™ may sound an audible alarm, send an email or SMS alert message or just simply flash the trap message on the administrative console screen.

Element Management Console v2.87 (User admin)

Network Alarm Trap Inventory

Search

Type: Current Time: [] Device: All Ack: All

Trap List (Last 100)

No.	Ack	Time	Device	Address	Message
1	<input type="checkbox"/>	2015-10-22 15:00:00	IGS-803SM-042	10.1.1.42	snmpTrapOID:linkDown, ifIndex:2, ifAdminStatus:up, ifOperStatus:down, snmpTrapEnterprise:0.0
2	<input type="checkbox"/>	2015-10-22 15:00:01	IGS-803SM-041	10.1.1.41	snmpTrapOID:linkDown, ifIndex:2, ifAdminStatus:up, ifOperStatus:down, snmpTrapEnterprise:0.0
3	<input type="checkbox"/>	2015-10-22 15:00:05	IGS-402SM-043	10.1.1.43	snmpTrapOID:linkDown, ifIndex:1, ifAdminStatus:up, ifOperStatus:down, snmpTrapEnterprise:0.0
4	<input type="checkbox"/>	2015-10-22 15:00:05	IGS-803SM-042	10.1.1.42	snmpTrapOID:linkUp, ifIndex:2, ifAdminStatus:up, ifOperStatus:up, snmpTrapEnterprise:0.0
5	<input type="checkbox"/>	2015-10-22 15:00:09	IGS-402SM-043	10.1.1.43	snmpTrapOID:linkUp, ifIndex:1, ifAdminStatus:up, ifOperStatus:up, snmpTrapEnterprise:0.0
6	<input type="checkbox"/>	2015-10-22 15:00:09	IGS-803SM-042	10.1.1.42	snmpTrapOID:linkDown, ifIndex:2, ifAdminStatus:up, ifOperStatus:down, snmpTrapEnterprise:0.0
7	<input type="checkbox"/>	2015-10-22 15:00:15	IGS-803SM-042	10.1.1.42	snmpTrapOID:linkUp, ifIndex:2, ifAdminStatus:up, ifOperStatus:up, snmpTrapEnterprise:0.0
8	<input type="checkbox"/>	2015-10-22 15:00:15	IGS-803SM-042	10.1.1.42	snmpTrapOID:linkDown, ifIndex:1, ifAdminStatus:up, ifOperStatus:down, snmpTrapEnterprise:0.0
9	<input type="checkbox"/>	2015-10-22 15:00:17	IGS-803SM-042	10.1.1.42	snmpTrapOID:linkUp, ifIndex:1, ifAdminStatus:up, ifOperStatus:up, snmpTrapEnterprise:0.0
10	<input type="checkbox"/>	2015-10-22 15:00:18	IGS-803SM-042	10.1.1.42	snmpTrapOID:linkDown, ifIndex:11, ifAdminStatus:up, ifOperStatus:down, snmpTrapEnterprise:0.0
11	<input type="checkbox"/>	2015-10-22 15:00:18	IGS-402SM-043	10.1.1.43	snmpTrapOID:linkDown, ifIndex:6, ifAdminStatus:up, ifOperStatus:down, snmpTrapEnterprise:0.0
12	<input type="checkbox"/>	2015-10-22 15:00:19	IGS-803SM-042	10.1.1.42	snmpTrapOID:linkUp, ifIndex:11, ifAdminStatus:up, ifOperStatus:up, snmpTrapEnterprise:0.0
13	<input type="checkbox"/>	2015-10-22 15:00:19	IGS-402SM-043	10.1.1.43	snmpTrapOID:linkUp, ifIndex:6, ifAdminStatus:up, ifOperStatus:up, snmpTrapEnterprise:0.0
14	<input type="checkbox"/>	2015-10-22 15:00:21	IGS-803SM-042	10.1.1.42	snmpTrapOID:linkDown, ifIndex:11, ifAdminStatus:up, ifOperStatus:down, snmpTrapEnterprise:0.0
15	<input type="checkbox"/>	2015-10-22 15:00:21	IGS-402SM-043	10.1.1.43	snmpTrapOID:linkDown, ifIndex:6, ifAdminStatus:up, ifOperStatus:down, snmpTrapEnterprise:0.0
16	<input type="checkbox"/>	2015-10-22 15:00:24	IGS-402SM-043	10.1.1.43	snmpTrapOID:linkUp, ifIndex:6, ifAdminStatus:up, ifOperStatus:up, snmpTrapEnterprise:0.0
17	<input type="checkbox"/>	2015-10-22 15:00:24	IGS-803SM-042	10.1.1.42	snmpTrapOID:linkUp, ifIndex:11, ifAdminStatus:up, ifOperStatus:up, snmpTrapEnterprise:0.0
18	<input type="checkbox"/>	2015-10-22 15:00:25	IGS-402SM-043	10.1.1.43	snmpTrapOID:linkDown, ifIndex:3, ifAdminStatus:up, ifOperStatus:down, snmpTrapEnterprise:0.0
19	<input type="checkbox"/>	2015-10-22 15:00:28	IGS-402SM-043	10.1.1.43	snmpTrapOID:linkUp, ifIndex:3, ifAdminStatus:up, ifOperStatus:up, snmpTrapEnterprise:0.0
20	<input type="checkbox"/>	2015-10-22 15:00:28	IGS-402SM-043	10.1.1.43	snmpTrapOID:linkDown, ifIndex:1, ifAdminStatus:up, ifOperStatus:down, snmpTrapEnterprise:0.0
21	<input type="checkbox"/>	2015-10-22 15:00:29	IGS-803SM-041	10.1.1.41	snmpTrapOID:linkDown, ifIndex:1, ifAdminStatus:up, ifOperStatus:down, snmpTrapEnterprise:0.0
22	<input type="checkbox"/>	2015-10-22 15:00:33	IGS-803SM-041	10.1.1.41	snmpTrapOID:linkUp, ifIndex:1, ifAdminStatus:up, ifOperStatus:up, snmpTrapEnterprise:0.0
23	<input type="checkbox"/>	2015-10-22 15:00:33	IGS-402SM-043	10.1.1.43	snmpTrapOID:linkUp, ifIndex:1, ifAdminStatus:up, ifOperStatus:up, snmpTrapEnterprise:0.0
24	<input type="checkbox"/>	2015-10-22 15:00:34	IGS-803SM-042	10.1.1.42	snmpTrapOID:linkDown, ifIndex:2, ifAdminStatus:up, ifOperStatus:down, snmpTrapEnterprise:0.0
25	<input type="checkbox"/>	2015-10-22 15:00:38	IGS-402SM-043	10.1.1.43	snmpTrapOID:linkDown, ifIndex:1, ifAdminStatus:up, ifOperStatus:down, snmpTrapEnterprise:0.0
26	<input type="checkbox"/>	2015-10-22 15:00:38	IGS-803SM-042	10.1.1.42	snmpTrapOID:linkUp, ifIndex:2, ifAdminStatus:up, ifOperStatus:up, snmpTrapEnterprise:0.0
27	<input type="checkbox"/>	2015-10-22 15:00:43	IGS-803SM-041	10.1.1.41	snmpTrapOID:linkUp, ifIndex:3, ifAdminStatus:up, ifOperStatus:up, snmpTrapEnterprise:0.0
28	<input type="checkbox"/>	2015-10-22 15:00:43	IGS-402SM-043	10.1.1.43	snmpTrapOID:linkUp, ifIndex:1, ifAdminStatus:up, ifOperStatus:up, snmpTrapEnterprise:0.0
29	<input type="checkbox"/>	2015-10-22 15:00:44	IGS-803SM-042	10.1.1.42	snmpTrapOID:linkDown, ifIndex:2, ifAdminStatus:up, ifOperStatus:down, snmpTrapEnterprise:0.0
30	<input type="checkbox"/>	2015-10-22 15:00:45	IGS-803SM-041	10.1.1.41	snmpTrapOID:linkDown, ifIndex:2, ifAdminStatus:up, ifOperStatus:down, snmpTrapEnterprise:0.0
31	<input type="checkbox"/>	2015-10-22 15:00:49	IGS-803SM-042	10.1.1.42	snmpTrapOID:linkDown, ifIndex:1, ifAdminStatus:up, ifOperStatus:down, snmpTrapEnterprise:0.0
32	<input type="checkbox"/>	2015-10-22 15:00:49	IGS-803SM-041	10.1.1.41	snmpTrapOID:linkUp, ifIndex:2, ifAdminStatus:up, ifOperStatus:up, snmpTrapEnterprise:0.0
33	<input type="checkbox"/>	2015-10-22 15:00:51	IGS-803SM-042	10.1.1.42	snmpTrapOID:linkUp, ifIndex:1, ifAdminStatus:up, ifOperStatus:up, snmpTrapEnterprise:0.0
34	<input type="checkbox"/>	2015-10-22 15:00:53	IGS-803SM-042	10.1.1.42	snmpTrapOID:linkDown, ifIndex:11, ifAdminStatus:up, ifOperStatus:down, snmpTrapEnterprise:0.0
35	<input type="checkbox"/>	2015-10-22 15:00:53	IGS-402SM-043	10.1.1.43	snmpTrapOID:linkDown, ifIndex:6, ifAdminStatus:up, ifOperStatus:down, snmpTrapEnterprise:0.0

All Events: 54 Non-Acked Events: 54

Export Clear Ack

Trap Messages

Active Alarm

SmartView™ continuously polls all network devices under its management and will visually display all alarm conditions found. Alarms will be categorized as Major, Minor or Warning, depending on severity. Although alarms may be acknowledged, they remain actively displayed on the alarm page until there is no longer an alarm condition.

Element Management Console v2.87 (User admin)

Network Alarm Trap Inventory

Search

Type: Current Time: [] Device: All Severity: All

Alarm List

No.	Ack	Time	Device	Address	Location	Message	Severity
1	<input type="checkbox"/>	2015-10-22 15:49:01	IGS-404SM-031	192.168.1.31	Device	Device disconnected	Major
2	<input type="checkbox"/>	2015-10-22 15:49:00	IGS-402SM-043	10.1.1.43	Device	Fault On	Minor
3	<input type="checkbox"/>	2015-10-22 15:49:09	IGS-402SM-043	10.1.1.43	Device	Fiber5 Link Down	Warning
4	<input type="checkbox"/>	2015-10-22 15:49:09	IGS-402SM-043	10.1.1.43	Device	Power2 Off	Minor
5	<input type="checkbox"/>	2015-10-22 15:49:09	IGS-402SM-043	10.1.1.43	Device	UTP2 Link Down	Warning
6	<input type="checkbox"/>	2015-10-22 15:49:09	IGS-402SM-043	10.1.1.43	Device	UTP4 Link Down	Warning
7	<input type="checkbox"/>	2015-10-22 15:49:10	IGS-803SM-034	10.1.1.34	Device	Fiber1 Link Down	Warning
8	<input type="checkbox"/>	2015-10-22 15:49:10	IGS-803SM-034	10.1.1.34	Device	Fiber2 Link Down	Warning
9	<input type="checkbox"/>	2015-10-22 15:49:10	IGS-803SM-034	10.1.1.34	Device	Fiber3 Link Down	Warning
10	<input type="checkbox"/>	2015-10-22 15:49:10	IGS-803SM-034	10.1.1.34	Device	UTP1 Link Down	Warning
11	<input type="checkbox"/>	2015-10-22 15:49:10	IGS-803SM-034	10.1.1.34	Device	UTP2 Link Down	Warning
12	<input type="checkbox"/>	2015-10-22 15:49:10	IGS-803SM-034	10.1.1.34	Device	UTP3 Link Down	Warning
13	<input type="checkbox"/>	2015-10-22 15:49:10	IGS-803SM-034	10.1.1.34	Device	UTP4 Link Down	Warning
14	<input type="checkbox"/>	2015-10-22 15:49:10	IGS-803SM-034	10.1.1.34	Device	UTP5 Link Down	Warning
15	<input type="checkbox"/>	2015-10-22 15:49:10	IGS-803SM-034	10.1.1.34	Device	UTP6 Link Down	Warning
16	<input type="checkbox"/>	2015-10-22 15:49:10	IGS-803SM-034	10.1.1.34	Device	UTP7 Link Down	Warning
17	<input type="checkbox"/>	2015-10-22 15:49:11	IGS-803SM-042	10.1.1.42	Device	Fault On	Major
18	<input type="checkbox"/>	2015-10-22 15:49:11	IGS-803SM-042	10.1.1.42	Device	Fiber1 Link Down	Warning
19	<input type="checkbox"/>	2015-10-22 15:49:11	IGS-803SM-042	10.1.1.42	Device	Fiber2 Link Down	Warning
20	<input type="checkbox"/>	2015-10-22 15:49:11	IGS-803SM-042	10.1.1.42	Device	Power2 Off	Minor
21	<input type="checkbox"/>	2015-10-22 15:49:11	IGS-803SM-042	10.1.1.42	Device	UTP3 Link Down	Warning
22	<input type="checkbox"/>	2015-10-22 15:49:11	IGS-803SM-042	10.1.1.42	Device	UTP4 Link Down	Warning
23	<input type="checkbox"/>	2015-10-22 15:49:11	IGS-803SM-042	10.1.1.42	Device	UTP5 Link Down	Warning
24	<input type="checkbox"/>	2015-10-22 15:49:11	IGS-803SM-042	10.1.1.42	Device	UTP6 Link Down	Warning
25	<input type="checkbox"/>	2015-10-22 15:49:11	IGS-803SM-042	10.1.1.42	Device	UTP7 Link Down	Warning
26	<input type="checkbox"/>	2015-10-22 15:49:11	IGS-803SM-042	10.1.1.42	Device	UTP8 Link Down	Warning
27	<input type="checkbox"/>	2015-10-22 15:50:58	IGS-803SM-041	10.1.1.41	Device	Fault On	Minor
28	<input type="checkbox"/>	2015-10-22 15:50:58	IGS-803SM-041	10.1.1.41	Device	Fiber1 Link Down	Warning
29	<input type="checkbox"/>	2015-10-22 15:50:58	IGS-803SM-041	10.1.1.41	Device	Fiber2 Link Down	Warning
30	<input type="checkbox"/>	2015-10-22 15:50:58	IGS-803SM-041	10.1.1.41	Device	Fiber3 Link Down	Warning
31	<input type="checkbox"/>	2015-10-22 15:50:58	IGS-803SM-041	10.1.1.41	Device	Power2 Off	Minor
32	<input type="checkbox"/>	2015-10-22 15:50:58	IGS-803SM-041	10.1.1.41	Device	UTP3 Link Down	Warning
33	<input type="checkbox"/>	2015-10-22 15:50:58	IGS-803SM-041	10.1.1.41	Device	UTP4 Link Down	Warning
34	<input type="checkbox"/>	2015-10-22 15:50:58	IGS-803SM-041	10.1.1.41	Device	UTP5 Link Down	Warning
35	<input type="checkbox"/>	2015-10-22 15:50:58	IGS-803SM-041	10.1.1.41	Device	UTP6 Link Down	Warning
36	<input type="checkbox"/>	2015-10-22 15:50:58	IGS-803SM-041	10.1.1.41	Device	UTP7 Link Down	Warning
37	<input type="checkbox"/>	2015-10-22 15:50:58	IGS-803SM-041	10.1.1.41	Device	UTP8 Link Down	Warning

All Events: 57 Non-Acked Events: 57


Export Ack

Active Warning

1 Management Software

Alarm Selection


Alarm events of network element are configurable. All alarm events are warned by default, but them can be disabled to ignore warning messages.

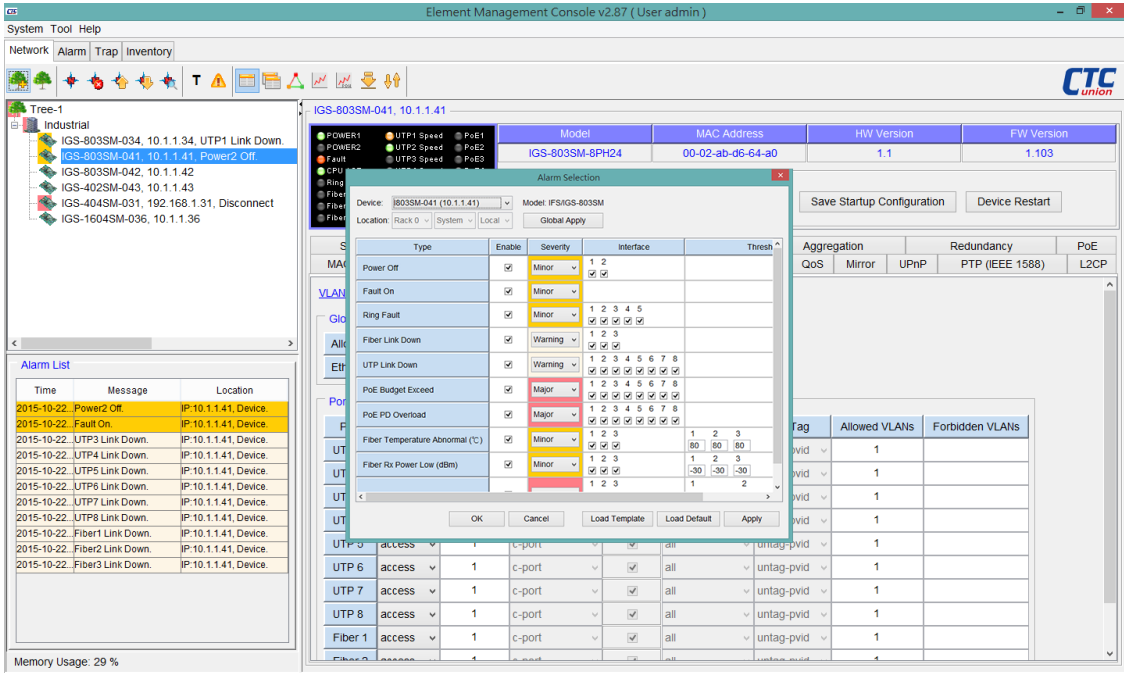

Alarms Selection

Alarms sent by E-mail & SMS


The SmartView™ is capable of sending emails and or SMS text messages to selected administrators when critical alarms occur. Prompt notification of system problems aid in getting problems in the network devices fixed in the shortest time possible.

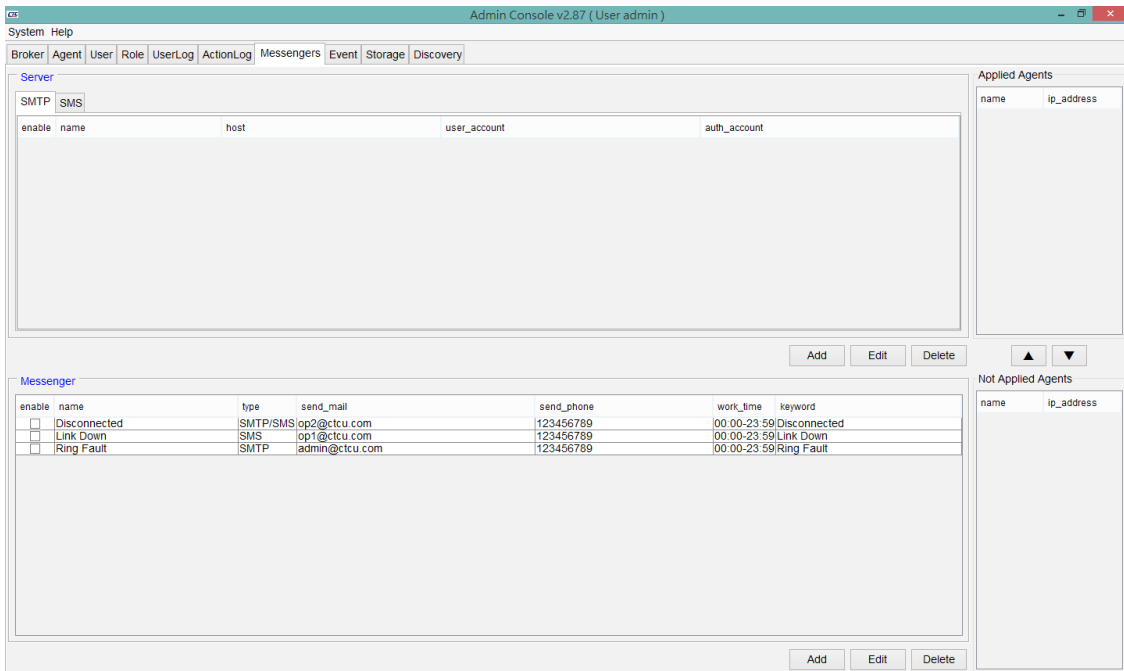

Alarms Sent by Email & SMS

Trap Forwarding and Syslog messages

The SmartView is capable of forwarding received traps to upper network management and sending event messages to a syslog server.

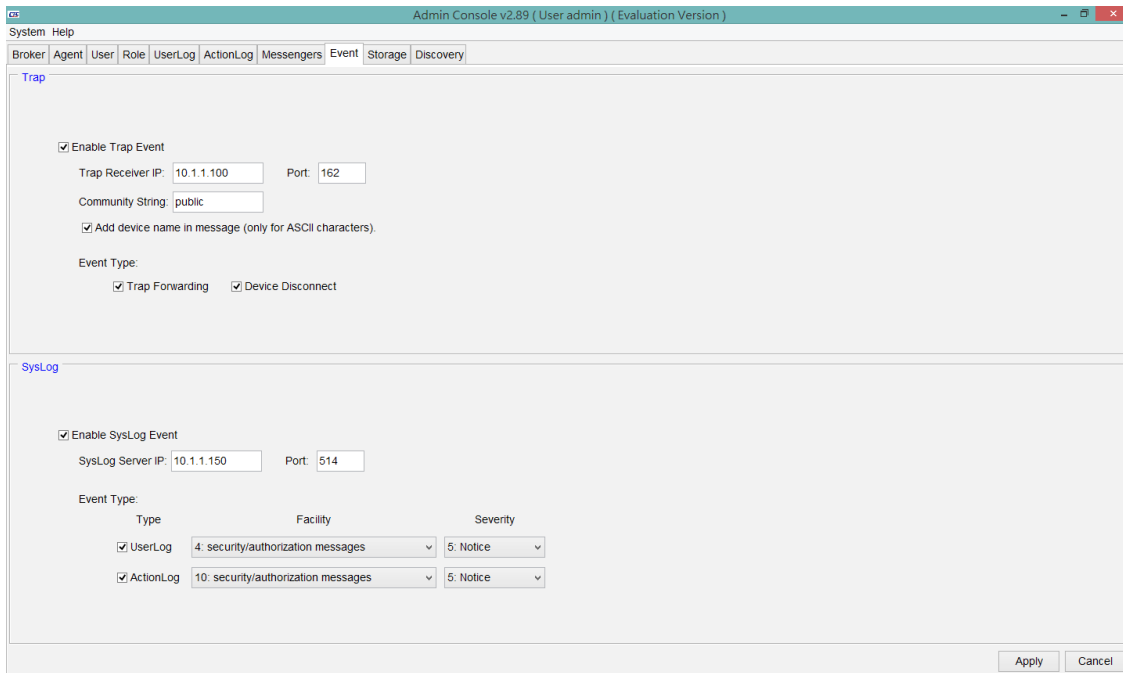


Trap Forwarding Syslog Message

- Configuration Management

Network Topology


User can load maps to SQL server, load maps from SQL server or delete attached maps. Download procedure is very simple. Map area may be used to layout any objects from Root and Node panel. Using drag-and-drop, put any object to map area. Any label or network element location name may be added to object. Objects in red color indicate some alarm condition is present in the device. Right clicking an object brings a popup window to select Telnet or http management of the device directly.

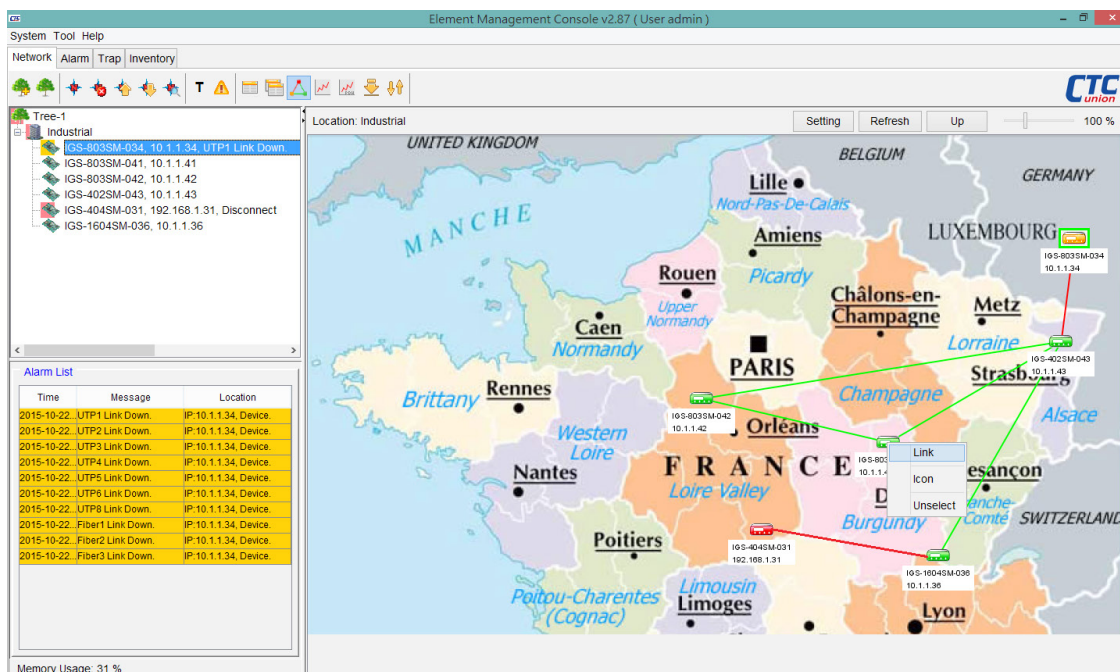

Network Topology

Network Element Configuration


SmartView™ is able to provide a single point of configuration for the network device elements. Most settings only require mouse clicks and by using a tab format, most scrolling is eliminated. Current settings and status are displayed along with hardware and firmware versions for each element.

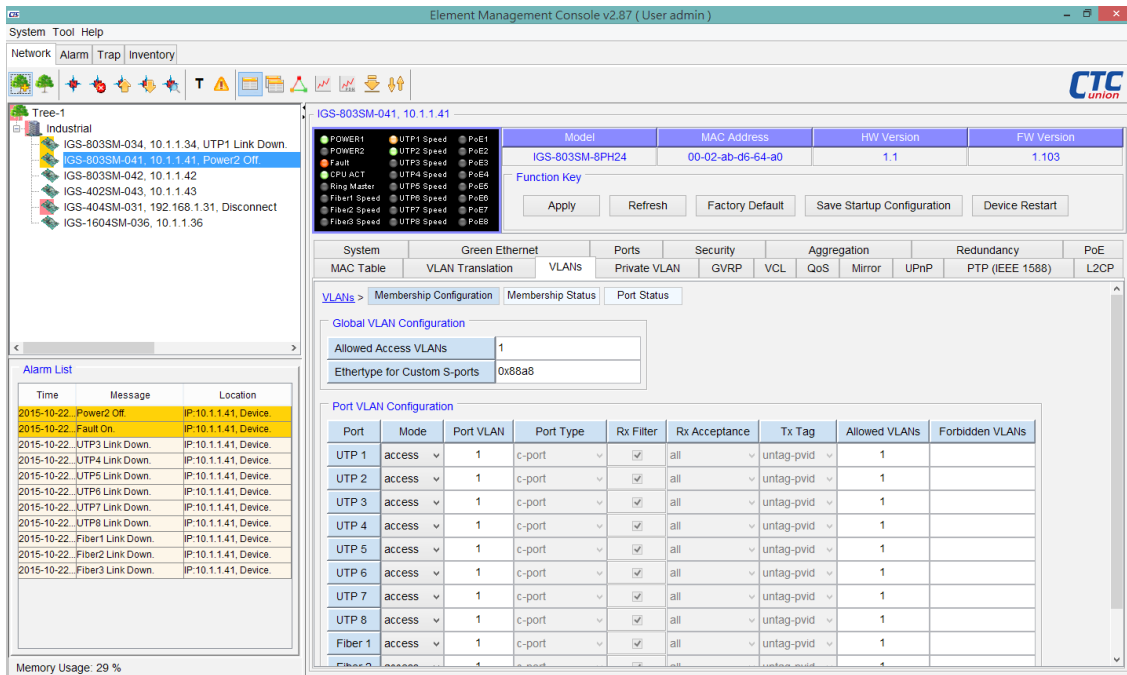

Network Element Configuration

Network Element Firmware Upgrade


SmartView™ is able to download firmware to device elements and perform configuration backup/restore.

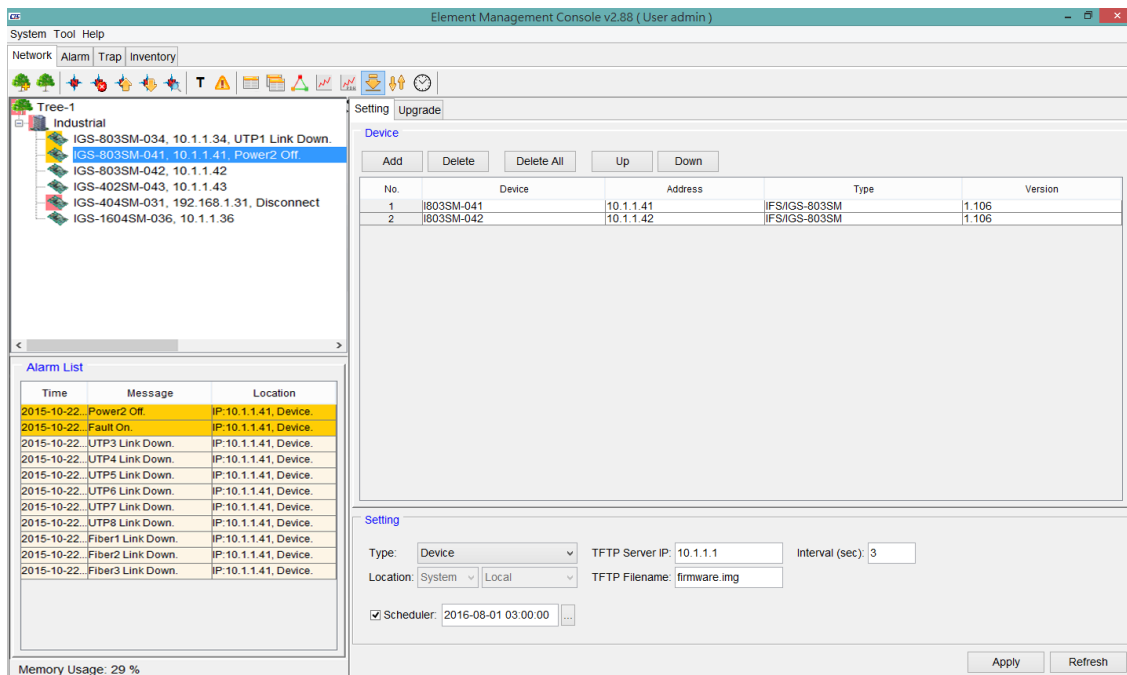

Network Element Firmware Upgrade

Network Element Time Synchronization


SmartView™ is able to trigger a command to network elements to perform time synchronization with Smartview or a NTP server.

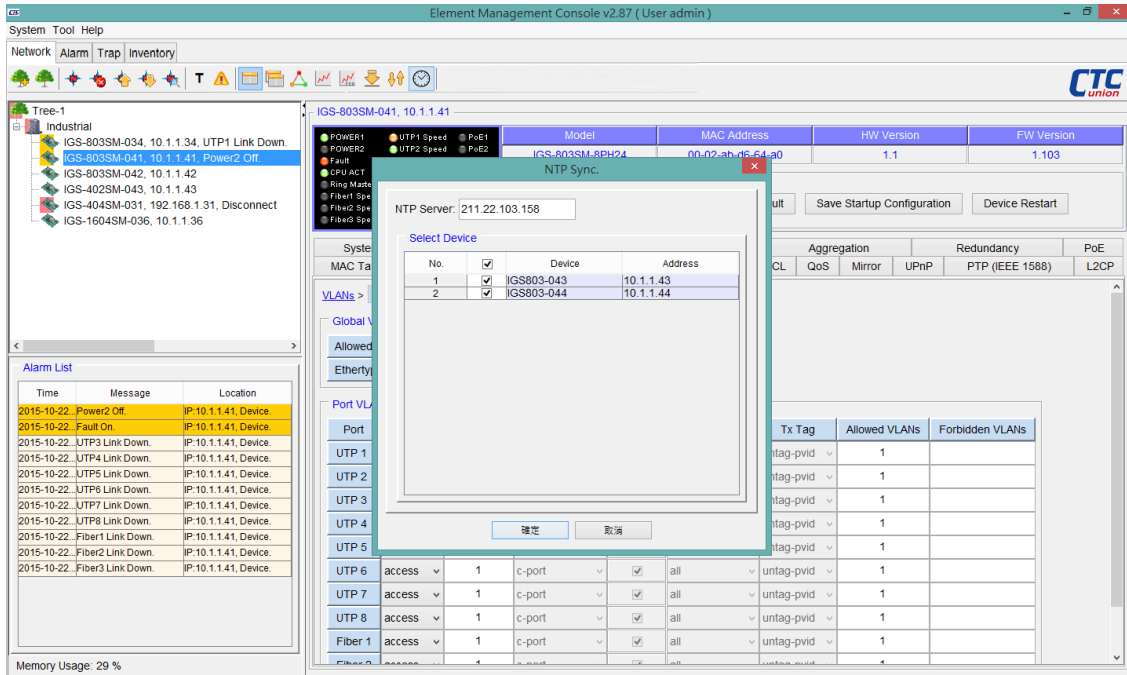

Network Element Time Synchronization

Network Element Discovery

SmartView™ has a tool for automatically discovering SNMP agents on the network. Simply enter an IP address range and the discovery program will ping every IP address looking for SNMP agents. Once discovered, the agents can be selected and brought into the broker for polling.

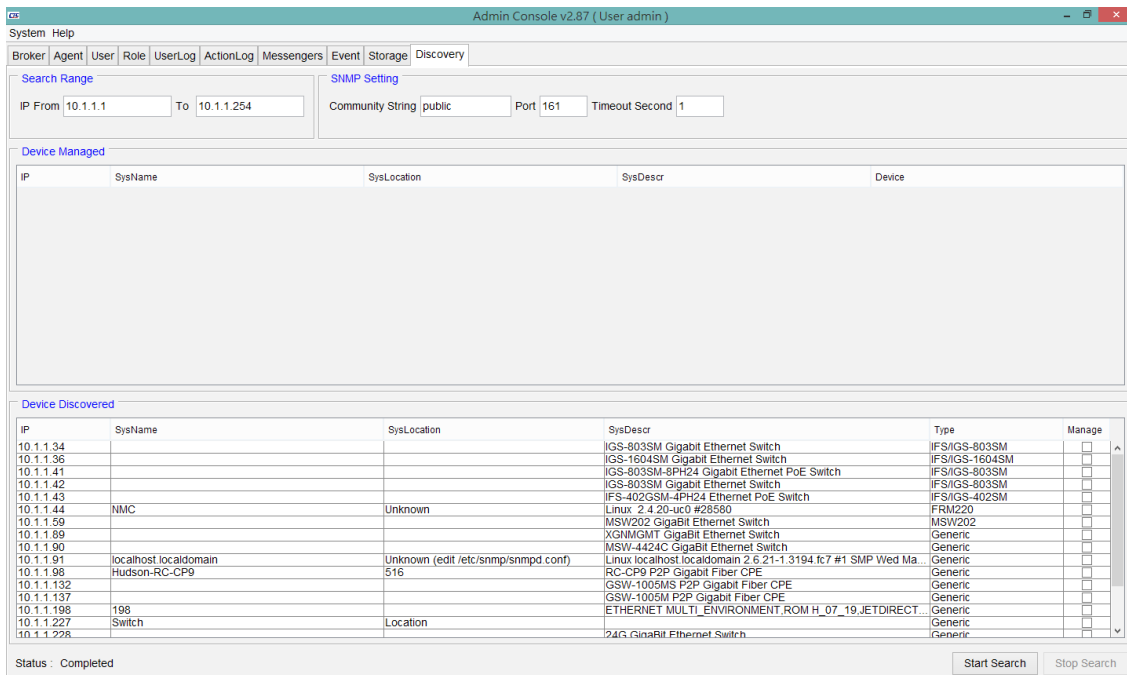

Network Element Discovery

- Accounting Management

The accounting management supports property overview for each network device. The location, status and version of all assets can be managed and exported.

Element Management Console v2.87 (User admin)

System Tool Help

Network Alarm Trap Inventory

Type: Inventory Time: [] Device: All Status: All Serial Number: [] Identity: []
 Summary To: [] Location: All Racks All Slots All Sites Type: [] Alias: [] Remark: [] Clear

Inventory

Page: 1 / 1 [First] [Previous] [Next] [Last] [Refresh]

No.	Device	Address	Location	Type	HW Version	FW Version	Serial Number	Alias	Status	Date
1	IGS-1604SM-036	10.1.1.36	Device	IGS-1604SM	1.1	1.103	None		Online	2015-10-22 15:36:44
2	IGS-803SM-041	10.1.1.41	Device	IGS-803SM-8PH24	1.1	1.103	None		Online	2015-10-22 15:36:41
3	IGS-803SM-042	10.1.1.42	Device	IGS-803SM	1.2	1.103	None		Online	2015-10-22 15:36:41
4	IGS-402SM-043	10.1.1.43	Device	IFS-402GSM-4PH24	1.1	1.103	None		Online	2015-10-22 15:36:40
5	IGS-803SM-034	10.1.1.34	Device	IGS-803SM	1.0	1.104	None		Online	2015-10-22 15:36:40
6	IGS-404SM-031	192.168.1.31	Device	IGS-404SM-4PH24	1.1	1.103	None		Offline	2015-10-22 15:40:19

[Export] [Edit] [Delete]

Inventory List

Element Management Console v2.87 (User admin)

System Tool Help

Network Alarm Trap Inventory

Type: Inventory Time: [] Device: All Status: All Serial Number: [] Identity: []
 Summary To: [] Location: All Racks All Slots All Sites Type: [] Alias: [] Remark: [] Clear

Summary [Refresh]


No.	Device	Type	Online	Offline	Total
1	IFS/IGS-1604SM				
2		IGS-1604SM	1	0	1
3					
4	IFS/IGS-402SM				
5		IFS-402GSM-4PH24	1	0	1
6					
7	IFS/IGS-404SM				
8		IGS-404SM-4PH24	0	1	1
9					
10	IFS/IGS-803SM				
11		IGS-803SM	2	0	2
12		IGS-803SM-8PH24	1	0	1
13					

[Export]

Inventory Summary

- Performance Management

SmartView™ is able to monitor device performance parameters through polling of specific OIDs. Graphs of performance information (for example PDH PM data such as ES, UAS, etc. as well as hardware parameters such as fan speed, temperature, optical Tx/Rx power or RMON counters) can be generated on an X Y axis showing different trend data.

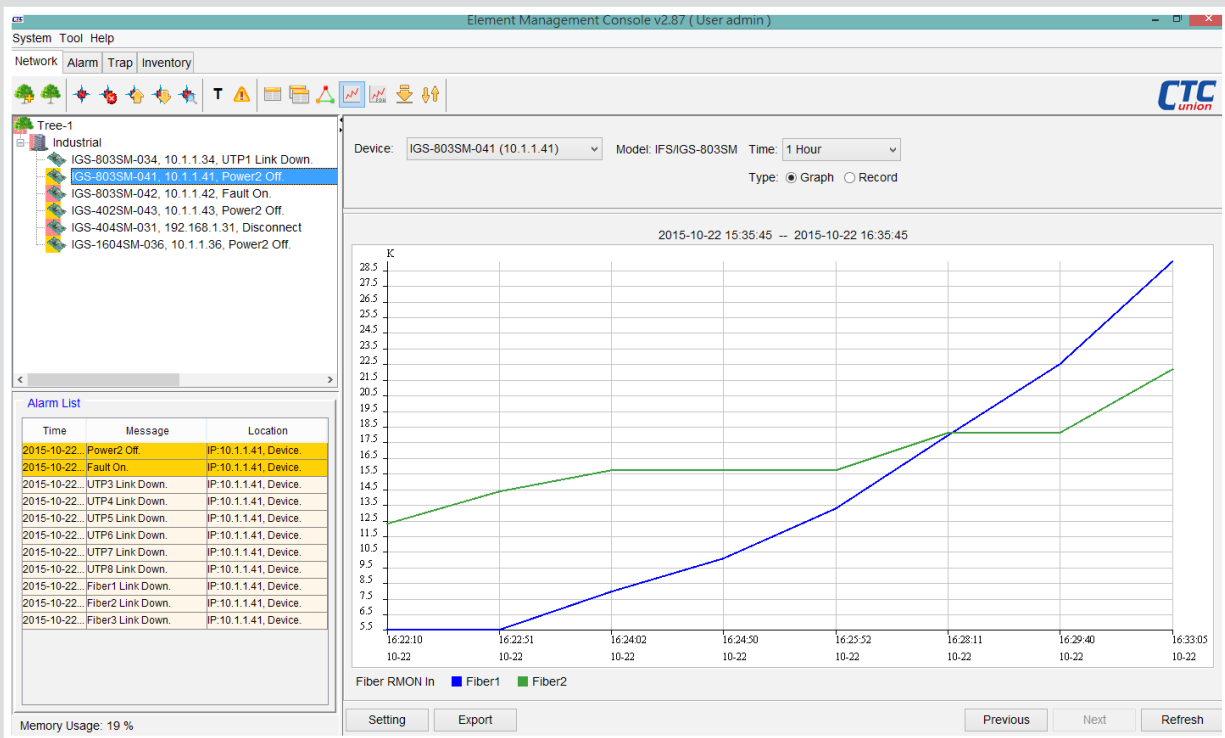

Performance Graphics

Device: IGS-803SM-041 (10.1.1.41) Model: IFS\IGS-803SM Time: 1 Hour Type: Graph Record


No.	Device	Address	Time	Param	Interface	Value
1	IGS-803SM-041	10.1.1.41	2015-10-22 16:22:10	Fiber RMON In	1	5536
2	IGS-803SM-041	10.1.1.41	2015-10-22 16:22:10	Fiber RMON In	2	12354
3	IGS-803SM-041	10.1.1.41	2015-10-22 16:22:51	Fiber RMON In	1	5536
4	IGS-803SM-041	10.1.1.41	2015-10-22 16:22:51	Fiber RMON In	2	14422
5	IGS-803SM-041	10.1.1.41	2015-10-22 16:24:02	Fiber RMON In	1	7998
6	IGS-803SM-041	10.1.1.41	2015-10-22 16:24:02	Fiber RMON In	2	15758
7	IGS-803SM-041	10.1.1.41	2015-10-22 16:24:50	Fiber RMON In	1	10134
8	IGS-803SM-041	10.1.1.41	2015-10-22 16:24:50	Fiber RMON In	2	15758
9	IGS-803SM-041	10.1.1.41	2015-10-22 16:25:52	Fiber RMON In	1	13338
10	IGS-803SM-041	10.1.1.41	2015-10-22 16:25:52	Fiber RMON In	2	15758
11	IGS-803SM-041	10.1.1.41	2015-10-22 16:28:11	Fiber RMON In	1	18004
12	IGS-803SM-041	10.1.1.41	2015-10-22 16:28:11	Fiber RMON In	2	18156
13	IGS-803SM-041	10.1.1.41	2015-10-22 16:29:40	Fiber RMON In	1	22544
14	IGS-803SM-041	10.1.1.41	2015-10-22 16:29:40	Fiber RMON In	2	18156
15	IGS-803SM-041	10.1.1.41	2015-10-22 16:33:05	Fiber RMON In	1	29090
16	IGS-803SM-041	10.1.1.41	2015-10-22 16:33:05	Fiber RMON In	2	22222
17	IGS-803SM-041	10.1.1.41	2015-10-22 16:38:05	Fiber RMON In	1	44126
18	IGS-803SM-041	10.1.1.41	2015-10-22 16:38:05	Fiber RMON In	2	22222
19	IGS-803SM-041	10.1.1.41	2015-10-22 16:43:04	Fiber RMON In	1	59022
20	IGS-803SM-041	10.1.1.41	2015-10-22 16:43:04	Fiber RMON In	2	22222
21	IGS-803SM-041	10.1.1.41	2015-10-22 16:48:04	Fiber RMON In	1	74126
22	IGS-803SM-041	10.1.1.41	2015-10-22 16:48:04	Fiber RMON In	2	22222

Performance Records

- Security Management

User Privilege


- The administrator can add necessary user logins with specific privileges, from Administrator to Operator and lastly to normal user.
- Radius Authentication. Supports authentication login provided by credentials stored on RADIUS server.

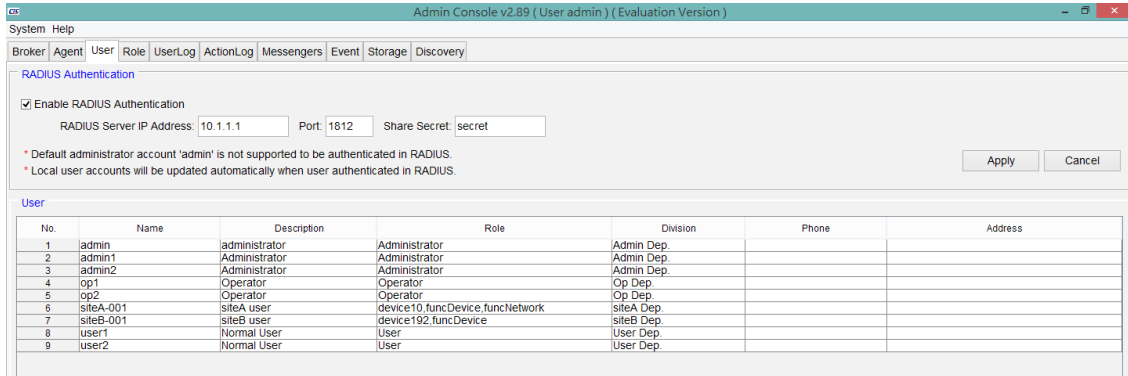

User Privilege

User Role


A user role is a group and defines privileges for users to perform management tasks. The access to network elements is also restricted by user role.

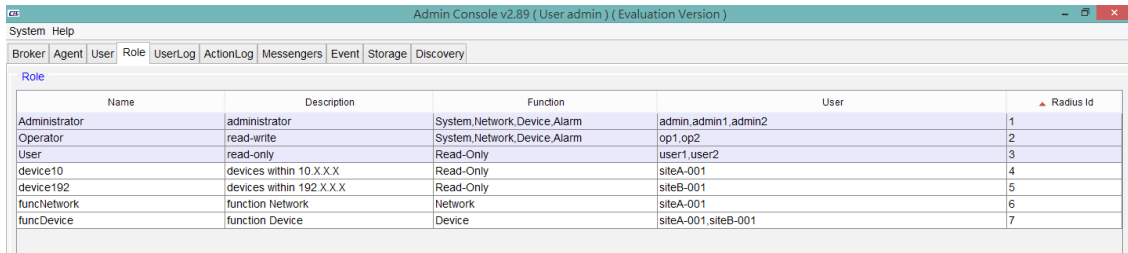

User Role

User Activity

Provides viewing and clearing of the user login and configuration action logs. User client login & logouts are recorded, including the client's source IP address. All activities performed on any Network Element are logged with time-stamping, the user making changes and the changes made.

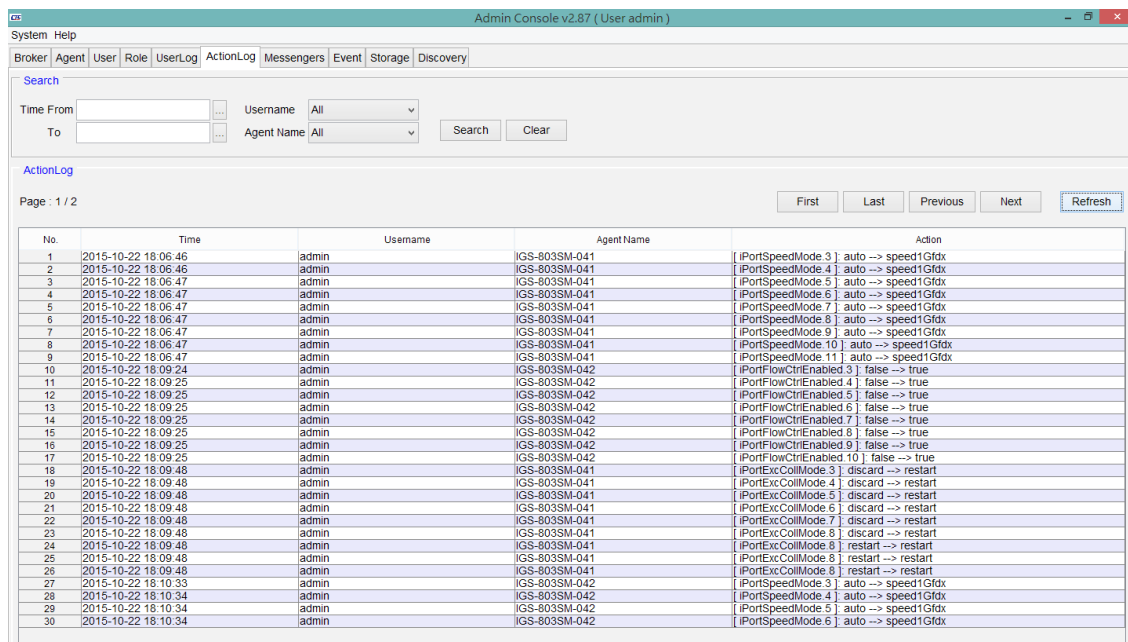

User Activity




SmartConfig™ (Quick & Easy for Mass Configuration)

- Multiple device auto discovery
- Group configuration, access
- Group firmware upgrade
- Backup / restore device configuration
- IP address assignment
- Connectivity testing

SmartConfig™ is a convenient configuration tool for mass deployment of CTC Union's managed industrial switch products. SmartConfig™ is designed for field engineers, to aid in mass deployments but can just as easily be used for initial configuration of a small group of switches or even a single device. It is portable, so it can easily be included on a network tools pen drive, it has been tested on all versions of Windows and the GUI is both simple and intuitive. Different configurations can be saved and recalled for later use, saving valuable time in the field and minimizing downtime when expanding networks or doing field replacements.

SmartConfig™ Application & Topology

- Quick & Easy for mass configuration tool
- Multiple device auto discovery
- Group configuration, access
- Group firmware upgrade
- Export/Import Configuration

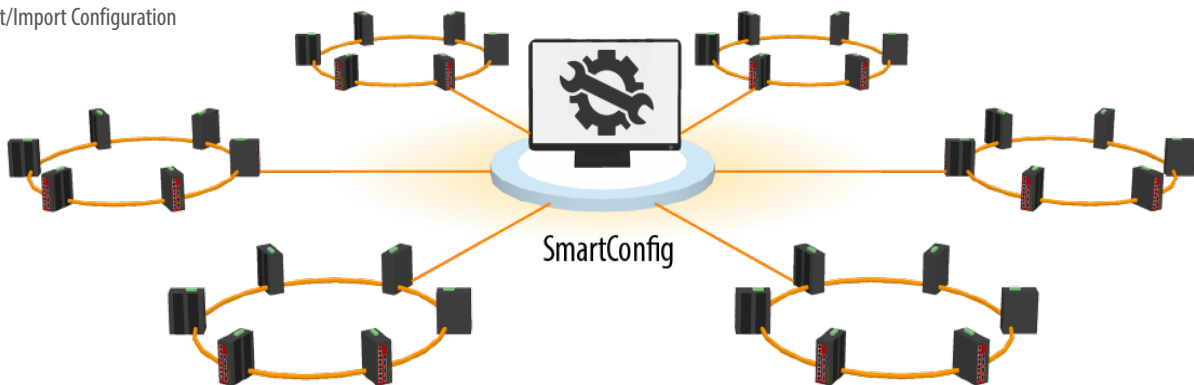

SmartConfig™ is a convenient configuration tool for mass deployment of switch product

Main Feature

• Multiple device auto discovery

SmartConfig™ can discover all inter-connected devices (no initial IP setting required) using broadcast or SNMP discovery methods. The results will show a list of discovered devices on the network including their IP address, MAC address, Model name, Firmware version.

• Group Firmware Upgrade

SmartConfig™ supports firmware upgrade for one device or multiple devices at a time. This function helps to increase firmware upgrade efficiency and convenience.

• Group Configuration & Access

For quick access and configurations, SmartConfig™ provide an efficient way to access and configure functions of one or multiple devices.

• Backup / Restore device Configuration

Running-config, startup-config and default config can be both stored to your local PC and restored to the devices via SmartConfig™

System Requirements

SmartView™	Hardware (minimum)	Software	Operating System
SmartView™ Server	Intel Core2 or higher processor, 2GB RAM, 40GB HD	JAVA JRE. SmartView™ Kit. MS-SQL Server	Windows Server 2012/2014 Win 7/8/10
SmartView™ Clients	Intel Core2 or higher processor, 2GB RAM, 20GB HD	JAVA JRE. SmartView™ Kit.	Windows 7/8/10
All-In-One	Intel Core2 or higher processor, 4GB RAM, 80GB HD	JAVA JRE. MS-SQL Server. SmartView™ Kit. SmartView™ Server/Client	Windows Server 2012/2014, Win 7/8/10
SmartConfig™	Hardware (minimum)	Software	Operating System
SmartConfig™	CPU : 2 GHz or faster Dual core RAM : 1GB, Hard Disc : 1GB	—	Windows 7/8/10

Ordering Information

SmartView™ EMS Server for industrial product

Model Name	Description
SV2-AGT-50	SmartView™ management software with 50 nodes (by IP address)
SV2-AGT-100	SmartView™ management software with 100 nodes (by IP address)
SV2-AGT-200	SmartView™ management software with 200 nodes (by IP address)
SV2-AGT-500	SmartView™ management software with 500 nodes (by IP address)
SV2-AGT-1000	SmartView™ management software with 1000 nodes (by IP address)
SV2-AGT-1500	SmartView™ management software with 1500 nodes (by IP address)
SV2-AGT-2000	SmartView™ management software with 2000 nodes (by IP address)

Preliminary



ICS-RG24044X

24x 10/100/1000Base-T(X) + 4x 100/1000Base-X SFP + 4x 1G/2.5G/10G SFP+ Layer 3 Core Switch

ICS-G24044X

24x 10/100/1000Base-T(X) + 4x 100/1000Base-X SFP + 4x 1G/2.5G/10G SFP+ Layer 2 Core Switch



CTC Industrial Rackmount Ethernet Core Switch ICS-RG24044X / ICS-G24044X is a hardened design Layer 3 / Layer 2 managed core switch for rigorous demands of centralize and critical applications. The rackmount Ethernet core switch supports 4-port 10Gbps SFP+ and 24 Gigabit Ethernet (10/100/1000BaseTX) RJ-45 port plus 4 dual speed (100/1000Base-X) SFP fiber optical slots, thus providing 32 ports total for Ethernet connectivity. ICS-RG24044X / ICS-G24044X is an ideal solution for Smart City, surveillance, Intelligent traffic control systems and production automation applications.

ICS-RG24044X / ICS-G24044X provides up to 10KB jumbo frame support, a 32K MAC address table and 4MB packet memory buffer. Moreover, the full Gigabit capability supports Link Aggregation (Dynamic IEEE 802.3ad LACP) with up to 14 trunk group (maximum 8 ports per group) to increase bandwidth for providing high performance quick transfer of large amounts of video, voice and data across a network.

ICS-RG24044X / ICS-G24044X supports a variety of Ethernet ring redundancy functions, including STP/RSTP/MSTP/ERPS and enhanced μ -Ring/ μ -Chain/Sub-Ring that provide less than 50ms recovery time with up to 250 nodes in a ring. Redundant power input increase system reliability and the availability of your network backbone.

Features

- 24x10/100/1000Base-T RJ-45+ 4x100/1000Base-X SFP + 4x 1G/2.5G/10GBase-X SFP+
- Redundant isolated 24/48VDC, or/and isolated 110/220VAC power inputs
- **Supports negative voltage power input**
- Rugged metal, IP30 protection & Fanless design
- UL60950-1, EN60950-1, CE, FCC, Rail Traffic EN50121-4 certified
- Heavy industrial grade EMS, EMI, EN61000-6-2, EN61000-6-4 certified
- **4KV surge protection for RJ45 and SFP ports**
- **2.25K VDC Hi-pot isolation protection for Ethernet ports and power**
- Supports Static Routing ,RIP v1, RIP v2, OSPF v2, OSPF v3 (ICS-RG24044X)
- Supports Layer 3 redundancy VRRP v3 (ICS-RG24044X)
- STP, RSTP, MSTP, ITU-T G.8032 Ethernet Ring Protection Switching (ERPS) for network redundancy
- Provides 14 instances each can support μ -Ring, u-Chain or Sub-Ring for flexible networking applications
- μ -Ring redundancy, recovery time <50ms in 250 devices
- DHCP Server/Client/Relay/Snooping/Relay option 82
- QoS, Traffic classification QoS, CoS, bandwidth control for Ingress and Egress, Storm Control, Diffserv
- IEEE802.1q VLAN, MAC based VLAN, IP subnet based VLAN, Protocol based VLAN, VLAN translation, GVRP, MVR
- Dynamic IEEE 802.3ad LACP Link Aggregation, Static Link Aggregation
- IGMP snooping V1/V2/V3, IGMP Filtering/ Throttling, IGMP query, IGMP proxy reporting, MLD snooping V1/V2
- Flexibility security: Port based and MAC based IEEE802.1X, RADIUS, ACL, TACACS+, HTTP/HTTPS, SSL/SSH v2
- Software upgrade via TFTP and HTTP, redundant firmware to avoid in case of upgrade failure
- Supports IEEE1588 PTP V2 for precise time synchronization to operate in Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master, Slave mode by each port
- RMON, MIB II, Port mirroring, Event syslog, DNS, NTP V4.0, SNTP, IEEE802.1ab LLDP
- CLI, Web based management, SNMP v1/v2c/v3, Telnet server for management
- Supports Modbus/TCP protocols for management
- Provides SmartConfig for quick and easy mass Configuration*
- Supports SmartView for Centralized Management*
- Supporting Central EMS for management of up to 50 SmartView Server, and maximum up to 25,000 device*

Specifications

Standard	IEEE 802.3	10Base-T 10Mbit/s Ethernet	Standard	IEEE 802.1Q	Virtual LANs (VLAN)
	IEEE 802.3u	100Base-TX, 100Base-FX, Fast Ethernet		IEEE 802.1X	Port based and MAC based Network Access Control, Authentication
	IEEE 802.3ab	1000Base-T Gbit/s Ethernet over twisted pair		IEEE802.3ac	Max frame size extended to 1522Bytes
	IEEE 802.3z	1000Base-X Gbit/s Ethernet over Fiber-Optic		IEEE 802.3ad	Link aggregation for parallel links with LACP(Link Aggregation Control Protocol)
	IEEE802.3ae	10 Gbit/s Ethernet over fiber		IEEE802.3X	Flow control for full duplex
	IEEE 802.1d	STP (Spanning Tree Protocol)		IEEE 802.1ad	Stacked VLANs, Q-in-Q
	IEEE 802.1w	RSTP (Rapid Spanning Tree Protocol)			
	IEEE 802.1s	MSTP (Multiple Spanning Tree Protocol)			
	ITU-T G.8032 / Y.1344	ERPS (Ethernet Ring Protection Switching)			

Standard	IEEE 802.1p	LAN Layer 2 QoS/CoS Protocol for Traffic Prioritization
	IEEE 802.1ab	Link Layer Discovery Protocol (LLDP)
	IEEE 802.3az	EEE (Energy Efficient Ethernet)
VLAN ID	4094	IEEE802.1Q VLAN VID
Switch Architecture	Back-plane (Switching Fabric): 136Gbps (Full wire-speed)	
Data Processing	Store and Forward	
Network Connector	10GbE SFP+ : 4x 1G/2.5G/10G SFP socket Supports DDMI	
	SFP: 4x 100/1000Base-X SFP socket Support DDMI	
	RJ45: 24x 10/100/1000Base-T RJ-45 Support Auto negotiation speed, Auto MDI/MDI-X function	
Console	RS-232 (RJ-45)	
Network Cable	UTP/STP Cat.5e cable or above EIA/TIA-568 100-ohm (100m)	
Protocols	CSMA/CD	
Reverse Polarity Protection	For input power	
Overload Current Protection	Supported	
CPU Watch Dog	Supported	
Power Supply	Redundant 2x AC input power (-AA model) 1x AC input power (-A model) Redundant 1x AC and 1x DC input power (-AD model) Redundant 2x DC input power (-DD model) 1x DC input power (-D model)	
	AC input power (A) : Isolated 110/220VAC (88VAC~264VAC) DC input power (D) : Isolated 24/48VDC (18~60VDC), Removable Terminal Block Supports negative voltage power input	
Power Consumption	TBD	
LED	Per unit: Power 1 (Green), Power 2 (Green), Act/Alarm (Green/Red), Ring Master (Green) P1~P24 Per RJ-45 port: 10/100 Link/Active (Green) 1000 Link/Active (Amber) P25~P28 Per SFP Fiber port: 100Base-X Link/Active (Green) 1000Base-X Link/Active (Amber) P29~P32 Per SFP+ Fiber port: 1000Base-X Link/Active (Amber) 10GBase-X Link/Active (Blue)	

Jumbo Frame	10K Byte
MAC Address Table	32K
Memory Buffer	4M Bytes for packet buffer
Warning Message	System Syslog, SMTP/ e-mail event message, alarm relay
Alarm Relay Contact	Relay outputs with current carrying capacity of 1A @24VDC, 2-Pin removable terminal block
Operating Temperature	-40 ~ 60°C
Operating Humidity	5% to 95% (Non-condensing)
Storage Temperature	-40 ~ 85°C
Housing	Rugged Metal, IP30 Protection, Fanless
Dimensions	TBD
Weight	TBD
Installation Mounting	19" rack mount
MTBF	TBD
Warranty	5 years
Certification	
EMC	CE (EN55024, EN55032)
EMI (Electromagnetic Interference)	FCC Part 15 Subpart B Class A, CE
Railway Traffic	EN50121-4
Immunity for Heavy Industrial Environment	EN61000-6-2
Emission for Heavy Industrial Environment	EN61000-6-4
EMS (Electromagnetic Susceptibility) Protection Level	EN61000-4-2 (ESD) Level 3, Criteria B EN61000-4-3 (RS) Level 3, Criteria A EN61000-4-4 (Burst) Level 3, Criteria A EN61000-4-5 (Surge) Level 3, Criteria B EN61000-4-6 (CS) Level 3, Criteria A EN61000-4-8 (PFMF, Magnetic Field) Field Strength: 300A/m, Criteria A
Safety	UL60950-1, EN60950-1
Hi pot protection	DC 2.25KV for power to chassis ground, Ethernet port to chassis ground
4KV surge protection	Supported for RJ45 and SFP ports
Shock	IEC 60068-2-27
Freefall	IEC 60068-2-32
Vibration	IEC 60068-2-6

Software Specifications

Topology	
Layer 3 Routing	Static Routing ,RIP v1, RIP v2, OSPF v2, OSPF v3 (ICS-RG24044X)
Layer 3 redundancy	VRRP v3 (ICS-RG24044X)
VLAN	IEEE 802.1q VLAN, up to 4094 802.1Q VLAN VID IEEE 802.1q VLAN, up to 4094 Groups IEEE 802.1ad Q-in-Q MAC-based VLAN, up to 256 entries IP Subnet-based VLAN, up to 128 entries Protocol-based VLAN(Ethernet, SNAP, LLC), up to 128 entries VLAN Translation, up to 256 entries GVRP (GARP VLAN Registration Protocol) MVR (Multicast VLAN Registration)
Link Aggregation (Port Trunk)	Static (Hash with SA, DA, IP, TCP/UDP port), up to 14 trunk group Dynamic (IEEE 802.3ad LACP), up to 14 trunk group Per group up-to 8 port
Spanning Tree	IEEE802.1d STP, IEEE802.1w RSTP, IEEE802.1s MSTP
Multiple μ-Ring	Up to 14 instances each support μ-Ring, μ-Chain or Sub-Ring for flexible networking applications. Recovery time <50ms The maximum number of device is allowed 250 in a Ring.

Loop Protection	Supported
ITU-T G.8032 / Y.1344 ERPS (Ethernet Ring Protection)	Recovery time <50ms Single Ring, Sub-Ring, Multiple ring topology
QoS Features	
Class of Service	IEEE802.1p 8 active priorities queues for per port
Traffic Classification QoS	IEEE802.1p based CoS IP Precedence based CoS IP DSCP based CoS
Traffic Classification QoS	QCL(QoS Control List): Frame Type, Source/Destination MAC, VLAN ID, PCP, DEI Protocol, Source IP, IP Fragment, DSCP, TCP/UDP port number
Bandwidth Control for Ingress	Per port based
Bandwidth Control for Egress	Per port based Per queue / Per port shaper
DiffServ (RF 2474) Remarking	
Storm Control	for Unicast, Broadcast, Multicast

IP Multicasting Features	
IGMP / MLD Snooping	IGMP Snooping v1, v2, v3 / MLD Snooping v1, v2 Port Filtering Profile Throttling, Fast Leave Maximum Multicast Group : up to 1022 entries Query / Static Router Port
Security Features	
IEEE 802.1X	Port-Based MAC-Based
ACL	Number of rules : up to 256 entries for L2 / L3 / L4 L2 : Mac address SA/DA/VLAN L3 : IP address SA/DA, Subnet L4 : TCP/UDP
RADIUS authentication & accounting	
TACACS+ authentication & accounting, TACACS+ 3.0	
HTTPS, HTTP	Supported
SSL / SSH v2	Supported
User Name Password Authentication	Local Authentication Remote Authentication (via RADIUS / TACACS+)
Management Interface Access Filtering	
Management Features	
CLI	Cisco® like CLI
Web Based Management	
Telnet	Server
SNMP	V1, V2c, V3
Modbus/TCP	Support for management and monitoring

SW & Configuration Upgrade	TFTP, HTTP Redundant firmware in case of upgrade failure
RMON	RMON I (1, 2, 3, 9 group), RMON II
MIB	RFC1213 MIB II, Private MIB
UPnP	Supported
DHCP	Server/Client/Relay/Relay option 82/Snooping
IP Source Guard	Supported
Mirroring	Local and Remote
Event Syslog	Syslog server (RFC3164) (Support 1 server)
Warning Message	System syslog, e-mail, alarm relay
DNS	Client, Proxy
IEEE1588 PTP V2	Supports 5 operating mode in each port : Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master, Slave
NTP V4.0, SNTP	Client
LLDP (IEEE 802.1ab)	Link Layer Discovery Protocol LLDP-MED
IPv6 Features	
IPv6 Management	Telnet Server/ICMP v6
SNMP over IPv6	Supported
HTTP over IPv6	Supported
SSH over IPv6	Supported
IPv6 Telnet	Supported
IPv6 NTP, SNTP	Client
IPv6 TFTP	Supported
IPv6 QoS	Supported
IPv6 ACL	Number of rules: up to 256 entries for L2 / L3 / L4 L2 : Mac address SA/DA/VLAN L3 : IP address SA/DA, Subnet L4 : TCP/UDP

Application

Figure 1 : 10G Backbone application


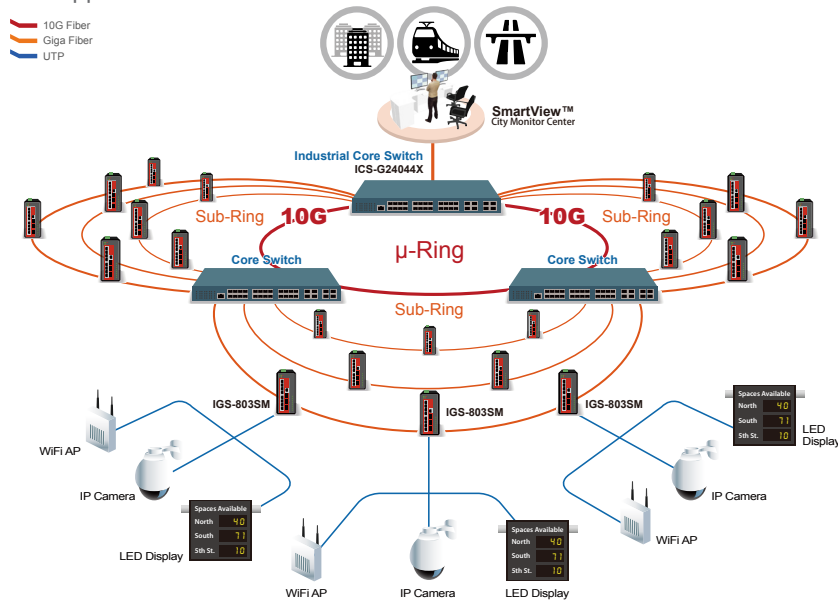



Figure 2 : 10G Backbone with μ -Ring topology

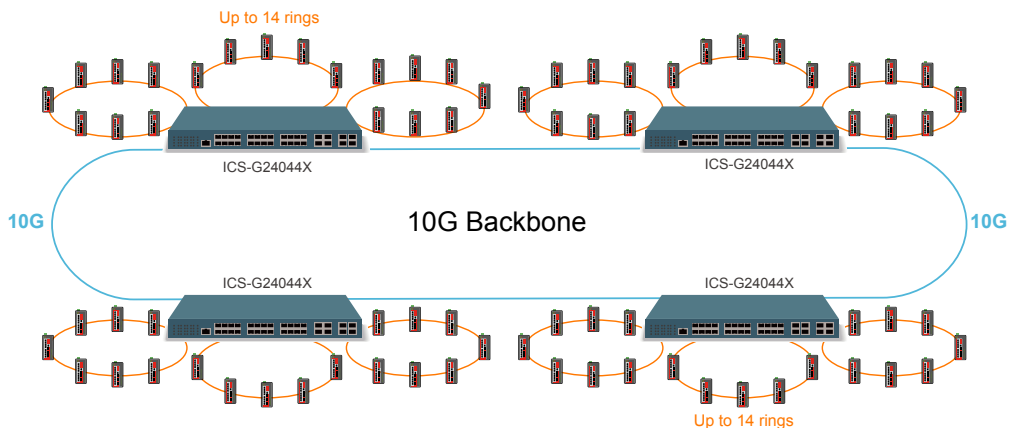

Ordering Information

Model Name	Managed	Total Ports (Maximum)	GbE		10GbE	Input power		Certification			
			10/100/1000 Base-T(X) RJ45	100/1000 Base-X SFP	1G/2.5G/10GBase-X SFP+	24/48VDC	110/220VAC	Safety UL60950-1 EN60950-1	EN50121-4	EN61000-6-2 EN61000-6-4	CE, FCC
ICS-RG24044X-AA	Layer 3	32	24	4	4		2	V	V	V	V
ICS-RG24044X-AD	Layer 3	32	24	4	4	1	1	V	V	V	V
ICS-RG24044X-DD	Layer 3	32	24	4	4	2		V	V	V	V
ICS-G24044X-AA	V	32	24	4	4		2	V	V	V	V
ICS-G24044X-AD	V	32	24	4	4	1	1	V	V	V	V
ICS-G24044X-DD	V	32	24	4	4	2		V	V	V	V

Model Naming Rule

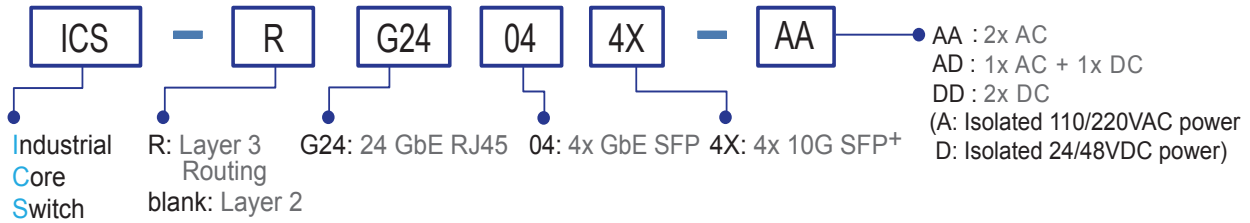


Optional Accessories

Industrial SFP Transceiver

The ISFP series of industrial grade SFP modules have been fully tested with the series product for guaranteed compatibility and performance. The best performance can be guaranteed even in mission-critical applications.

ISFP-M9000-85-D(E)	Industrial SFP 10GbE 10GBase-SR, M/M, 300 meter (OM3 fiber), wave length 850nm, DDMI, -10~70°C (-40~85°C)
ISFP-S9010-31-D(E)	Industrial SFP 10GbE 10GBase-LR, S/M, 10km, wave length 1310nm, DDMI, -10~70°C (-40~85°C)
ISFP-M7000-85-D(E)	Industrial SFP GbE 1000Base-SX, M/M, 500 meter, wave length 850nm, 7.5dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-S7020-31-D(E)	Industrial SFP 1000Base-LX, S/M, 20km, wave length 1310nm, 15dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-T7T00-00-(E)	Industrial SFP 1000Base-T UTP 100meter, -10~70°C (-40~85°C)
ISFP-M5002-31-D(E)	Industrial SFP 155M 100Base-FX, MM, 2km, wave length 1310nm, 12dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-S5030-31-D(E)	Industrial SFP 155M 100Base-FX, SM, 30km, 1310nm, 19dB, LC, DDMI, -10~70°C (-40~85°C)

SFP Naming Rule

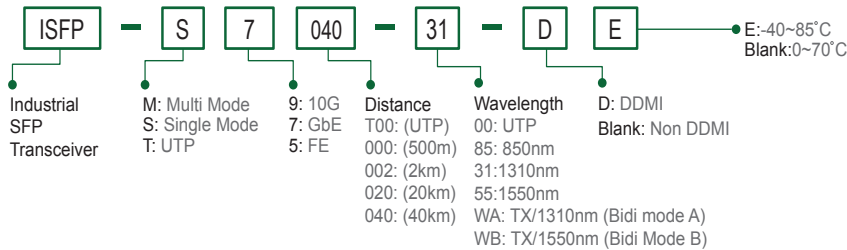

Preliminary



ICS-G24044X-24PH

24x 10/100/1000Base-T(X) + 4x 100/1000Base-X SFP
+ 4x 1G/2.5G/10G SFP+ with 24x PoE+ Core Switch



CTC Industrial Rackmount Ethernet Core Switch ICS-G24044X-24PH is a hardened design Layer 2 managed core switch with PoE+/PSE for rigorous demands of centralize and critical applications. The rackmount Ethernet core switch ICS-G24044X-24PH supports 4-port 10Gbps SFP+ and 24 Gigabit Ethernet (10/100/1000BaseTX) with 24 PoE+ RJ-45 port plus 4 dual speed (100/1000Base-X) SFP fiber optical slots, thus providing 32 ports total for Ethernet connectivity. ICS-G24044X-24PH is an ideal solution for Smart City, surveillance, Intelligent traffic control systems and production automation applications. ICS-G24044X-24PH supports up to 24 PoE/PoE+ (IEEE 802.3af/IEEE 802.3at) ports which provide 15.4/30watts power output per port for connecting with heavy-duty industrial PoE devices, such as PTZ IP surveillance cameras, high-performance wireless access points, digital signage and IP phones. The ICS-G24044X-24PH is designed especially for harsh outdoor cabinet applications with 4kV surge protection to ensure the uninterrupted reliability of PoE systems.

ICS-G24044X-24PH provides up to 10KB jumbo frame support, a 32K MAC address table and 4MB packet memory buffer. Moreover, the full Gigabit capability supports Link Aggregation (Dynamic IEEE 802.3ad LACP) with up to 14 trunk group (maximum 8 ports per group) to increase bandwidth for providing high performance quick transfer of large amounts of video, voice and data across a network.

ICS-G24044X-24PH supports a variety of Ethernet ring redundancy functions, including STP/RSTP/MSTP/ERPS and enhanced μ-Ring/μ-Chain/ Sub-Ring that provide less than 50ms recovery time with up to 250 nodes in a ring. Redundant power input increase system reliability and the availability of your network backbone.

Features

- 24x10/100/1000Base-T RJ-45 + 4x100/1000Base-X SFP + 4x 1G/2.5G/10GBase-X SFP+ with 24x PoE+
- Maximum up to 24x IEEE802.3af / 802.3at PoE+ output, 30W per port, 400W PoE power budget in total
- Redundant dual input power 48VDC (44~57VDC)
- **Supports negative voltage power input**
- Rugged metal, IP30 protection & Fanless design
- UL60950-1, EN60950-1, CE, FCC, Rail Traffic EN50121-4 certified
- Heavy industrial grade EMS, EMI, EN61000-6-2, EN61000-6-4 certified
- **4KV surge protection for RJ45 and SFP ports**
- **2.25K VDC Hi-pot isolation protection for Ethernet ports and power**
- STP, RSTP, MSTP, ITU-T G.8032 Ethernet Ring Protection Switching (ERPS) for network redundancy
- Provides 14 instances each can support μ-Ring, μ-Chain or Sub-Ring for flexible networking applications
- μ-Ring redundancy, recovery time <50ms in 250 devices
- DHCP Server/Client/Relay/Snooping/Relay option 82
- QoS, Traffic classification QoS, CoS, bandwidth control for Ingress and Egress, Storm Control, DiffServ
- IEEE802.1q VLAN, MAC based VLAN, IP subnet based VLAN, Protocol based VLAN, VLAN translation, GVRP, MVR
- Dynamic IEEE 802.3ad LACP Link Aggregation, Static Link Aggregation
- IGMP snooping V1/V2/V3, IGMP Filtering/ Throttling, IGMP query, IGMP proxy reporting, MLD snooping V1/V2
- Flexibility security: Port based and MAC based IEEE802.1X, RADIUS, ACL, TACACS+, HTTP/HTTPS, SSL/SSH v2
- Software upgrade via TFTP and HTTP, redundant firmware to avoid in case of upgrade failure
- Supports IEEE1588 PTP V2 for precise time synchronization to operate in Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master, Slave mode by each port
- RMON, MIB II, Port mirroring, Event syslog, DNS, NTP 4.0, SNTP, IEEE802.1ab LLDP
- CLI, Web based management, SNMP v1/v2c/v3, Telnet server for management
- Supports Modbus/TCP protocols for management
- Provides SmartConfig for quick and easy mass Configuration*
- Supports SmartView for Centralized Management*
- Supporting Central EMS for management of up to 50 SmartView Server, and maximum up to 25,000 device*

Specifications

Standard	IEEE 802.3	10Base-T 10Mbit/s Ethernet
	IEEE 802.3u	100Base-TX, 100Base-FX, Fast Ethernet
	IEEE 802.3ab	1000Base-T Gbit/s Ethernet over twisted pair
	IEEE 802.3z	1000Base-X Gbit/s Ethernet over Fiber-Optic
	IEEE802.3ae	10 Gbit/s Ethernet over fiber
	IEEE 802.1d	STP (Spanning Tree Protocol)

Standard	IEEE 802.1w	RSTP (Rapid Spanning Tree Protocol)
	IEEE 802.1s	MSTP (Multiple Spanning Tree Protocol)
	ITU-T G.8032 / Y.1344	ERPS (Ethernet Ring Protection Switching)
	IEEE 802.1Q	Virtual LANs (VLAN)
	IEEE 802.1X	Port based and MAC based Network Access Control, Authentication

Standard	IEEE802.3ac	Max frame size extended to 1522Bytes
	IEEE 802.3ad	Link aggregation for parallel links with LACP(Link Aggregation Control Protocol)
	IEEE802.3af	PoE (Power over Ethernet)
	IEEE802.3at	PoE+ (Power over Ethernet enhancement)
	IEEE802.3X	Flow control for full duplex
	IEEE 802.1ad	Stacked VLANs, Q-in-Q
	IEEE 802.1p	LAN Layer 2 QoS/CoS Protocol for Traffic Prioritization
	IEEE 802.1ab	Link Layer Discovery Protocol (LLDP)
	IEEE 802.3az	EEE (Energy Efficient Ethernet)
	VLAN ID	4094
Switch Architecture	Back-plane (Switching Fabric): 136Gbps (Full wire-speed)	
Data Processing	Store and Forward	
Network Connector	10GbE SFP+: 4x 1G/2.5G/10G SFP socket Supports DDMI SFP: 4x 100/1000Base-X SFP socket Support DDMI RJ45: 24x 10/100/1000Base-T RJ-45 Support Auto negotiation speed, Auto MDI/MDI-X function PoE: 24x IEEE 802.3at /IEEE 802.3af PoE+ End-Span, Alternative A mode. Maximum 30W per port, 400W PoE power budget in total RJ45 Pin Assignment: PoE Positive (V+): RJ-45 pin 1, 2. PoE Negative (V-): RJ-45 pin 3, 6. Data (1,2,3,6,4,5,7,8)	
Console	RS-232 (RJ-45)	
Network Cable	UTP/STP Cat.5e cable or above EIA/TIA-568 100-ohm (100m)	
Protocols	CSMA/CD	
Reverse Polarity Protection	For input power	
Overload Current Protection	Supported	
CPU Watch Dog	Supported	
Power Supply	Redundant dual input power 48VDC (44~57VDC) (Removable terminal block) (50~57VDC input is recommended for IEEE802.3at PoE+ in 30W applications) Supports negative voltage power input (for example application in telecom system)	
Power Consumption	TBD	

LED	Per unit: Power 1 (Green), Power 2 (Green), Act /Alarm (Green/Red), Ring Master (Green) P1~P24 Per RJ-45 port: 10/100 Link/Active (Green) 1000 Link/Active (Amber) P25~P28 Per SFP Fiber port: 100Base-X Link/Active (Green) 1000Base-X Link/Active (Amber) P29~P32 Per SFP+ Fiber port: 1000Base-X Link/Active (Amber) 10GBase-X Link/Active (Blue) PoE port (P1~P24): PoE ON (Green)
Jumbo Frame	10K Byte
MAC Address Table	32K
Memory Buffer	4M Bytes for packet buffer
Warning Message	System Syslog, SMTP/ e-mail event message, alarm relay
Alarm Relay Contact	Relay outputs with current carrying capacity of 1A @24VDC, 2-Pin removable terminal block
Operating Temperature	-40 ~ 60°C
Operating Humidity	5% to 95% (Non-condensing)
Storage Temperature	-40 ~ 85°C
Housing	Rugged Metal, IP30 Protection, Fanless
Dimensions	TBD
Weight	TBD
Installation Mounting	19" rack mount
MTBF	TBD
Warranty	5 years
Certification	
EMC	CE (EN55024, EN55032)
EMI (Electromagnetic Interference)	FCC Part 15 Subpart B Class A, CE
Railway Traffic	EN50121-4
Immunity for Heavy Industrial Environment	EN61000-6-2
Emission for Heavy Industrial Environment	EN61000-6-4
EMS (Electromagnetic Susceptibility) Protection Level	EN61000-4-2 (ESD) Level 3, Criteria B EN61000-4-3 (RS) Level 3, Criteria A EN61000-4-4 (Burst) Level 3, Criteria A EN61000-4-5 (Surge) Level 3, Criteria B EN61000-4-6 (CS) Level 3, Criteria A EN61000-4-8 (PFMF, Magnetic Field) Field Strength: 300A/m, Criteria A
Safety	UL60950-1, EN60950-1
Hi pot protection	DC 2.25KV for power to chassis ground, Ethernet port to chassis ground
4KV surge protection	Supported for PoE, RJ45 and SFP
Shock	IEC 60068-2-27
Freelfall	IEC 60068-2-32
Vibration	IEC 60068-2-6

Software Specifications

Topology	
VLAN	IEEE 802.1q VLAN, up to 4094 IEEE 802.1Q VLAN VID IEEE 802.1q VLAN, up to 4094 Groups IEEE 802.1ad Q-in-Q MAC-based VLAN, up to 256 entries IP Subnet-based VLAN, up to 128 entries Protocol-based VLAN(Ethernet, SNAP, LLC), up to 128 entries VLAN Translation, up to 256 entries GVRP (GARP VLAN Registration Protocol) MVR (Multicast VLAN Registration)
Link Aggregation (Port Trunk)	Static (Hash with SA, DA, IP, TCP/UDP port), up to 14 trunk group Dynamic (IEEE 802.3ad LACP), up to 14 trunk group Per group up to 8 port

Spanning Tree	IEEE802.1d STP, IEEE802.1w RSTP, IEEE802.1s MSTP
Multiple μ-Ring	Up to 14 instances each support μ-Ring, μ-Chain or Sub-Ring for flexible networking applications. Recovery time <50ms The maximum number of device is allowed 250 in a Ring.
Loop Protection	Supported
ITU-T G.8032 / Y.1344 ERPS (Ethernet Ring Protection)	Recovery time <50ms Single Ring, Sub-Ring, Multiple ring topology
QoS Features	
Class of Service	IEEE802.1p 8 active priorities queues for per port
Traffic Classification QoS	IEEE802.1p based CoS IP Precedence based CoS IP DSCP based CoS

Traffic Classification QoS	QCL(QoS Control List): Frame Type, Source/Destination MAC, VLAN ID, PCP, DEI Protocol, Source IP, IP Fragment, DSCP, TCP/UDP port number
Bandwidth Control for Ingress	Per port based
Bandwidth Control for Egress	Per port based Per queue / Per port shaper
DiffServ (RF 2474) Remarking	
Storm Control	for Unicast, Broadcast, Multicast
IP Multicasting Features	
IGMP / MLD Snooping	IGMP Snooping v1, v2, v3 / MLD Snooping v1, v2 Port Filtering Profile Throttling, Fast Leave Maximum Multicast Group : up to 1022 entries Query / Static Router Port
Security Features	
IEEE 802.1X	Port-Based MAC-Based
ACL	Number of rules : up to 256 entries for L2 / L3 / L4 L2 : Mac address SA/DA/VLAN L3 : IP address SA/DA, Subnet L4 : TCP/UDP
RADIUS authentication & accounting	
TACACS+ authentication & accounting, TACACS+ 3.0	
HTTPS, HTTP	Supported
SSL / SSH v2	Supported
User Name Password Authentication	Local Authentication Remote Authentication (via RADIUS / TACACS+)
Management Interface Access Filtering	Web, Telnet / SSH , CLI RS-232 console
Management Features	
CLI	Cisco® like CLI
Web Based Management	
Telnet	Server
SNMP	V1, V2c, V3
Modbus/TCP	Support for management and monitoring

SW & Configuration Upgrade	TFTP, HTTP Redundant firmware in case of upgrade failure
RMON	RMON I (1, 2, 3, 9 group), RMON II
MIB	RFC1213 MIB II, Private MIB
UPnP	Supported
DHCP	Server/Client/Relay/Relay option 82/Snooping
IP Source Guard	Supported
Mirroring	Local and Remote
Event Syslog	Syslog server (RFC3164) (Support 1 server)
Warning Message	System syslog, e-mail, alarm relay
DNS	Client, Proxy
IEEE1588 PTP V2	Supports 5 operating mode in each port : Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master, Slave
NTP V4.0, SNTP	Client
LLDP (IEEE 802.1ab)	Link Layer Discovery Protocol LLDP-MED
IPv6 Features	
IPv6 Management	Telnet Server/ICMP v6
SNMP over IPv6	Supported
HTTP over IPv6	Supported
SSH over IPv6	Supported
IPv6 Telnet	Supported
IPv6 NTP, SNTP	Client
IPv6 TFTP	Supported
IPv6 QoS	Supported
IPv6 ACL	Number of rules: up to 256 entries for L2 / L3 / L4 L2 : Mac address SA/DA/VLAN L3 : IP address SA/DA, Subnet L4 : TCP/UDP
Advanced PoE Management	PoE PD failure auto checking, and auto reset when PD fail PoE port on/off weekly scheduling PoE Configuration PoE Enable/Disable Power limit by classification Power limit by management Total PoE Power budget limitation management: Maximum 400W power budget Power feeding priority

Application

Figure 1 : 10G Backbone application


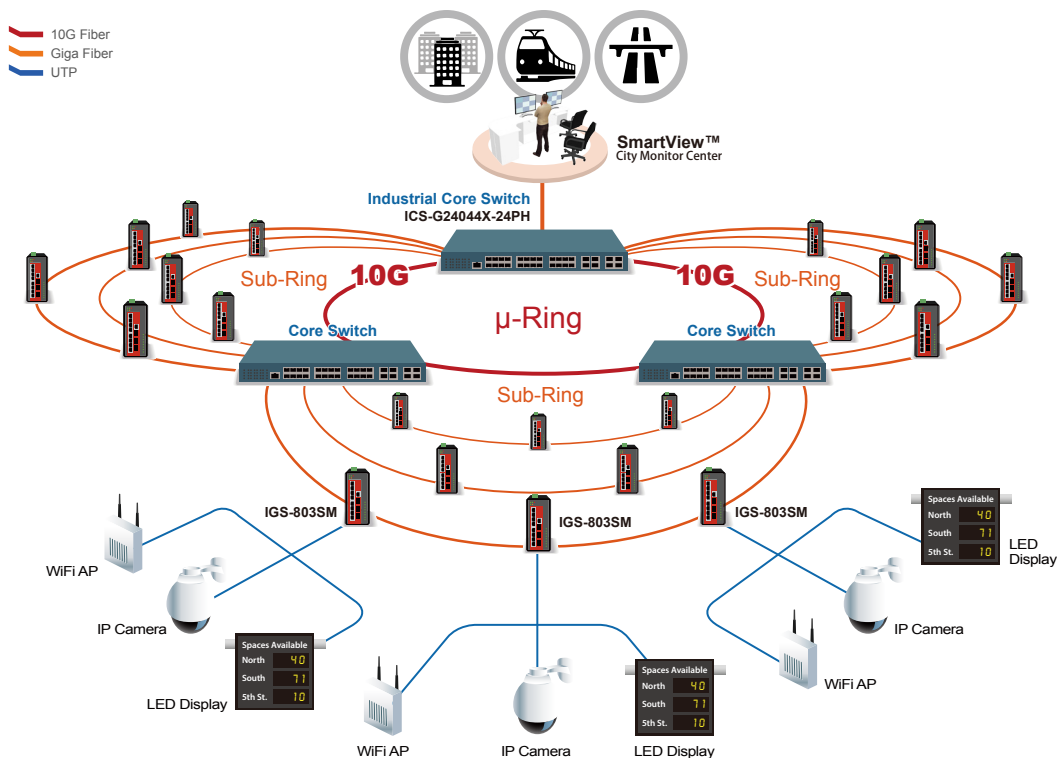



Figure 2 : 10G Backbone with μ -Ring topology

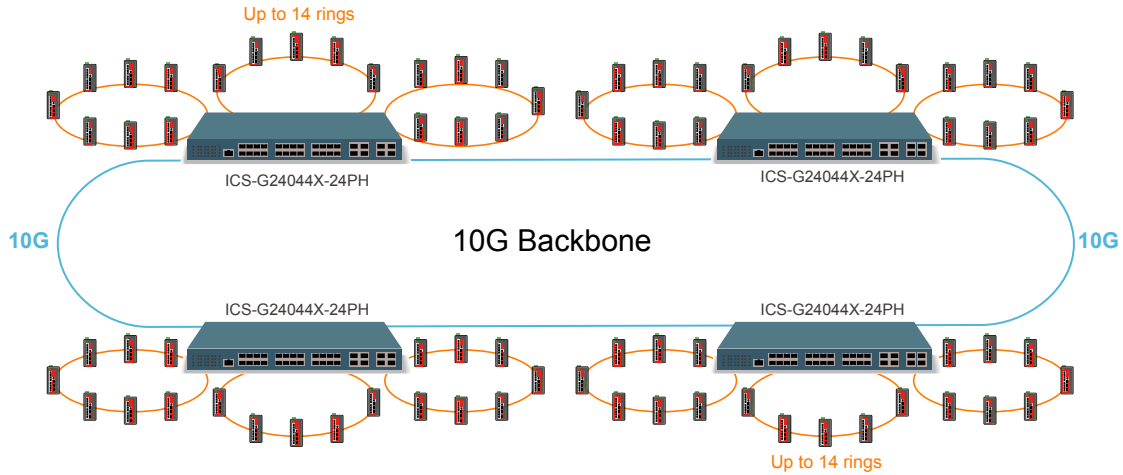

Ordering Information

Model Name	Total Port	GbE Port		10GbE	PoE port		Input power	Certification				Operating Temperature
		10/100/1000 Base-T(X) RJ45	100/1000 Base-X SFP	G/2.5G/10GBase-X SFP+	IEEE 802.3at/af	Power Budget		Safety UL60950-1 EN60950-1	EN50121-4	EN61000-6-2 EN61000-6-4	CE, FCC	
ICS-G24044X-24PH	32	24	4	4	24	400W	2	V	V	V	V	-40~60°C

Model Naming Rule

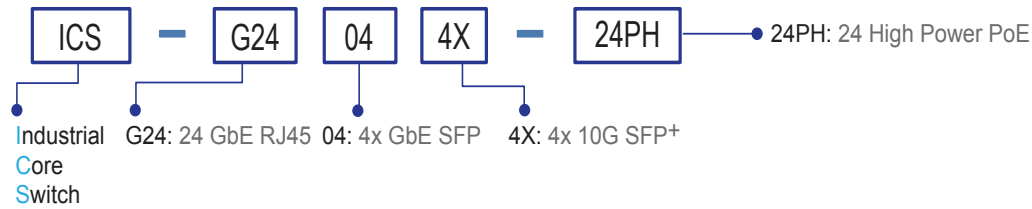


Optional Accessories

Industrial SFP Transceiver

The ISFP series of industrial grade SFP modules have been fully tested with the series product for guaranteed compatibility and performance. The best performance can be guaranteed even in mission-critical applications.

ISFP-M9000-85-D(E)	Industrial SFP 10GbE 10GBase-SR, M/M, 300 meter (OM3 fiber), wave length 850nm, DDMI, -10~70°C (-40~85°C)
ISFP-S9010-31-D(E)	Industrial SFP 10GbE 10GBase-LR, S/M, 10km, wave length 1310nm, DDMI, -10~70°C (-40~85°C)
ISFP-M7000-85-D(E)	Industrial SFP GbE 1000Base-SX, M/M, 500 meter, wave length 850nm, 7.5dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-S7020-31-D(E)	Industrial SFP 1000Base-LX, S/M, 20km, wave length 1310nm, 15dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-T7T00-00-(E)	Industrial SFP 1000Base-T UTP 100meter, -10~70°C (-40~85°C)
ISFP-M5002-31-D(E)	Industrial SFP 155M 100Base-FX, MM, 2km, wave length 1310nm, 12dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-S5030-31-D(E)	Industrial SFP 155M 100Base-FX, SM, 30km, 1310nm, 19dB, LC, DDMI, -10~70°C (-40~85°C)

SFP Naming Rule

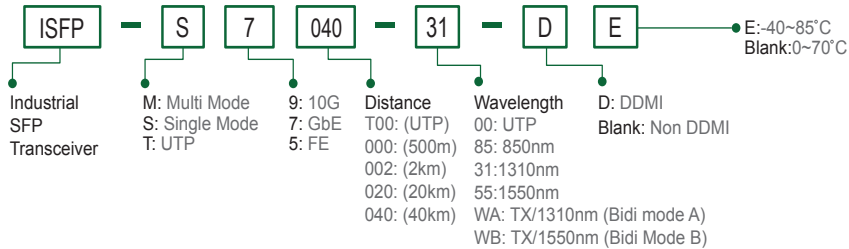



ICS-G24S4X

24x 100/1000Base-X SFP with 4x GbE Combo plus
4x 10GbE SFP+ Core Switch

ICS-G24S2X

24x 100/1000Base-X SFP with 4x GbE Combo plus
2x 10GbE SFP+ Core Switch



ICS-G24S4X & ICS-G24S2X are industrial grade Ethernet Core Switches that are equipped with 20 gigabit SFP ports plus 4 combo gigabit ports and 2 or 4 10G SFP+ ports. ICS series models are all fan-less designs with redundant, isolated power supplies (2 AC, 2 DC, AC + DC) and can be mounted in 19 inch EIA standard rack. This series offers various layer 2 Ethernet functions (IGMP, VLAN, QoS, ACL, Security, IPv6, bandwidth control, and port mirroring) and also support μ -Ring redundancy protocol that can establish 14 independent rings for flexible applications, especially when employed in backbone infrastructure. ICS switches can also be managed centrally and conveniently by CTC Union's SmartView™ Element Management System and mass configured by SmartConfig™.

Housed in rugged rack mountable enclosures, ICS Series are certified with many industrial-grade standards and are ideal for deployments in harsh environments to deliver mission-critical network services. Additionally, with high port density and Gigabit or 10 Gigabit high-speed uplink, ICS-G24S4X & ICS-G24S2X are a reliable and scalable solution for core layer or backbone applications (See figure 1 & 2).

Features

- 24x 100/1000Base-X SFP with 4x Combo (SFP+RJ-45) and 4x 10G Base-X SFP+ (ICS-G24S4X)
- 24x 100/1000Base-X SFP with 4x Combo (SFP+RJ-45) and 2x 10G Base-X SFP+ (ICS-G24S2X)
- Redundancy isolated low voltage 24/48VDC, or/and isolated High voltage AC/DC (110/220 VAC/VDC) power inputs
- **Supports negative voltage power input with isolated RS-232 console port (for example in telecom system)**
- Rugged metal, IP30 protection & Fanless design
- UL60950-1, CE, FCC, Rail Traffic EN50121-4 certified
- Heavy industrial grade EMS, EMI, EN61000-6-2, EN61000-6-4 certified
- STP, RSTP, MSTP, ITU-T G.8032 Ethernet Ring Protection Switching (ERPS) for redundant cabling
- Provides 14 instances that each can support μ -Ring, μ -Chain or Sub-Ring type for flexible uses. Supports up to 14 rings in one device (Please see CTC Union μ -Ring white paper for more details and more topology application)
- μ -Ring for Redundant Cabling, recovery time<50ms in 250 devices
- DHCP Server/Client/Relay/Snooping/Snooping option 82/Relay option 82
- QoS, Traffic classification QoS, CoS, bandwidth control for Ingress and Egress, Storm Control, DiffServ
- IEEE802.1q VLAN, MAC based VLAN, IP subnet based VLAN, Protocol based VLAN, VLAN translation, GVRP, MVR
- Dynamic IEEE 802.3ad LACP Link Aggregation, Static Link Aggregation
- IGMP snooping V1/V2/V3, IGMP Filtering/ Throttling, IGMP query, IGMP proxy reporting, MLD snooping V1/V2
- Flexibility security: Port based and MAC based IEEE802.1X, RADIUS, ACL, TACACS+, HTTP/HTTPS, SSL/SSH v2
- Software upgrade via TFTP and HTTP, redundant firmware to avoid in case of upgrade failure
- Supports IEEE1588 PTP V2 for precise time synchronization to operate in Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master, Slave mode by each port
- RMON, MIB II, Port mirroring, Event syslog, DNS, NTP, SNTP, IEEE802.1ab LLDP
- Supports IPv6 Telnet server /ICMP v6
- CLI, Web based management, SNMP v1/v2c/v3, Telnet server for management
- Provides SmartConfig for quick and easy mass configuration (Please see Catalog chapter 1- Software Management for more details)
- Supports SmartView for Centralized Management (Please see Catalog chapter 1- Software Management for more details)
- Supporting Central EMS for management of up to 50 SmartView Server, and maximum up to 25,000 device (Please see Catalog chapter 1- Software Management for more details)

Specifications

Standard	IEEE 802.3	10Base-T 10Mbit/s Ethernet
	IEEE 802.3u	100Base-TX, 100Base-FX, Fast Ethernet
	IEEE 802.3ab	1000Base-T Gbit/s Ethernet over twisted pair
	IEEE 802.3z	1000Base-X Gbit/s Ethernet over Fiber-Optic
	IEEE802.3ae	10 Gbit/s Ethernet over fiber
	IEEE 802.1d	STP (Spanning Tree Protocol)
	IEEE 802.1w	RSTP (Rapid Spanning Tree Protocol)
	IEEE 802.1s	MSTP (Multiple Spanning Tree Protocol)
	ITU-T G.8032 / Y.1344	ERPS (Ethernet Ring Protection Switching)
	IEEE 802.1Q	Virtual LANs (VLAN)
	IEEE 802.1X	Port based and MAC based Network Access Control, Authentication

Standard	IEEE 802.3ad	Link aggregation for parallel links with LACP(Link Aggregation Control Protocol)
	IEEE 802.1ad	Stacked VLANs, Q-in-Q
	IEEE 802.1p	LAN Layer 2 QoS/CoS Protocol for Traffic Prioritization
	IEEE 802.ab	Link Layer Discovery Protocol (LLDP)
VLAN ID	4094	IEEE802.1Q VLAN VID
Switch Architecture	Back-plane (Switching Fabric): 128Gbps (ICS-G24S4X) 88Gbps (ICS-G24S2X) (Full wire-speed)	
Data Processing	Store and Forward	
Network Connector	24x 100/1000Base-X SFP with 4x GbE Combo (UTP/SFP)+ 4x 10GBase-X SFP+ (ICS-G24S4X) 24x 100/1000Base-X SFP with 4x GbE Combo (UTP/SFP)+ 2x 10GBase-X SFP+ (ICS-G24S2X)	

Network Connector	RJ-45 UTP port support 10/100/1000Base-T(X) , Auto negotiation speed,Auto MDI/MDI-X function GbE port SFP support dual speed (100M/1000M) with DDMI 10GbE port SFP+ support dual speed (1000M/10G) with DDMI		
Console	RS-232 (RJ-45) Isolated RS-232 port grounding for negative voltage power system, or telecom application		
Network Cable	UTP/STP above Cat. 5e cable EIA/TIA-568 100-ohm (100m)		
Protocols	CSMA/CD		
Reverse Polarity Protection	Supported		
Overload Current Protection	Supported		
CPU Watch Dog	Supported		
Power Supply	Redundant 2x isolated High Voltage AC/DC input power (-AA model) Redundant 2x Isolated Low Voltage DC Input power (-DD model) Redundant 1x isolated Low Voltage DC and 1x High Voltage AC/DC input power (-AD model) Low Voltage DC (D): Isolated 24/48V (18~60VDC), Removable Terminal Block High voltage AC/DC (A): Isolated 110/220VAC (88VAC~264VAC) ,isolated 110/220DC (88~300VDC) Supports negative voltage power input with isolated RS-232 console port (for example in telecom system)		
Power Consumption	Input Voltage	ICS-G24S4X	ICS-G24S2X
	24VDC	33.1W	29.8W
	48VDC	33.4	30.1W
	110VAC/VDC	34.4W	31.1W
	220VAC/VDC	34.4W	31.1W
LED	Per unit: Power 1 (Green), Power 2 (Green), Act /Alarm (Green/Red), Ring Master (Green) Per RJ-45 port: 10/100 Link/Active (Green) 1000 Link/Active (Yellow) SFP (P1~24) Fiber Per port: 100Base-X Link/Active (Green) 1000Base-X Link/Active (Yellow) SFP+ (P25~P28) Fiber Per port: 1000Base-X Link/Active (Amber) 10GBase-X Link/Active (Blue)		
Jumbo Frame	10K		
MAC Address Table	32K		
Memory Buffer	4M Bytes for packet buffer		
Warning Message	System Syslog, SMTP/ e-mail event message, alarm relay		

Software Specifications

Topology	
VLAN	IEEE 802.1q VLAN, up to 4094 802.1Q VLAN VID IEEE 802.1q VLAN, up to 4094 Groups IEEE 802.1ad Q-in-Q MAC-based VLAN, up to 256 entries IP Subnet-based VLAN, up to 128 entries Protocol-based VLAN(Ethernet, SNAP, LLC), up to 128 entries VLAN Translation, up to 256 entries GVRP (GARP VLAN Registration Protocol) MVR (Multicast VLAN Registration)
Link Aggregation (Port Trunk)	Static (Hash with SA, DA, IP, TCP/UDP port), up to 14 trunk group Dynamic (IEEE 802.3ad LACP), up to 14 trunk group Per group up-to 8 port
Spanning Tree	IEEE802.1d STP, IEEE802.1w RSTP, IEEE802.1s MSTP
Multiple μ-Ring	up to 14 instances that each supports μ-Ring, μ-Chain or Sub-Ring type for flexible uses, and maximum up to 14 Rings. Recovery time <50ms The maximum number of devices allowed in a Ring supported ring is 250. (Please see CTC Union μ-Ring white paper for more details and more topology application)
Loop Protection	Supported
ITU-T G.8032 / Y.1344 ERPS (Ethernet Ring Protection)	Recovery time <50ms Single Ring, Sub-Ring, Multiple ring topology network
QoS Features	
Class of Service	IEEE802.1p 8 active priorities queues for per port

Alarm Relay Contact	Relay outputs with current carrying capacity of 1 A @24VDC, 2-Pin removable terminal block	
Operating Temperature	-10 ~ 60°C	
Operating Humidity	5% to 95% (Non-condensing)	
Storage Temperature	-40 ~ 85°C	
Housing	Rugged Metal, IP30 Protection, Fanless	
Dimensions	315 x 440 x 44 mm (D x W x H)	
Weight	4.755kg (ICS-G24S4X-AA) 4.51kg (ICS-G24S4X-AD) 4.2kg (ICS-G24S2X-DD)	4.26kg (ICS-G24S4X-DD) 4.695kg (ICS-G24S2X-AA) 4.45kg (ICS-G24S2X-AD)
Installation Mounting	19" rack mount	
MTBF	176,414 Hours (ICS-G24S4X-AA) 190,965 Hours (ICS-G24S4X-AD) 214,649 Hours (ICS-G24S4X-DD) 176,663 Hours (ICS-G24S2X-AA) 191,257 Hours (ICS-G24S2X-AD) 215,018 Hours (ICS-G24S2X-DD) (MIL-HDBK-217)	
Warranty	5 years	
Certification		
EMC	CE	
EMI (Electromagnetic Interference)	FCC Part 15 Subpart B Class A, CE	
Railway Traffic	EN50121-4	
Immunity for Heavy Industrial Environment	EN61000-6-2	
Emission for Heavy Industrial Environment	EN61000-6-4	
EMS (Electromagnetic Susceptibility) Protection Level	EN61000-4-2 (ESD) Level 3, Criteria B EN61000-4-3 (RS) Level 3, Criteria A EN61000-4-4 (Burst) Level 3, Criteria A EN61000-4-5 (Surge) Level 3, Criteria B EN61000-4-6 (CS) Level 3, Criteria A EN61000-4-8 (PFMF, Magnetic Field) Field Strength: 300A/m, Criteria A	
Safety	UL60950-1	
Shock	IEC 60068-2-27	
Freefall	IEC 60068-2-32	
Vibration	IEC 60068-2-6	

Traffic Classification QoS	IEEE802.1p based CoS IP Precedence based CoS IP DSCP based CoS QCL(QoS Control List): Frame Type, Source/Destination MAC, VLAN ID, PCF, DEI QCE(QoS Control Entry): Protocol, Source IP, IP Fragment, DSCP, TCP/UDP port number
Bandwidth Control for Ingress	Per port based
Bandwidth Control for Egress	Per port based Per queue / Per port shaper
DiffServ (RF 2474) Remarking	
Storm Control	for Unicast, Broadcast, Multicast
IP Multicasting Features	
IGMP / MLD Snooping	IGMP Snooping v1, v2, v3 / MLD Snooping v1, v2 Port Filtering Profile Throttling, Fast Leave Maximum Multicast Group : up to 1022 entries Query / Static Router Port
Security Features	
IEEE 802.1X	Port-Based MAC-Based
ACL	Number of rules : up to 256 entries for L2 / L3 / L4 L2 : Mac address SA/DA/VLAN L3: IP address SA/DA, Subnet L4: TCP/UDP
RADIUS authentication & accounting	

TACACS+ authentication & accounting, TACACS+ 3.0	
HTTPS, HTTP	Supported
SSL / SSH v2	Supported
User Name	Local Authentication
Password	Local Authentication
Authentication	Remote Authentication (via RADIUS / TACACS+)
Management	
Interface Access	Web, Telnet / SSH , CLI RS-232 console
Filtering	
Management Features	
CLI	Cisco® like CLI
Web Based Management	
Telnet	Server
SNMP	V1, V2c, V3
SW & Configuration Upgrade	TFTP, HTTP
Redundant firmware in case of upgrade failure	
RMON	RMON I (1, 2, 3, 9 group), RMON II
MIB	RFC1213 MIB II, Private MIB
UPnP	Supported
DHCP	TFTP, HTTP
Redundant firmware in case of upgrade failure	
IP Source Guard	Supported
Port Mirroring	Supported

Event Syslog	Syslog server (RFC3164) (Support 1 server)
Warning Message	System syslog, e-mail, alarm relay
DNS	Client, Proxy
IEEE1588 PTP V2	Supports 5 operating mode in each port : Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master, Slave
NTP, SNTP	Client
LLDP (IEEE 802.1ab)	Link Layer Discovery Protocol LLDP-MED
IPv6 Features	
IPv6 Management	Telnet Server/ICMP v6
SNMP over IPv6	Supported
HTTP over IPv6	Supported
SSH over IPv6	Supported
IPv6 Telnet	Supported
IPv6 NTP, SNTP	Client
IPv6 TFTP	Supported
IPv6 QoS	Supported
IPv6 ACL	Number of rules: up to 256 entries for L2 / L3 / L4 L2 : Mac address SA/DA/VLAN L3: IP address SA/DA, Subnet L4: TCP/UDP

Application

Figure 1 : 10G Backbone application



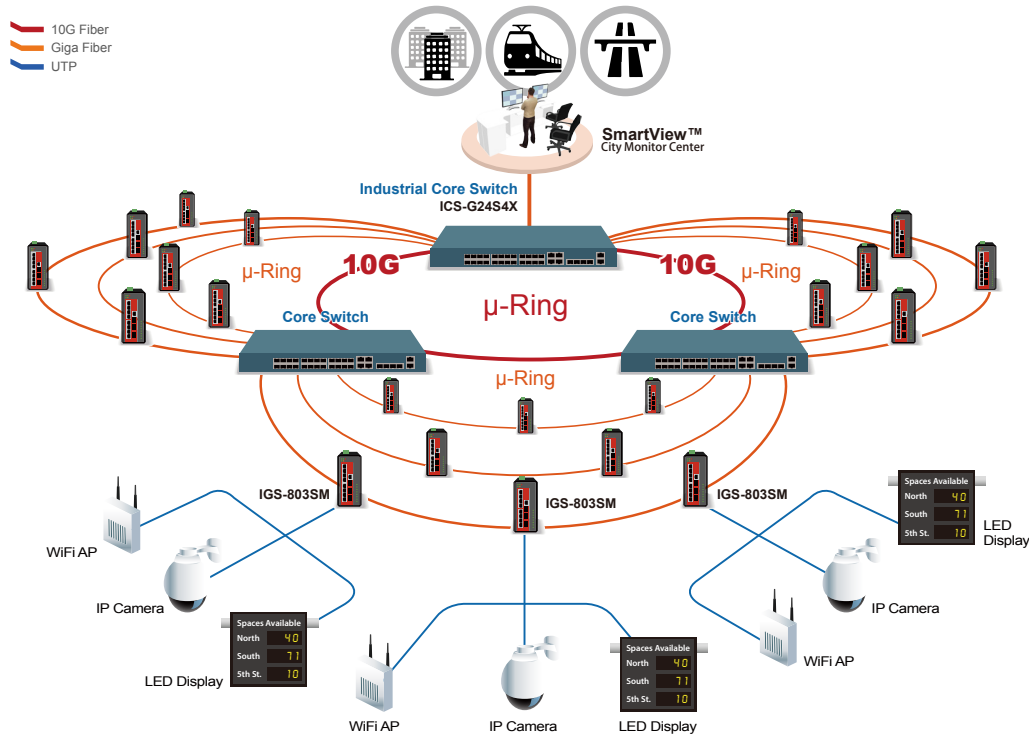


Figure 2 : 10G Backbone with μ-Ring topology

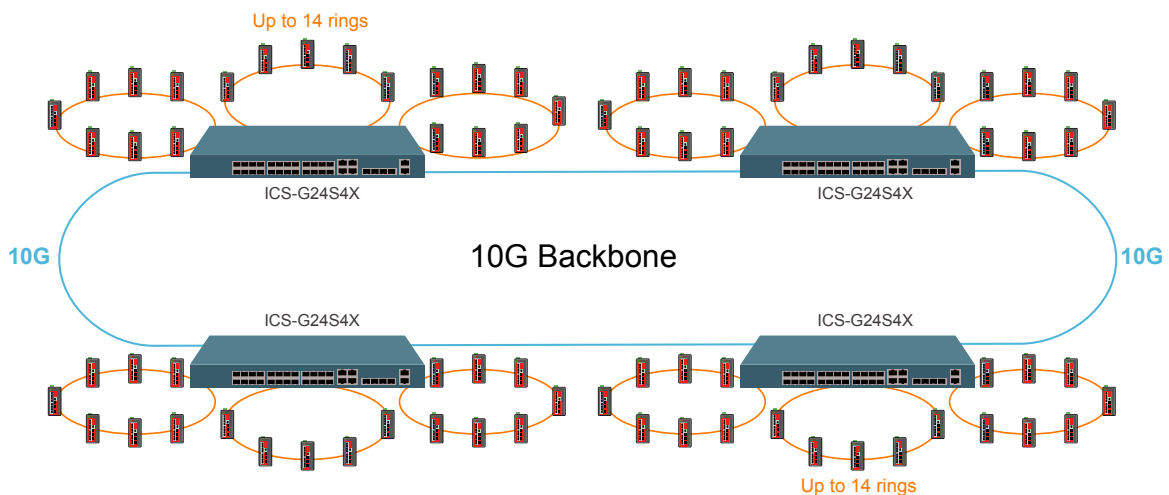


Dimensions


Rear View

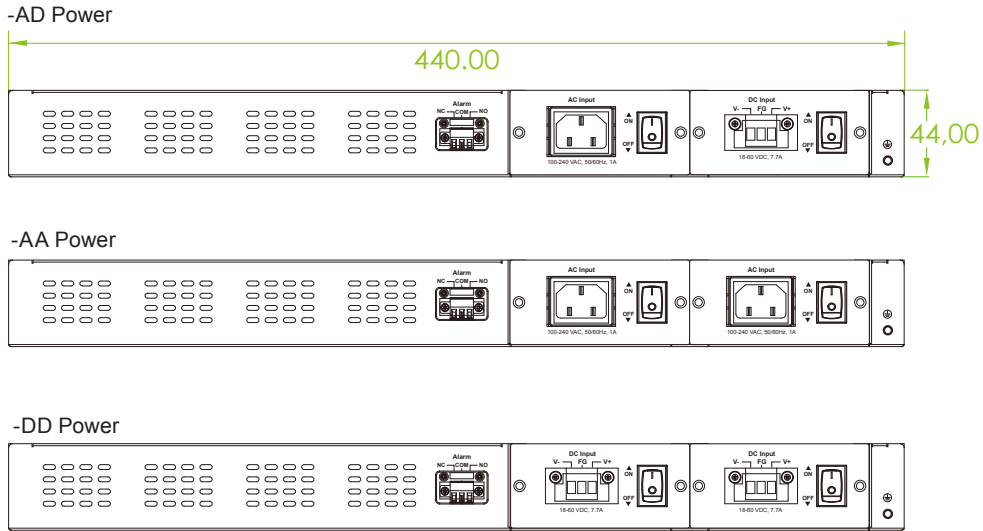


Side View

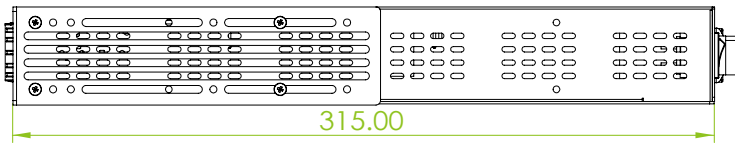

Top View

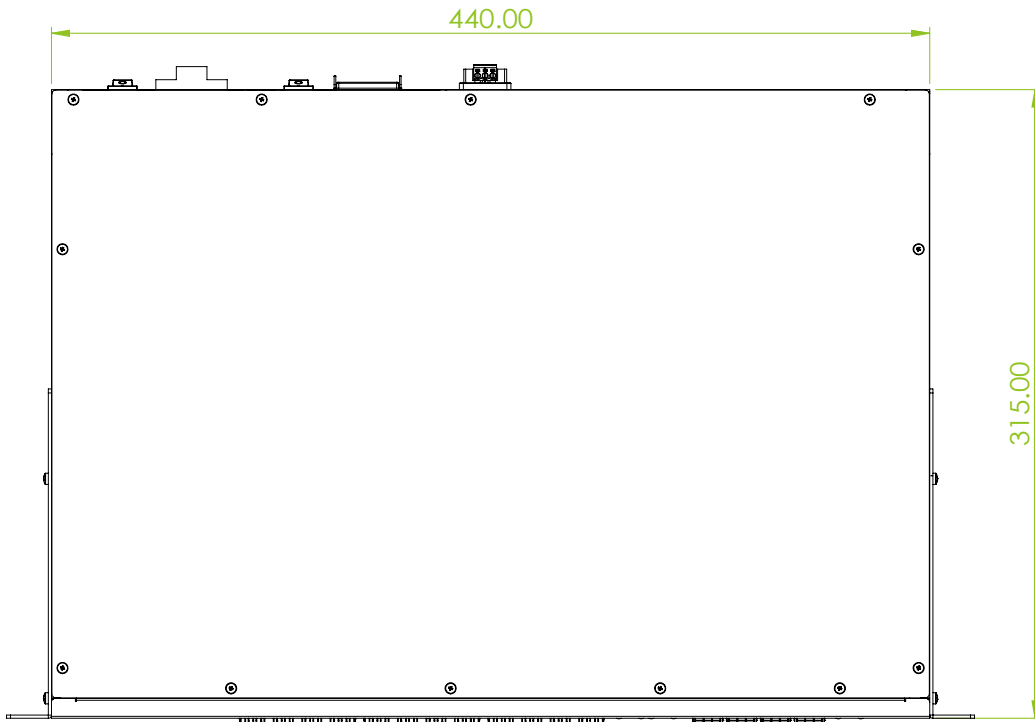


Front View

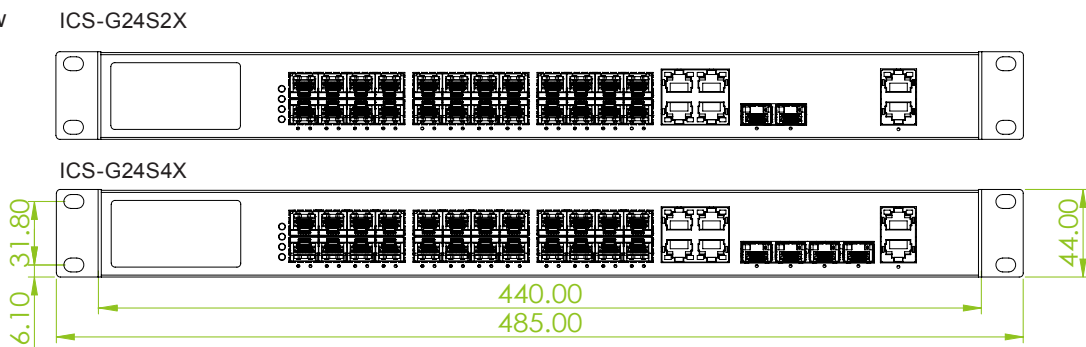

Model Name	Managed	Total Port	GbE Port		10GbE	Input Power		Certification			
			100/1000 Base-X SFP	10/100/1000 Base-T UTP or 100/1000Base-X SFP	IEEE 802.3ae SFP+	DC (Low Volt) isolated 24/48VDC	(High Volt) 110/220V AC/DC	Safety UL60950-1	EN50121-4	EN61000-6-2 EN61000-6-4	CE FCC
ICS-G24S4X-AA	V	28	20	4 Combo	4		2	V	V	V	V
ICS-G24S4X-DD	V	28	20	4 Combo	4	2		V	V	V	V
ICS-G24S4X-AD	V	28	20	4 Combo	4	1	1	V	V	V	V
ICS-G24S2X-AA	V	26	20	4 Combo	2		2	V	V	V	V
ICS-G24S2X-DD	V	26	20	4 Combo	2	2		V	V	V	V
ICS-G24S2X-AD	V	26	20	4 Combo	2	1	1	V	V	V	V

Model Naming Rule

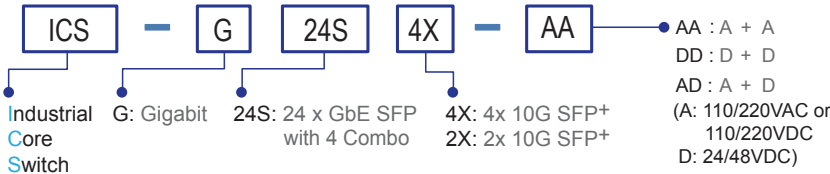

Package List

- ICS-G24S4X or ICS-G24S2X device
- Console cable (RJ-45 to DB9)
- CD (SmartConfig, MIB file, Manual)
- Quickly installation guide
- Rack mount ear with screws
- Power cord (for-A model)


Optional Accessories

Industrial SFP Transceiver

The ISFP series of industrial grade SFP modules have been fully tested with the series product for guaranteed compatibility and performance. The best performance can be guaranteed even in mission-critical applications. (Please see CTC Union’s Industrial SFP datasheet for more details and more items.)

ISFP-M9000-85-D(E)	Industrial SFP 10GbE 10GBase-SR, M/M, 300 meter (OM3 fiber) ,wave length 850nm, DDMI , -10~70°C (-40~85°C)
ISFP-S9010-31-D(E)	Industrial SFP 10GbE 10GBase-LR, S/M, 10km, wave length 1310nm, DDMI, -10~70°C (-40~85°C)
ISFP-M7000-85-D(E)	Industrial SFP GbE 1000Base-SX, M/M, 500 meter, wave length 850nm, DDMI, -10~70°C (-40~85°C)
ISFP-S7020-31-D(E)	Industrial SFP 1000Base-SX, S/M, 20km, wave length 1310nm, DDMI, -10~70°C (-40~85°C)
ISFP-T7T00-00-(E)	Industrial SFP 1000Base-SX, UTP 100meter, -10~70°C (-40~85°C)
ISFP-M5002-31-D(E)	Industrial SFP 155M 100Base-FX, MM, 2km, wave length 1310nm, 12dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-S5030-31-D(E)	Industrial SFP 155M 100Base-FX, SM, 30km, 1310nm, 19dB, LC, DDMI, -10~70°C (-40~85°C)

SFP Naming Rule

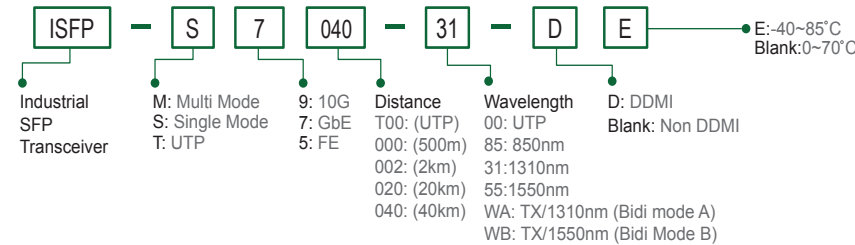



IGS-804SM-SE

8x 10/100/1000Base-T + 4x 100/1000Base-X SFP with SyncE

IGS-1608SM-SE

16x 10/100/1000Base-T + 8x 100/1000Base-X SFP with SyncE



These models are managed industrial grade Gigabit switches with 8/16 10/100/1000Base-T ports and 4/8 Gigabit/Fast SFP ports that provide stable and reliable Ethernet transmission. They also support timing synchronization features (SyncE & IEEE 1588 PTP v2) that allow operators to deliver services with optimal stability and continuity in end to end connectivity. SyncE and IEEE1588 PTP V2 are also increasingly applied in mobile backhaul application where many devices are placed in outdoor cabinets. The switches support a variety of Ethernet functions, including STP/RSTP/MSTP/ITU-T G.8032 ERPS and multiple μ-Ring for redundant cabling, layer 2 Ethernet IGMP, VLAN, QoS, Security, IPv6, bandwidth control, port mirroring, cable diagnostic and Green Ethernet. Housed in rugged DIN rail or wall mountable enclosures, these switches are designed for harsh environments, such as industrial networking, security automation applications, intelligent transportation systems (ITS) and are also suitable for many military and utility market applications where environmental conditions exceed commercial product specifications (See Figure). Standard operating temperature range models (-10 to 60°C) and wide operating temperature range models (-40 to 75°C) fulfill the special needs of industrial automation applications.

Features

- 8x 10/100/1000Base-T RJ-45 and 4x 100/1000Base-X SFP Fiber with SyncE (IGS-804SM-SE)
- 16x 10/100/1000Base-T RJ-45 and 8x 100/1000Base-X SFP Fiber with SyncE (IGS-1608SM-SE)
- Redundant dual DC input power 12/24/48VDC (9.6~60VDC)
- Supports negative voltage power input with isolated RS-232 console port (for example in telecom system)**
- UL60950-1, CE, FCC, Rail Traffic EN50121-4, certified
- Heavy industrial grade EMS, EMI, EN61000-6-2, EN61000-6-4 certified
- 2.25K VDC Hi-pot isolation protection for Ethernet ports and power**
- 4KV surge protection for UTP and Fiber ports
- Cable diagnostic, Measuring cable normal or broken point distance
- Rugged Metal, IP30 Protection & Fanless design
- Supports Green Ethernet IEEE802.3az EEE (Energy Efficient Ethernet) management to optimize the power Consumption
- STP, RSTP, MSTP, ITU-T G.8032 Ethernet Ring Protection Switching (ERPS) for redundant cabling
- Provides 5 instances that each can support μ-Ring, μ-Chain or Sub-Ring type for flexible uses. Supports up to 5 rings in one device (Please see CTC μ-Ring white paper for more details and more topology application)
- μ-Ring for Redundant Cabling, recovery time < 10ms in 250 devices
- DHCP Server/Client/Relay/Snooping/Snooping option 82/Relay option 82
- QoS, Traffic classification QoS, CoS, bandwidth control for Ingress and Egress, Storm Control, DiffServ
- IEEE802.1q VLAN, MAC based VLAN, IP subnet based VLAN, Protocol based VLAN, VLAN translation, GVRP, MVR
- Dynamic IEEE 802.3ad LACP Link Aggregation, Static Link Aggregation
- IGMP snooping V1/V2/V3, IGMP Filtering/ Throttling, IGMP query, IGMP proxy reporting, MLD snooping V1/V2
- Security : Port based and MAC based IEEE802.1X, RADIUS, ACL, TACACS+, HTTP/HTTPS, SSL/SSH v2
- Software upgrade via TFTP and HTTP, redundant firmware to avoid in case of upgrade failure
- Supports Sync Ethernet allow operators to deliver service with optimal stability and continuity in end-to-end connectivity
- Supports IEEE1588 PTP V2 for precise time synchronization to operate in Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master, Slave mode by each port
- RMON, MIB II, Port mirroring, Event syslog, DNS, NTP, SNTP, IEEE802.1ab LLDP
- Supports IPv6 Telnet server /ICMP v6
- CLI, Web based management, SNMP v1/v2c/v3, Telnet server for management
- Provides SmartConfig for quick and easy mass configuration tool (Please see Catalog chapter 1- Software Management for more details)
- Supports SmartView for Centralized management (Please see Catalog chapter 1- Software Management for more details)

Specifications

Standard	IEEE 802.3	10Base-T 10Mbit/s Ethernet	Standard	IEEE 802.3ad	Link aggregation for parallel links with LACP(Link Aggregation Control Protocol)
	IEEE 802.3u	100Base-TX, 100Base-FX, Fast Ethernet		IEEE 802.3x	Flow control for Full Duplex
	IEEE 802.3ab	1000Base-T Gbit/s Ethernet over twisted pair		IEEE 802.1ad	Stacked VLANs, Q-in-Q
	IEEE 802.3z	1000Base-X Gbit/s Ethernet over Fiber-Optic		IEEE 802.1p	LAN Layer 2 QoS/CoS Protocol for Traffic Prioritization
	IEEE 802.1d	STP (Spanning Tree Protocol)		IEEE 802.1ab	Link Layer Discovery Protocol (LLDP)
	IEEE 802.1w	RSTP (Rapid Spanning Tree Protocol)		IEEE 802.3az	EEE (Energy Efficient Ethernet)
	IEEE 802.1s	MSTP (Multiple Spanning Tree Protocol)	VLAN ID	4094	IEEE802.1Q VLAN VID
	ITU-T G.8032 / Y.1344	ERPS (Ethernet Ring Protection Switching)	Switch Architecture		Back-plane (Switching Fabric): 24Gbps (IGS-804SM-SE) 48Gbps (IGS-1608SM-SE) Full wire-speed
	IEEE 802.1Q	Virtual LANs (VLAN)	Data Processing		Store and Forward
	IEEE 802.1X	Port based and MAC based Network Access Control, Authentication			
	IEEE802.3ac	Max frame size extended to 1522Bytes.			

Flow Control	IEEE 802.3x for full duplex mode Back pressure for half duplex mode												
Network Connector	8x 10/100/1000Base-T RJ-45 + 4x 100/1000Base-X SFP connector (IGS-804SM-SE) 16x 10/100/1000Base-T RJ-45+ 8x 100/1000Base-X SFP connector (IGS-1604SM-SE) RJ-45 UTP port support Auto negotiation speed, Auto MDI/MDI-X function, SFP port support dual speed with DDMI												
Console	RS-232 (RJ-45) Isolated RS-232 port grounding for negative power system, or telecom network application												
Network Cable	UTP/STP above Cat. 5e cable EIA/TIA-568 100-ohm (100m)												
Protocols	CSMA/CD												
Reverse Polarity Protection	Supported												
Overload Current Protection	Supported												
CPU Watch Dog	Supported												
Power Supply	Redundant Dual DC 12/24/48V (9.6~60VDC) Input power Removable Terminal Block for input power connector Support negative voltage input power for telecom												
Power Consumption	<table border="1"> <thead> <tr> <th>Input Voltage</th> <th>IGS-804SM-SE</th> <th>IGS-1608SM-SE</th> </tr> </thead> <tbody> <tr> <td>12 VDC</td> <td>11W</td> <td>17W</td> </tr> <tr> <td>24 VDC</td> <td>12.4W</td> <td>17.8W</td> </tr> <tr> <td>48 VDC</td> <td>12.9W</td> <td>20.2W</td> </tr> </tbody> </table>	Input Voltage	IGS-804SM-SE	IGS-1608SM-SE	12 VDC	11W	17W	24 VDC	12.4W	17.8W	48 VDC	12.9W	20.2W
Input Voltage	IGS-804SM-SE	IGS-1608SM-SE											
12 VDC	11W	17W											
24 VDC	12.4W	17.8W											
48 VDC	12.9W	20.2W											
LED	Per unit: Power 1 (Green), Power 2 (Green), Fault (Amber), CPU Act (Green), Ring Master (Yellow) Per RJ-45 port: 10/100 Link/Active (Green) 1000 Link/Active (Amber) SFP Fiber Per port: Link/Active (Green)												
Jumbo Frame	9.6KB												
IEEE802.3ac	Max frame size extended to 1522Bytes (allow Q-tag in packet)												
MAC Address Table	8K												
Memory Buffer	512K Bytes for packet buffer												
Warning Message	System Syslog, SMTP/ e-mail event message, alarm relay												
Alarm Relay Contact	Relay outputs with current carrying capacity of 1 A @24VDC												
Removable Terminal Block	Provide 2 redundant power, alarm relay contact, 6 Pin												

Software Specifications

Topology	
VLAN	IEEE 802.1q VLAN, up to 4094 802.1Q VLAN VID IEEE 802.1q VLAN, up to 4094 Groups IEEE 802.1ad Q-in-Q MAC-based VLAN, up to 256 entries IP Subnet-based VLAN, up to 128 entries Protocol-based VLAN (Ethernet, SNAP, LLC), up to 128 entries VLAN Translation, up to 256 entries GVRP (GARP VLAN Registration Protocol) MVR (Multicast VLAN Registration)
Link Aggregation (Port Trunk)	Static (Hash with SA, DA, IP, TCP/UDP port), up to 5 trunk group Dynamic (IEEE 802.3ad LACP), up to 5 trunk group
Spanning Tree	IEEE802.1d STP IEEE802.1w RSTP IEEE802.1s MSTP
Multiple μ-Ring	up to 5 instances that each supports μ-Ring, μ-Chain or Sub-Ring type for flexible uses, and maximum up to 5 Rings. Recovery time <10ms The maximum number of devices allowed in a Ring supported ring is 250. (Please see CTC Union μ-Ring white paper for more details and more topology applications)
Loop Protection	Supported
ITU-T G.8032 / Y.1344 ERPS (Ethernet Ring Protection)	Recovery time <50ms Single Ring, Sub-Ring, Multiple ring topology network
QoS Features	
Class of Service	IEEE802.1p 8 active priorities queues for per port
Traffic Classification QoS	IEEE802.1p based CoS IP Precedence based CoS IP DSCP based CoS QCL(QoS Control List): Frame Type, Source/ Destination MAC, VLAN ID, PCP, DEI QCE(QoS Control Entry): Protocol, Source IP, IP Fragment, DSCP, TCP/UDP port number

Operating Temperature	-10 ~ 60°C (IGS-804SM-SE, IGS-1608SM-SE) -40 ~ 75°C (IGS-804SM-SE-E, IGS-1608SM-SE-E)
Operating Humidity	5% to 95% (Non-condensing)
Storage Temperature	-40 ~ 85°C
Housing	Rugged Metal, IP30 Protection, Fanless
Dimensions	106 x 72 x 152 mm (D x W x H) (IGS-804SM-SE) 116 x 91 x 157 mm (Dx Wx H) (IGS-1608SM-SE)
Weight	0.74kg (IGS-804SM-SE) 1.35kg (IGS-1608SM-SE)
Installation Mounting	DIN Rail mounting, or wall mounting (optional)
MTBF	593,726 Hours (IGS-803SM-SE) 431,610 Hours (IGS-1608SM-SE) (MIL-HDBK-217)
Warranty	5 years
Certification	
EMC	CE
EMI (Electromagnetic Interference)	FCC Part 15 Subpart B Class A, CE
Railway Traffic	EN50121-4
Immunity for Heavy Industrial Environment	EN61000-6-2
Emission for Heavy Industrial Environment	EN61000-6-4
EMS (Electromagnetic Susceptibility) Protection Level	EN61000-4-2 (ESD) Level 3, Criteria B EN61000-4-3 (RS) Level 3, Criteria A EN61000-4-4 (Burst) Level 3, Criteria A EN61000-4-5 (Surge) Level 3, Criteria B EN61000-4-6 (CS) Level 3, Criteria A EN61000-4-8 (PFMF, Magnetic Field) Field Strength: 300A/m, Criteria A
Safety	UL60950-1, EN60950-1 (IGS-1608SM-SE) EN60950-1 (IGS-804SM-SE)
Hi pot protection	DC 2.25KV for power to chassis ground, Ethernet ports to chassis ground
4KV surge protection	Supported for UTP and Fiber ports
Shock	IEC 60068-2-27
Freefall	IEC 60068-2-32
Vibration	IEC 60068-2-6


Bandwidth Control for Ingress	Rate in steps :1 kbps / Mbps / fps / kfps Range : 100 kbps to 1Gbps / 1fps to 3300kfps Rate Unit : bit or frame
Bandwidth Control for Egress	Rate in steps : 1 kbps / Mbps Range : 100 kbps to 1Gbps Rate Unit : bit Per queue / Per port shaper
DiffServ (RF 2474) Remarking	
Storm Control	for Unicast, Broadcast, Multicast
IP Multicasting Features	
IGMP / MLD Snooping	IGMP Snooping v1, v2, v3 / MLD Snooping v1, v2 Port Filtering Profile Throttling, Fast Leave Maximum Multicast Group : up to 1022 entries Query / Static Router Port
Security Features	
IEEE 802.1X	Port-Based MAC-Based
ACL	Number of rules : up to 256 entries for L2 / L3 / L4 L2 : Mac address SA/DA/VLAN L3 : IP address SA/DA, Subnet L4 : TCP/UDP
RADIUS authentication & accounting	
TACACS+ authentication & accounting, TACACS+ 3.0	
HTTPS, HTTP	Supported
SSL / SSH v2	Supported
User Name Password Authentication	Local Authentication Remote Authentication (via RADIUS / TACACS+)
Management Interface Access Filtering	Web, Telnet / SSH , CLI RS-232 console

Management Features	
CLI	Cisco® like CLI
Web Based Management	
Telnet	Server
SNMP	V1, V2c, V3
SW & Configuration Upgrade	TFTP, HTTP
Configuration Upgrade	Redundant firmware in case of upgrade failure
RMON	RMON I (1, 2, 3, 9 group), RMON II
MIB	RFC1213 MIB II, Private MIB
UPnP	Supported
DHCP	Server, Client, Relay, Snooping Snooping option 82 Relay option 82
IP Source Guard	Supported
Port Mirroring	Supported
Event Syslog	Syslog server (RFC3164) (Support 1 server)
Warning Message	System syslog, e-mail, alarm relay
DNS	Client, Proxy
SyncE	ITU-T G.8262 Sync Ethernet
IEEE1588 PTP V2	Support 5 operating mode in each port : Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master, Slave
NTP, SNTP	Client
LLDP (IEEE 802.1ab)	Link Layer Discovery Protocol LLDP-MED

IPv6 Features	
IPv6 Management	Telnet Server/ICMP v6
SNMP over IPv6	Supported
HTTP over IPv6	Supported
SSH over IPv6	Supported
IPv6 Telnet	Supported
IPv6 NTP, SNTP	Client
IPv6 TFTP	Supported
IPv6 QoS	Supported
IPv6 ACL	Number of rules: up to 256 entries for L2 / L3 / L4 L2 : Mac address SA/DA/VLAN L3: IP address SA/DA, Subnet L4: TCP/UDP
Others Features	
Green Ethernet	Supports IEEE802.3az EEE (Energy Efficient Ethernet) Management to optimize the power consumption Determine the cable length and lowering the power for ports with short cables Lower the power for a port when there is no link LED Power Management :Adjustment LEDs intensity
Cable Diagnostic	Measuring UTP cable normal or broken point distance


Application

Figure : Application for mobile backhaul

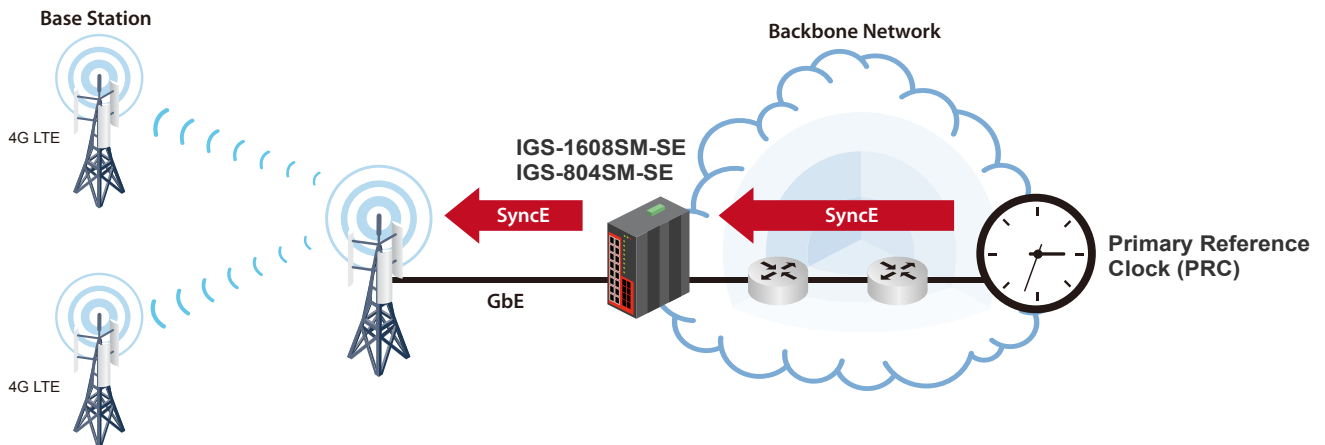


Dimensions

► IGS-804SM-SE

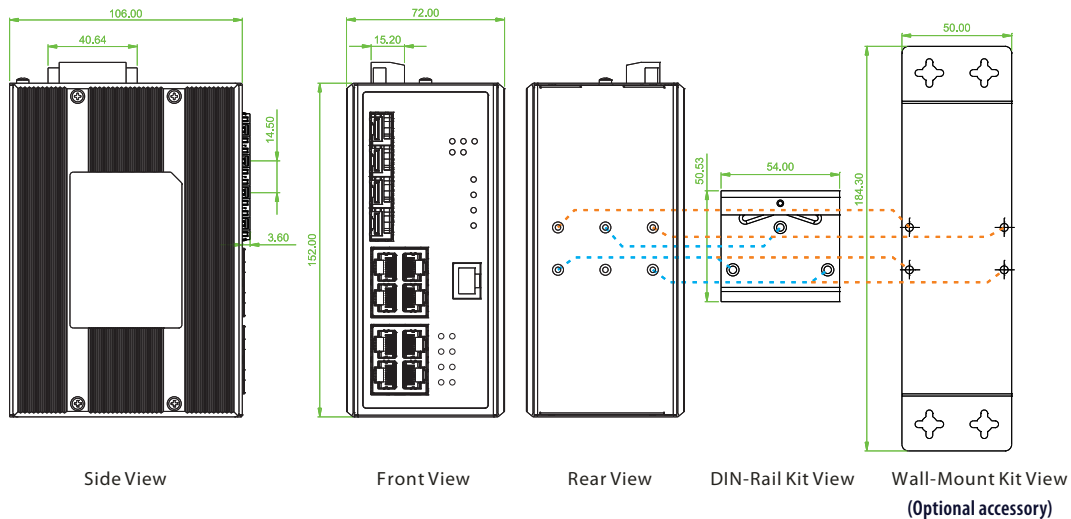


▶ IGS-1608SM-SE

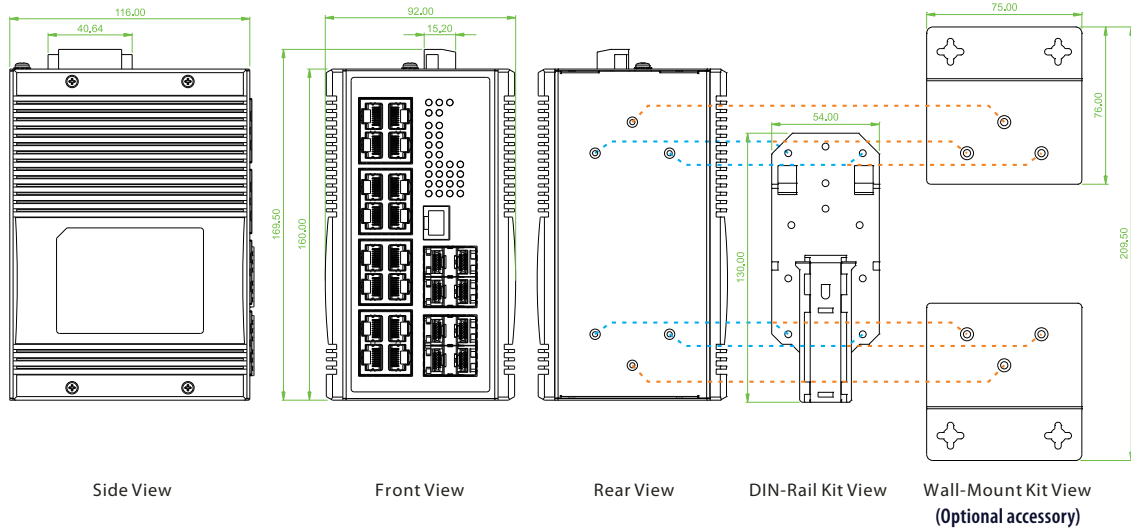

Ordering Information

Model Name	Managed	Total Port	UTP Port		Fiber Port		Certification				Operating Temperature
			10/100/1000 Base-T	100/1000 Base-X	Railway EN50121-4	Safety UL60950-1	Safety EN60950-1	EN61000-6-2 EN61000-6-4	CE FCC		
IGS-804SM-SE	V	12	8	4 SFP	V	V	V	V	V	-10~60°C	
IGS-804SM-SE-E	V	12	8	4 SFP	V	V	V	V	V	-40~75°C	
IGS-1608SM-SE	V	24	16	8 SFP	V	V	V	V	V	-10~60°C	
IGS-1608SM-SE-E	V	24	16	8 SFP	V	V	V	V	V	-40~75°C	

Model Naming Rule

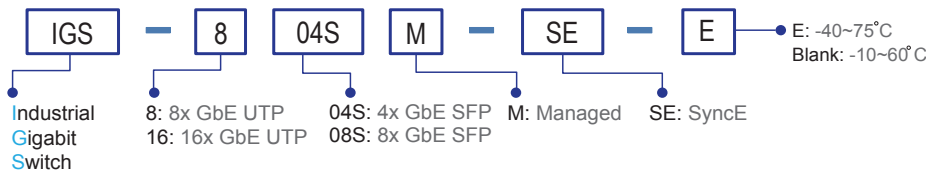

Package List

- One device of the series
- Console cable (RJ-45 to DB9)
- CD (SmartConfig, MIB file, Manual)
- Quickly installation guide
- Din Rail with screws
- Terminal block
- Protective caps for SFP ports

Optional Accessories

Wall mount kit accessories


IND-WMK02	Wall Mount kit for Industrial product (Wide) (184 x 50mm) (For IGS-804SM-SE)
IND-WMK04	Wall Mount kit for Industrial product (2 pcs in 1 set, 76mm x 75mm x 2pcs) (For IGS-1608SM-SE)

Industrial SFP Transceiver

The ISFP series of industrial grade SFP modules have been fully tested with the series product for guaranteed compatibility and performance. The best performance can be guaranteed even in mission-critical applications. (Please see CTC Union's Industrial SFP datasheet for more details and more items.)

ISFP-M7000-85-D(E)	Industrial SFP GbE 1000Base-SX, M/M, 500 meter, wave length 850nm, 7.5dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-S7020-31-D(E)	Industrial SFP 1000Base-LX, S/M, 20km, wave length 1310nm, 15dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-T7T00-00-(E)	Industrial SFP 1000Base-T UTP 100meter, -10~70°C (-40~85°C)
ISFP-M5002-31-D(E)	Industrial SFP 155M 100Base-FX, MM, 2km, wave length 1310nm, 12dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-S5030-31-D(E)	Industrial SFP 155M 100Base-FX, SM, 30km, 1310nm, 19dB, LC, DDMI, -10~70°C (-40~85°C)

SFP Naming Rule

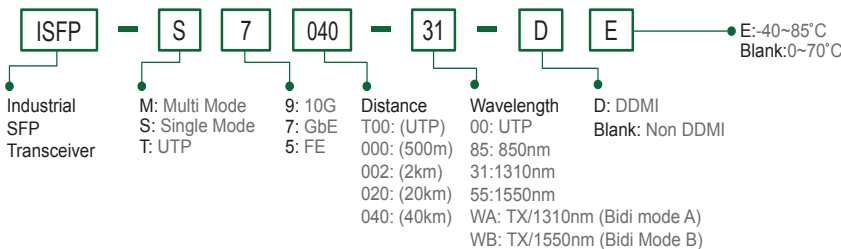

New



ICR-4103

4G LTE + 3x 10/100Base-T(X) Router



The ICR-4103 series are high-performance industrial grade 4G-LTE cellular routers. It is designed to offer the fast connectivity over cellular network for industrial applications. ICR-4103's Ethernet ports can allow up to 3 Ethernet devices link to the cellular network, provides dual SIM cards and 1 Ethernet WAN port can automatic re-connecting and auto-switching for offering the cellular network redundancy to ensure uninterrupted connectivity. The ICR-4103 cellular router is integrated with WAN, LAN, SIM, VPN, Firewall, built-in DI/DO and Serial port services. In addition, ICR-4103 uses the highest level of industrial grade design for connected in the most demanding environments, is ideal solution for Industrial Internet of Things (IIoT) and M2M(Machine-to-Machine)applications, such as remote control and monitoring, bus ticketing collection system, CCTV, SCADA, digital signage, kiosk and intelligent traffic systems.

Features

- Supports multi-band connectivity with FDD 4G LTE/ TDD 4G LTE/ 3G WCDMA/2G GSM/ LTE Cat4
- 2 SIM card, 4G LTE antenna, 1x WAN (10/100Base-TX) + 3x LAN (10/100Base-TX UTP), 2x DI + 1x DO, 3x Serial Com port (2x RS232, 1x RS485)
- GPS, GNSS to get your location on earth, and obtains map information using Google Map (Optional)
- Highly reliable and secure for mission-critical cellular communications
- Provide flexible options to configure LAN/ WAN ports
- Built-in dual SIM for network redundancy / failover/ roaming over/ back up
- Integrated dual detachable antenna against radio interference
- 4G LTE and WAN port for seamless connection and redundancy
- Supports 3x Serial port (1x RS484, 2x RS232) for IoT and automation application, ModBus RTU and ModBus/TCP gateway, MQTT
- Supports Routing/Firewall, NAT, Virtual Server, DMZ, Port filtering, MAC Filter, URL Filter, IP Filter, VLAN, Static Routing and RIP 1 & 2, VRRP, OSPF V2 & V3, BGP
- Supports VPN, OpenVPN, IPSec (3DES, AES128, AES196, AES256, MD5, SHA-1, SHA256)
- IPv6/IPv4 dual stack and all applications are IPv6 ready
- Supports DHCP server and client, PPPoE, Static IP, SNTP, DNS Proxy, DDNS, QoS, Virtual Com, UPnP
- Supports Alarm message : DO, SNMP Trap, E-mail
- Supports SNMP, TR069, Web, Telnet, CLI for management
- Supports dual Image firmware upgrade by Web
- CE, FCC, Rail Traffic EN50121-4 certified
- Safety EN60950-1 certified
- Radio RED ETSI EN301 489-1/-19/-52, EN301 908-1, EN303 413 certified
- Heavy industrial grade EMS, EMI, EN61000-6-2, EN61000-6-4 certified
- Rugged metal, IP30 protection & Fanless design
- Wide operating temperature -20 ~ 75°C

Specifications

Standard	Cellular MobilComm standard: (Please see order information for optional band) 4G LTE: FDD-LTE, TDD-LTE 3G: WCDMA 2G: GSM/EDGE GNSS: GPS	LED	System status (Green) VPN (Green) Cell signal Strong / Weak, 2 LED (Green)
	IEEE 802.3 10Base-T 10Mbit/s Ethernet IEEE 802.3u 100Base-TX Fast Ethernet IEEE 802.1Q Virtual LANs (VLAN) IEEE 802.3x Flow control for Full Duplex	DIP SW for RS485 port	DIP 1 Pull Low : OFF: Disable, ON: Enable DIP 2 Pull High : OFF: Disable, ON: Enable DIP 3 120 ohm terminal resistor : OFF: Disable, ON: Enable
Connector	Cellular MobilComm and WAN: Built-in dual SIM card for network redundancy / failover/ roaming over/ back up 2 SMA (female) connector for Antenna (Please see order information for optional band) 1x 10/100Base-TX RJ45 for WAN port LAN: 3x 10/100Base-TX RJ45 Serial: 1x RS485 and 2x RS232 (one of RS232 could be configured for console) Programmable DI/DO: 2xDI and 1x DO	Alarm message	DO for alarm message, with current capacity of 500mA/50VDC maximum SNMP trap, E-mail, SMS, Alarm trigger by DI, VPN or WAN disconnection
LTE data rate	Cat 4 ,Max download 150Mbps, Max upload 50 Mbps	Operation Temperature	-20~-75°C
Removable terminal block	Provides for Power input, DO, DI1, DI2, COM2 (RS232), COM3 (RS485)	Housing	Rugged Metal, Fanless , IP30 grade housing protection
Power Supply	Input 12/24 VDC (8.4~36VDC), removable terminal block	Dimensions (D x W x H)	106 x 62.5 x 135mm
Power consumption	<7W	Weight	0.74kg
		Installation	Mounting Wall mounting, or DIN Rail mounting (Optional)
		MTBF	296,306 Hours (MIL-HDBK-217)
		Warranty	5 years

Certification	
EMC	CE (EN55024, EN55032)
EMI	FCC Part 15 Subpart B Class A, CE
Railbus Traffic	EN50121-4
Immunity for Heavy Industrial Environment	EN61000-6-2
Emission for Heavy Industrial Environment	EN61000-6-4
EMS (Electromagnetic Susceptibility Protection Level)	EN61000-4-2 (ESD) Level 3, Criteria B EN61000-4-3 (RS) Level 3, Criteria A EN61000-4-4 (Burst) Level 3, Criteria A

EMS (Electromagnetic Susceptibility Protection Level)	EN61000-4-5 (Surge) Level 3, Criteria B EN61000-4-6 (CS) Level 3, Criteria A EN61000-4-8 (PFMF, Magnetic Field) Field Strength: 300A/m, Criteria A
Safety Radio	EN60950-1 RED ETSI EN301 908-1 RED ETSI EN303 413 RED ETSI EN301 489-1 RED ETSI EN301 489-19 RED ETSI EN301 489-52
Shock	IEC 60068-2-27
Freefall	IEC 60068-2-32
Vibration	IEC 60068-2-6

Software Specifications

Network Protocols	IPv4, IPv6, IPv4/IPv6 dual stack, DHCP server and client, DNS Proxy, PPPoE, Static IP, SNTP, VRRP, OSPF V2, OSPF V3, BGP, MQTT
Modbus TCP, Modbus RTU	Gateway between Ethernet and COM3 (RS485) port
Routing/Firewall	NAT, Virtual Server, DMZ, Port filtering, MAC Filter, URL Filter, IP Filter, VLAN, Static Routing and RIP 1, RIP 2
VPN	OpenVPN, IPSec (3DES, AES128, AES196, AES256, MD5, SHA-1, SHA256)
MobilComm Connectivity	Two SIM for failover/ roaming over/ back up Seamless multi WAN connections switch (2x SIM and 1x Ethernet WAN)

Others	DDNS, UPnP, QoS Virtual Com for serial COM port
Alarm message Management	Sent by DO, SMS, SNMP Trap, E-mail Web GUI for remote and local management CLI Dual Image firmware upgrade by Web GUI Syslog monitor SNMP TR069: TR098 model Remote management via Telnet, SSH v2, HTTPS Local management via Telnet, SSH v2, HTTP/HTTPS

Application

Figure 1 : Application for Outdoor Digital Signage



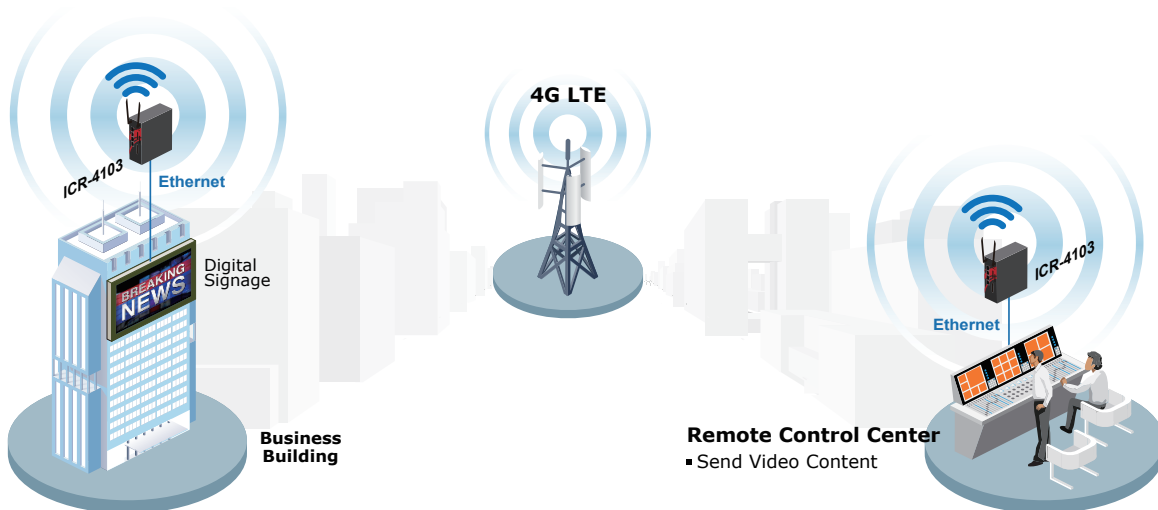


Figure 2 : Application for Transportation/Bus Communication

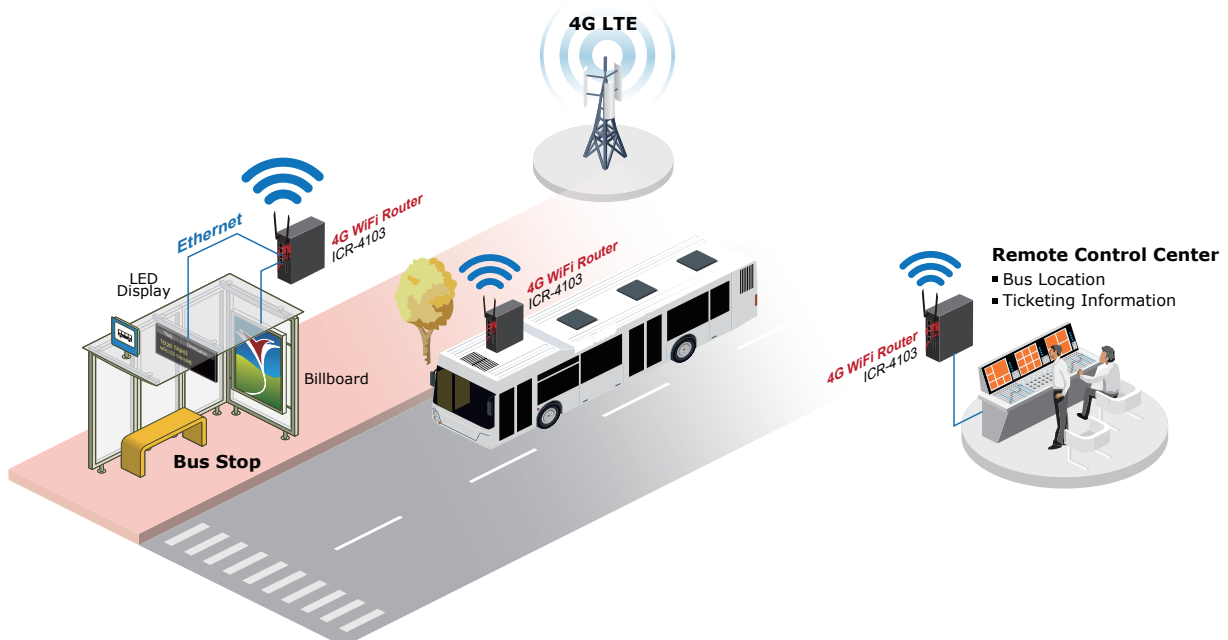


Dimensions

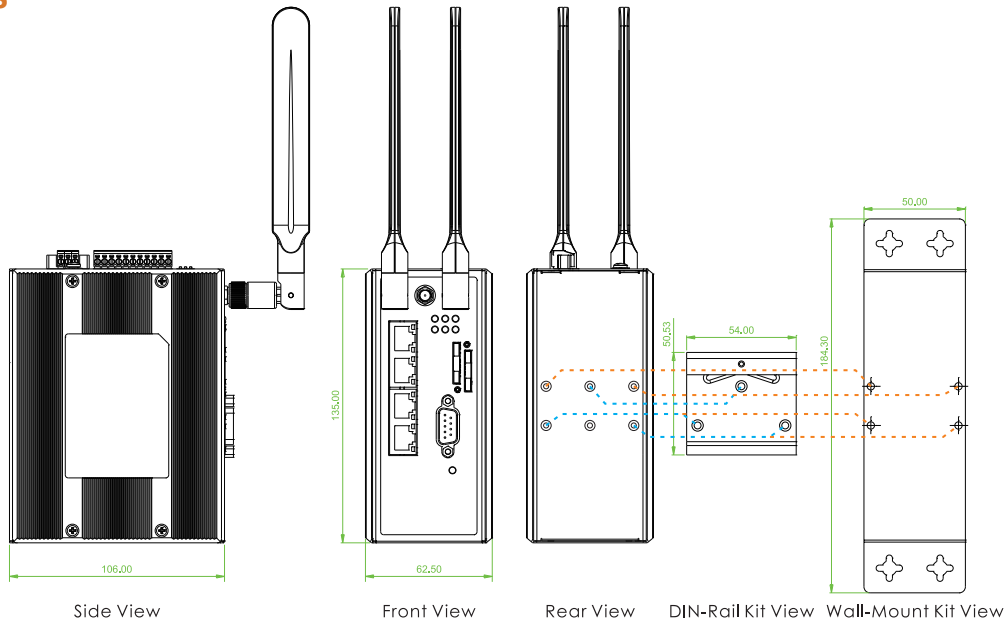

Ordering Information

Model Name	Managed	WAN		Local Port			Certification			
		Cellular MobilComm band (2 SIM for Redundant)	10/100Base-TX	10/100Base-TX	RS232	RS485 (ModBus)	Railway EN50121-4	Safety EN60950-1	EN61000-6-2 EN61000-6-4	CE, FCC
ICR-4103-EU	V	see Region code table EU	1	3	2	1	V	V	V	V
ICR-4103-A	V	see Region code table A	1	3	2	1	V	V	V	V
ICR-4103-AU	V	see Region code table AU	1	3	2	1	V	V	V	V
ICR-4103-J	V	see Region code table J	1	3	2	1	V	V	V	V

Model Naming Rule

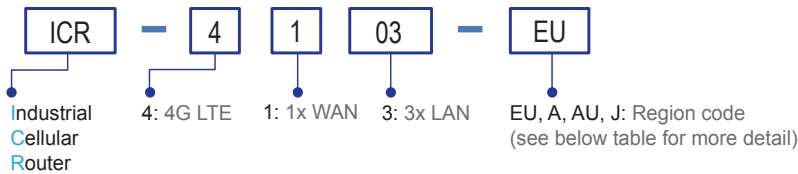

MobilComm region Code Optional

Region Code	4G LTE		3G	2G	Region
	FDD LTE	TDD LTE	WCDMA	GSM / EDGE	
EU	B1(2100), B3(1800), B5(850), B7(2600), B8(900), B20(800)	B38(2600), B40(2300), B41(2500)	B1(2100), B5(850), B8(900)	B3(1800), B8(900)	Europe, Africa, Middle East, Korea, Thailand, India
A	B2(1900), B4(1700), B12(700)		B2(1900), B4(1700), B5(850)		USA (AT&T, T-Mobile)
AU	B1(2100), B2(1900), B3(1800), B4(1700), B5(850), B7(2600), B8(900), B28(700)	B40(2300)	B1(2100), B2(1900), B5(850), B8(900)	B2(1900), B3(1800), B5(850), B8(900)	ANZ, South America, Taiwan
J	B1(2100), B3(1800), B8(900), B18(850), B19(850), B26(850)	B41(2500)	B1(2100), B6(850), B8(900), B19(850)		Japan

Optional Accessories

Antenna accessories

ANT-BASE-01	Antennas Base with Magnetic, SMA (Female) connector, 1 meter extension
--------------------	--

Wall mount kit accessories

IND-WMK02	Wall Mount kit for Industrial product (Wide) (184 x 50mm)
------------------	---



New

ICR-W403

4G LTE, WiFi ac/b/g/n 2T2R Gateway



The ICR-W403 is a high-performance industrial grade wireless gateway. It combines IEEE802.11b/g/n/ac WLAN and 4G LTE cellular technologies to provide flexible wireless network connectivity. It is designed to offer the flexible connectivity over cellular and Wireless LAN for industrial applications. ICR-W403's Ethernet ports can allow up to 3 Ethernet devices link, provides dual SIM cards for failover redundancy to ensure uninterrupted connectivity. ICR-W403 with support for secure VPN communications, GPS, static and dynamic IP routing of RIP1/2 and OSPF, NAT, port forwarding, Firewall, built-in DI/DO and Serial port services. In addition, ICR-W403 uses the highest level of industrial grade design for connected in the most demanding environments, is ideal solution for Industrial Internet of Things (IIoT) and M2M (Machine-to-Machine) applications, such as remote control and monitoring, bus ticketing collection system, CCTV, SCADA, digital signage, kiosk and intelligent traffic systems.

Features

- 4G LTE, GPS, IEEE 802.11b/g/n/ac WiFi, 2x SIM card, 3x GbE RJ45 LAN/WAN + 2x DI + 1x DO, 1x RS232 com port
- Supports multi-band connectivity with FDD 4G LTE/ TDD 4G LTE/ 3G WCDMA/2G GSM
- Supports concurrent dual band WiFi With 802.11n 2T2R (2.4GHz), and 802.11ac 2T2R (5GHz)
- Supports 4G LTE/ WiFi/ UTP port to configure WAN ports for failover redundant
- Supports GPS and GNSS for location tracking
- Built-in NAT/Port Forward/Routing/IPv6 are compatible with existing IP networks
- Built-in various VPN protocols for security, Firewall & IPS, ACL & Authentication by MAC/User to enhance access security
- IEEE 802.11 a/b/g/n/ac, multiple SSID, captive portal for WiFi hotspot
- Web, CLI, SNMP, TR069, SMS for management and configuration
- Events triggered by pre-defined, and notification sent by SMS, SNMP trap, or e-mail
- Supports USB for log storage
- EN-60950-1, CE, FCC, Rail Traffic EN50121-4 certified
- Heavy industrial grade EMS, EMI, EN61000-6-2, EN61000-6-4 certified
- Rugged metal, IP30 protection & Fanless design

Specifications

Standard	Cellular MobilComm standard: (Please see order information for optional band)		
	4G LTE: FDD-LTE, TDD-LTE		
	3G: WCDMA		
	2G: GSM/EDGE		
	GPS: GNSS		
	IEEE 802.3	10Base-T 10Mbit/s Ethernet	
	IEEE 802.3u	100Base-TX Fast Ethernet	
	IEEE 802.3ab	1000Base-T Gbit Ethernet over twisted pair	
	IEEE 802.1Q	Virtual LANs (VLAN)	
	IEEE 802.3x	Flow control for Full Duplex	
Interface	WAN	IEEE 802.1p	LAN Layer 2 QoS for Traffic Prioritization
		IEEE 802.1X	Port based and MAC based Network Access Control, Authentication
		1x 3G/4G LTE (Please see order information for detail optional mobil band)	
		Built-in dual SIM card for network redundancy / failover/ roaming over/ back up	
		IEEE802.11ac (5G Hz)	
		1x GbE UTP (WAN or LAN configureable)	
		LAN	
		Concurrent WiFi 2.4G/5G with IEEE802.11ac 2T2R (5GHz), and IEEE802.11b/g/n 2T2R (2.4GHz)	
		3x 10/100/1000Base-T UTP port, port 1 could be WAN or LAN configureable	
		COM port	
1x RS232			
DI/DO			
2x DI, 1x DO, 1x IGN (Ignition Sense for Vehicle)			
GPS			
1x GNSS receiver			
Log Storage			
1x USB 2.0			
Connector	2x 2.3dBi LTE Antenna and connector		
	2x 5dBi WiFi Antenna and connector		
	1x SMA Female connector for GPS antenna (Antenna optional)		
	2 SIM card socket		
	1x USB 2.0 socket		
	3 RJ45 for GbE LAN/WAN		
	1x Removable Terminal block (Input power, 1x GN, 2x DI, 1x DO, RS232)		
	4G LTE data rate	Cat 4 , Mximum 150Mbps download, upload 50Mbps	
	Power Supply	12/24 VDC (9~36VDC)	
	Power consumption	<14W	
LED	Power (Green), GPS (Green)		
	2.4G (Green), 5G (Green)		
	Sim 1 (Green), Sim 2 (Green)		
	LTE signal High (Green), LTE signal Low (Green)		
WAN/LAN LNK/ACT (Green)			
Alarm message Handling	Events triggered by pre-defined, and notification sent by SMS, SNMP trap, or e-mail		
Operation Temperature	-30~ 75°C		
Housing	Rugged Metal, IP30 Protection, Fanless		
Dimensions (D x W x H)	TBD		
Weight	TBD		
Installation	Wall mounting		
MTBF	TBD (MIL-HDBK-217)		
Warranty	5 years		

Certification	
EMC	CE (EN55024, EN55032)
EMI	FCC Part 15 Subpart B Class A, CE EN55022 Class A
Railway Traffic	EN50121-4
Immunity for Heavy Industrial Environment	EN61000-6-2
Emission for Heavy Industrial Environment	EN61000-6-4

EMS (Electromagnetic Susceptibility) Protection Level	EN61000-4-2 (ESD) Level 3, Criteria B
	EN61000-4-3 (RS) Level 3, Criteria A
	EN61000-4-4 (Burst) Level 3, Criteria A
	EN61000-4-5 (Surge) Level 3, Criteria B
	EN61000-4-6 (CS) Level 3, Criteria A
	EN61000-4-8 (PFMF, Magnetic Field) Field Strength: 300A/m, Criteria A
Safety	EN60950-1
Shock	IEC 60068-2-27
Freefall	IEC 60068-2-32
Vibration	IEC 60068-2-6

Software Specifications

Routing	Static routing , Dynamic routing, RIP1/RIP2, OSPF, BGP
Security	Firewall: SPI Firewall with Stealth Mode, IPS VPN Tunneling: IPSec, OpenVPN, PPTP, L2TP, GRE; Tunneling with Full Tunnel, Tunnel Failover VPN Scenario: Site to Site, Site to Host, Host to Site, Host to Host, Hub and Spoke, Dynamic VPN Port Forwarding: Virtual Server/ Computer, DMZ Host, Special AP & APG, VPN Pass-through Access control: Packet Filter, URL Blocking, MAC Filter, Content Filter, Application Filter Authentication: Captive Portal, MAC Authentication
VLAN	Port-based VLAN, Tag-based VLAN
QoS	Policy-based Bandwidth Control and Packet Flow Prioritization
Management	Web, CLI, Telnet, SNMP V3, TR069
IPV6	Dual Stack
Upgrade F/W	Support
Backup & Restore Configuration file	Support

Others	
System Time Information	NTP client
DHCP	Server and Client
Cellular toolkit	SIM PIN, USSD, Network Scan, SMS, Data Usage
Alarm message Handling	DI, DO, SMS, Syslog, SNMP Trap, Email Alert, Reboot
Location Tracking	GNSS
Diagnostic	Packet Analyzer, Diagnostic tools
Power Control	Ignition Sense for delay OFF
MobilComm Connectivity	Two SIM for muti ISP failover/ back up Seamless
Multi WAN connections	4G LTE , 1xWiFi IEEE802.11ac and 1x Ethernet WAN for failover/ back up Seamless
WiFi mode	AP Router, WDS, WDS Hybrid
WiFi Security	WEP, WPA, WPA2, WPA-PSK, WPA2-PSK, IEEE802.1X
Virtual COM	TCP Client, TCP Server, UDP, RFC2217
Others DDNS, UPnP, QoS	
Remote management via Telnet, SSH v2, HTTPS	
Local management via Telnet, SSH v2, HTTP/HTTPS	
Syslog monitor	

Application

Figure 1 : Application of Wireless Transmission in Logistics Center


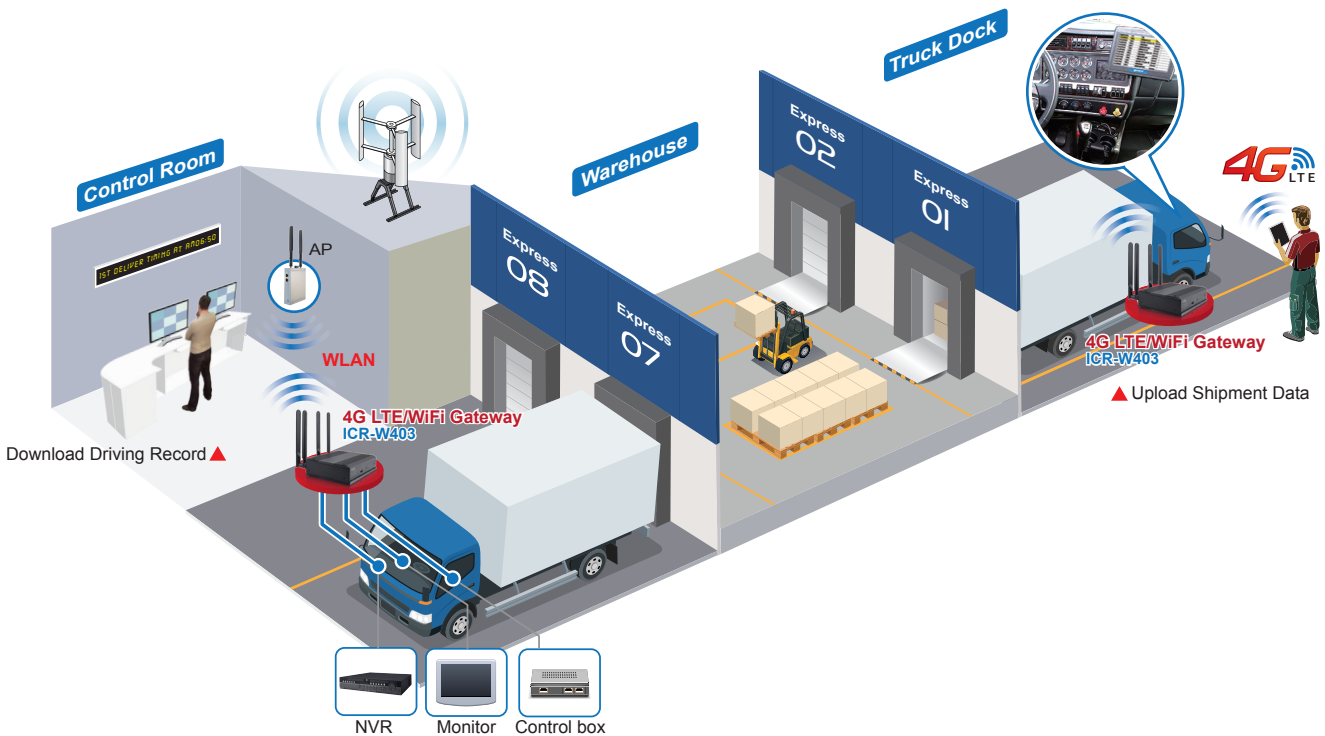



Figure 2 : Application of Vehicle Location Tracking System

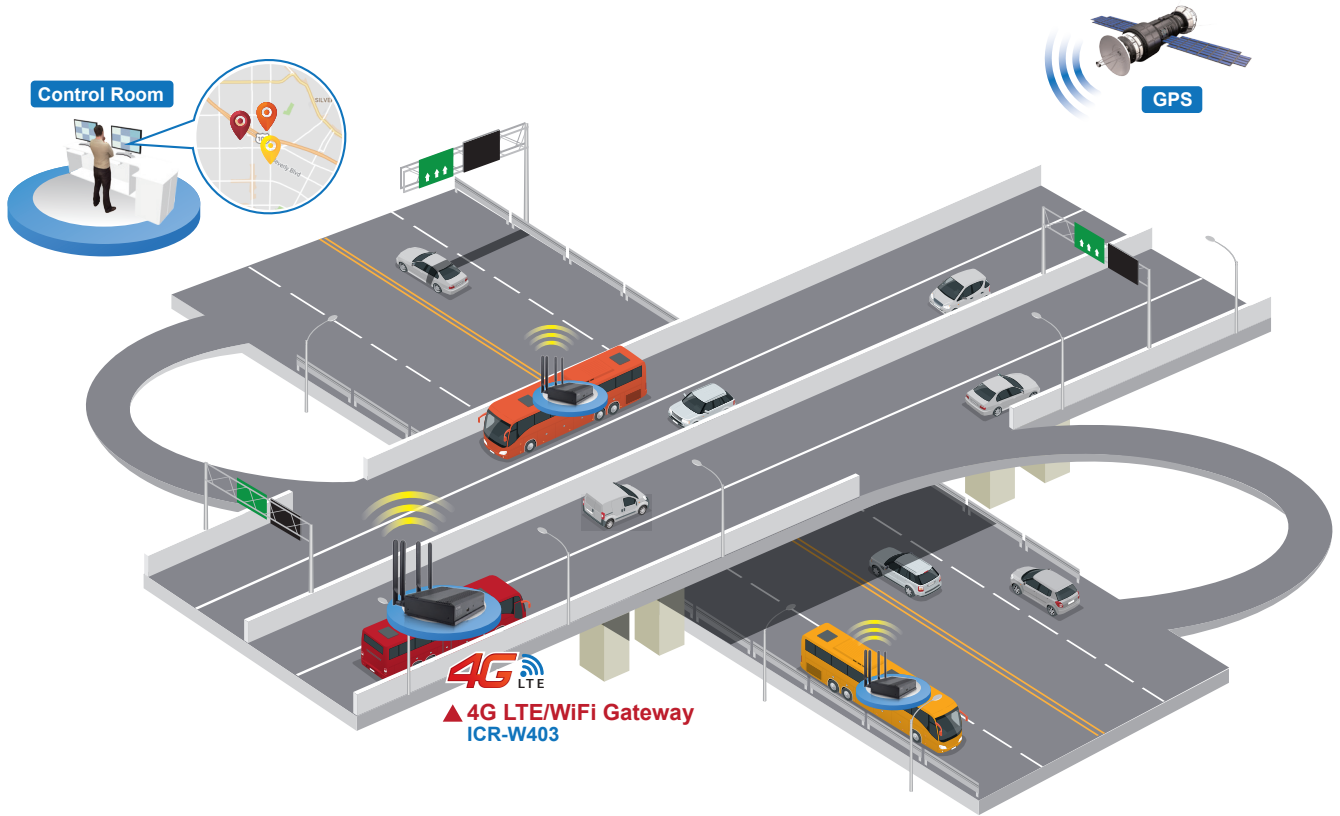

Ordering Information

Model Name	WAN		WAN/LAN		Local Port		Certification			
	Cellular Mobil Band (2 Sim for Redundant)	GPS (Ant. Optional)	WiFi	UTP 10/100/1000Base-T	DI, DO	RS232	Safety EN60950-1	RailWay EN50121-4	EN61000-6-2 EN61000-6-4	CE, FCC
ICR-W403-EU	see Region code table EU	1x GNSS	IEEE802.11ac/b/g/n (LAN) or IEEE802.11ac (WAN)	2x(LAN) +1x (LAN or WAN)	2xDI, 1xDO	1	V	V	V	V
ICR-W403-A	see Region code table A	1x GNSS	IEEE802.11ac/b/g/n (LAN) or IEEE802.11ac (WAN)	2x(LAN) +1x (LAN or WAN)	2xDI, 1xDO	1	V	V	V	V
ICR-W403-AU	see Region code table AU	1x GNSS	IEEE802.11ac/b/g/n (LAN) or IEEE802.11ac (WAN)	2x(LAN) +1x (LAN or WAN)	2xDI, 1xDO	1	V	V	V	V
ICR-W403-C	see Region code table C	1x GNSS	IEEE802.11ac/b/g/n (LAN) or IEEE802.11ac (WAN)	2x(LAN) +1x (LAN or WAN)	2xDI, 1xDO	1	V	V	V	V

Model Naming Rule

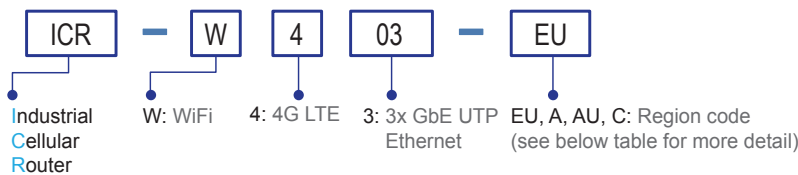

MobilComm region Code Optional

Region Code	4G LTE		3G	2G	GNSS	Region
	FDD LTE	TDD LTE	WCDMA	GSM / EDGE		
EU	B1(2100) , B3(1800), B7(2600), B8(900), B20(800)		B1(2100), B8(900)	B3(1800), B8(900)	Yes	Europe, Africa, Middle East, Korea,Thailand, India
A	B2(1900), B4(1700), B12(700)		B2(1900), B4(1700), B5(850)		Yes	USA (AT&T, T-Mobil)
AU	B1(2100), B2(1900), B3(1800), B4(1700), B5(850), B7(2600), B8(900), B28(700)	B40(2300)	B1(2100), B2(1900), B5(850), B8(900)	B2(1900), B3(1800), B5(850), B8(900)	Yes	ANZ, South America, Taiwan
C	B1(2100), B3(1800)	B38(2600), B39 (1900), B40(2300), B41(2500)	B1(2100), B2(1900), B5(850), B8(900)	B2(1900), B3(1800), B5(850), B8(900)	Yes	China

Optional Accessories

Antenna accessories

ANT-GPS-01	Antennas for GNSS
------------	-------------------




EN50155 ^{IP67}

Industrial Ethernet Switch

The ITP series Ethernet switches are EN50155 certified and are especially designed for industrial applications such as rolling stock, railways, buses, and subways. With M12 connectors, ITP Ethernet switches are vibration and shock resistant. They can provide stable and reliable operation for mission-critical applications. To satisfy the needs of industrial and harsh environments, ITP Ethernet switches adopt an IP-67 rated housing which can effectively protect against dust, oil and water. In addition, ITP Ethernet switches also provide flexible Gigabit Ethernet solutions to meet various demands from different industrial applications.

■ Resilient Bypass


EN50155 compliant products offer two copper interfaces with auto bypass function in the event of sudden power loss, particularly in daisy chain or linear topology networks. When power failure occurs in one of the switches on a train, the bypass relay function can activate, automatically bypassing the internal circuits and maintaining link between neighboring equipment. With this function, secure data transmission from terminals to backbone and higher network availability can be guaranteed.

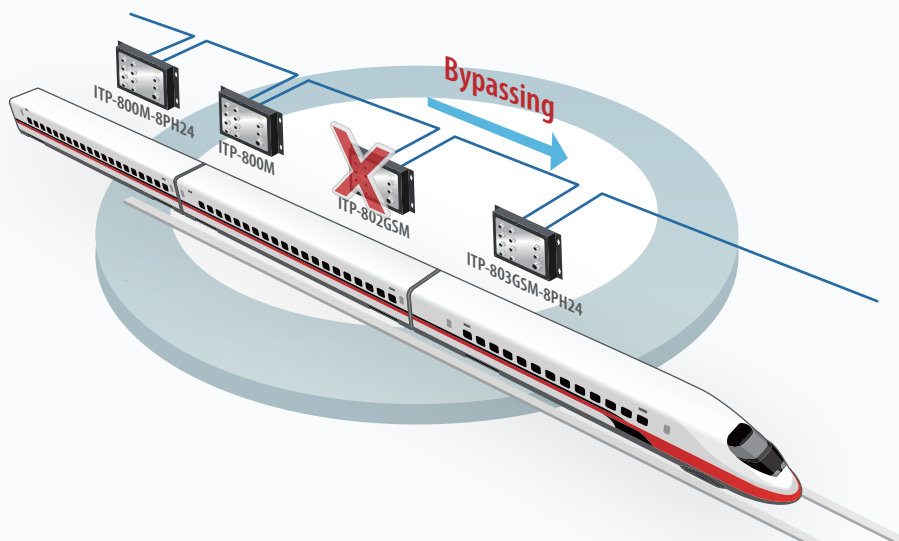

Application

Smart Train

Modern transportation systems for rail are now incorporating many IOT devices, including PoE IP cameras, Wireless Access Points for Hotspots, Voice over IP communications, monitoring and digital signage. Ethernet switches, provided by CTC Union, for this market segment, include EN50155 certifications, utilize rugged M12 connectors and provide a wide range for DC power connections.

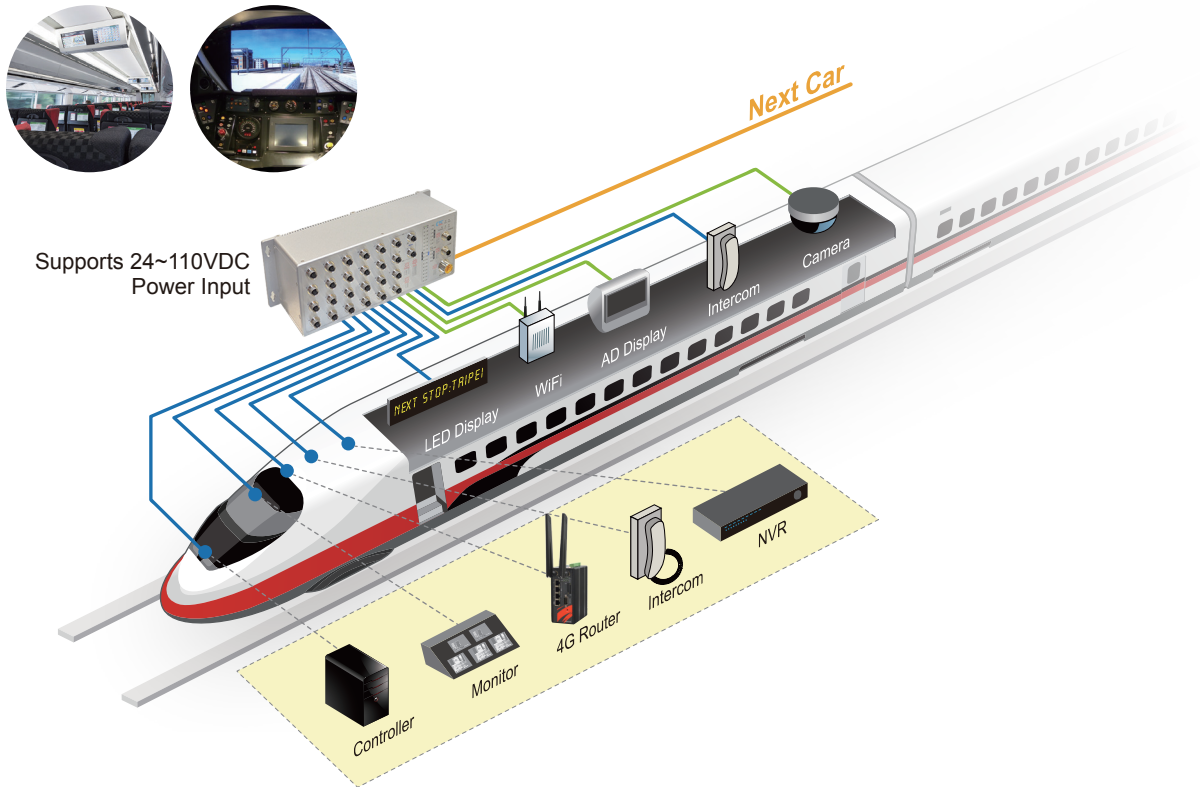


TTDP


TTDP (Train Topology Discovery Protocol) for train inauguration is a process where the network devices can automatically reconfigure for topology changes (i.e., as carriages are swapped). TTDP identifies the order of the Ethernet switches in a train backbone from the head and allows auto-reconfiguration of the other switches in the entire network.



Exchange

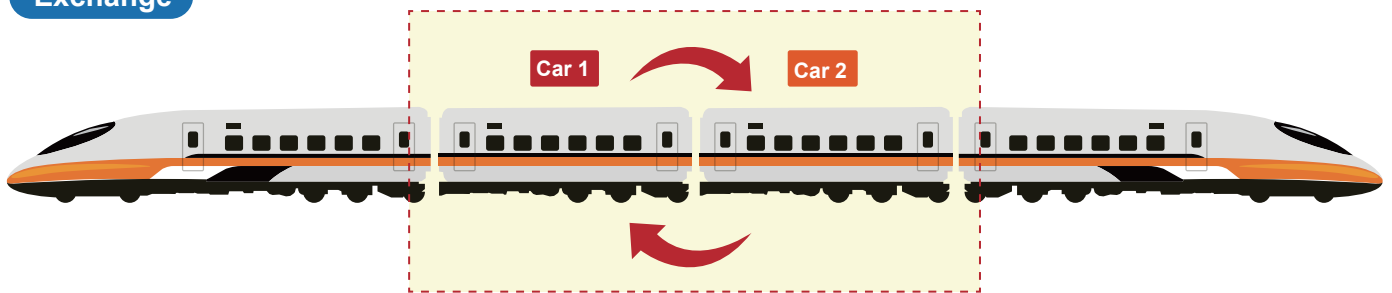

Remove & Add

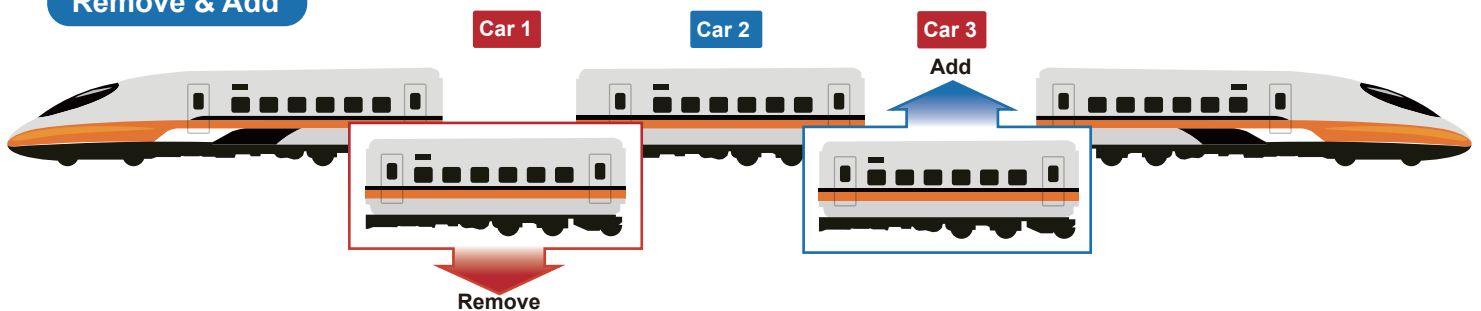

180W, 24V Booster

ITP-G802TM-8PH24

10x 100/1000Base-T with 8x PoE+ Managed Ethernet Switch

ITP-G802SM-8PH24

8x 100/1000Base-T + 2x 100/1000Base-X SFP with 8x PoE+ Managed Ethernet Switch



These models are managed industrial grade Gigabit PoE (Power over Ethernet) switches that provide 8x GbE UTP + 2x GbE SFP or 10x GbE UTP with 8x PoE Ports, that equipped with PoE features enable power and data to be transferred via a single cable, thereby considerably reducing cabling and electrical wiring expenses. These switches also provide a variety of functions to manage PoE operation including PoE device auto-checking, auto reset, and PoE power weekly scheduling. Other advanced Ethernet functions are supported and include STP/RSTP/MSTP/ ITU-T G.8032 ERPS and multiple μ -Ring for redundant cabling, layer 2 Ethernet IGMP, VLAN, QoS, Security, IPv6, bandwidth control, port mirroring, cable diagnostic and Green Ethernet.

Housed in rugged DIN rail or wall mountable enclosures, these switches are designed for the harshest environments. Specifically, These switches use M12 connectors to ensure water tight, robust connections and to guarantee reliable connections against environmental disturbances, such as vibration and shock. Besides, these models are compliant with EN50155, covering power input voltage, surge, EFT, ESD, vibration, shock, thus making the switches suitable for industrial applications, such as vehicle, rolling stock, ship, vessel.

These models are IP67 rated to protect against dust and water submersion, they are particularly used in environments with extreme temperature, high humidity, oil, dust and in outdoor environments requiring water-proof applications such as IP surveillance, city security. They can also work with CTC Union's platform SmartView™ to provide convenient, real-time and centralized device management.

Features

- 8x 10/100/1000Base-T M12 UTP and 2x 100/1000Base-X SFP Fiber with 8x PoE+ (Total 10 ports) (ITP-G802SM-8PH24)
- 10x 10/100/1000Base-T M12 UTP with 8x PoE+ (Total 10 ports) (ITP-G802TM-8PH24)
- M12 and M23 connector against vibration and shock, X-code or A-code M12 for Gigabit port optional
- IP67 grade housing for against water, dust, and oil (Figure 4)
- 24/48VDC redundant dual input power, and built-in power booster design upto 55 VDC for PoE output (Figure 2)
- Regulated PoE output voltage (55VDC) to stabilize PoE device, and guarantee delivery PoE power distance to 100meters (Figure 2)
- Provides 8-port IEEE802.3af / 802.3at PoE output (30W per Port)
- Maximum PoE output power budget 180W
- Advanced PoE Management, management, PoE PD failure, auto checking and auto reset, PoE configuration for power planning, weekly scheduling
- UL60950-1, CE, FCC, Rail Traffic EN50155, EN50121-4 certified
- Heavy industrial grade EMS, EMI, EN61000-6-2, EN61000-6-4 certified
- Cable diagnostics, identifies opens/shorts from 7 to 100 meters
- Supports Green Ethernet IEEE802.3az EEE (Energy Efficient Ethernet) management to optimize the power consumption
- STP, RSTP, MSTP, ITU-T G.8032 Ethernet Protection Ring (EPR) for redundant cabling
- Provides up to 5 instances that each supports μ -Ring, μ -Chain or Sub-Ring type for flexible uses. (Please see CTC Union's μ -Ring white paper for more details)
- μ -Ring for Redundant Cabling, recovery time < 10ms in 250 maximum devices
- Build-in 2 bypass GbE UTP ports to avoid one or more nodes power fail in a ring or bus structure to collapse the network (ITP-G802TM-8PH24)
- DHCP Server/Client/Relay/Snooping/Snooping option 82/Relay option 82
- QoS, Traffic classification QoS, CoS, bandwidth control for Ingress and Egress, Storm Control, DiffServ
- IEEE802.1q VLAN, MAC based VLAN, IP subnet based VLAN, Protocol based VLAN, VLAN translation, GVRP, MVR
- Dynamic IEEE 802.3ad LACP Link Aggregation, Static Link Aggregation
- IGMP snooping V1/V2/V3, IGMP Filtering/ Throttling, IGMP query, IGMP proxy reporting, MLD snooping V1/V2
- Security : Port based and MAC based IEEE802.1X, RADIUS, ACL, TACACS+, HTTP/HTTPS, SSL/SSH v2
- Software upgrade via TFTP and HTTP, redundant firmware to avoid in case of upgrade failure
- Supports IEEE1588 PTP V2 for precise time synchronization to operate in Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master, Slave mode by each port
- RMON, MIB II, Port mirroring, Event syslog, DNS, NTP, SNTP, IEEE802.1ab LLDP
- Supports IPv6 Telnet server /ICMP v6
- CLI, Web based management, SNMP v1/v2c/v3, Telnet server for management
- Provides SmartConfig for quick and easy mass configuration tool (Please see Catalog chapter 1- Software Management for more details)
- Supports SmartView for Centralized Management. (Please see Catalog chapter 1- Software Management for more details)
- Supporting Central EMS for management of up to 50 SmartView Server, and maximum up to 25,000 devices (Please see Catalog chapter 1- Software Management for more details)

Specifications

Standard	IEEE 802.3	10Base-T 10Mbit/s Ethernet
	IEEE 802.3u	100Base-TX, 100Base-FX, Fast Ethernet
	IEEE 802.3ab	1000Base-T Gbit/s Ethernet over twisted pair
	IEEE 802.3z	1000Base-X Gbit/s Ethernet over Fiber-Optic
	IEEE 802.1d	STP (Spanning Tree Protocol)
	IEEE 802.1w	RSTP (Rapid Spanning Tree Protocol)
	IEEE 802.1s	MSTP (Multiple Spanning Tree Protocol)
	ITU-T G.8032 / Y.1344	ERPS (Ethernet Ring Protection Switching)
	IEEE 802.1Q	Virtual LANs (VLAN)
	IEEE 802.1X	Port based and MAC based Network Access Control, Authentication
	IEEE802.3ac	Max frame size extended to 1522Bytes
	IEEE 802.3ad	Link aggregation for parallel links with LACP(Link Aggregation Control Protocol)
	IEEE 802.3x	Flow control for Full Duplex
	IEEE802.3ac	Max frame size extended to 1522Bytes
	IEEE 802.3af	PoE (Power over Ethernet)
	IEEE 802.3at	PoE+ (Power over Ethernet enhancements)
	IEEE 802.1ad	Stacked VLANs, Q-in-Q
	IEEE 802.1p	LAN Layer 2 QoS/CoS Protocol for Traffic Prioritization
	IEEE 802.1ab	Link Layer Discovery Protocol (LLDP)
	IEEE 802.3az	EEE (Energy Efficient Ethernet)
VLAN ID	4094	IEEE802.1Q VLAN VID
Switch Architecture	Back-plane (Switching Fabric): 20Gbps (Full wire-speed)	
Data Processing	Store and Forward	
Flow Control	IEEE 802.3x for full duplex mode Back pressure for half duplex mode	
PoE RJ-45 Pin Assignment	8x M12 (8-Pin A-code or X-code Female) ports support IEEE 802.3af / IEEE 802.3at End-Span, Alternative A mode.	
Network Connector	10x M12 (8-Pin, Female, A-Code or X-code) 10/100/1000Base-T UTP (ITP-G802TM-8PH24) 8x M12(8-Pin, Female, A-Code or X-code) 10/100/1000Base-T + 2x 100/1000Base-X SFP (ITP-G802SM-8PH) UTP port provide auto negotiation speed, Auto MDI/MDI-X, Full/Half duplex function Build-in 2x bypass GbE UTP ports (ITP-G802TM-8PH24) 2x Water-proof cable connector 2x 100/1000Base-X SFP slot, with DDMI (ITP-G802SM-8PH24)	
Console	RS-232 (5-pin A-Code M12 male)	
Network Cable	UTP/STP above Cat. 5e cable EIA/TIA-568 100-ohm (100m)	
Protocols	CSMA/CD	
Reverse Polarity Protection	Supported	
Overload Current Protection	Supported	
CPU Watch Dog	Supported	
LED	Per unit: Power 1 (Green), Power 2 (Green), Fault (Amber), CPU Act (Green), Ring Master (Amber) UTP port: 10/100 Link/Active (Green) 1000 Link/Active (Amber) SFP Fiber Per port: Link/Active (Green) PoE Port LED 1 LED /per Port : • PoE Output Power On : ON (Green) • PoE Fault (Over Load, Short Circuit, Port failed at Startup) : Flash 1times /sec (Green)	
Jumbo Frame	9.6KB	

Software Specifications

Topology	
VLAN	IEEE 802.1q VLAN, up to 4094 802.1Q VLAN VID IEEE 802.1q VLAN, up to 4094 Groups IEEE 802.1ad Q-in-Q MAC-based VLAN, up to 256 entries IP Subnet-based VLAN, up to 128 entries Protocol-based VLAN(Ethernet, SNAP, LLC), up to 128 entries VLAN Translation, up to 256 entries GVRP (GARP VLAN Registration Protocol) MVR (Multicast VLAN Registration)
Link Aggregation (Port Trunk)	Static (Hash with SA, DA, IP, TCP/UDP port), up to 5 trunk group Dynamic (IEEE 802.3ad LACP), up to 5 trunk group
Spanning Tree	IEEE802.1d STP, IEEE802.1w RSTP, IEEE802.1s MSTP

MAC Address Table	8K																														
Memory Buffer	512K Bytes for packet buffer																														
PoE Standard	IEEE802.3af, IEEE802.3at																														
PoE Power Output	Maximum PoE output power budget 180W (30W/per port) Regulated PoE output voltage at 55VDC (Figure 2)																														
Power Supply	Provides 1x M23 (5-Pin, male) for redundant dual DC 24/48V (20~57VDC) input power Built-in very high efficiency booster(94~97%) to rise up 55 VDC for PoE output Regulated PoE output voltage (55VDC) to stabilize PoE device, and guarantee delivery PoE power distance to 100meter (Figure 2)																														
Power Consumption	<p>ITP-G802TM-8PH24</p> <table border="1"> <thead> <tr> <th>Input Voltage</th> <th>Total Power Consumption</th> <th>Device Power Consumption</th> <th>PoE Budget</th> <th>Boost Efficiency</th> </tr> </thead> <tbody> <tr> <td>24 VDC</td> <td>200.4W</td> <td>11.7W</td> <td>180W</td> <td>95.6%</td> </tr> <tr> <td>48 VDC</td> <td>200.2W</td> <td>12.5W</td> <td>180W</td> <td>95.9%</td> </tr> </tbody> </table> <p>ITP-G802SM-8PH24</p> <table border="1"> <thead> <tr> <th>Input Voltage</th> <th>Total Power Consumption</th> <th>Device Power Consumption</th> <th>PoE Budget</th> <th>Boost Efficiency</th> </tr> </thead> <tbody> <tr> <td>24 VDC</td> <td>198.5W</td> <td>9.8W</td> <td>180W</td> <td>95.30%</td> </tr> <tr> <td>48 VDC</td> <td>199.2W</td> <td>11.5W</td> <td>180W</td> <td>95.80%</td> </tr> </tbody> </table>	Input Voltage	Total Power Consumption	Device Power Consumption	PoE Budget	Boost Efficiency	24 VDC	200.4W	11.7W	180W	95.6%	48 VDC	200.2W	12.5W	180W	95.9%	Input Voltage	Total Power Consumption	Device Power Consumption	PoE Budget	Boost Efficiency	24 VDC	198.5W	9.8W	180W	95.30%	48 VDC	199.2W	11.5W	180W	95.80%
Input Voltage	Total Power Consumption	Device Power Consumption	PoE Budget	Boost Efficiency																											
24 VDC	200.4W	11.7W	180W	95.6%																											
48 VDC	200.2W	12.5W	180W	95.9%																											
Input Voltage	Total Power Consumption	Device Power Consumption	PoE Budget	Boost Efficiency																											
24 VDC	198.5W	9.8W	180W	95.30%																											
48 VDC	199.2W	11.5W	180W	95.80%																											
Warning Message	System Syslog, SMTP/ e-mail event message, alarm relay																														
Alarm Relay Contact	5-pin A-code M12 male Relay outputs with current carrying capacity of 1 A @24VDC																														
Operating Temperature	-40 ~ 75°C																														
Operating Humidity	5% to 95% (Non-condensing)																														
Storage Temperature	-40 ~ 85°C																														
Housing	Rugged Metal, Fanless , IP67 grade housing for against water, dust, and oil (Figure 4)																														
Dimensions	70 x 240 x 168mm (D x W x H)																														
Weight	2.170kg (ITP-G802SM-8PH24) 2.15kg (ITP-G802TM-8PH24)																														
Installation Mounting	Wall mounting, or DIN Rail mounting (Optional)																														
MTBF	371,857 Hours (ITP-G802SM-8PH24) 362,429 Hours (ITP-G802TM-8PH24) (MIL-HDBK-217)																														
Warranty	5 years																														
Certification																															
EMC	CE																														
EMI (Electromagnetic Interference)	FCC Part 15 Subpart B Class A, CE																														
Railway Traffic	EN50155, EN50121-4																														
Immunity for Heavy Industrial Environment	EN61000-6-2																														
Emission for Heavy Industrial Environment	EN61000-6-4																														
EMS (Electromagnetic Susceptibility) Protection Level	EN61000-4-2 (ESD) Level 3, Criteria B EN61000-4-3 (RS) Level 3, Criteria A EN61000-4-4 (Burst) Level 3, Criteria A EN61000-4-5 (Surge) Level 3, Criteria B EN61000-4-6 (CS) Level 3, Criteria A EN61000-4-8 (PFMF, Magnetic Field) Field Strength: 300A/m, Criteria A																														
Safety	UL60950-1																														
Shock	IEC-61373																														
Freefall	IEC 60068-2-32																														
Vibration	IEC-61373																														

Multiple μ-Ring	up to 5 instances that each supports u-Ring, u-Chain or Sub-Ring type for flexible uses, and maximum up to 5 Rings. Recovery time <10ms The maximum number of devices allowed in a Ring supported ring is 250. (Please see CTC μ-Ring white paper for more details and more topology application)
Loop Protection	Supported
ITU-T G.8032 / Y.1344 ERPS (Ethernet Ring Protection)	Recovery time <50ms Single Ring, Sub-Ring, Multiple ring topology network
QoS Feature	
Class of Service	IEEE802.1p 8 active priorities queues for per port

Traffic Classification	IEEE802.1p based CoS IP Precedence based CoS IP DSCP based CoS QCL(QoS Control List): Frame Type, Source/ Destination MAC, VLAN ID, PCP, DEI QCE(QoS Control Entry): Protocol, Source IP, IP Fragment, DSCP, TCP/UDP port number
Bandwidth Control for Ingress	Rate in steps : 1 kbps / Mbps / fps / kfps Range : 100 kbps to 1Gbps / 1fps to 3300kfps Rate Unit : bit or frame
Bandwidth Control for Egress	Rate in steps : 1 kbps / Mbps Range : 100 kbps to 1Gbps Rate Unit : bit / Per queue / Per port shaper
DiffServ (RF 2474) Remarking	
Storm Control	for Unicast, Broadcast, Multicast
IP Multicasting Feature	
IGMP / MLD Snooping	IGMP Snooping v1, v2, v3 / MLD Snooping v1, v2 Port Filtering Profile, Throttling
IGMP / MLD Snooping	Fast Leave Maximum Multicast Group : up to 1022 entries Query / Static Router Port
Security Features	
IEEE 802.1X	Port-Based, MAC-Based
ACL	Number of rules : up to 256 entries for L2 / L3 / L4 L2: Mac address SA/DA/VLAN L3: IP address SA/DA, Subnet L4: TCP/UDP
RADIUS authentication & accounting	
TACACS+ authentication & accounting, TACACS+ 3.0	
HTTPS, HTTP	Supported
SSL / SSH v2	Supported
User Name Password Authentication	Local Authentication Remote Authentication (via RADIUS / TACACS+)
Management Interface Access	Web, Telnet / SSH , CLI RS-232 console
Filtering	
Management Features	
CLI	Cisco® like CLI
Web Based Management	
Telnet	Server
SNMP	V1, V2c, V3
SW & Configuration Upgrade	TFTP, HTTP Redundant firmware in case of upgrade failure
RMON	RMON I (1, 2, 3, 9 group), RMON II
MIB II	RFC 1213
UPnP	Supported

DHCP	Server, Client, Relay, Snooping Snooping option 82, Relay option 82
IP Source Guard	Supported
Port Mirroring	Supported Syslog server (RFC3164) (Support 1 server)
Warning Message	System syslog, e-mail, alarm relay
DNS	Client, Proxy
IEEE1588 PTP V2	Support 5 operating mode in each port : Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master, Slave
NTP, SNTP	Client
LLDP (IEEE 802.1ab)	Link Layer Discovery Protocol LLDP-MED
IPv6 Features	
IPv6 Management	Telnet Server/ICMP v6
SNMP over IPv6	Supported
HTTP over IPv6	Supported
SSH over IPv6	Supported
IPv6 Telnet	Supported
IPv6 NTP, SNTP	Client
IPv6 TFTP	Supported
IPv6 QoS	Supported
IPv6 ACL	Number of rules: up to 256 entries for L2 / L3 / L4 L2: Mac address SA/DA/VLAN L3: IP address SA/DA, Subnet L4: TCP/UDP
Others Features	
Green Ethernet	Supports IEEE802.3az EEE (Energy Efficient Ethernet) Management to optimize the power consumption Determine the cable length and lowering the power for ports with short cables Lower the power for a port when there is no link LED Power Management :Adjustment LEDs intensity
Cable Diagnostic	Measuring UTP cable OK or broken point distance
Advanced PoE Management	PoE PD Failure Auto Checking, and Auto reset when PD fail PoE Scheduling (On/Off schedule weekly) PoE Configuration PoE Enable/Disable Power limit by classification Power limit by management Total PoE Power budge (maximum 180W) limitation Power feeding priority

Application

Figure 1 : ITP Series in Onboard Train Application


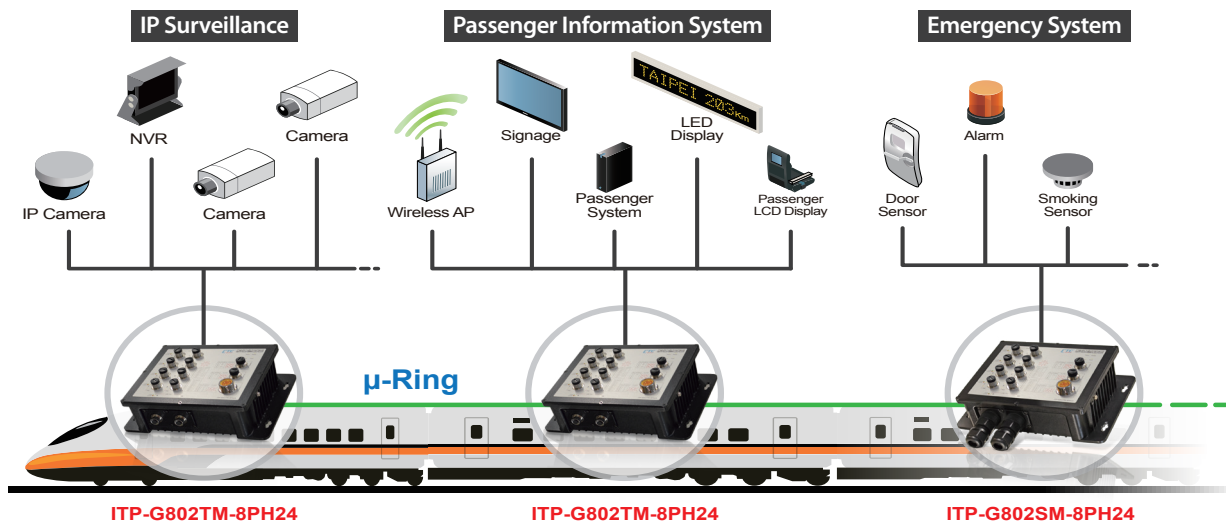


Figure 2 : High Efficiency Boost Technology for PoE

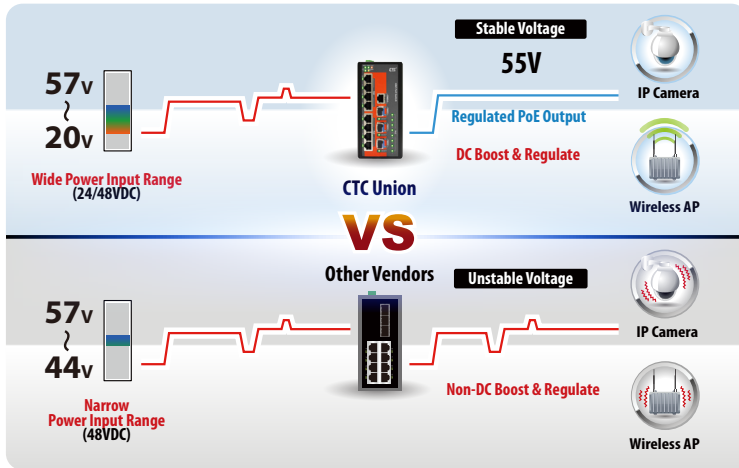

- Regulated PoE output voltage (55VDC) to stabilize PoE device
- Guarantee delivery PoE power distance to 100 meters
- Wide range input power 24/48VDC (20~57VDC)
- Built-in very high efficiency (94~97%) to boost PoE output voltage

Figure 3 : ITP Series for Industrial Automation

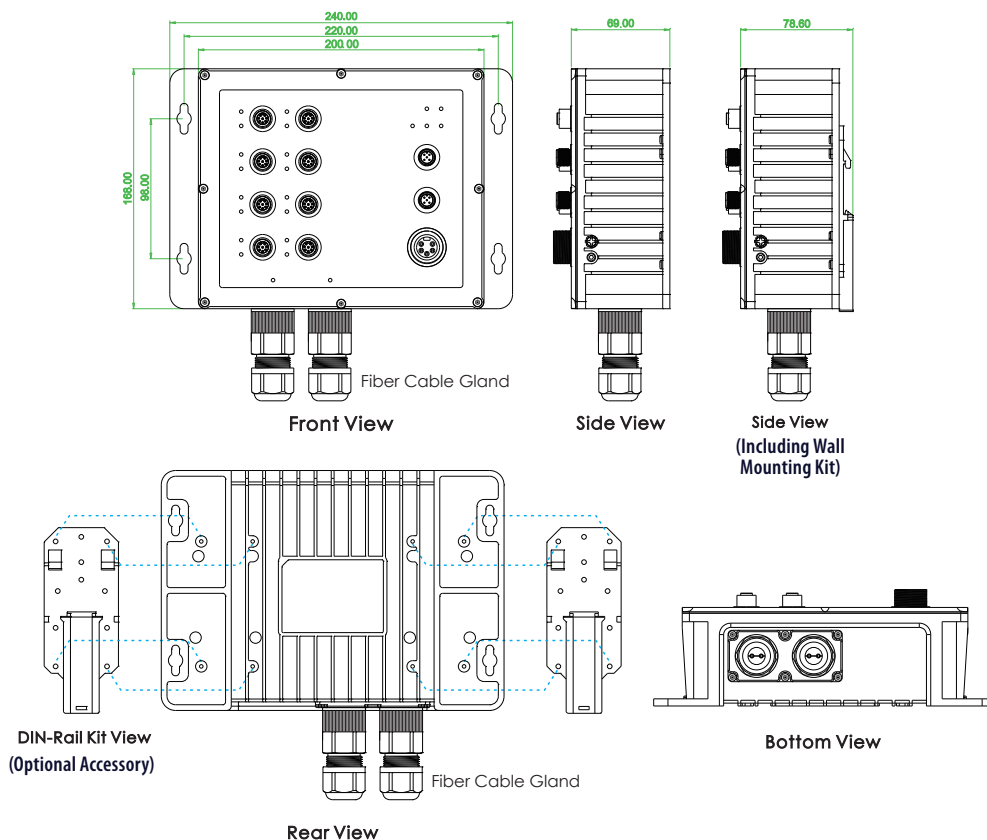


Figure 4 : IP67 Waterproof




Dimensions

▶ ITP-G802SM-8PH24




▶ ITP-G802TM-8PH24

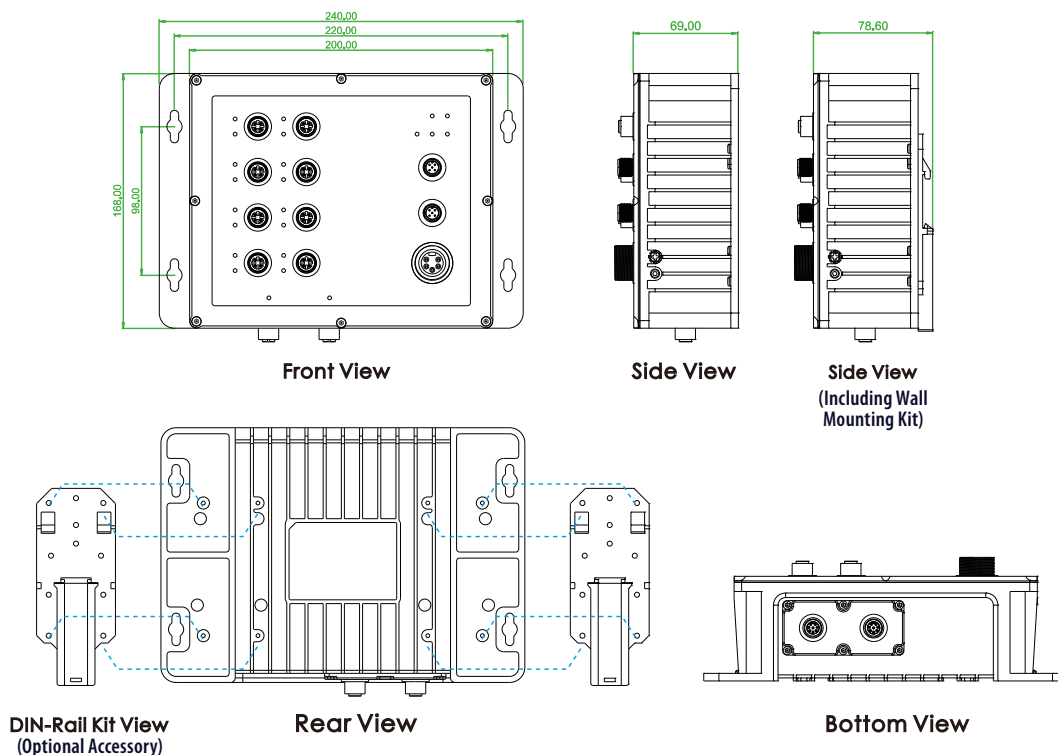

Ordering Information

Model Name	Managed	IP67	Total Port	UTP Port M12		Fiber	PoE Port	PoE Total Power Budget	Power Input	Certification				Shock Vibration	Operating Temperature
				10/100/1000 Base-T	100/1000 Base-X					EN50155 EN50121-4	UL60950-1	EN61000-6-2 EN61000-6-4	CE FCC		
ITP-G802TM-8PHE24-X	V	V	10	10 (X-Code)			8	180W	24/48VDC	V	V	V	V	V	-40~75°C
ITP-G802TM-8PHE24	V	V	10	10 (A-Code)			8	180W	24/48VDC	V	V	V	V	V	-40~75°C
ITP-G802SM-8PHE24-X	V	V	10	8 (X-Code)	2 SFP		8	180W	24/48VDC	V	V	V	V	V	-40~75°C
ITP-G802SM-8PHE24	V	V	10	8 (A-Code)	2 SFP		8	180W	24/48VDC	V	V	V	V	V	-40~75°C

Model Naming Rule

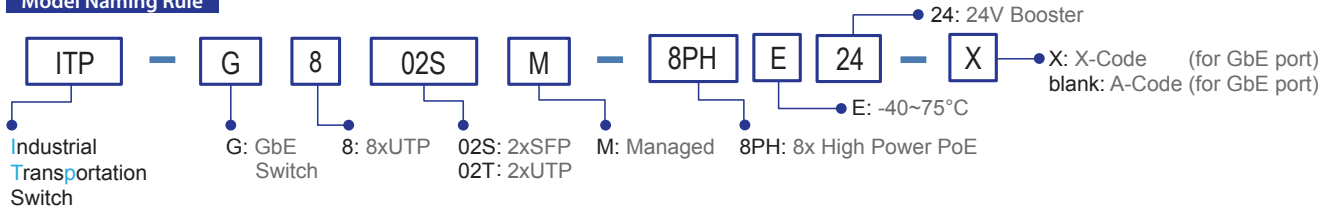

Package List

- One of the device series
- Protective caps for SFP ports and console, alarm port
- Fiber Cable Gland for SFP port x 2 set (for ITP-G802SM-8PH24)
- Console cable (M12 to DB9)
- CD (Smartconfig, Manual)
- Quickly installation guide


Optional Accessories

Industrial SFP Transceiver

The ISFP series of industrial grade SFP modules have been fully tested with the ITP-G802SM-8PH24 for guaranteed compatibility and performance. The best performance can be guaranteed even in mission-critical applications. (Please see CTC Union's Industrial SFP datasheet for more details and more items.)

ISFP-M7000-85-D(E)	Industrial SFP GbE 1000Base-SX, M/M, 500 meter, wave length 850nm, 7.5dB, LC, DDML, -10~70°C (-40~85°C)
ISFP-S7020-31-D(E)	Industrial SFP 1000Base-LX, S/M, 20km, wave length 1310nm, 15dB, LC, DDML, -10~70°C (-40~85°C)
ISFP-M5002-31-D(E)	Industrial SFP 155M 100Base-FX, MM, 2km, wave length 1310nm, 12dB, LC, DDML, -10~70°C (-40~85°C)
ISFP-S5030-31-D(E)	Industrial SFP 155M 100Base-FX, SM, 30km, 1310nm, 19dB, LC, DDML, -10~70°C (-40~85°C)

SFP Naming Rule

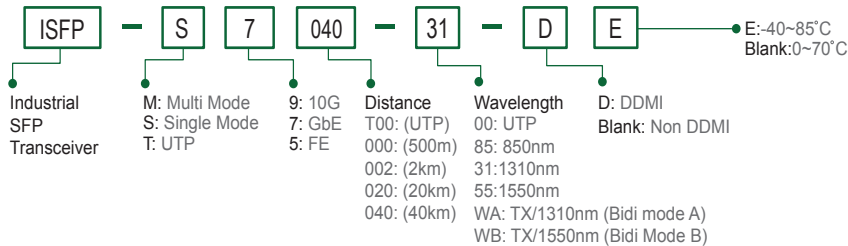

Optional Cable/Connector & Din-Rail Kit

<p>P/N: CAB-M12XM8-RJ45 M12 X-code Male (8-Pin) to RJ-45, AWG 24 ,IP67, 1 meter</p>  <p>For GbE UTP (X-code model)</p>	<p>P/N: CAB-M12AM8-RJ45 M12 A-code Male (8-Pin) to RJ-45, AWG 24 ,IP67, 1 meter</p>  <p>For GbE UTP (A-code model)</p>	<p>P/N: CAB-M12AF5-OPEN M12 A-code Female (5-Pin) to open wire , AWG 22 , IP67, 1 meter</p>  <p>For Alarm</p>	<p>P/N: CAB-M23F5-OPEN M23 Female (5-Pin) to open wire, (AWG 16) , IP67, 1 meter</p>  <p>For Power</p>
<p>P/N: M12A-M8 M12 A-code Male (8-Pin) connector, IP67</p>  <p>For GbE UTP (A-code model)</p>	<p>P/N: M12A-F5 M12 A-code Female (5-Pin) connector, IP67</p>  <p>For Alarm</p>	<p>P/N: IND-DNK04 Din Rail Kit for Industrial, Wide: 52mm</p>  <p>(130 X52mm / 4 Screws) (2pcs/set)</p>	

Preliminary



ITP-1204GTM-12PH

12x 10/100Base-TX + 4x 10/100/1000Base-T with
12x PoE+ Managed Ethernet Switch

ITP-2204GTM-16PH

22x 10/100Base-TX + 4x 10/100/1000Base-T with
16x PoE+ Managed Ethernet Switch



These models of industrial grade M12 managed PoE switches that provide total 16/26 ports Ethernet connectivity, come with 12/22 ports 10/100Base-TX and 4 ports 10/100/1000Base-T(X). These PoE switches with up to 12/16 IEEE 802.3at compliant PoE plus ports are classified as power source equipment (PSE) and provide up to 30 watts of power per port, maximum power budget up to 120W, and can be used to power IEEE 802.3af/at compliant powered devices (PDs), such as surveillance cameras, wireless access points, and IP phones.

The PoE switches use M12/M23 connectors to ensure tight and robust connections to guarantee the reliable connections against environmental disturbances, such as strongly vibration and shock, these switches provide wide power input range of 24/48/72/96/110VDC (operating range 16.8 to 137.5VDC) make this product series suitable for rolling stock and track side installations. Especially, the ITP series switches defined by the EN 50155 standard covering power input voltage and insulation, surge, EFT, ESD, operating temperature as well, thus making the M12 switches suitable for industrial applications, not only for rolling stock, vehicle but also for oil, gas, mining and heavy industry applications.

These switches provide a variety of advanced Ethernet functionalities including STP/RSTP/MSTP/ ITU-T G.8032 ERPS and μ -Ring, μ -Chain (recovery time <10ms @250 devices) for networking redundancy, layer 2 Ethernet IGMP, VLAN, QoS, Security, IPv6, bandwidth control, port mirroring, cable diagnostic and Green Ethernet, can work with CTC Union's platform SmartView™ to provide convenient, real-time and centralized device management.

Features

- 12x 10/100Base-TX + 4x 10/100/1000Base-T with 12x PoE+ (ITP-1204GTM-12PH)
- 22x 10/100Base-TX + 4x 10/100/1000Base-T with 16x PoE+ (ITP-2204GTM-16PH)
- M12 and M23 connector against vibration and shock, M12 X-code for Gigabit port
- IP64 grade housing protection
- 24 to 110VDC (16.8~137.5VDC) redundant dual wide input power
- Supports negative voltage power input (for example in telecom system)
- Regulated PoE output voltage (50VDC) to stabilize PoE device, and guarantee delivery PoE power distance to 100meters
- Provides 12/16-port IEEE802.3af / 802.3at PoE output (30W per Port)
- Maximum PoE output power budget 120W
- Advanced PoE Management, management, PoE PD failure, auto checking and auto reset, PoE configuration for power planning, weekly scheduling
- EN45545-2, EN-60950-1, CE, FCC, Rail Traffic EN50155, EN50121-4 certified
- Heavy industrial grade EMS, EMI, EN61000-6-2, EN61000-6-4 certified
- 4KV surge protection for PoE and UTP ports
- 2.25K VDC Hi-pot isolation protection for Ethernet ports and power
- Cable diagnostics, identifies opens/shorts from 7 to 100 meters
- Supports Green Ethernet IEEE802.3az EEE (Energy Efficient Ethernet) management to optimize the power consumption
- STP, RSTP, MSTP, ITU-T G.8032 Ethernet Protection Ring (EPR) for redundant cabling
- Provides up to 5 instances that each supports μ -Ring, μ -Chain or Sub-Ring type for flexible uses. (Please see CTC Union's μ -Ring white paper for more details)
- μ -Ring for Redundant Cabling, recovery time <10ms in 250 maximum devices
- Build-in 2 bypass GbE UTP ports to avoid one or more nodes power fail in a ring or bus structure to collapse the network (-BP bypass model)
- DHCP Server/Client/Relay/Snooping/Snooping option 82/Relay option 82
- QoS, Traffic classification QoS, CoS, bandwidth control for Ingress and Egress, Storm Control, DiffServ
- IEEE802.1q VLAN, MAC based VLAN, IP subnet based VLAN, Protocol based VLAN, VLAN translation, GVRP, MVR
- Dynamic IEEE 802.3ad LACP Link Aggregation, Static Link Aggregation
- IGMP snooping V1/V2/V3, IGMP Filtering/ Throttling, IGMP query, IGMP proxy reporting, MLD snooping V1/V2
- Security : Port based and MAC based IEEE802.1X, RADIUS, ACL, TACACS+, HTTP/HTTPS, SSL/SSH v2
- Software upgrade via TFTP and HTTP, redundant firmware to avoid in case of upgrade failure
- Supports IEEE1588 PTP V2 for precise time synchronization to operate in Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master, Slave mode by each port
- RMON, MIB II, Port mirroring, Event syslog, DNS, NTP, SNTP, IEEE802.1ab LLDP
- Supports IPv6 Telnet server /ICMP v6
- CLI, Web based management, SNMP v1/v2c/v3, Telnet server for management
- Provides SmartConfig for quick and easy mass configuration tool*
- Supports SmartView for Centralized Management*
- Supporting Central EMS for management of up to 50 SmartView Server, and maximum up to 25,000 devices*

*Please see Catalog chapter 1- Software Management for more details

Specifications

Standard	IEEE 802.3	10Base-T 10Mbit/s Ethernet
	IEEE 802.3u	100Base-TX, 100Base-FX, Fast Ethernet
	IEEE 802.3ab	1000Base-T Gbit/s Ethernet over twisted pair
	IEEE 802.1d	STP (Spanning Tree Protocol)
	IEEE 802.1w	RSTP (Rapid Spanning Tree Protocol)
	IEEE 802.1s	MSTP (Multiple Spanning Tree Protocol)
	ITU-T G.8032 / Y.1344	ERPS (Ethernet Ring Protection Switching)
	IEEE 802.1Q	Virtual LANs (VLAN)
	IEEE 802.1X	Port based and MAC based Network Access Control, Authentication
	IEEE802.3ac	Max frame size extended to 1522Bytes
	IEEE 802.3ad	Link aggregation for parallel links with LACP(Link Aggregation Control Protocol)
	IEEE 802.3x	Flow control for Full Duplex
	IEEE802.3ac	Max frame size extended to 1522Bytes
	IEEE 802.3af	PoE (Power over Ethernet)
	IEEE 802.3at	PoE+ (Power over Ethernet enhancements)
	IEEE 802.1ad	Stacked VLANs, Q-in-Q
IEEE 802.1p	LAN Layer 2 QoS/CoS Protocol for Traffic Prioritization	
IEEE 802.1ab	Link Layer Discovery Protocol (LLDP)	
IEEE 802.3az	EEE (Energy Efficient Ethernet)	
VLAN ID	4094	IEEE802.1Q VLAN VID
Switch Architecture	10.4 Gbps	(ITP-1204GTM-12PH)
	12.4Gbps	(ITP-2204GTM-16PH) (Full wire-speed)
Data Processing	Store and Forward	
Flow Control	IEEE 802.3x for full duplex mode Back pressure for half duplex mode	
PoE Port	12x M12 (4-Pin D-code Female) PoE ports	(ITP-1204GTM-12PH)
	16x M12 (4-Pin D-code Female) PoE ports	(ITP-2204GTM-16PH)
	Maximum PoE output power budget 120W (30W/per port), Regulated PoE output voltage at 50VDC	
	IEEE 802.3af / IEEE 802.3at End-Span, Alternative A mode	
Network Connector	12x M12 (4-Pin, Female,D-Code)	10/100Base-TX UTP + 4x M12 (8-Pin, Female, X-Code) 10/100/1000Base-T UTP (ITP-1204GTM-12PH)
	22x M12 (4-Pin, Female,D-Code)	10/100Base-TX UTP + 4x M12 (8-Pin, Female, X-Code) 10/100/1000Base-T UTP (ITP-2204GTM-16PH)
	UTP port provide auto negotiation speed, Auto MDI/MDI-X, Full/Half duplex function Build-in 2x bypass GbE UTP ports (For -BP model optional)	
Console	RS-232 (5-pin A-Code M12 male)	
Network Cable	UTP/STP above Cat. 5e cable	
	EIA/TIA-568 100-ohm (100m)	
Protocols	CSMA/CD	
Reverse Polarity Protection	Supported	
Overload Current Protection	Supported	
CPU Watch Dog	Supported	
LED	Per unit: Power 1 (Green), Power 2 (Green), Fault (Amber), CPU Act (Green), Ring Master (Amber)	
	UTP port: 10/100 Link/Active (Green) 1000 Link/Active (Amber)	

LED	PoE Port LED 1 LED /per Port : • PoE Output Power On : ON (Green)
Jumbo Frame	9.6KB
MAC Address Table	8K
Memory Buffer	512K Bytes for packet buffer
Power Supply	Provides 1x M23 (5-Pin, male) for redundant dual DC 24 to 110VDC (16.8~137.5VDC) wide input power Supports negative voltage power input (for example in telecom system) Regulated PoE output voltage (50VDC) to stabilize PoE device, and guarantee delivery PoE power distance to 100meter
Power Consumption	TBD
Warning Message	System Syslog, SMTP/ e-mail event message, alarm relay
Alarm Relay Contact	5-pin A-code M12 male Relay outputs with current carrying capacity of 1 A@24VDC
Operating Temperature	-40 ~ 75°C
Operating Humidity	5% to 95% (Non-condensing)
Storage Temperature	-40 ~ 85°C
Housing	Rugged Metal, Fanless, IP64 grade housing protection
Dimensions	125 x 230 x 132 (D x W x H) (ITP-1204GTM-12PH)
	125 x 350 x 132 (D x W x H) (ITP-2204GTM-16PH)
Weight	TBD
Installation Mounting	Wall mounting
MTBF	TBD (MIL-HDBK-217)
Warranty	5 years
Certification	
EMC	CE (EN55024, EN55032)
EMI (Electromagnetic Interference)	FCC Part 15 Subpart B Class A, CE
Railway Traffic	EN50155, EN50121-4
Fire protection of railway vehicles	EN 45545-2
Immunity for Heavy Industrial Environment	EN61000-6-2
Emission for Heavy Industrial Environment	EN61000-6-4
EMS (Electromagnetic Susceptibility) Protection Level	EN61000-4-2 (ESD) Level 3, Criteria B
	EN61000-4-3 (RS) Level 3, Criteria A
	EN61000-4-4 (Burst) Level 3, Criteria A
	EN61000-4-5 (Surge) Level 3, Criteria B
Safety	EN61000-4-6 (CS) Level 3, Criteria A
	EN61000-4-8 (PFMF, Magnetic Field) Field Strength: 300A/m, Criteria A
Hi pot protection	EN60950-1 DC 2.25KV for power to chassis ground, Ethernet port to chassis ground
4KV surge protection	Supported for PoE and UTP port
Shock	IEC-61373
Freelfall	IEC 60068-2-32
Vibration	IEC-61373

Software Specifications

Topology		
VLAN	IEEE 802.1q VLAN,	up to 4094 802.1Q VLAN VID
	IEEE 802.1q VLAN,	up to 4094 Groups
	IEEE 802.1ad Q-in-Q	
	MAC-based VLAN,	up to 256 entries
	IP Subnet-based VLAN,	up to 128 entries
	Protocol-based VLAN(Ethernt, SNAP, LLC),	up to 128 entries
	VLAN Translation,	up to 256 entries
	GVRP (GARP VLAN Registration Protocol)	
MVR (Multicast VLAN Registration)		
Link Aggregation (Port Trunk)	Static (Hash with SA, DA, IP, TCP/UDP port),	up to 5 trunk group
	Dynamic (IEEE 802.3ad LACP),	up to 5 trunk group


Spanning Tree Multiple μ-Ring	IEEE802.1d STP, IEEE802.1w RSTP, IEEE802.1s MSTP
	up to 5 instances that each supports μ-Ring, μ-Chain or Sub-Ring type for flexible uses, and maximum up to 5 Rings. Recovery time <10ms The maximum number of devices allowed in a Ring supported ring is 250. (Please see CTC μ-Ring white paper for more details and more topology application)
Loop Protection	Supported
ITU-T G.8032 / Y.1344 ERPS (Ethernet Ring Protection)	Recovery time <10ms Single Ring, Sub-Ring, Multiple ring topology network

QoS Feature	
Class of Service	IEEE802.1p 8 active priorities queues for per port
Traffic Classification	IEEE802.1p based CoS
QoS	IP Precedence based CoS
	IP DSCP based CoS
	QCL(QoS Control List): Frame Type, Source/Destination MAC, VLAN ID, PCP, DEI
	QCE(QoS Control Entry): Protocol, Source IP, IP Fragment, DSCP, TCP/UDP port number
Bandwidth Control for Ingress	
	Rate in steps : 1 kbps / Mbps / fps / kfps
	Range : 100 kbps to 1Gbps / 1fps to 3300kfps
	Rate Unit : bit or frame
Bandwidth Control for Egress	
	Rate in steps : 1 kbps / Mbps
	Range : 100 kbps to 1Gbps
	Rate Unit : bit / Per queue / Per port shaper
DiffServ (RF 2474) Remarking	
Storm Control	for Unicast, Broadcast, Multicast
IP Multicasting Feature	
IGMP / MLD Snooping	IGMP Snooping v1, v2, v3 / MLD Snooping v1, v2
	Port Filtering Profile, Throttling
IGMP / MLD Snooping	Fast Leave
	Maximum Multicast Group : up to 1022 entries
	Query / Static Router Port
Security Features	
IEEE 802.1X	Port-Based, MAC-Based
ACL	Number of rules : up to 256 entries for L2 / L3 / L4
	L2: Mac address SA/DA/VLAN
	L3: IP address SA/DA, Subnet
	L4: TCP/UDP
RADIUS authentication & accounting	
TACACS+ authentication & accounting, TACACS+ 3.0	
HTTPS, HTTP	Supported
SSL / SSH v2	Supported
User Name Password Authentication	Local Authentication
	Remote Authentication (via RADIUS / TACACS+)
Management Interface Access Filtering	
Management Interface Access Filtering	Web, Telnet / SSH, CLI, RS-232 console
Management Features	
CLI	Cisco® like CLI
Web Based Management	
Telnet	Server
SNMP	V1, V2c, V3
SW & Configuration Upgrade	TFTP, HTTP
	Redundant firmware in case of upgrade failure

RMON	RMON I (1, 2, 3, 9 group), RMON II
MIB II	RFC 1213
UPnP	Supported
DHCP	Server, Client, Relay, Snooping
	Snooping option 82, Relay option 82
IP Source Guard	Supported
Port Mirroring	Supported
Event Syslog	Syslog server (RFC3164) (Support 1 server)
Warning Message	System syslog, e-mail, alarm relay
DNS	Client, Proxy
IEEE1588 PTP V2	Support 5 operating mode in each port : Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master, Slave
NTP, SNTP	Client
LLDP (IEEE 802.1ab)	Link Layer Discovery Protocol
	LLDP-MED
IPv6 Features	
IPv6 Management	Telnet Server/ICMP v6
SNMP over IPv6	Supported
HTTP over IPv6	Supported
SSH over IPv6	Supported
IPv6 Telnet	Supported
IPv6 NTP, SNTP	Client
IPv6 TFTP	Supported
IPv6 QoS	Supported
IPv6 ACL	Number of rules: up to 256 entries for L2 / L3 / L4
	L2: Mac address SA/DA/VLAN
	L3: IP address SA/DA, Subnet
	L4: TCP/UDP
Others Features	
Green Ethernet	Supports IEEE802.3az EEE (Energy Efficient Ethernet) Management to optimize the power consumption
	Determine the cable length and lowering the power for ports with short cables
	Lower the power for a port when there is no link
	LED Power Management :Adjustment LEDs intensity
Cable Diagnostic	Measuring UTP cable OK or broken point distance
Advanced PoE Management	PoE PD Failure Auto Checking, and Auto reset when PD fail
	PoE Scheduling (On/Off schedule weekly)
	PoE Configuration
	PoE Enable/Disable
	Power limit by classification
	Power limit by management
	Total PoE Power budget (maximum 120W) limitation
	Power feeding priority

Application

Figure : ITP Series in Onboard Train Application

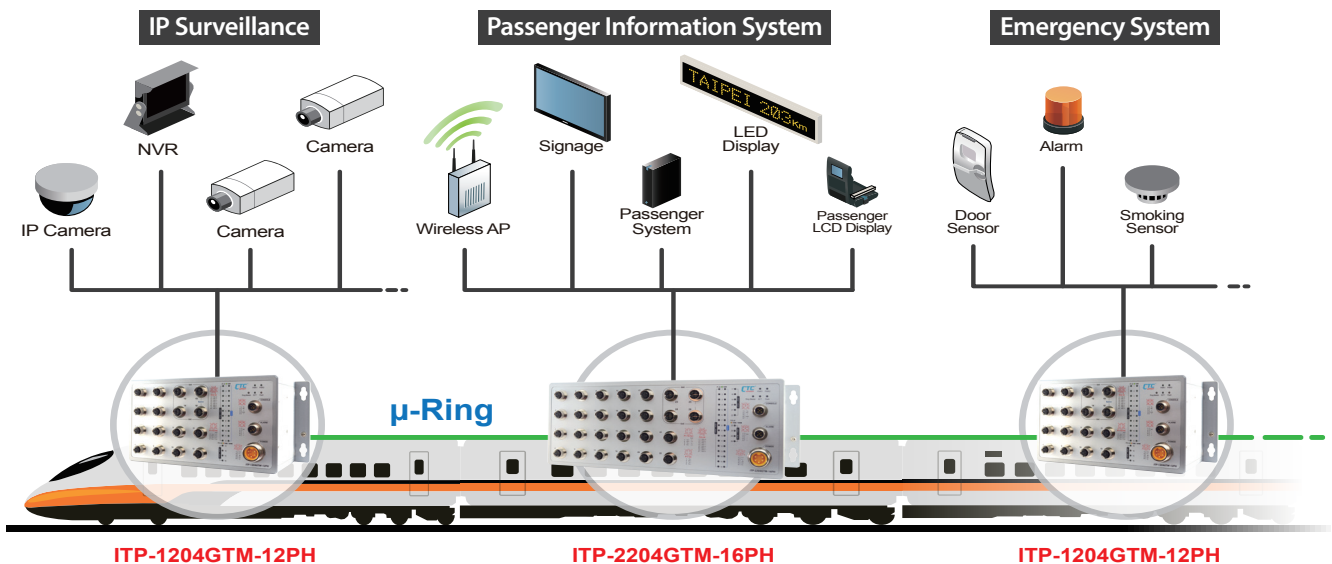


Ordering Information

Model Name	Managed	Protection	Total Port	FE Port	GbE port		PoE Port		Redundant Dual Input Power 24 to 110VDC (16.8~137.5VDC)
				D-code M12	GbE X-code M12 UTP	GbE X-code M12 UTP Bypass	IEEE802.3at	PoE Total Power Budget	
ITP-1204GTM-12PHE	V	IP42	16	12	4		12	120W	V
ITP-1204GTM-12PHE-BP	V	IP42	16	12	2	2	12	120W	V
ITP-2204GTM-16PHE	V	IP42	26	22	4		16	120W	V
ITP-2204GTM-16PHE-BP	V	IP42	26	22	2	2	16	120W	V

Model Name	Certification					
	EN45545-2	EN50155 EN50121-4	EN60950-1	EN61000-6-2 EN61000-6-4	CE, FCC	IEC61373
ITP-1204GTM-12PHE	V	V	V	V	V	V
ITP-1204GTM-12PHE-BP	V	V	V	V	V	V
ITP-2204GTM-16PHE	V	V	V	V	V	V
ITP-2204GTM-16PHE-BP	V	V	V	V	V	V

Model Naming Rule

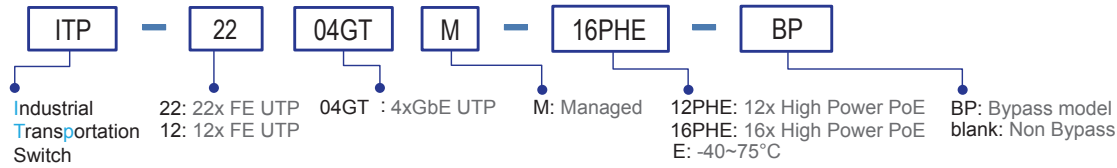

Package List

- One unit device
- Protective caps for UTP ports and console, alarm port
- Console cable (M12 to DB9)
- CD (Smartconfig, Manual)
- Quickly installation guide

Optional Accessories

Optional Cable/Connector

P/N: CAB-M12XM8-RJ45

M12 X-code Male (8-Pin) to RJ-45, AWG 24 ,IP67, 1 meter



For GbE UTP (X-code)

P/N: CAB-M12DM4-RJ45

M12 D-code Male (4-Pin) to RJ-45, AWG 24 ,IP67, 1 meter



For FE UTP

P/N: CAB-M12AF5-OPEN

M12 A-code Female (5-Pin) to open wire, AWG 22 , IP67, 1 meter



For Alarm

P/N: CAB-M23F5-OPEN

M23 Female (5-Pin) to open wire, (AWG 16) , IP67, 1 meter



For Power

P/N: M12D-M4

M12 D-code Male (4-Pin) connector, IP67



For FE UTP

P/N: M12A-F5

M12 A-code Female (5-Pin) connector, IP67



For Alarm

180W, 24V Booster



ITP-802GTM-8PH24

8x 10/100Base-TX + 2x 10/100/1000Base-T with
8x PoE+ Managed Ethernet Switch

ITP-802GSM-8PH24

8x 10/100Base-TX + 2x 100/1000Base-X SFP with
8x PoE+ Managed Ethernet Switch



These models are managed industrial grade PoE (Power over Ethernet) switches that provide 8x FE UTP + 2x GbE SFP or 8x FE UTP + 2x GbE UTP. The PoE features enable power and data to be transferred via a single cable, thereby considerably reducing cabling and electrical wiring expenses. These switches also provide a variety of functions to manage PoE operation including PoE device auto-checking, auto reset, and PoE power weekly scheduling. Other advanced Ethernet functions are supported and include STP/RSTP/MSTP/ ITU-T G.8032 ERPS and multiple μ -Ring for redundant cabling, layer 2 Ethernet IGMP, VLAN, QoS, Security, IPv6, bandwidth control, port mirroring, cable diagnostic and Green Ethernet.

Housed in rugged DIN rail or wall mountable enclosures, these switches are designed for the harshest environments. Specifically, These switches use M12 connectors to ensure water tight, robust connections and to guarantee reliable connections against environmental disturbances, such as vibration and shock. Besides, these models are compliant with EN50155, covering power input voltage, surge, EFT, ESD, vibration, shock, thus making the switches suitable for industrial applications, such as vehicle, rolling stock, ship, vessel.

These models are IP67 rated to protect against dust and water submersion, they are particularly used in environments with extreme temperature, high humidity, oil, dust and in outdoor environments requiring water-proof applications such as IP surveillance, city security. They can also work with CTC Union's platform SmartView™ to provide convenient, real-time and centralized device management.

Features

- 8x 10/100Base-TX M12 UTP and 2x 100/1000Base-X SFP Fiber with 8x PoE+ (Total 10 ports) (ITP-802GSM-8PH24)
- 8x 10/100Base-TX M12 UTP and 2x 10/100/1000Base-T UTP with 8x PoE+ (Total 10 ports) (ITP-802GTM-8PH24)
- M12 and M23 connector against vibration and shock, X-code or A-code M12 for Gigabit port optional
- IP67 grade housing for against water, dust, and oil (Figure 4)
- 24/48VDC redundant dual input power, and built-in power booster design upto 55 VDC for PoE output (Figure 2)
- Regulated PoE output voltage (55VDC) to stabilize PoE device, and guarantee delivery PoE power distance to 100meters (Figure 2)
- Provides 8-port IEEE802.3af / 802.3at PoE output (30W per Port)
- Maximum PoE output power budget 180W
- Advanced PoE Management, management, PoE PD failure, auto checking and auto reset, PoE configuration for power planning, weekly scheduling
- UL60950-1, CE, FCC, Rail Traffic EN50155, EN50121-4 certified
- Heavy industrial grade EMS, EMI, EN61000-6-2, EN61000-6-4 certified
- Cable diagnostics, identifies opens/shorts from 7 to 100 meters
- Supports Green Ethernet IEEE802.3az EEE (Energy Efficient Ethernet) management to optimize the power consumption
- STP, RSTP, MSTP, ITU-T G.8032 Ethernet Protection Ring (EPR) for redundant cabling
- Provides up to 5 instances that each supports μ -Ring, μ -Chain or Sub-Ring type for flexible uses. (Please see CTC Union's μ -Ring white paper for more details)
- μ -Ring for Redundant Cabling, recovery time < 10ms in 250 maximum devices
- Build-in 2 bypass GbE UTP ports to avoid one or more nodes power fail in a ring or bus structure to collapse the network (ITP-802GTM-8PH24)
- DHCP Server/Client/Relay/Snooping/Snooping option 82/Relay option 82
- QoS, Traffic classification QoS, CoS, bandwidth control for Ingress and Egress, Storm Control, DiffServ
- IEEE802.1q VLAN, MAC based VLAN, IP subnet based VLAN, Protocol based VLAN, VLAN translation, GVRP, MVR
- Dynamic IEEE 802.3ad LACP Link Aggregation, Static Link Aggregation
- IGMP snooping V1/V2/V3, IGMP Filtering/ Throttling, IGMP query, IGMP proxy reporting, MLD snooping V1/V2
- Security : Port based and MAC based IEEE802.1X, RADIUS, ACL, TACACS+, HTTP/HTTPS, SSL/SSH v2
- Software upgrade via TFTP and HTTP, redundant firmware to avoid in case of upgrade failure
- Supports IEEE1588 PTP V2 for precise time synchronization to operate in Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master, Slave mode by each port
- RMON, MIB II, Port mirroring, Event syslog, DNS, NTP, SNTP, IEEE802.1ab LLDP
- Supports IPv6 Telnet server /ICMP v6
- CLI, Web based management, SNMP v1/v2c/v3, Telnet server for management
- Provides SmartConfig for quick and easy mass configuration tool (Please see Catalog chapter 1- Software Management for more details)
- Supports SmartView for Centralized Management. (Please see Catalog chapter 1- Software Management for more details)
- Supporting Central EMS for management of up to 50 SmartView Server, and maximum up to 25,000 devices (Please see Catalog chapter 1- Software Management for more details)

Specifications

Standard	IEEE 802.3	10Base-T 10Mbit/s Ethernet
	IEEE 802.3u	100Base-TX, 100Base-FX, Fast Ethernet
	IEEE 802.3ab	1000Base-T Gbit/s Ethernet over twisted pair
	IEEE 802.3z	1000Base-X Gbit/s Ethernet over Fiber-Optic
	IEEE 802.1d	STP (Spanning Tree Protocol)
	IEEE 802.1w	RSTP (Rapid Spanning Tree Protocol)
	IEEE 802.1s	MSTP (Multiple Spanning Tree Protocol)
	ITU-T G.8032 / Y.1344	ERPS (Ethernet Ring Protection Switching)
	IEEE 802.1Q	Virtual LANs (VLAN)
	IEEE 802.1X	Port based and MAC based Network Access Control, Authentication
	IEEE802.3ac	Max frame size extended to 1522Bytes
	IEEE 802.3ad	Link aggregation for parallel links with LACP(Link Aggregation Control Protocol)
	IEEE 802.3x	Flow control for Full Duplex
	IEEE802.3ac	Max frame size extended to 1522Bytes
	IEEE 802.3af	PoE (Power over Ethernet)
	IEEE 802.3at	PoE+ (Power over Ethernet enhancements)
	IEEE 802.1ad	Stacked VLANs, Q-in-Q
IEEE 802.1p	LAN Layer 2 QoS/CoS Protocol for Traffic Prioritization	
IEEE 802.1ab	Link Layer Discovery Protocol (LLDP)	
IEEE 802.3az	EEE (Energy Efficient Ethernet)	
VLAN ID	4094 IEEE802.1Q VLAN VID	
Switch Architecture	Back-plane (Switching Fabric): 5.6Gbps (Full wire-speed)	
Data Processing	Store and Forward	
Flow Control	IEEE 802.3x for full duplex mode Back pressure for half duplex mode	
PoE Port	8x M12 (4-Pin D-code Female) ports support IEEE 802.3af / IEEE 802.3at End-Span, Alternative A mode.	
Network Connector	8x M12 (4-Pin, Female,D-Code) 10/100Base-TX UTP + 2x M12 (8-Pin, female,A-code or X-Code) 10/100/1000Base-T UTP (ITP-802GTM-8PH24) 8x M12 (4-Pin, Female,D-Code) 10/100Base-TX UTP + 2x 100/1000Base-X SFP (ITP-802GSM-8PH24) UTP port provide auto negotiation speed, Auto MDI/MDI-X, Full/Half duplex function Build-in 2x bypass GbE UTP ports (ITP-802GTM-8PH24) 2x Water-proof cable connector 2x 100/1000Base-X SFP slot, with DDMI (ITP-802GSM-8PH24)	
Console	RS-232 (5-pin A-Code M12 male)	
Network Cable	UTP/STP above Cat. 5e cable EIA/TIA-568 100-ohm (100m)	
Protocols	CSMA/CD	
Reverse Polarity Protection	Supported	
Overload Current Protection	Supported	
CPU Watch Dog	Supported	
LED	Per unit: Power 1 (Green), Power 2 (Green), Fault (Amber), CPU Act (Green), Ring Master (Amber) UTP port: 10/100 Link/Active (Green) 1000 Link/Active (Amber) SFP Fiber Per port: Link/Active (Green) PoE Port LED 1 LED /per Port : • PoE Output Power On : ON (Green) • PoE Fault (Over Load, Short Circuit, Port failed at Startup) : Flash 1times /sec (Green)	
Jumbo Frame	9.6KB	

Software Specifications

Topology	
VLAN	IEEE 802.1q VLAN, up to 4094 802.1Q VLAN VID IEEE 802.1q VLAN, up to 4094 Groups IEEE 802.1ad Q-in-Q MAC-based VLAN, up to 256 entries IP Subnet-based VLAN, up to 128 entries Protocol-based VLAN(Ethernet, SNAP, LLC), up to 128 entries VLAN Translation, up to 256 entries GVRP (GARP VLAN Registration Protocol) MVR (Multicast VLAN Registration)
Link Aggregation (Port Trunk)	Static (Hash with SA, DA, IP, TCP/UDP port), up to 5 trunk group Dynamic (IEEE 802.3ad LACP), up to 5 trunk group

MAC Address Table	8K																														
Memory Buffer	512K Bytes for packet buffer																														
PoE Standard	IEEE802.3af, IEEE802.3at																														
PoE Power Output	Maximum PoE output power budget 180W (30W/per port) Regulated PoE output voltage at 55VDC (Figure 2)																														
Power Supply	Provides 1x M23 (5-Pin, male) for redundant dual DC 24/48V (20~57VDC) input power Built-in very high efficiency booster(94~97%) to rise up 55 VDC for PoE output Regulated PoE output voltage (55VDC) to stabilize PoE device, and guarantee delivery PoE power distance to 100meter (Figure 2)																														
Power Consumption	<p>ITP-802GSM-8PH24</p> <table border="1"> <thead> <tr> <th>Input Voltage</th> <th>Total Power Consumption</th> <th>Device Power Consumption</th> <th>PoE Budget</th> <th>Boost Efficiency</th> </tr> </thead> <tbody> <tr> <td>24 VDC</td> <td>196.4W</td> <td>8.1W</td> <td>180W</td> <td>95.50%</td> </tr> <tr> <td>48 VDC</td> <td>197.8W</td> <td>9.6W</td> <td>180W</td> <td>95.60%</td> </tr> </tbody> </table> <p>ITP-802GTM-8PH24</p> <table border="1"> <thead> <tr> <th>Input Voltage</th> <th>Total Power Consumption</th> <th>Device Power Consumption</th> <th>PoE Budget</th> <th>Boost Efficiency</th> </tr> </thead> <tbody> <tr> <td>24 VDC</td> <td>198.3W</td> <td>8.9W</td> <td>180W</td> <td>95.00%</td> </tr> <tr> <td>48 VDC</td> <td>198.8W</td> <td>10.1W</td> <td>180W</td> <td>95.30%</td> </tr> </tbody> </table>	Input Voltage	Total Power Consumption	Device Power Consumption	PoE Budget	Boost Efficiency	24 VDC	196.4W	8.1W	180W	95.50%	48 VDC	197.8W	9.6W	180W	95.60%	Input Voltage	Total Power Consumption	Device Power Consumption	PoE Budget	Boost Efficiency	24 VDC	198.3W	8.9W	180W	95.00%	48 VDC	198.8W	10.1W	180W	95.30%
Input Voltage	Total Power Consumption	Device Power Consumption	PoE Budget	Boost Efficiency																											
24 VDC	196.4W	8.1W	180W	95.50%																											
48 VDC	197.8W	9.6W	180W	95.60%																											
Input Voltage	Total Power Consumption	Device Power Consumption	PoE Budget	Boost Efficiency																											
24 VDC	198.3W	8.9W	180W	95.00%																											
48 VDC	198.8W	10.1W	180W	95.30%																											
Warning Message	System Syslog, SMTP/ e-mail event message, alarm relay																														
Alarm Relay Contact	5-pin A-code M12 male Relay outputs with current carrying capacity of 1 A@24VDC																														
Operating Temperature	-40 ~ 75°C																														
Operating Humidity	5% to 95% (Non-condensing)																														
Storage Temperature	-40 ~ 85°C																														
Housing	Rugged Metal, Fanless , IP67 grade housing for against water, dust, and oil (Figure 4)																														
Dimensions	70 x 240 x 168mm (D x W x H)																														
Weight	2.170kg (ITP-802GSM-8PH24) 2.15kg (ITP-802GTM-8PH24)																														
Installation Mounting	Wall mounting, or DIN Rail mounting (Optional)																														
MTBF	371,961 Hours (ITP-802GSM-8PH24) 362,429 Hours (ITP-802GTM-8PH24) (MIL-HDBK-217)																														
Warranty	5 years																														
Certification																															
EMC	CE																														
EMI (Electromagnetic Interference)	FCC Part 15 Subpart B Class A, CE																														
Railway Traffic	EN50155, EN50121-4																														
Immunity for Heavy Industrial Environment	EN61000-6-2																														
Emission for Heavy Industrial Environment	EN61000-6-4																														
EMS (Electromagnetic Susceptibility) Protection Level	EN61000-4-2 (ESD) Level 3, Criteria B EN61000-4-3 (RS) Level 3, Criteria A EN61000-4-4 (Burst) Level 3, Criteria A EN61000-4-5 (Surge) Level 3, Criteria B EN61000-4-6 (CS) Level 3, Criteria A EN61000-4-8 (PFMF, Magnetic Field) Field Strength: 300A/m, Criteria A																														
Safety	UL60950-1																														
Shock	IEC-61373																														
Freefall	IEC 60068-2-32																														
Vibration	IEC-61373																														
Spanning Tree	IEEE802.1d STP, IEEE802.1w RSTP, IEEE802.1s MSTP																														
Multiple μ-Ring	up to 5 instances that each supports μ-Ring, μ-Chain or Sub-Ring type for flexible uses, and maximum up to 5 Rings. Recovery time <10ms The maximum number of devices allowed in a Ring supported ring is 250. (Please see CTC μ-Ring white paper for more details and more topology application)																														
Loop Protection	Supported																														
ITU-T G.8032 / Y.1344 ERPS (Ethernet Ring Protection)	Recovery time <50ms Single Ring, Sub-Ring, Multiple ring topology network																														

QoS Feature	
Class of Service	IEEE802.1p 8 active priorities queues for per port
Traffic Classification	IEEE802.1p based CoS
Classification QoS	IP Precedence based CoS IP DSCP based CoS QCL(QoS Control List): Frame Type, Source/Destination MAC, VLAN ID, PCP, DEI QCE(QoS Control Entry): Protocol, Source IP, IP Fragment, DSCP, TCP/UDP port number
Bandwidth Control for Ingress	Rate in steps : 1 kbps / Mbps / fps / kfps Range : 100 kbps to 1Gbps / 1fps to 3300kfps Rate Unit : bit or frame
Bandwidth Control for Egress	Rate in steps : 1 kbps / Mbps Range : 100 kbps to 1Gbps Rate Unit : bit Per queue / Per port shaper
DiffServ (RF 2474) Remarking	
Storm Control	for Unicast, Broadcast, Multicast
IP Multicasting Feature	
IGMP / MLD Snooping	IGMP Snooping v1, v2, v3 / MLD Snooping v1, v2 Port Filtering Profile, Throttling
IGMP / MLD Snooping	Fast Leave Maximum Multicast Group : up to 1022 entries Query / Static Router Port
Security Features	
IEEE 802.1X	Port-Based, MAC-Based
ACL	Number of rules : up to 256 entries for L2 / L3 / L4 L2: Mac address SA/DA/VLAN L3: IP address SA/DA, Subnet L4: TCP/UDP
RADIUS authentication & accounting	
TACACS+ authentication & accounting, TACACS+ 3.0	
HTTPS, HTTP	Supported
SSL / SSH v2	Supported
User Name Password Authentication	Local Authentication Remote Authentication (via RADIUS / TACACS+)
Management Interface Access	Web, Telnet / SSH , CLI RS-232 console
Filtering	
Management Features	
CLI	Cisco® like CLI
Web Based Management	
Telnet	Server
SNMP	V1, V2c, V3
SW & Configuration Upgrade	TFTP, HTTP Redundant firmware in case of upgrade failure
RMON	RMON I (1, 2, 3, 9 group), RMON II

MIB II	RFC 1213
UPnP	Supported
DHCP	Server, Client, Relay, Snooping Snooping option 82, Relay option 82
IP Source Guard	Supported
Port Mirroring	Supported
Event Syslog	Syslog server (RFC3164) (Support 1 server)
Warning Message	System syslog, e-mail, alarm relay
DNS	Client, Proxy
IEEE1588 PTP V2	Support 5 operating mode in each port : Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master, Slave
NTP, SNTP	Client
LLDP (IEEE 802.1ab)	Link Layer Discovery Protocol LLDP-MED
IPv6 Features	
IPv6 Management	Telnet Server/ICMP v6
SNMP over IPv6	Supported
HTTP over IPv6	Supported
SSH over IPv6	Supported
IPv6 Telnet	Supported
IPv6 NTP, SNTP	Client
IPv6 TFTP	Supported
IPv6 QoS	Supported
IPv6 ACL	Number of rules: up to 256 entries for L2 / L3 / L4 L2: Mac address SA/DA/VLAN L3: IP address SA/DA, Subnet L4: TCP/UDP
Others Features	
Green Ethernet	Supports IEEE802.3az EEE (Energy Efficient Ethernet) Management to optimize the power consumption Determine the cable length and lowering the power for ports with short cables Lower the power for a port when there is no link LED Power Management :Adjustment LEDs intensity
Cable Diagnostic Advanced PoE Management	Measuring UTP cable OK or broken point distance PoE PD Failure Auto Checking, and Auto reset when PD fail PoE Scheduling (On/Off schedule weekly) PoE Configuration PoE Enable/Disable Power limit by classification Power limit by management Total PoE Power budget (maximum 180W) limitation Power feeding priority

Application

Figure 1 : ITP Series in Onboard Train Application


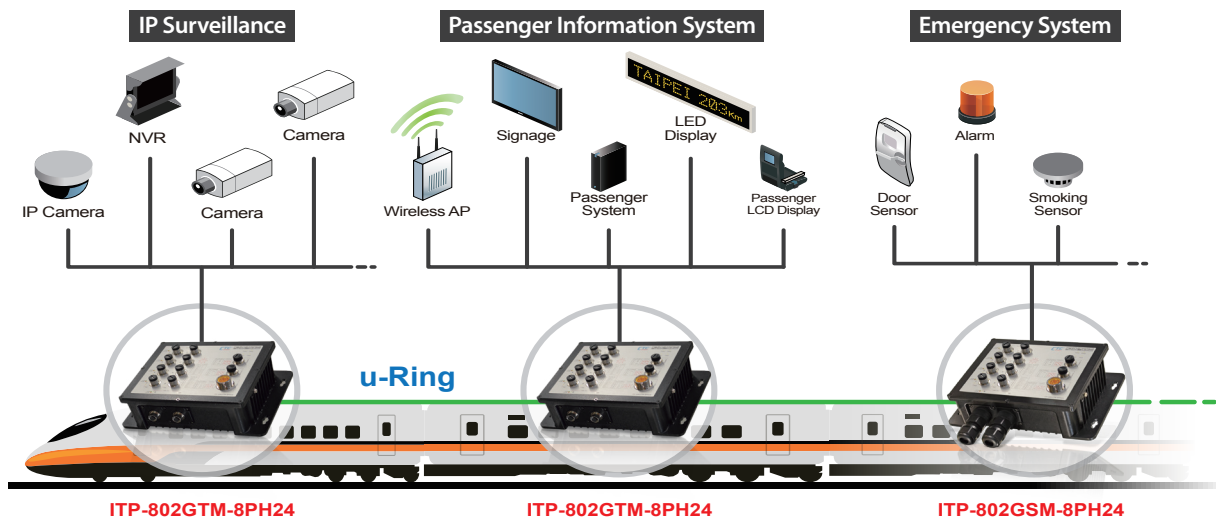


Figure 2 : High Efficiency Boost Technology for PoE

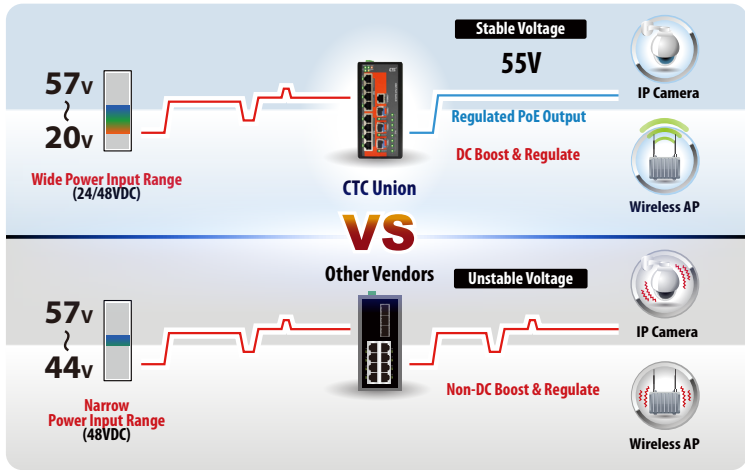

- Regulated PoE output voltage (55VDC) to stabilize PoE device
- Guarantee delivery PoE power distance to 100 meters
- Wide range input power 24/48VDC (20~57VDC)
- Built-in very high efficiency (94~97%) to boost PoE output voltage

Figure 3 : ITP Series for Industrial Automation

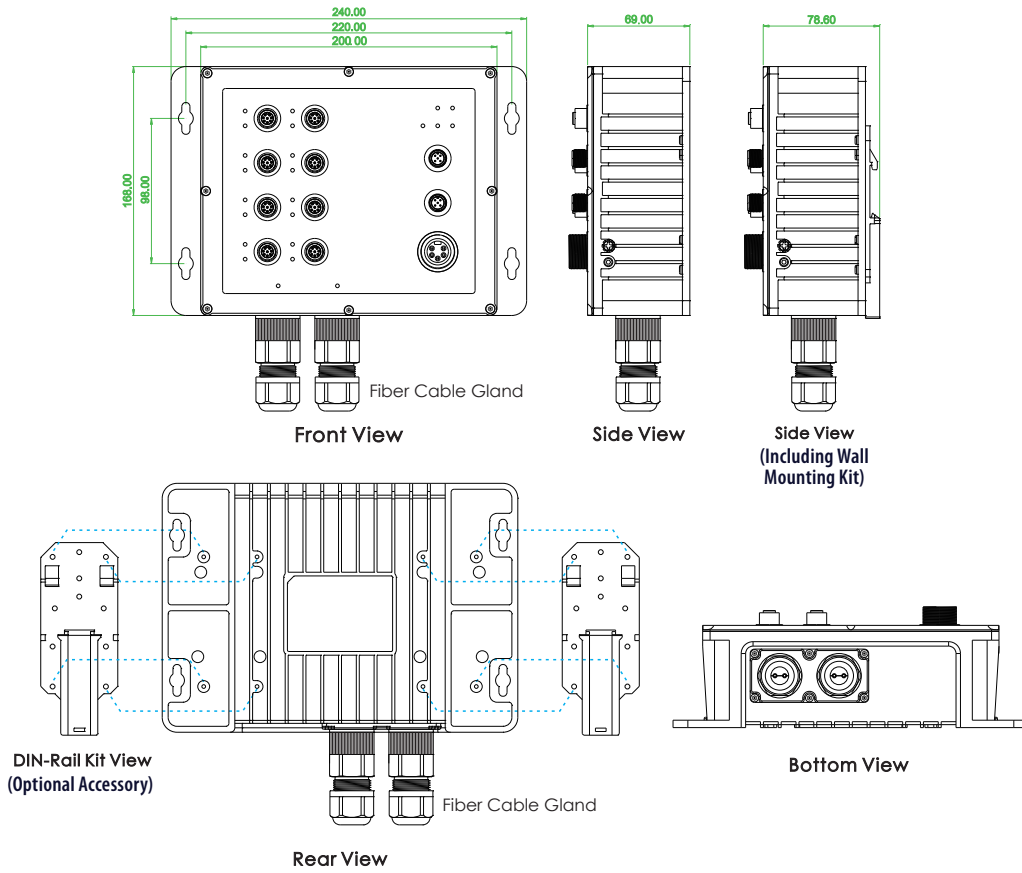


Figure 4 : IP67 Waterproof




Dimensions

▶ ITP-802GSM-8PH24




▶ ITP-802GTM-8PH24

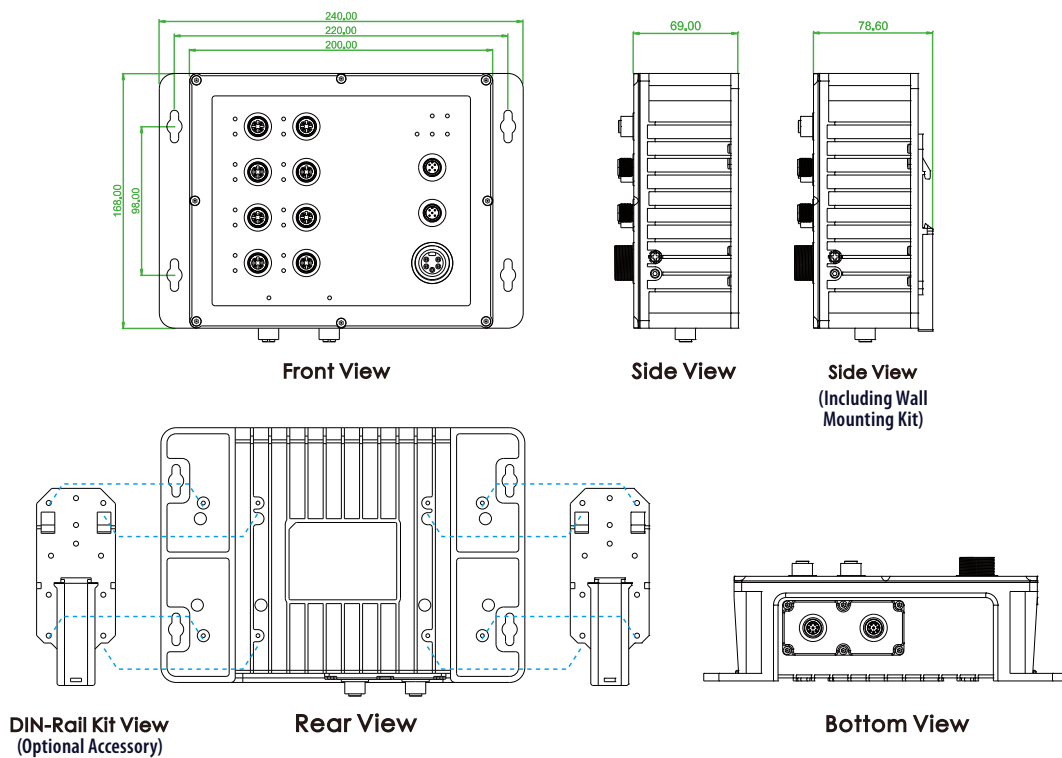

Ordering Information

Model Name	Managed	IP67	Total Port	UTP Port M12	UTP or SFP	PoE Port	PoE Total Power Budget	Power Input	Certification				Shock Vibration	Operating Temperature
				10/100 Base-TX	100/1000 Base-X	IEEE802.3at		Redundant	EN50155 EN50121-4	UL60950-1	EN61000-6-2 EN61000-6-4	CE FCC	IEC61373	
ITP-802GTM-8PHE24-X	V	V	10	8	2 (X-code)	8	180W	24/48VDC	V	Plan	V	V	V	-40~75°C
ITP-802GTM-8PHE24	V	V	10	8	2 (A-code)	8	180W	24/48VDC	V	Plan	V	V	V	-40~75°C
ITP-802GSM-8PHE24	V	V	10	8	2 SFP	8	180W	24/48VDC	V	Plan	V	V	V	-40~75°C

Model Naming Rule

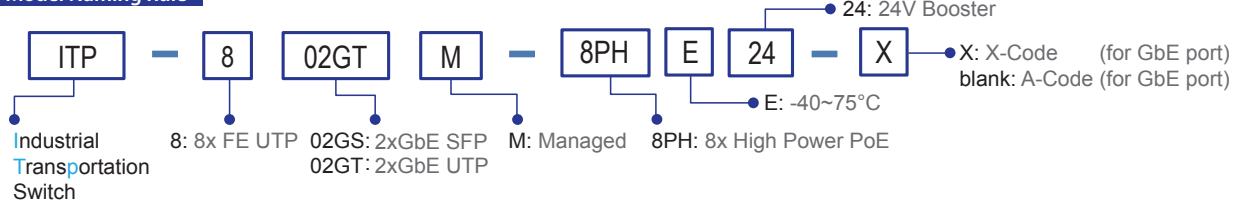

Package List

- One of the device series
- Protective caps for SFP ports and console, alarm port
- Fiber Cable Gland for SFP port x 2 set (for ITP-802GSM-8PH24)
- Console cable (M12 to DB9)
- CD (Smartconfig, Manual)
- Quickly installation guide


Optional Accessories

Industrial SFP Transceiver

The ISFP series of industrial grade SFP modules have been fully tested with the ITP-802GSM-8PH24 for guaranteed compatibility and performance. The best performance can be guaranteed even in mission-critical applications. (Please see CTC Union's Industrial SFP datasheet for more details and more items.)

ISFP-M7000-85-D(E)	Industrial SFP GbE 1000Base-SX, M/M, 500 meter, wave length 850nm, 7.5dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-S7020-31-D(E)	Industrial SFP 1000Base-LX, S/M, 20km, wave length 1310nm, 15dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-M5002-31-D(E)	Industrial SFP 155M 100Base-FX, MM, 2km, wave length 1310nm, 12dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-S5030-31-D(E)	Industrial SFP 155M 100Base-FX, SM, 30km, 1310nm, 19dB, LC, DDMI, -10~70°C (-40~85°C)

SFP Naming Rule

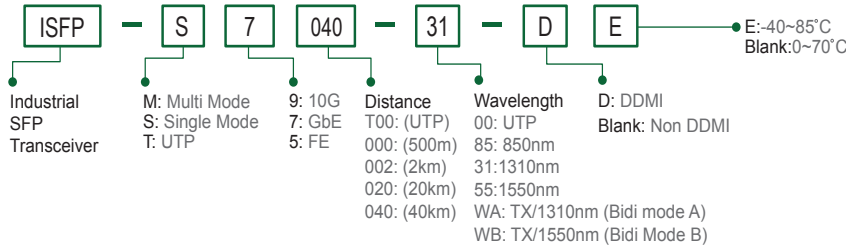

Optional Cable/Connector & Din-Rail Kit

P/N: CAB-M12XM8-RJ45

M12 X-code Male (8-Pin) to RJ-45, AWG 24, IP67, 1 meter



For GbE UTP (X-code model)

P/N: CAB-M12AM8-RJ45

M12 A-code Male (8-Pin) to RJ-45, AWG 24, IP67, 1 meter



For GbE UTP (A-code model)

P/N: CAB-M12DM4-RJ45

M12 D-code Male (4-Pin) to RJ-45, AWG 24, IP67, 1 meter



For FE UTP

P/N: CAB-M12AF5-OPEN

M12 A-code Female (5-Pin) to open wire, AWG 22, IP67, 1 meter



For Alarm

P/N: CAB-M23F5-OPEN

M23 Female (5-Pin) to open wire, (AWG 16), IP67, 1 meter



For Power

P/N: M12A-M8

M12 A-code Male (8-Pin) connector, IP67



For GbE UTP (A-code model)

P/N: M12D-M4

M12 D-code Male (4-Pin) connector, IP67



For FE UTP

P/N: M12A-F5

M12 A-code Female (5-Pin) connector, IP67



For Alarm

P/N: IND-DNK04

Din Rail Kit for Industrial, Wide: 52mm



(130 X52mm / 4 Screws) (2pcs/set)

180W, 24V Booster



ITP-800-8PH24

8x 10/100Base-TX with 8x PoE+ Ethernet Switch



The ITP-800-8PH24 is a unmanaged Fast Ethernet PoE switch that provides 8 10/100Base-TX PoE+ Fast Ethernet ports. The Ethernet switch is designed for industrial applications in harsh environments. The switch's Ethernet ports utilize M12 connectors to ensure tight, robust connections and guarantee reliable operation against environmental disturbances such as vibration and shock. The ITP-800-8PHE24 series Ethernet switches are compliant with EN50155, covering operating temperature, power input voltage, surge, ESD, vibration, and shock, thus making these switches suitable for industrial applications in vehicle, rolling stock and railways.

Features

- IP67 grade housing for against water, dust, and oil (Figure 3)
- Rugged and fanless design
- 8-Port 10/100Base-TX UTP with 8x IEEE802.3at/af PoE Ethernet Switch
- Use M12/M23 connector anti vibration and shock for vehicle, rolling stock, and railway applications
- 24/48VDC (20~57VDC) redundant dual input power with built-in very high efficiency (94~97%) to boost PoE output voltage to 55VDC
- Regulated PoE output voltage (55VDC) to stabilize PoE device, and guarantee delivery PoE power distance to 100 meters (Figure 2)
- Provides 8-port IEEE802.3af / 802.3at PoE output (30W per Port), Maximum PoE output power budget 180W
- Supports flow control
- DIN rail or wall mounting installation
- Supports broadcast storm protection
- Supports auto-negotiation and auto-MDI/MDI-X
- Wide operating temperature -40~75°C (ITP-800-8PHE24)
- CE, FCC, EN50155 and EN50121-4 for railway certified
- Industrial Grade EMS, EMI, EN61000-6-2, EN61000-6-4 certified

Specifications

IEEE Standard	IEEE 802.3 10Base-T Ethernet IEEE 802.3u 100Base-TX Fast Ethernet IEEE802.3x Flow Control and Back Pressure IEEE 802.3af PoE (Power over Ethernet) IEEE 802.3at PoE+ (Power over Ethernet enhancements)
Switch Architecture	Back-plane (Switching Fabric): 1.6Gbps (Full wire-speed)
Data Processing	Store and Forward
Flow Control	IEEE 802.3x flow control, back pressure flow control
Provides Broadcast Storm Protection	Present
MAC Address Table	1 K
Packet Buffer Size	448Kbits
Network Connector	8x M12 D-code Female 10/100Base-TX auto negotiation speed Auto MDI/MDI-X function Full/Half duplex
Network Cable	10Base-T: 2-pair UTP/STP Cat. 5e cable EIA/TIA-568 100-ohm (100m) 100Base-TX: 2-pair UTP/STP Cat. 5e cable EIA/TIA-568 100-ohm (100m)
Protocols	CSMA/CD
LED	Per unit: Power 1 (Green), Power 2 (Green) Per port: Link/Active (Green) PoE Port LED 1x LED /per Port : • PoE Output Power On : ON (Green)
Reverse Polarity Protection	Present for power input
Overload Current Protection	Supported
PoE Standard	IEEE802.3af, IEEE802.3at
PoE Power Budget	Maximum PoE output power budget 180W (30W/per port) Regulated PoE output voltage at 55VDC (Figure 2)

Power Supply	Provide 1x M23 (5-Pin, male) for redundant dual DC 24/48V (20~57VDC) input power Built-in very high efficiency (94~97%) to boost PoE output voltage to 55VDC Regulate PoE output voltage (55VDC) to stabilize PoE device, and guarantee delivery PoE power distance to 100 meters (Figure 2)																			
Power Consumption	<table border="1"> <thead> <tr> <th>Input Voltage</th> <th>Total Power Consumption</th> <th>Device Power Consumption</th> <th>PoE Budget</th> <th>Boost Efficiency</th> </tr> </thead> <tbody> <tr> <td>24 VDC</td> <td>188.9W</td> <td>3.6W</td> <td>180W</td> <td>95.7%</td> </tr> <tr> <td>48 VDC</td> <td>191W</td> <td>4.3W</td> <td>180W</td> <td>96.0%</td> </tr> </tbody> </table>	Input Voltage	Total Power Consumption	Device Power Consumption	PoE Budget	Boost Efficiency	24 VDC	188.9W	3.6W	180W	95.7%	48 VDC	191W	4.3W	180W	96.0%				
Input Voltage	Total Power Consumption	Device Power Consumption	PoE Budget	Boost Efficiency																
24 VDC	188.9W	3.6W	180W	95.7%																
48 VDC	191W	4.3W	180W	96.0%																
Operating Temperature	-40°C~75°C																			
Operating Humidity	5% to 95% (Non-condensing)																			
Storage Temperature	-40°C~85°C																			
Housing	IP67 water-proof grade housing, and fanless (Figure 3)																			
Dimensions	67 x 71.4 x 214.5 mm (D x W x H)																			
Weight	470g																			
Installation Mounting	Wall mounting, or DIN rail (optional)																			
MTBF	937,878 Hours (MIL-HDBK-217)																			
Warranty	5 years																			
Certification																				
EMC	CE																			
EMI	FCC, FCC Part 15 Subpart B Class A CE																			
Railway Traffic	EN50155, EN50121-4																			
Immunity for Heavy Industrial Environment	EN61000-6-2																			
Emission for Heavy Industrial Environment	EN61000-6-4																			

5

EN50155 Managed PoE Switch

EMS (Electromagnetic Susceptibility) Protection Level	EN61000-4-2 (ESD) Level 3, Criteria B
	EN61000-4-3 (RS) Level 3, Criteria A
	EN61000-4-4 (Burst) Level 3, Criteria A
	EN61000-4-5 (Surge) Level 3, Criteria B
	EN61000-4-6 (CS) Level 3, Criteria A
	EN61000-4-8 (PFMF, Magnetic Field) Field Strength: 300A/m, Criteria A
	EN 61000-4-11 Voltage Dips

Safety	UL60950-1 (Pending)
Shock	IEC 61373
Freefall	IEC 60068-2-32
Vibration	IEC 61373

Application

Figure 1 : ITP Series in Onboard Train Application


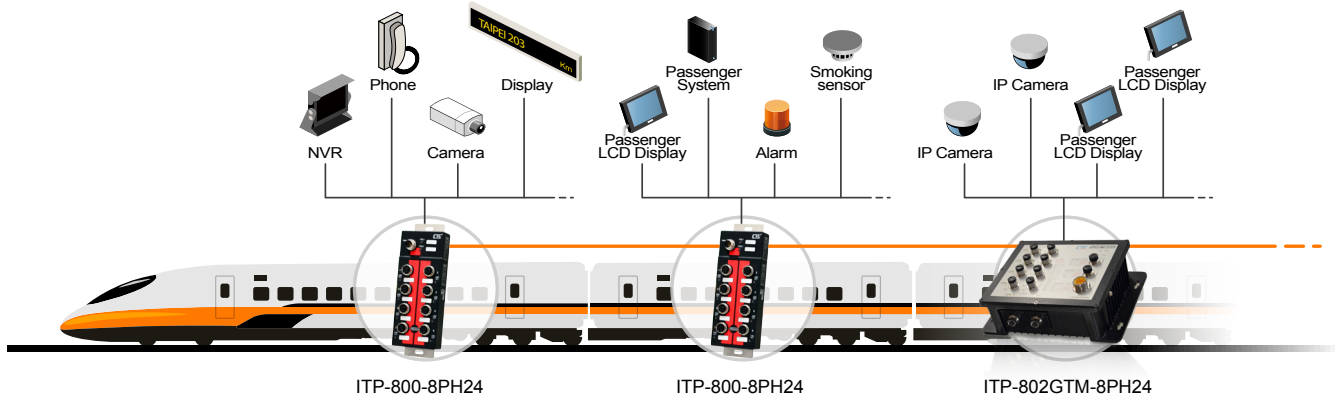


Figure 2 : High efficiency boost technology for PoE

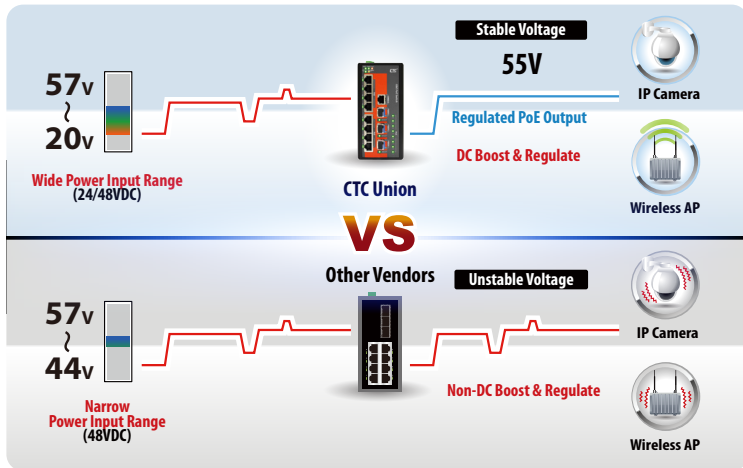

- Regulated PoE output voltage (55VDC) to stabilize PoE device
- Guarantee delivery PoE power distance to 100 meters
- Wide range input power 24/48VDC (20~57VDC)
- Built-in very high efficiency (94~97%) to boost PoE output voltage

Figure 3 : IP67 water proof Protection

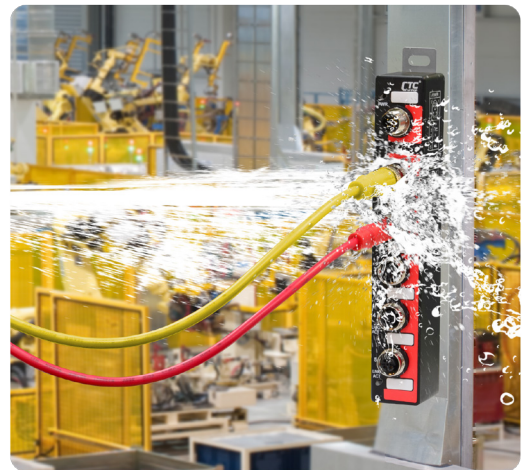



Figure 4 : Wide Range Temperature



Figure 5 : ITP Series for Industrial Automation




Dimensions

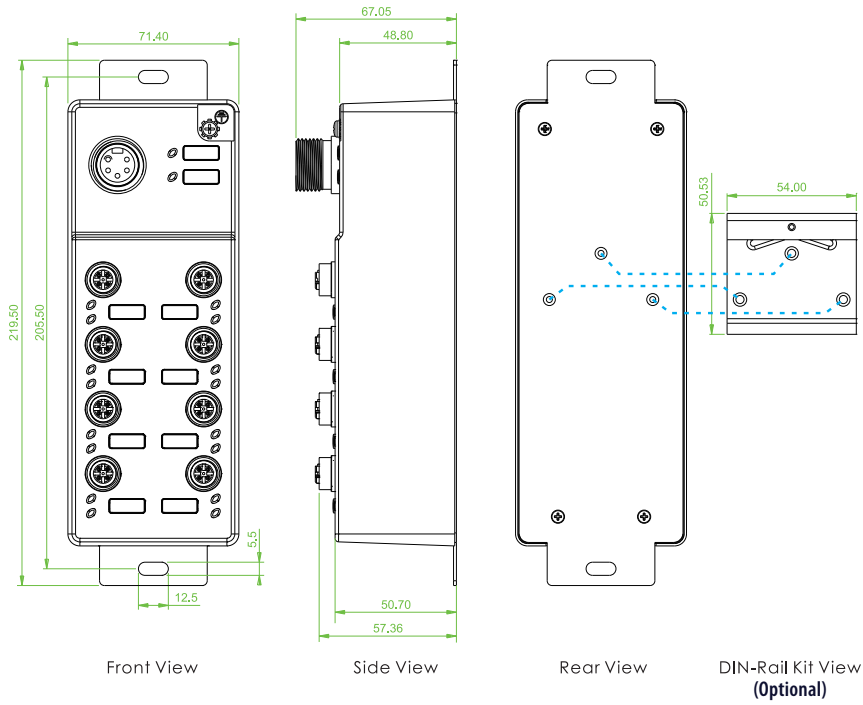

Ordering Information

Model Name	IP67	Total Port	UTP Port M12	PoE Port	PoE Total Power Budget	Power Input	Certification				Shock Vibration	Operating Temperature
			10/100 Base-TX	IEEE802.3at		Redundant	EN50155	EN50121-4	EN61000-6-2 EN61000-6-4	CE FCC	IEC61373	
ITP-800-8PHE24	V	8	8	8	180W	24/48VDC	V	V	V	V	V	-40~75°C

Model Naming Rule

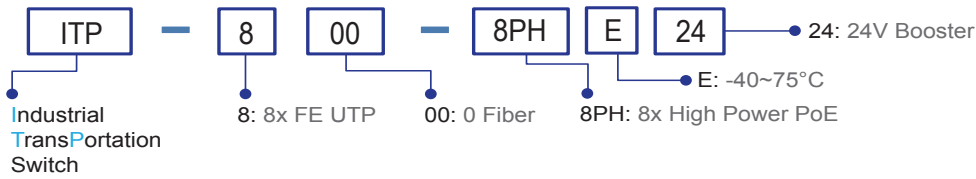

Package List

- ITP-800-8PHE24 device
- Protective caps for UTP port
- Wall mount (bound with switch device)
- Quickly installation guide

Optional Accessories

Optional Cable/Connector

P/N: CAB-M12DM4-RJ45

M12 D-code Male (4-Pin) to RJ-45, AWG 24 ,IP67, 1 meter



For FE UTP

P/N: CAB-M23F5-OPEN

M23 Female (5-Pin) to open wire, (AWG 16) ,IP67, 1 meter



For Power

P/N: M12D-M4

M12 D-code Male (4-Pin) connector, IP67



For FE UTP



ITP-G802TM

10x 100/1000Base-T Managed Ethernet Switch

ITP-G802SM

8x 100/1000Base-T + 2x 100/1000Base-X SFP Managed Ethernet Switch



These models are managed industrial grade Gigabit switches that provide 8x GbE UTP + 2x GbE SFP or 10x GbE UTP. These switches provide advanced Ethernet functions are supported and include STP/RSTP/MSTP/ITU-T G.8032 ERPS and multiple μ-Ring for redundant cabling, layer 2 Ethernet IGMP, VLAN, QoS, Security, IPv6, bandwidth control, port mirroring, cable diagnostic and Green Ethernet. Housed in rugged DIN rail or wall mountable enclosures, these switches are designed for the harshest environments. Specifically, These switches use M12 connectors to ensure water tight, robust connections and to guarantee reliable connections against environmental disturbances, such as vibration and shock. Besides, these models are compliant with EN50155, covering power input voltage, surge, EFT, ESD, vibration, shock, thus making the switches suitable for industrial applications, such as vehicle, rolling stock, ship, vessel.

These models are IP67 rated to protect against dust and water submersion, they are particularly used in environments with extreme temperature, high humidity, oil, dust and in outdoor environments requiring water-proof applications such as IP surveillance, city security. They can also work with CTC Union's platform SmartView™ to provide convenient, real-time and centralized device management.

Features

- 10x 10/100/1000Base-T M12 UTP (Total 10 ports) (ITP-G802TM)
- 8x 10/100/1000Base-T M12 UTP and 2x 100/1000Base-X SFP Fiber (Total 10 ports) (ITP-G802SM)
- M12 and M23 connector against vibration and shock, X-code or A-code M12 for Gigabit port optional
- IP67 grade housing for against water, dust, and oil (Figure 3)
- Redundant and wide input range voltage, Low voltage (12/24/48VDC) and High Voltage (110/220VDC or 110/220VAC)
- UL60950-1, CE, FCC, Rail Traffic EN50155, EN50121-4 certified
- Heavy industrial grade EMS, EMI, EN61000-6-2, EN61000-6-4 certified
- Cable diagnostics, identifies opens/shorts from 7 to 100 meters
- Supports Green Ethernet IEEE802.3az EEE (Energy Efficient Ethernet) management to optimize the power consumption
- STP, RSTP, MSTP, ITU-T G.8032 Ethernet Protection Ring (EPR) for redundant cabling
- Provides up to 5 instances that each supports μ-Ring, μ-Chain or Sub-Ring type for flexible uses. (Please see CTC Union's μ-Ring white paper for more details)
- μ-Ring for Redundant Cabling, recovery time < 10ms in 250 maximum devices
- Build-in 2 bypass GbE UTP ports to avoid one or more nodes power fail in a ring or bus structure to collapse the network (ITP-G802TM)
- DHCP Server/Client/Relay/Snooping/Snooping option 82/Relay option 82
- QoS, Traffic classification QoS, CoS, bandwidth control for Ingress and Egress, Storm Control, DiffServ
- IEEE802.1q VLAN, MAC based VLAN, IP subnet based VLAN, Protocol based VLAN, VLAN translation, GVRP, MVR
- Dynamic IEEE 802.3ad LACP Link Aggregation, Static Link Aggregation
- IGMP snooping V1/V2/V3, IGMP Filtering/ Throttling, IGMP query, IGMP proxy reporting, MLD snooping V1/V2
- Security : Port based and MAC based IEEE802.1X, RADIUS, ACL, TACACS+, HTTP/HTTPS, SSL/SSH v2
- Software upgrade via TFTP and HTTP, redundant firmware to avoid in case of upgrade failure
- Supports IEEE1588 PTP V2 for precise time synchronization to operate in Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master, Slave mode by each port
- RMON, MIB II, Port mirroring, Event syslog, DNS, NTP, SNTP, IEEE802.1ab LLDP
- Supports IPv6 Telnet server /ICMP v6
- CLI, Web based management, SNMP v1/v2c/v3, Telnet server for management
- Provides SmartConfig for quick and easy mass configuration tool (Please see Catalog chapter 1- Software Management for more details)
- Supports SmartView for Centralized Management. (Please see Catalog chapter 1- Software Management for more details)
- Supporting Central EMS for management of up to 50 SmartView Server, and maximum up to 25,000 devices (Please see Catalog chapter 1- Software Management for more details)

Specifications

Standard	IEEE 802.3	10Base-T 10Mbit/s Ethernet	Standard	ITU-T G.8032 / Y.1344	ERPS (Ethernet Ring Protection Switching)
	IEEE 802.3u	100Base-TX, 100Base-FX, Fast Ethernet		IEEE 802.1Q	Virtual LANs (VLAN)
	IEEE 802.3ab	1000Base-T Gbit/s Ethernet over twisted pair		IEEE 802.1X	Port based and MAC based Network Access Control, Authentication
	IEEE 802.3z	1000Base-X Gbit/s Ethernet over Fiber-Optic		IEEE802.3ac	Max frame size extended to 1522Bytes
	IEEE 802.1d	STP (Spanning Tree Protocol)		IEEE 802.3ad	Link aggregation for parallel links with LACP(Link Aggregation Control Protocol)
	IEEE 802.1w	RSTP (Rapid Spanning Tree Protocol)		IEEE 802.3x	Flow control for Full Duplex
	IEEE 802.1s	MSTP (Multiple Spanning Tree Protocol)			

Standard	IEEE802.3ac	Max frame size extended to 1522Bytes			
	IEEE 802.1ad	Stacked VLANs, Q-in-Q			
	IEEE 802.1p	LAN Layer 2 QoS/CoS Protocol for Traffic Prioritization			
	IEEE 802.1ab	Link Layer Discovery Protocol (LLDP)			
	IEEE 802.3az	EEE (Energy Efficient Ethernet)			
VLAN ID	4094 IEEE802.1Q VLAN VID				
Switch Architecture	Back-plane (Switching Fabric): 20Gbps (Full wire-speed)				
Data Processing	Store and Forward				
Flow Control	IEEE 802.3x for full duplex mode Back pressure for half duplex mode				
Network Connector	10x M12 (8-Pin, Female, A-Code or X-code) 10/100/1000Base-T UTP (ITP-G802TM)				
	8x M12(8-Pin, Female, A-Code or X-code) 10/100/1000Base-T + 2x 100/1000Base-X SFP (ITP-G802SM)				
	UTP port provide auto negotiation speed, Auto MDI/MDI-X, Full/Half duplex function				
	Build-in 2x bypass GbE UTP ports (ITP-G802TM)				
	2x Water-proof cable connector 2x 100/1000Base-X SFP slot, with DDMI (for ITP-G802SM)				
Console	RS-232 (5-pin A-Code M12 male)				
Network Cable	UTP/STP above Cat. 5e cable EIA/TIA-568 100-ohm (100m)				
Protocols	CSMA/CD				
Reverse Polarity Protection	Supported				
Overload Current Protection	Supported				
CPU Watch Dog	Supported				
LED	Per unit: Power 1 (Green), Power 2 (Green), Fault (Amber), CPU Act (Green), Ring Master (Amber)				
	UTP port: 10/100 Link/Active (Green) 1000 Link/Active (Amber) SFP Fiber Per port: Link/Active (Green)				
Jumbo Frame	9.6KB				
MAC Address Table	8K				
Memory Buffer	512K Bytes for packet buffer				
Power Supply	Provides 1x M23 (5-Pin, male) for redundant dual input, optional Low (L) or High (H) voltage. Low voltage (L) : 12/24/48V (8.4~60VDC) High voltage (H) : 110/220VDC (88~300VDC), or 110/220VAC (88~264VAC)				
Power Consumption		ITP-G802SM-LL	ITP-G802SM-HL	ITP-G802TM-LL	ITP-G802TM-HL
	12VDC	8.5W	9.9W	10.1W	11.9W
	24VDC	9.2W	10.3W	10.9W	12.3W
	48VDC	11W	11.6W	13.1W	14W
	110 VAC/VDC		9.9W		11.9W
	220 VAC/VDC		9.9W		11.9W

Software Specifications

Topology	
VLAN	IEEE 802.1q VLAN, up to 4094 802.1Q VLAN VID IEEE 802.1q VLAN, up to 4094 Groups IEEE 802.1ad Q-in-Q MAC-based VLAN, up to 256 entries IP Subnet-based VLAN, up to 128 entries Protocol-based VLAN(Ethernet, SNAP, LLC), up to 128 entries VLAN Translation, up to 256 entries GVRP (GARP VLAN Registration Protocol) MVR (Multicast VLAN Registration)
Link Aggregation (Port Trunk)	Static (Hash with SA, DA, IP, TCP/UDP port), up to 5 trunk group Dynamic (IEEE 802.3ad LACP), up to 5 trunk group
Spanning Tree	IEEE802.1d STP, IEEE802.1w RSTP, IEEE802.1s MSTP
Multiple u-Ring	up to 5 instances that each supports u-Ring, u-Chain or Sub-Ring type for flexible uses, and maximum up to 5 Rings. Recovery time <10ms The maximum number of devices allowed in a Ring supported ring is 250. (Please see CTC u-Ring white paper for more details and more topology application)
Loop Protection	Supported
ITU-T G.8032 / Y.1344 ERPS (Ethernet Ring Protection)	Recovery time <50ms Single Ring, Sub-Ring, Multiple ring topology network
QoS Feature	
Class of Service	IEEE802.1p 8 active priorities queues for per port

Warning Message	System Syslog, SMTP/ e-mail event message, alarm relay
Alarm Relay Contact	5-pin A-code M12 male Relay outputs with current carrying capacity of 1 A @24VDC
Operating Temperature	-40 ~ 75°C
Operating Humidity	5% to 95% (Non-condensing)
Storage Temperature	-40 ~ 85°C
Housing	Rugged Metal, Fanless , IP67 grade housing for against water, dust, and oil (Figure 3)
Dimensions	70 x 240 x 168mm (D x W x H)
Weight	2.645kg (ITP-G802SM-LL) 2.82kg (ITP-G802SM-HL) 2.625kg (ITP-G802TM-LL) 2.8kg (ITP-G802TM-HL)
Installation Mounting	Wall mounting, or DIN Rail mounting (Optional)
MTBF	443,868 Hours (ITP-G802SM-LL)
	353,092 Hours (ITP-G802SM-HL)
	423,602 Hours (ITP-G802TM-LL)
	349,564 Hours (ITP-G802TM-HL)
	(MIL-HDBK-217)
Warranty	5 years
Certification	
EMC	CE
EMI (Electromagnetic Interference)	FCC Part 15 Subpart B Class A, CE
Railway Traffic	EN50155, EN50121-4
Immunity for Heavy Industrial Environment	EN61000-6-2
Emission for Heavy Industrial Environment	EN61000-6-4
EMS (Electromagnetic Susceptibility) Protection Level	EN61000-4-2 (ESD) Level 3, Criteria B
	EN61000-4-3 (RS) Level 3, Criteria A
	EN61000-4-4 (Burst) Level 3, Criteria A
	EN61000-4-5 (Surge) Level 3, Criteria B
	EN61000-4-6 (CS) Level 3, Criteria A
	EN61000-4-8 (PFME, Magnetic Field) Field Strength: 300A/m, Criteria A
Safety Shock	UL60950-1 IEC-61373
Freefall	IEC 60068-2-32
Vibration	IEC-61373

Traffic Classification QoS	IEEE802.1p based CoS
	IP Precedence based CoS
	IP DSCP based CoS QCL(QoS Control List): Frame Type, Source/Destination MAC, VLAN ID, PCP, DEI QCE(QoS Control Entry): Protocol, Source IP, IP Fragment, DSCP, TCP/UDP port number
Bandwidth Control for Ingress	Rate in steps : 1 kbps / Mbps / fps / kfps Range : 100 kbps to 1Gbps / 1fps to 3300kfps Rate Unit : bit or frame
Bandwidth Control for Egress	Rate in steps : 1 kbps / Mbps Range : 100 kbps to 1Gbps Rate Unit : bit Per queue / Per port shaper
DiffServ (RF 2474) Remarking	
Storm Control	for Unicast, Broadcast, Multicast
IP Multicasting Feature	
IGMP / MLD Snooping	IGMP Snooping v1, v2, v3 / MLD Snooping v1, v2 Port Filtering Profile, Throttling
IGMP / MLD Snooping	Fast Leave Maximum Multicast Group : up to 1022 entries Query / Static Router Port
Security Features	
IEEE 802.1X ACL	Port-Based, MAC-Based Number of rules : up to 256 entries for L2 / L3 / L4 L2: Mac address SA/DA/VLAN L3: IP address SA/DA, Subnet L4: TCP/UDP

RADIUS authentication & accounting	
TACACS+ authentication & accounting, TACACS+ 3.0	
HTTPS, HTTP	Supported
SSL / SSH v2	Supported
User Name	Local Authentication
Password	Remote Authentication (via RADIUS / TACACS+)
Authentication	Remote Authentication (via RADIUS / TACACS+)
Management	
Interface Access	Web, Telnet / SSH , CLI RS-232 console
Filtering	
Management Features	
CLI	Cisco® like CLI
Web Based Management	
Telnet	Server
SNMP	TFTP, HTTP
SW & Configuration Upgrade	TFTP, HTTP
Upgrade	Redundant firmware in case of upgrade failure
RMON	RMON I (1, 2, 3, 9 group), RMON II
MIB II	RFC 1213
UPnP	Supported
DHCP	Server, Client, Relay, Snooping
	Snooping option 82, Relay option 82
IP Source Guard	Supported
Port Mirroring	Supported
Event Syslog	Syslog server (RFC3164) (Support 1 server)
Warning Message	System syslog, e-mail, alarm relay
DNS	Client, Proxy

IEEE1588 PTP V2	Support 5 operating mode in each port : Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master, Slave
NTP, SNTP	Client
LLDP (IEEE 802.1ab)	Link Layer Discovery Protocol LLDP-MED
IPv6 Features	
IPv6 Management	Telnet Server/ICMP v6
SNMP over IPv6	Supported
HTTP over IPv6	Supported
SSH over IPv6	Supported
IPv6 Telnet	Supported
IPv6 NTP, SNTP	Client
IPv6 TFTP	Supported
IPv6 QoS	Supported
IPv6 ACL	Number of rules: up to 256 entries for L2 / L3 / L4 L2: Mac address SA/DA/VLAN L3: IP address SA/DA, Subnet L4: TCP/UDP
Others Features	
Green Ethernet	Supports IEEE802.3az EEE (Energy Efficient Ethernet) Management to optimize the power consumption Determine the cable length and lowering the power for ports with short cables Lower the power for a port when there is no link LED Power Management :Adjustment LEDs intensity
Cable Diagnostic	Measuring UTP cable OK or broken point distance

Application

Figure 1 : ITP Series in Onboard Train Application

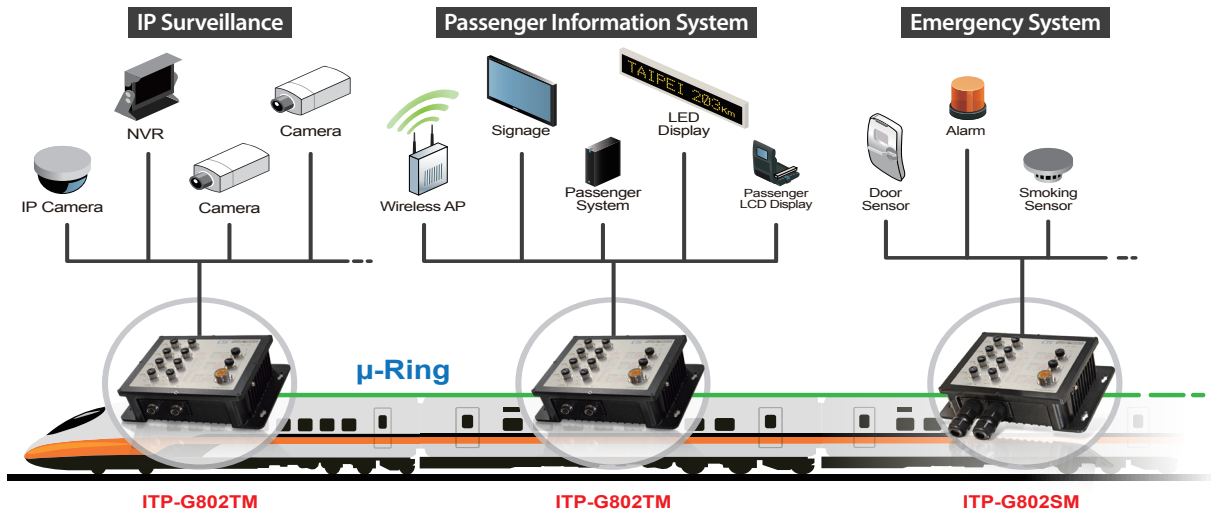


Figure 2 : ITP Series for Industrial Automation

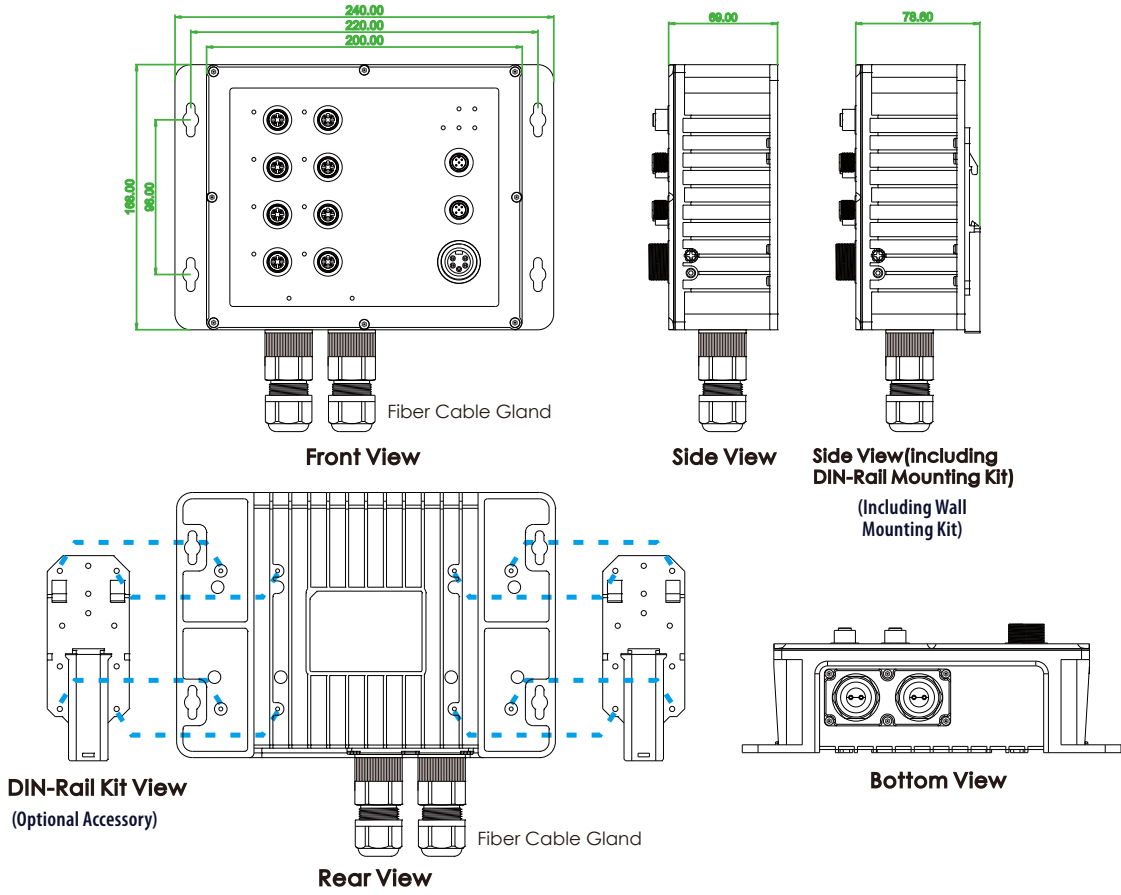


Figure 3 : IP67 Waterproof




Dimensions

▶ ITP-G802SM




▶ ITP-G802TM

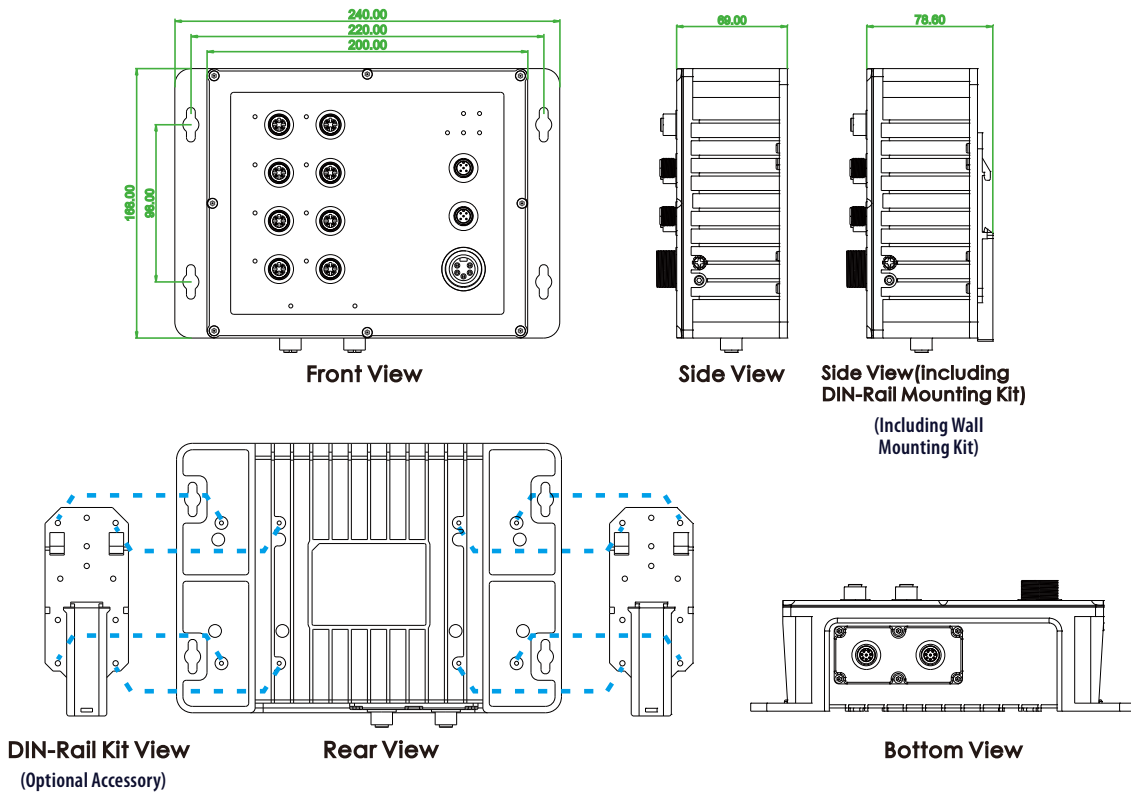

Ordering Information

Model Name	Managed	IP67	Total Port	UTP Port M12	Fiber Port	Redundant Power supply		Certification				Shock Vibration	Operating Temperature
				10/100/1000 Base-T(X)	100/1000 Base-X	Low Volt 12/24/48VDC (8.4~60VDC)	High Volt 110/220 VDC 110/220 VAC	EN50155 EN50121-4	UL60950-1	EN61000-6-2 EN61000-6-4	CE FCC	IEC61373	
ITP-G802SM-ELL-X	V	V	10	8 (X-code)	2 SFP	2		V	V	V	V	V	-40~75°C
ITP-G802SM-EHL-X	V	V	10	8 (X-code)	2 SFP	1	1	V	V	V	V	V	-40~75°C
ITP-G802SM-ELL	V	V	10	8 (A-code)	2 SFP	2		V	V	V	V	V	-40~75°C
ITP-G802SM-EHL	V	V	10	8 (A-code)	2 SFP	1	1	V	V	V	V	V	-40~75°C
ITP-G802TM-ELL-X	V	V	10	10 (X-code)		2		V	V	V	V	V	-40~75°C
ITP-G802TM-EHL-X	V	V	10	10 (X-code)		1	1	V	V	V	V	V	-40~75°C
ITP-G802TM-ELL	V	V	10	10 (A-code)		2		V	V	V	V	V	-40~75°C
ITP-G802TM-EHL	V	V	10	10 (A-code)		1	1	V	V	V	V	V	-40~75°C

Model Naming Rule

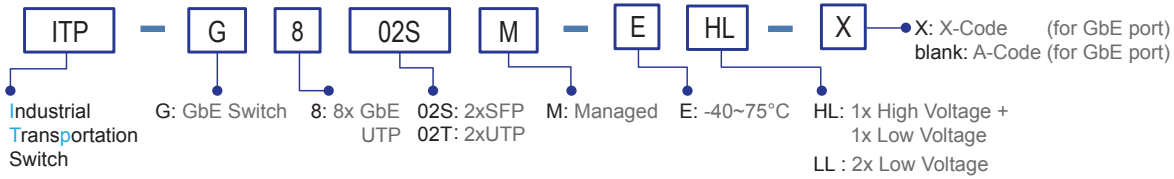

Package List

- One of the device series
- Protective caps for SFP ports and console, alarm port
- Fiber Cable Gland for SFP port x 2 set (for ITP-G802SM)
- Console cable (M12 to DB9)
- CD (Smartconfig, Manual)
- Quickly installation guide


Optional Accessories

Industrial SFP Transceiver

The ISFP series of industrial grade SFP modules have been fully tested with the ITP-G802SM for guaranteed compatibility and performance. The best performance can be guaranteed even in mission-critical applications. (Please see CTC Union's Industrial SFP datasheet for more details and more items.)

ISFP-M7000-85-D(E)	Industrial SFP GbE 1000Base-SX, M/M, 500 meter, wave length 850nm, 7.5dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-S7020-31-D(E)	Industrial SFP 1000Base-LX, S/M, 20km, wave length 1310nm, 15dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-M5002-31-D(E)	Industrial SFP 155M 100Base-FX, MM, 2km, wave length 1310nm, 12dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-S5030-31-D(E)	Industrial SFP 155M 100Base-FX, SM, 30km, 1310nm, 19dB, LC, DDMI, -10~70°C (-40~85°C)

SFP Naming Rule

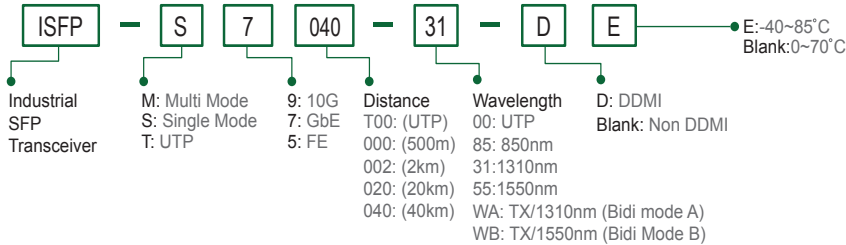

Optional Cable/Connector & Din-Rail Kit

<p>P/N: CAB-M12XM8-RJ45</p> <p>M12 X-code Male (8-Pin) to RJ-45, AWG 24, IP67, 1 meter</p>  <p>For GbE UTP (X-code model)</p>	<p>P/N: CAB-M12AM8-RJ45</p> <p>M12 A-code Male (8-Pin) to RJ-45, AWG 24, IP67, 1 meter</p>  <p>For GbE UTP (A-code model)</p>	<p>P/N: CAB-M12AF5-OPEN</p> <p>M12 A-code Female (5-Pin) to open wire, AWG 22, IP67, 1 meter</p>  <p>For Alarm</p>	<p>P/N: CAB-M23F5-OPEN</p> <p>M23 Female (5-Pin) to open wire, (AWG 16), IP67, 1 meter</p>  <p>For Power</p>
<p>P/N: M12A-M8</p> <p>M12 A-code Male (8-Pin) connector, IP67</p>  <p>For GbE UTP (A-code model)</p>	<p>P/N: M12A-F5</p> <p>M12 A-code Female (5-Pin) connector, IP67</p>  <p>For Alarm</p>	<p>P/N: IND-DNK04</p> <p>Din Rail Kit for Industrial, Wide: 52mm</p>  <p>(130 X52mm / 4 Screws) (2pcs/set)</p>	

Preliminary



ITP-1204GTM

12x 10/100Base-TX + 4x 10/100/1000Base-T
Managed Ethernet Switch

ITP-2204GTM

22x 10/100Base-TX + 4x 10/100/1000Base-T
Managed Ethernet Switch



These models of industrial grade M12 managed Ethernet switches that provide total 16/26 ports Ethernet connectivity, come with 12/22 ports 10/100Base-TX and 4 ports 10/100/1000Base-T(X).

The switches use M12/M23 connectors to ensure tight and robust connections to guarantee the reliable connections against environmental disturbances, such as strongly vibration and shock, these switches provide wide power input range of 24/48/72/96/110VDC (operating range 16.8 to 137.5VDC) make this product series suitable for rolling stock and track side installations, especially the ITP series switches defined by the EN 50155 standard covering power input voltage and insulation, surge, EFT, ESD, operating temperature as well, thus making the M12 switches suitable for industrial applications, not only for rolling stock, vehicle but also for oil, gas, mining and heavy industry applications.

These switches provide a variety of advanced Ethernet functionalities including STP/RSTP/MSTP/ ITU-T G.8032 ERPS and μ-Ring, μ-Chain (recovery time <10ms @250 devices) for networking redundancy, layer 2 Ethernet IGMP, VLAN, QoS, Security, IPv6, bandwidth control, port mirroring, cable diagnostic and Green Ethernet, can work with CTC Union's platform SmartView™ to provide convenient, real-time and centralized device management.

Features

- 12x 10/100Base-TX + 4x 10/100/1000Base-T (ITP-1204GTM)
- 22x 10/100Base-TX + 4x 10/100/1000Base-T (ITP-2204GTM)
- M12 and M23 fiber connector against vibration and shock, M12 X-code for Gigabit port
- IP64 grade housing protection
- 24 to 110VDC (16.8~137.5VDC) redundant dual wide input power
- Supports negative voltage power input (for example in telecom system)
- EN45545-2, EN-60950-1, CE, FCC, Rail Traffic EN50155, EN50121-4 certified
- Heavy industrial grade EMS, EMI, EN61000-6-2, EN61000-6-4 certified
- 4KV surge protection for UTP ports
- 2.25KVDC Hi-pot isolation protection for Ethernet ports and power
- Cable diagnostics, identifies opens/shorts from 7 to 100 meters
- Supports Green Ethernet IEEE802.3az EEE (Energy Efficient Ethernet) management to optimize the power consumption
- STP, RSTP, MSTP, ITU-T G.8032 Ethernet Protection Ring (EPR) for redundant cabling
- Provides up to 5 instances that each supports μ-Ring, μ-Chain or Sub-Ring type for flexible uses. (Please see CTC Union's μ-Ring white paper for more details)
- μ-Ring for Redundant Cabling, recovery time<10ms in 250 maximum devices
- Build-in 2 bypass GbE UTP ports to avoid one or more nodes power fail in a ring or bus structure to collapse the network (-BP bypass model)
- DHCP Server/Client/Relay/Snooping/Snooping option 82/Relay option 82
- QoS, Traffic classification QoS, CoS, bandwidth control for Ingress and Egress, Storm Control, DiffServ
- IEEE802.1q VLAN, MAC based VLAN, IP subnet based VLAN, Protocol based VLAN, VLAN translation, GVRP, MVR
- Dynamic IEEE 802.3ad LACP Link Aggregation, Static Link Aggregation
- IGMP snooping V1/V2/V3, IGMP Filtering/ Throttling, IGMP query, IGMP proxy reporting, MLD snooping V1/V2
- Security : Port based and MAC based IEEE802.1X, RADIUS, ACL, TACACS+, HTTP/HTTPS, SSL/SSH v2
- Software upgrade via TFTP and HTTP, redundant firmware to avoid in case of upgrade failure
- Supports IEEE1588 PTP V2 for precise time synchronization to operate in Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master, Slave mode by each port
- RMON, MIB II, Port mirroring, Event syslog, DNS, NTP, SNTP, IEEE802.1ab LLDP
- Supports IPv6 Telnet server /ICMP v6
- CLI, Web based management, SNMP v1/v2c/v3, Telnet server for management
- Provides SmartConfig for quick and easy mass configuration tool*
- Supports SmartView for Centralized Management*
- Supporting Central EMS for management of up to 50 SmartView Server, and maximum up to 25,000 devices*

*Please see Catalog chapter 1- Software Management for more details

Specifications

Standard	IEEE 802.3	10Base-T 10Mbit/s Ethernet	Standard	ITU-T G.8032 / Y.1344	ERPS (Ethernet Ring Protection Switching)
	IEEE 802.3u	100Base-TX, 100Base-FX, Fast Ethernet		IEEE 802.1Q	Virtual LANs (VLAN)
	IEEE 802.3ab	1000Base-T Gbit/s Ethernet over twisted pair		IEEE 802.1X	Port based and MAC based Network Access Control, Authentication
	IEEE 802.1d	STP (Spanning Tree Protocol)		IEEE802.3ac	Max frame size extended to 1522Bytes
	IEEE 802.1w	RSTP (Rapid Spanning Tree Protocol)			
	IEEE 802.1s	MSTP (Multiple Spanning Tree Protocol)			

Standard	IEEE 802.3ad	Link aggregation for parallel links with LACP(Link Aggregation Control Protocol)
	IEEE 802.3x	Flow control for Full Duplex
	IEEE802.3ac	Max frame size extended to 1522Bytes
	IEEE 802.1ad	Stacked VLANs, Q-in-Q
	IEEE 802.1p	LAN Layer 2 QoS/CoS Protocol for Traffic Prioritization
	IEEE 802.1ab	Link Layer Discovery Protocol (LLDP)
	IEEE 802.3az	EEE (Energy Efficient Ethernet)
VLAN ID	4094	IEEE802.1Q VLAN VID
Switch Architecture	10.4 Gbps (ITP-1204GTM)	12.4Gbps (ITP-2204GTM) (Full wire-speed)
Data Processing	Store and Forward	
Flow Control	IEEE 802.3x for full duplex mode Back pressure for half duplex mode	
Network Connector	12x M12 (4-Pin, Female,D-Code) 10/100Base-TX UTP + 4x M12 (8-Pin, Female, X-Code) 10/100/1000Base-T UTP (ITP-1204GTM)	
	22x M12 (4-Pin, Female,D-Code) 10/100Base-TX UTP + 4x M12 (8-Pin, Female, X-Code) 10/100/1000Base-T UTP (ITP-2204GTM)	
	UTP port provide auto negotiation speed, Auto MDI/MDI-X, Full/Half duplex function Build-in 2x bypass GbE UTP ports (For -BP model optional)	
Console	RS-232 (5-pin A-Code M12 male)	
Network Cable	UTP/STP above Cat. 5e cable EIA/TIA-568 100-ohm (100m)	
Protocols	CSMA/CD	
Reverse Polarity Protection	Supported	
Overload Current Protection	Supported	
CPU Watch Dog	Supported	
LED	Per unit: Power 1 (Green), Power 2 (Green), Fault (Amber), CPU Act (Green), Ring Master (Amber) UTP port: 10/100 Link/Active (Green) 1000 Link/Active (Amber)	
Jumbo Frame	9.6KB	
MAC Address Table	8K	
Memory Buffer	512K Bytes for packet buffer	
Power Supply	Provides 1x M23 (5-Pin, male) for redundant dual DC 24 to 110VDC (16.8~137.5VDC) wide input power Supports negative voltage power input (for example in telecom system)	
Power Consumption	TBD	
Warning Message	System Syslog, SMTP/ e-mail event message, alarm relay	

Alarm Relay Contact	5-pin A-code M12 male Relay outputs with current carrying capacity of 1 A @24VDC
Operating Temperature	-40 ~ 75°C
Operating Humidity	5% to 95% (Non-condensing)
Storage Temperature	-40 ~ 85°C
Housing	Rugged Metal, Fanless, IP64 grade housing protection
Dimensions	125 x 230 x 132 (D x W x H) (ITP-1204GTM) 125 x 350 x 132 (D x W x H) (ITP-2204GTM)
Weight	TBD
Installation Mounting	Wall mounting
MTBF	TBD (MIL-HDBK-217)
Warranty	5 years
Certification	
EMC	CE (EN55024, EN55032)
EMI (Electromagnetic Interference)	FCC Part 15 Subpart B Class A, CE
Railway Traffic	EN50155, EN50121-4
Fire protection of railway vehicles	EN 45545-2
Immunity for Heavy Industrial Environment	EN61000-6-2
Emission for Heavy Industrial Environment	EN61000-6-4
EMS (Electromagnetic Susceptibility) Protection Level	EN61000-4-2 (ESD) Level 3, Criteria B EN61000-4-3 (RS) Level 3, Criteria A EN61000-4-4 (Burst) Level 3, Criteria A EN61000-4-5 (Surge) Level 3, Criteria B EN61000-4-6 (CS) Level 3, Criteria A EN61000-4-8 (PFMF, Magnetic Field) Field Strength: 300A/m, Criteria A
Safety	EN60950-1
Hi pot protection	DC 2.25KV for power to chassis ground, Ethernet port to chassis ground
4KV surge protection	Supported for UTP port
Shock	IEC-61373
Freefall	IEC 60068-2-32
Vibration	IEC-61373

Software Specifications

Topology	
VLAN	IEEE 802.1q VLAN, up to 4094 IEEE 802.1q VLAN, up to 4094 Groups IEEE 802.1ad Q-in-Q MAC-based VLAN, up to 256 entries IP Subnet-based VLAN, up to 128 entries Protocol-based VLAN(Ethernet, SNAP, LLC), up to 128 entries VLAN Translation, up to 256 entries GVRP (GARP VLAN Registration Protocol) MVR (Multicast VLAN Registration)
Link Aggregation (Port Trunk)	Static (Hash with SA, DA, IP, TCP/UDP port), up to 5 trunk group Dynamic (IEEE 802.3ad LACP), up to 5 trunk group
Spanning Tree	IEEE802.1d STP, IEEE802.1w RSTP, IEEE802.1s MSTP
Multiple μ-Ring	up to 5 instances that each supports μ-Ring, μ-Chain or Sub-Ring type for flexible uses, and maximum up to 5 Rings. Recovery time <10ms The maximum number of devices allowed in a Ring supported ring is 250. (Please see CTC μ-Ring white paper for more details and more topology application)
Loop Protection	Supported
ITU-T G.8032 / Y.1344 ERPS (Ethernet Ring Protection)	Recovery time <10ms Single Ring, Sub-Ring, Multiple ring topology network
QoS Feature	
Class of Service	IEEE802.1p 8 active priorities queues for per port


Traffic Classification QoS	IEEE802.1p based CoS IP Precedence based CoS IP DSCP based CoS
Traffic Classification QoS	QCL(QoS Control List): Frame Type, Source/Destination MAC, VLAN ID, PCP, DEI QCE(QoS Control Entry): Protocol, Source IP, IP Fragment, DSCP, TCP/UDP port number
Bandwidth Control for Ingress	Rate in steps : 1 kbps / Mbps / fps / kfps Range : 100 kbps to 1Gbps / 1fps to 3300kfps Rate Unit : bit or frame
Bandwidth Control for Egress	Rate in steps : 1 kbps / Mbps Range : 100 kbps to 1Gbps Rate Unit : bit Per queue / Per port shaper
DiffServ (RF 2474) Remarking	
Storm Control	for Unicast, Broadcast, Multicast
IP Multicasting Feature	
IGMP / MLD Snooping	IGMP Snooping v1, v2, v3 / MLD Snooping v1, v2 Port Filtering Profile, Throttling Fast Leave Maximum Multicast Group : up to 1022 entries Query / Static Router Port
Security Features	
IEEE 802.1X	Port-Based, MAC-Based
ACL	Number of rules : up to 256 entries for L2 / L3 / L4 L2: Mac address SA/DA/VLAN L3: IP address SA/DA, Subnet L4: TCP/UDP

RADIUS authentication & accounting	
TACACS+ authentication & accounting, TACACS+ 3.0	
HTTPS, HTTP	Supported
SSL / SSH v2	Supported
User Name	Local Authentication
Password	Local Authentication
Authentication	Remote Authentication (via RADIUS / TACACS+)
Management	
Interface Access	Web, Telnet / SSH, CLI, RS-232 console
Filtering	
Management Features	
CLI	Cisco® like CLI
Web Based Management	
Telnet	Server
SNMP	V1, V2c, V3
SW & Configuration Upgrade	TFTP, HTTP
Upgrade	Redundant firmware in case of upgrade failure
RMON	RMON I (1, 2, 3, 9 group), RMON II
MIB II	RFC 1213
UPnP	Supported
DHCP	Server, Client, Relay, Snooping
	Snooping option 82, Relay option 82
IP Source Guard	Supported
Port Mirroring	Supported
Event Syslog	Syslog server (RFC3164) (Support 1 server)
Warning Message	System syslog, e-mail, alarm relay
DNS	Client, Proxy

IEEE1588 PTP V2	Support 5 operating mode in each port : Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master, Slave
NTP, SNTP	Client
LLDP (IEEE 802.1ab)	Link Layer Discovery Protocol LLDP-MED
IPv6 Features	
IPv6 Management	Telnet Server/ICMP v6
SNMP over IPv6	Supported
HTTP over IPv6	Supported
SSH over IPv6	Supported
IPv6 Telnet	Supported
IPv6 NTP, SNTP	Client
IPv6 TFTP	Supported
IPv6 QoS	Supported
IPv6 ACL	Number of rules: up to 256 entries for L2 / L3 / L4 L2: Mac address SA/DA/VLAN L3: IP address SA/DA, Subnet L4: TCP/UDP
Others Features	
Green Ethernet	Supports IEEE802.3az EEE (Energy Efficient Ethernet) Management to optimize the power consumption Determine the cable length and lowering the power for ports with short cables Lower the power for a port when there is no link LED Power Management :Adjustment LEDs intensity
Cable Diagnostic	Measuring UTP cable OK or broken point distance

Application


Figure : ITP Series in Onboard Train Application

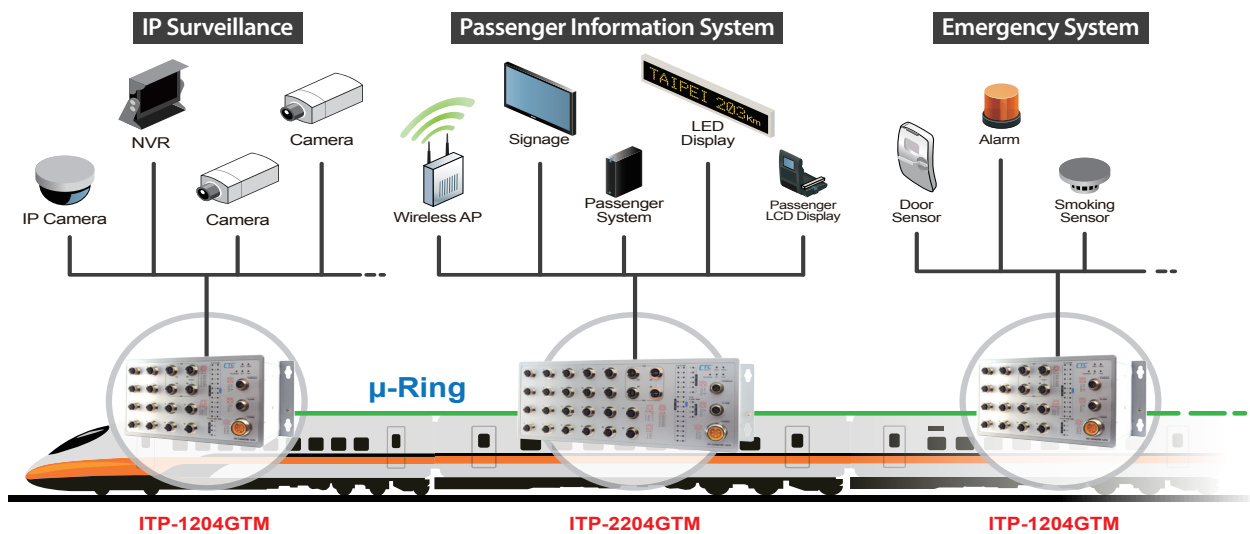

Ordering Information

Model Name	Managed	Protection	Total Port	FE Port	GbE port		Redundant Dual Input Power 24 to 110VDC (16.8~137.5VDC)
				D-code M12	GbE X-code M12 UTP	GbE X-code M12 UTP Bypass	
ITP-1204GTM-E	V	IP42	16	12	4		V
ITP-1204GTM-E-BP	V	IP42	16	12	2	2	V
ITP-2204GTM-E	V	IP42	26	22	4		V
ITP-2204GTM-E-BP	V	IP42	26	22	2	2	V
Model Name	Certification						
	EN45545-2	EN50155 EN50121-4	EN60950-1	EN61000-6-2 EN61000-6-4	CE, FCC	IEC61373	
ITP-1204GTM-E	V	V	V	V	V	V	
ITP-1204GTM-E-BP	V	V	V	V	V	V	
ITP-2204GTM-E	V	V	V	V	V	V	
ITP-2204GTM-E-BP	V	V	V	V	V	V	

Model Naming Rule

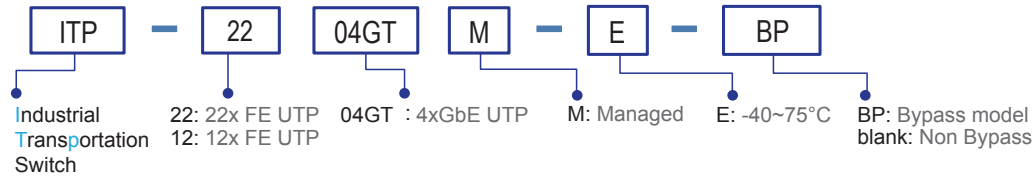

Package List

- One unit device
- Protective caps for UTP ports and console, alarm port
- Console cable (M12 to DB9)
- CD (Smartconfig, Manual)
- Quickly installation guide

Optional Accessories

Optional Cable/Connector

P/N: CAB-M12XM8-RJ45

M12 X-code Male (8-Pin) to RJ-45, AWG 24, IP67, 1 meter



For GbE UTP (X-code)

P/N: CAB-M12DM4-RJ45

M12 D-code Male (4-Pin) to RJ-45, AWG 24, IP67, 1 meter



For FE UTP

P/N: CAB-M12AF5-OPEN

M12 A-code Female (5-Pin) to open wire, AWG 22, IP67, 1 meter



For Alarm

P/N: CAB-M23F5-OPEN

M23 Female (5-Pin) to open wire, (AWG 16), IP67, 1 meter



For Power

P/N: M12D-M4

M12 D-code Male (4-Pin) connector, IP67



For FE UTP

P/N: M12A-F5

M12 A-code Female (5-Pin) connector, IP67



For Alarm



ITP-802GTM

8x 10/100Base-TX + 2x 10/100/1000Base-T
Managed Ethernet Switch

ITP-802GSM

8x 10/100Base-T + 2x 100/1000Base-X SFP
Managed Ethernet Switch



These models are managed industrial grade switches that provide 8x FE UTP + 2x GbE SFP or 8x FE UTP + 2x GbE UTP. These switches provide advanced Ethernet functions are supported and include STP/RSTP/MSTP/ ITU-T G.8032 ERPS and multiple μ -Ring for redundant cabling, layer 2 Ethernet IGMP, VLAN, QoS, Security, IPv6, bandwidth control, port mirroring, cable diagnostic and Green Ethernet.

Housed in rugged DIN rail or wall mountable enclosures, these switches are designed for the harshest environments. Specifically, These switches use M12 connectors to ensure water tight, robust connections and to guarantee reliable connections against environmental disturbances, such as vibration and shock. Besides, these models are compliant with EN50155, covering power input voltage, surge, EFT, ESD, vibration, shock, thus making the switches suitable for industrial applications, such as vehicle, rolling stock, ship, vessel.

These models are IP67 rated to protect against dust and water submersion, they are particularly used in environments with extreme temperature, high humidity, oil, dust and in outdoor environments requiring water-proof applications such as IP surveillance, city security. They can also work with CTC Union's platform SmartView™ to provide convenient, real-time and centralized device management.

Features

- 8x 10/100Base-TX M12 UTP and 2x 10/100/1000Base-T M12 UTP (Total 10 ports) (ITP-802GTM)
- 8x 10/100Base-TX M12 UTP and 2x 100/1000Base-X SFP Fiber (Total 10 ports) (ITP-802GSM)
- M12 and M23 connector against vibration and shock, X-code or A-code M12 for Gigabit port optional
- IP67 grade housing for against water, dust, and oil (Figure 3)
- Redundant and wide input range voltage, Low voltage (12/24/48VDC) and High Voltage (110/220VDC or 110/220VAC)
- UL60950-1, CE, FCC, Rail Traffic EN50155, EN50121-4 certified
- Heavy industrial grade EMS, EMI, EN61000-6-2, EN61000-6-4 certified
- Cable diagnostics, identifies opens/shorts from 7 to 100 meters
- Supports Green Ethernet IEEE802.3az EEE (Energy Efficient Ethernet) management to optimize the power consumption
- STP, RSTP, MSTP, ITU-T G.8032 Ethernet Protection Ring (EPR) for redundant cabling
- Provides up to 5 instances that each supports μ -Ring, μ -Chain or Sub-Ring type for flexible uses. (Please see CTC Union's μ -Ring white paper for more details)
- μ -Ring for Redundant Cabling, recovery time < 10ms in 250 maximum devices
- Build-in 2 bypass GbE UTP ports to avoid one or more nodes power fail in a ring or bus structure to collapse the network (ITP-802GTM)
- DHCP Server/Client/Relay/Snooping/Snooping option 82/Relay option 82
- QoS, Traffic classification QoS, CoS, bandwidth control for Ingress and Egress, Storm Control, DiffServ
- IEEE802.1q VLAN, MAC based VLAN, IP subnet based VLAN, Protocol based VLAN, VLAN translation, GVRP, MVR
- Dynamic IEEE 802.3ad LACP Link Aggregation, Static Link Aggregation
- IGMP snooping V1/V2/V3, IGMP Filtering/ Throttling, IGMP query, IGMP proxy reporting, MLD snooping V1/V2
- Security : Port based and MAC based IEEE802.1X, RADIUS, ACL, TACACS+, HTTP/HTTPS, SSL/SSH v2
- Software upgrade via TFTP and HTTP, redundant firmware to avoid in case of upgrade failure
- Supports IEEE1588 PTP V2 for precise time synchronization to operate in Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master, Slave mode by each port
- RMON, MIB II, Port mirroring, Event syslog, DNS, NTP, SNTP, IEEE802.1ab LLDP
- Supports IPv6 Telnet server /ICMP v6
- CLI, Web based management, SNMP v1/v2c/v3, Telnet server for management
- Provides SmartConfig for quick and easy mass configuration tool (Please see Catalog chapter 1- Software Management for more details)
- Supports SmartView for Centralized Management. (Please see Catalog chapter 1- Software Management for more details)
- Supporting Central EMS for management of up to 50 SmartView Server, and maximum up to 25,000 devices (Please see Catalog chapter 1- Software Management for more details)

Specifications

Standard	IEEE 802.3	10Base-T 10Mbit/s Ethernet
	IEEE 802.3u	100Base-TX, 100Base-FX, Fast Ethernet
	IEEE 802.3ab	1000Base-T Gbit/s Ethernet over twisted pair
	IEEE 802.3z	1000Base-X Gbit/s Ethernet over Fiber-Optic
	IEEE 802.1d	STP (Spanning Tree Protocol)
	IEEE 802.1w	RSTP (Rapid Spanning Tree Protocol)
	IEEE 802.1s	MSTP (Multiple Spanning Tree Protocol)
	ITU-T G.8032 / Y.1344	ERPS (Ethernet Ring Protection Switching)
	IEEE 802.1Q	Virtual LANs (VLAN)

Standard	IEEE 802.1X	Port based and MAC based Network Access Control, Authentication
	IEEE802.3ac	Max frame size extended to 1522Bytes
	IEEE 802.3ad	Link aggregation for parallel links with LACP(Link Aggregation Control Protocol)
	IEEE 802.3x	Flow control for Full Duplex
	IEEE802.3ac	Max frame size extended to 1522Bytes
	IEEE 802.1ad	Stacked VLANs, Q-in-Q
	IEEE 802.1p	LAN Layer 2 QoS/CoS Protocol for Traffic Prioritization
	IEEE 802.1ab	Link Layer Discovery Protocol (LLDP)
	IEEE 802.3az	EEE (Energy Efficient Ethernet)

VLAN ID	4094 IEEE802.1Q VLAN VID																														
Switch Architecture	Back-plane (Switching Fabric): 5.6Gbps (Full wire-speed)																														
Data Processing	Store and Forward																														
Flow Control	IEEE 802.3x for full duplex mode Back pressure for half duplex mode																														
Network Connector	8x M12 (4-Pin, Female,D-Code) 10/100Base-TX UTP + 2x M12 (8-Pin, female,A-code or X-Code) 10/100/1000Base-T UTP (ITP-802GTM) 8x M12 (4-Pin, Female,D-Code) 10/100Base-TX UTP + 2x 100/1000Base-X SFP (ITP-802GSM) UTP port provide auto negotiation speed, Auto MDI/MDI-X, Full/Half duplex function Build-in 2x bypass GbE UTP ports (ITP-802GTM) 2x Water-proof cable connector 2x 100/1000Base-X SFP slot, with DDMI (ITP-802GSM)																														
Console	RS-232 (5-pin A-Code M12 male)																														
Network Cable	UTP/STP above Cat. 5e cable EIA/TIA-568 100-ohm (100m)																														
Protocols	CSMA/CD																														
Reverse Polarity Protection	Supported																														
Overload Current Protection	Supported																														
CPU Watch Dog	Supported																														
LED	Per unit: Power 1 (Green), Power 2 (Green), Fault (Amber), CPU Act (Green), Ring Master (Amber) UTP port: 10/100 Link/Active (Green) 1000 Link/Active (Amber) SFP Fiber Per port: Link/Active (Green)																														
Jumbo Frame	9.6KB																														
MAC Address Table	8K																														
Memory Buffer	512K Bytes for packet buffer																														
Power Supply	Provides 1x M23 (5-Pin, male) for redundant dual input, optional Low (L) or High (H) voltage. Low voltage (L) : 12/24/48V (8.4~60VDC) High voltage (H) : 110/220VDC (88~300VDC), or 110/220VAC (88~264VAC)																														
Power Consumption	<table border="1"> <thead> <tr> <th></th> <th>ITP-802GSM-LL</th> <th>ITP-802GSM-HL</th> <th>ITP-802GTM-LL</th> <th>ITP-802GTM-HL</th> </tr> </thead> <tbody> <tr> <td>12VDC</td> <td>6.9W</td> <td>9.1W</td> <td>8.8W</td> <td>8.8W</td> </tr> <tr> <td>24VDC</td> <td>8.3W</td> <td>9.3W</td> <td>9.2W</td> <td>9.2W</td> </tr> <tr> <td>48VDC</td> <td>9.8W</td> <td>10.5W</td> <td>10.6W</td> <td>10.6W</td> </tr> <tr> <td>110 VAC/VDC</td> <td></td> <td>9.7W</td> <td></td> <td>9.4W</td> </tr> <tr> <td>220 VAC/VDC</td> <td></td> <td>9.7W</td> <td></td> <td>9.4W</td> </tr> </tbody> </table>		ITP-802GSM-LL	ITP-802GSM-HL	ITP-802GTM-LL	ITP-802GTM-HL	12VDC	6.9W	9.1W	8.8W	8.8W	24VDC	8.3W	9.3W	9.2W	9.2W	48VDC	9.8W	10.5W	10.6W	10.6W	110 VAC/VDC		9.7W		9.4W	220 VAC/VDC		9.7W		9.4W
	ITP-802GSM-LL	ITP-802GSM-HL	ITP-802GTM-LL	ITP-802GTM-HL																											
12VDC	6.9W	9.1W	8.8W	8.8W																											
24VDC	8.3W	9.3W	9.2W	9.2W																											
48VDC	9.8W	10.5W	10.6W	10.6W																											
110 VAC/VDC		9.7W		9.4W																											
220 VAC/VDC		9.7W		9.4W																											

Warning Message	System Syslog, SMTP/ e-mail event message, alarm relay
Alarm Relay Contact	5-pin A-code M12 male Relay outputs with current carrying capacity of 1 A @24VDC
Operating Temperature	-40 ~ 75°C
Operating Humidity	5% to 95% (Non-condensing)
Storage Temperature	-40 ~ 85°C
Housing	Rugged Metal, Fanless , IP67 grade housing for against water, dust, and oil (Figure 3)
Dimensions	70 x 240 x 168mm (D x W x H)
Weight	2.645kg (ITP-802GSM-LL) 2.82kg (ITP-802GSM-HL) 2.625kg (ITP-802GTM-LL) 2.8kg (ITP-802GTM-HL)
Installation Mounting	Wall mounting, or DIN Rail mounting (Optional)
MTBF	443,868 Hours (ITP-802GSM-LL) 353,092 Hours (ITP-802GSM-HL) 335,823 Hours (ITP-802GTM-LL) 281,168 Hours (ITP-802GTM-HL) (MIL-HDBK-217)
Warranty	5 years
Certification	CE
EMI (Electromagnetic Interference)	FCC Part 15 Subpart B Class A, CE
Railway Traffic	EN50155, EN50121-4
Immunity for Heavy Industrial Environment	EN61000-6-2
Emission for Heavy Industrial Environment	EN61000-6-4
EMS (Electromagnetic Susceptibility) Protection Level	EN61000-4-2 (ESD) Level 3, Criteria B EN61000-4-3 (RS) Level 3, Criteria A EN61000-4-4 (Burst) Level 3, Criteria A EN61000-4-5 (Surge) Level 3, Criteria B EN61000-4-6 (CS) Level 3, Criteria A EN61000-4-8 (PFMF, Magnetic Field) Field Strength: 300A/m, Criteria A
Safety	UL60950-1
Shock	IEC-61373
Freefall	IEC 60068-2-32
Vibration	IEC-61373

Software Specifications

Topology	
VLAN	IEEE 802.1q VLAN, up to 4094 802.1Q VLAN VID IEEE 802.1q VLAN, up to 4094 Groups IEEE 802.1ad Q-in-Q MAC-based VLAN, up to 256 entries IP Subnet-based VLAN, up to 128 entries Protocol-based VLAN(Ethernet, SNAP, LLC), up to 128 entries VLAN Translation, up to 256 entries GVRP (GARP VLAN Registration Protocol) MVR (Multicast VLAN Registration)
Link Aggregation (Port Trunk)	Static (Hash with SA, DA, IP, TCP/UDP port), up to 5 trunk group Dynamic (IEEE 802.3ad LACP), up to 5 trunk group
Spanning Tree	IEEE802.1d STP, IEEE802.1w RSTP, IEEE802.1s MSTP
Multiple u-Ring	up to 5 instances that each supports u-Ring, u-Chain or Sub-Ring type for flexible uses, and maximum up to 5 Rings. Recovery time <10ms The maximum number of devices allowed in a Ring supported ring is 250. (Please see CTC μ-Ring white paper for more details and more topology application)
Loop Protection	Supported
ITU-T G.8032 / Y.1344 ERPS (Ethernet Ring Protection)	Recovery time <50ms Single Ring, Sub-Ring, Multiple ring topology network
QoS Feature	
Class of Service	IEEE802.1p 8 active priorities queues for per port
Traffic Classification QoS	IEEE802.1p based CoS IP Precedence based CoS IP DSCP based CoS QCL(QoS Control List): Frame Type, Source/Destination MAC, VLAN ID, PCP, DEI QCE(QoS Control Entry): Protocol, Source IP, IP Fragment, DSCP, TCP/UDP port number

Bandwidth Control for Ingress	Rate in steps : 1 kbps / Mbps / fps / kfps Range : 100 kbps to 1Gbps / 1fps to 3300kfps Rate Unit : bit or frame
Bandwidth Control for Egress	Rate in steps : 1 kbps / Mbps Range : 100 kbps to 1Gbps Rate Unit : bit Per queue / Per port shaper
DiffServ (RF 2474) Remarkings	
Storm Control	for Unicast, Broadcast, Multicast
IP Multicasting Feature	
IGMP / MLD Snooping	IGMP Snooping v1, v2, v3 / MLD Snooping v1, v2 Port Filtering Profile, Throttling
IGMP / MLD Snooping	Fast Leave Maximum Multicast Group : up to 1022 entries Query / Static Router Port
Security Features	
IEEE 802.1X	Port-Based, MAC-Based
ACL	Number of rules : up to 256 entries for L2 / L3 / L4 L2: Mac address SA/DA/VLAN L3: IP address SA/DA, Subnet L4: TCP/UDP
RADIUS authentication & accounting	
TACACS+ authentication & accounting, TACACS+ 3.0	
HTTPS, HTTP	Supported
SSL / SSH v2	Supported
User Name Password Authentication	Local Authentication Remote Authentication (via RADIUS / TACACS+)
Management Interface Access Filtering	Web, Telnet / SSH , CLI RS-232 console
Management Features	
CLI	Cisco® like CLI

Web Based Management	
Telnet	Server
SNMP	TFTP, HTTP
SW & Configuration Upgrade	TFTP, HTTP
RMON	Redundant firmware in case of upgrade failure
MIB II	RMON I (1, 2, 3, 9 group), RMON II
UPnP	RFC 1213
DHCP	Supported
IP Source Guard	Server, Client, Relay, Snooping
Port Mirroring	Snooping option 82, Relay option 82
Event Syslog	Supported
Warning Message	Supported
DNS	Syslog server (RFC3164) (Support 1 server)
IEEE1588 PTP V2	Client, Proxy
NTP, SNTP	Support 5 operating mode in each port : Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master, Slave
LLDP (IEEE 802.1ab)	Client
	Link Layer Discovery Protocol
	LLDP-MED

IPv6 Features	
IPv6 Management	Telnet Server/ICMP v6
SNMP over IPv6	Supported
HTTP over IPv6	Supported
SSH over IPv6	Supported
IPv6 Telnet	Supported
IPv6 NTP, SNTP	Client
IPv6 TFTP	Supported
IPv6 QoS	Supported
IPv6 ACL	Number of rules: up to 256 entries for L2 / L3 / L4
	L2: Mac address SA/DA/VLAN
	L3: IP address SA/DA, Subnet
	L4: TCP/UDP
Others Features	
Green Ethernet	Supports IEEE802.3az EEE (Energy Efficient Ethernet) Management to optimize the power consumption
	Determine the cable length and lowering the power for ports with short cables
	Lower the power for a port when there is no link
	LED Power Management :Adjustment LEDs intensity
Cable Diagnostic	Measuring UTP Cable OK or broken point distance

Application

Figure 1 : ITP Series in Onboard Train Application

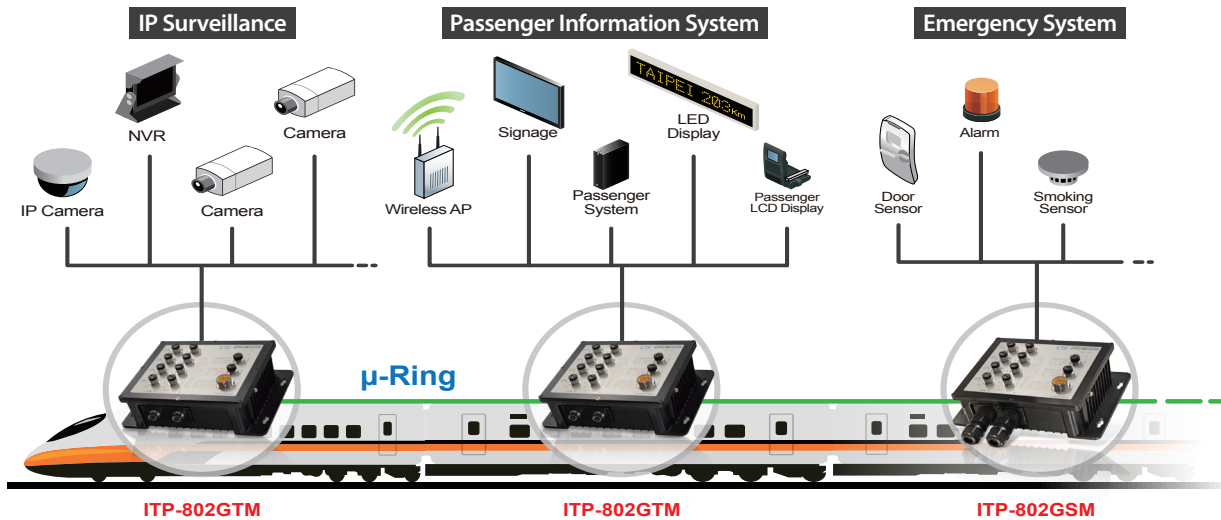


Figure 2 : ITP Series for Industrial Automation

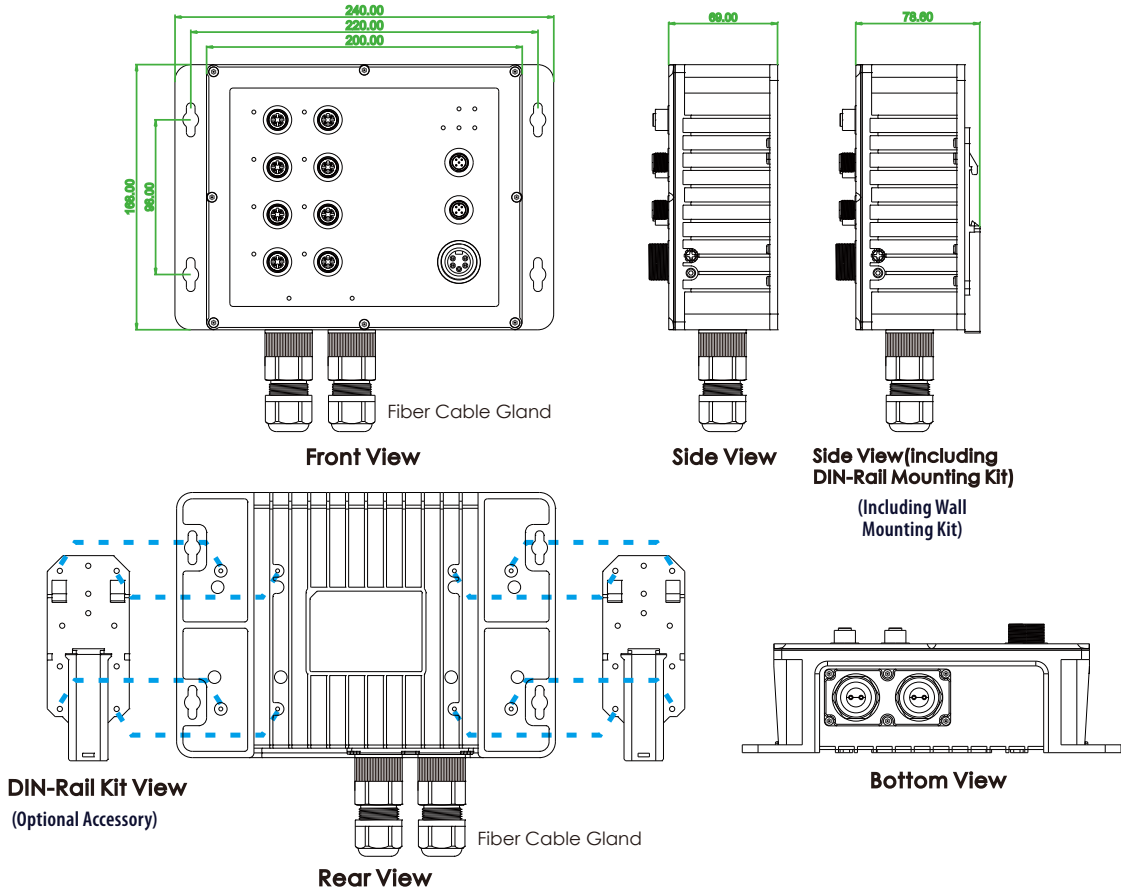


Figure 3 : IP67 Waterproof




Dimensions

▶ ITP-802GSM




▶ ITP-802GTM

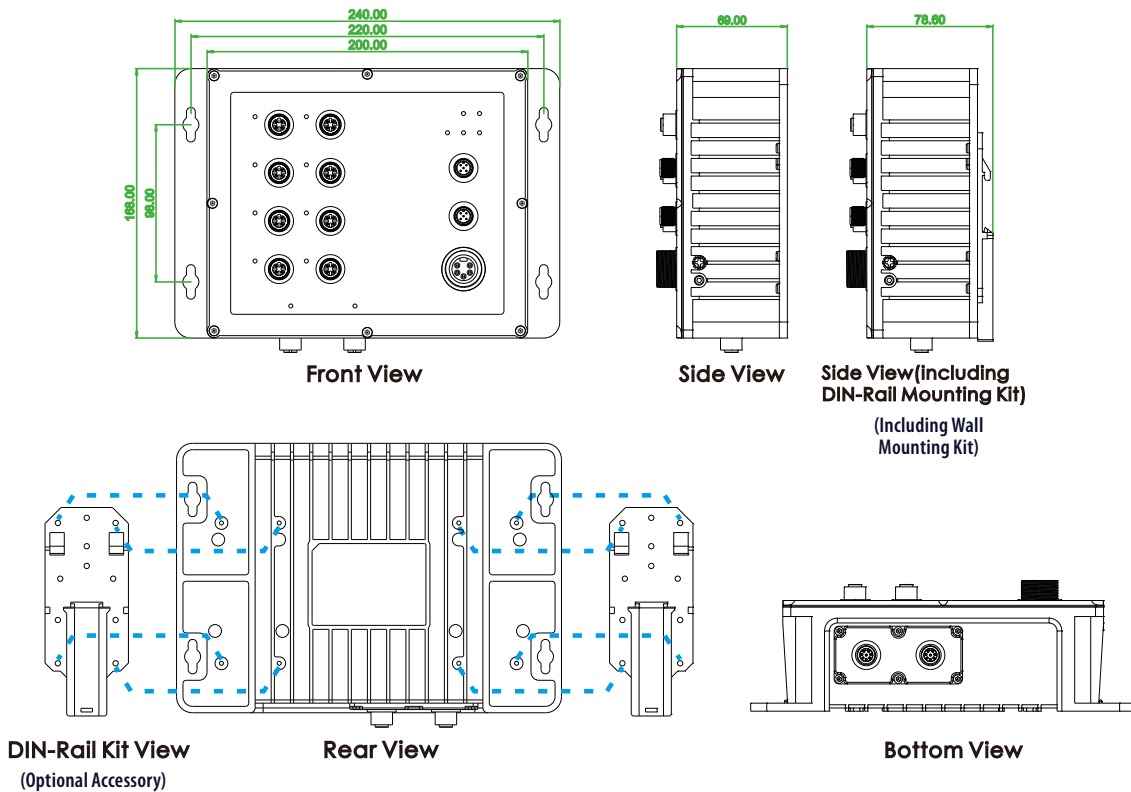

Ordering Information

Model Name	Managed	IP67	Total Port	UTP Port M12	SFP or UTP	Redundant Power supply		Certification				Shock Vibration	Operating Temperature
				10/100 Base-TX	100/1000 Base-X	Low Volt 12/24/48VDC (8.4~60VDC)	High Volt 110/220 VDC 110/220 VAC	EN50155 EN50121-4	UL60950-1	EN61000-6-2 EN61000-6-4	CE FCC	IEC61373	
ITP-802GSM-ELL	V	V	10	8	2 SFP	2		V	V	V	V	V	-40~75°C
ITP-802GSM-EHL	V	V	10	8	2 SFP	1	1	V	V	V	V	V	-40~75°C
ITP-802GTM-ELL-X	V	V	10	8	2 UTP (X-code)	2		V	V	V	V	V	-40~75°C
ITP-802GTM-EHL-X	V	V	10	8	2 UTP (X-code)	1	1	V	V	V	V	V	-40~75°C
ITP-802GTM-ELL	V	V	10	8	2 UTP (A-code)	2		V	V	V	V	V	-40~75°C
ITP-802GTM-EHL	V	V	10	8	2 UTP (A-code)	1	1	V	V	V	V	V	-40~75°C

Model Naming Rule

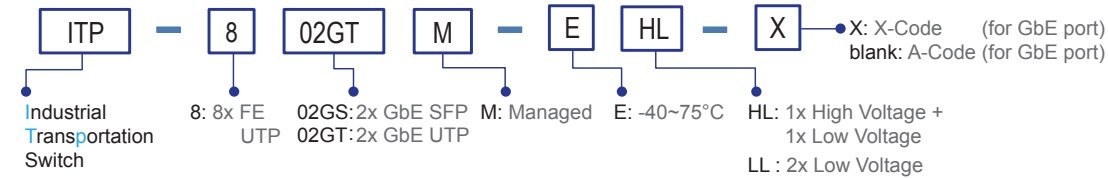

Package List

- One of the device series
- Protective caps for UTP ports and console, alarm port
- Fiber Cable Gland for SFP port x 2 set (for ITP-802GSM)
- Console cable (M12 to DB9)
- CD (Smartconfig, Manual)
- Quickly installation guide


Optional Accessories

Industrial SFP Transceiver

The ISFP series of industrial grade SFP modules have been fully tested with the ITP-802GSM for guaranteed compatibility and performance. The best performance can be guaranteed even in mission-critical applications. (Please see CTC Union's Industrial SFP datasheet for more details and more items.)

ISFP-M7000-85-D(E)	Industrial SFP GbE 1000Base-SX, M/M, 500 meter, wave length 850nm, 7.5dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-S7020-31-D(E)	Industrial SFP 1000Base-LX, S/M, 20km, wave length 1310nm, 15dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-M5002-31-D(E)	Industrial SFP 155M 100Base-FX, MM, 2km, wave length 1310nm, 12dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-S5030-31-D(E)	Industrial SFP 155M 100Base-FX, SM, 30km, 1310nm, 19dB, LC, DDMI, -10~70°C (-40~85°C)

SFP Naming Rule

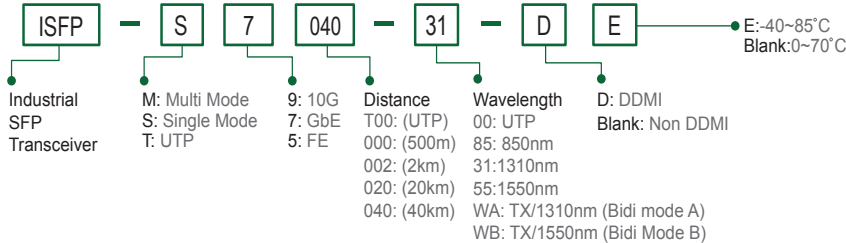

Optional Cable/Connector & Din-Rail Kit

P/N: CAB-M12XM8-RJ45

M12 X-code Male (8-Pin) to RJ-45, AWG 24, IP67, 1 meter



For GbE UTP (X-code model)

P/N: CAB-M12AM8-RJ45

M12 A-code Male (8-Pin) to RJ-45, AWG 24, IP67, 1 meter



For GbE UTP (A-code model)

P/N: CAB-M12DM4-RJ45

M12 D-code Male (4-Pin) to RJ-45, AWG 24, IP67, 1 meter



For FE UTP

P/N: CAB-M12AF5-OPEN

M12 A-code Female (5-Pin) to open wire, AWG 22, IP67, 1 meter



For Alarm

P/N: CAB-M23F5-OPEN

M23 Female (5-Pin) to open wire, (AWG 16), IP67, 1 meter



For Power

P/N: M12A-M8

M12 A-code Male (8-Pin) connector, IP67



For GbE UTP (A-code model)

P/N: M12D-M4

M12 D-code Male (4-Pin) connector, IP67



For FE UTP

P/N: M12A-F5

M12 A-code Female (5-Pin) connector, IP67



For Alarm

P/N: IND-DNK04

Din Rail Kit for Industrial, Wide: 52mm



(130 X52mm / 4 Screws) (2pcs/set)



ITP-500

5x 10/100Base-TX Ethernet Switch (Slim)

ITP-800

8x 10/100Base-TX Ethernet Switch



These models are unmanaged, industrial grade Fast Ethernet switches with 5(8) 10/100Base-TX Fast Ethernet ports. This series of unmanaged Ethernet switches is designed for industrial applications in harsh environments. These switches Ethernet ports utilize M12 connectors to ensure water tight, robust connections and guarantee reliable operation against environmental disturbances such as vibration and shock.

These switches are compliant with EN50155, covering operating temperature, power input voltage, surge, ESD, vibration, and shock, thus making these switches suitable for industrial applications in vehicle, rolling stock and railways.

Features

- 8-Port 10/100Base-TX Ethernet Switch (ITP-800)
- 5-Port 10/100Base-TX Ethernet Switch (ITP-500)
- Use M12 connector anti vibration and shock for vehicle, rolling stock, and railway applications
- Supports flow control
- Slim design (ITP-500, figure 5)
- Fanless design
- DIN rail or wall mounting installation
- Supports broadcast storm protection
- Supports auto-negotiation and auto-MDI/MDI-X
- Build-in 2 bypass port to avoid one or more nodes power fail in a bus structure to collapse the network (ITP-800)
- Redundant dual DC input power 12/24/48VDC (8.4~60VDC) (ITP-800)
- DC input power 12/24/48VDC (8.4~60VDC) (ITP-500)
- Very low power consumption
- IP67 water proof grade rugged housing for against water, dust, and and oil (Figure 2)
- Wide operating temperature -40~75°C (ITP-500-E, ITP-800-E)
- CE, FCC, EN50155 and EN50121-4 for railway certified
- Industrial Grade EMS, EMI, EN61000-6-2, EN61000-6-4 certified

Specifications

IEEE Standard	IEEE 802.3 10Base-T Ethernet IEEE 802.3u 100Base-TX Fast Ethernet IEEE802.3x Flow Control and Back Pressure
Switch Architecture	Back-plane (Switching Fabric): 1Gbps (ITP-500) Back-plane (Switching Fabric): 1.6Gbps (ITP-800) (Full wire-speed)
Data Processing	Store and Forward
Flow Control	IEEE 802.3x flow control, back pressure flow control
Provides Broadcast Storm Protection	Supported
MAC Address Table	1 K
Packet Buffer Size	448Kbits
Network Connector	5x M12 D-code Female (ITP-500) 8x M12 D-code Female (ITP-800) 10/100Base-TX auto negotiation speed Auto MDI/MDI-X function Full/Half duplex Built in 2 bypass port (ITP-800)
Network Cable	10Base-T: 2-pair UTP/STP Cat. 5e cable EIA/TIA-568 100-ohm (100m) 100Base-TX: 2-pair UTP/STP Cat. 5e cable EIA/TIA-568 100-ohm (100m)
Protocols	CSMA/CD
LED	Per unit: Power 1 (Green), Power 2 (Green) (ITP-800) Per unit: Power (Green) (ITP-500) Per port: Link/Active (Green)
Reverse Polarity Protection	Present for power input
Overload Current Protection	Supported

Power Supply	Redundant Dual DC 12/24/48V (8.4~60VDC) Input power (ITP-800) DC 12/24/48V (8.4~60VDC) Input power (ITP-500)		
Power Connector	5 Pin Male A-Code M12		
Power Consumption	Input Voltage	ITP-500	ITP-800
	12VDC	0.8W	1.8W
	24VDC	1.0W	2.2W
	48VDC	1.9W	3.4W
Operating Temperature	-40°C~75°C		
Operating Humidity	5% to 95% (Non-condensing)		
Storage Temperature	-40°C~85°C		
Housing	IP67 water-proof grade rugged housing, and fanless (Figure 2)		
Dimensions	43 x 30 x 206.5 mm (D x W x H) (ITP-500) 39 x 65.1 x 191.5 mm (D x W x H) (ITP-800)		
Weight	260g (ITP-500) 410g (ITP-800)		
Installation Mounting	Wall mounting, or DIN rail (optional)		
MTBF	2,315,383 Hours (ITP-500) 1,492,660 Hours (ITP-800) (MIL-HDBK-217)		
Warranty	5 years		
Certification			
EMC	CE		
EMI	FCC, FCC Part 15 Subpart B Class A, CE		
Railway Traffic	EN50155, EN50121-4		
Immunity for Heavy Industrial Environment	EN61000-6-2		

Emission for Heavy Industrial Environment	EN61000-6-4
EMS (Electromagnetic Susceptibility) Protection Level	EN61000-4-2 (ESD) Level 3, Criteria B EN61000-4-3 (RS) Level 3, Criteria A EN61000-4-4 (Burst) Level 3, Criteria A EN61000-4-5 (Surge) Level 3, Criteria B EN61000-4-6 (CS) Level 3, Criteria A EN61000-4-8 (PFMF, Magnetic Field) Field Strength: 300A/m, Criteria A EN 61000-4-11 Voltage Dips

Safety	UL60950-1 (Pending)
Shock	IEC 61373
Freefall	IEC 60068-2-32
Vibration	IEC 61373

Application

Figure 1 : ITP Series in Onboard Train Application

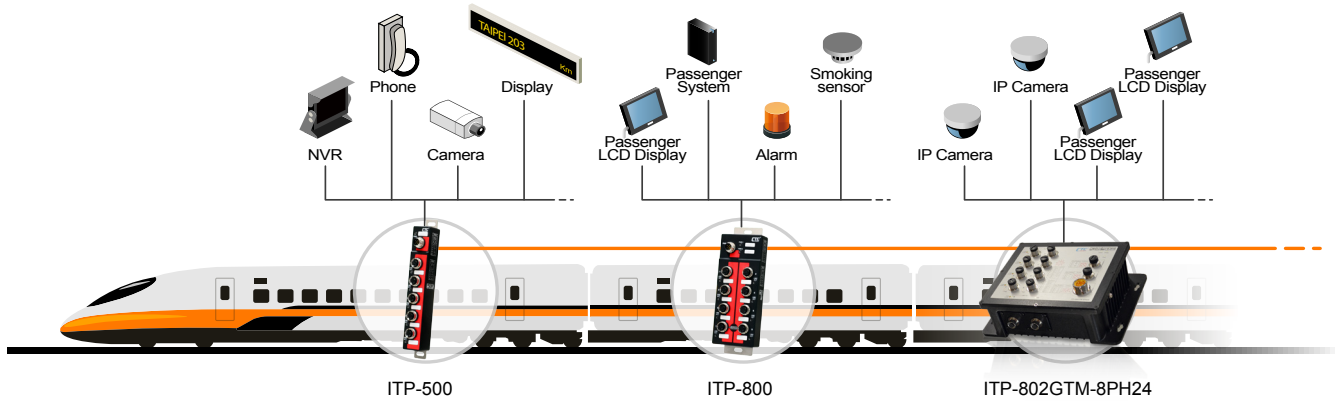


Figure 2 : IP67 Protection

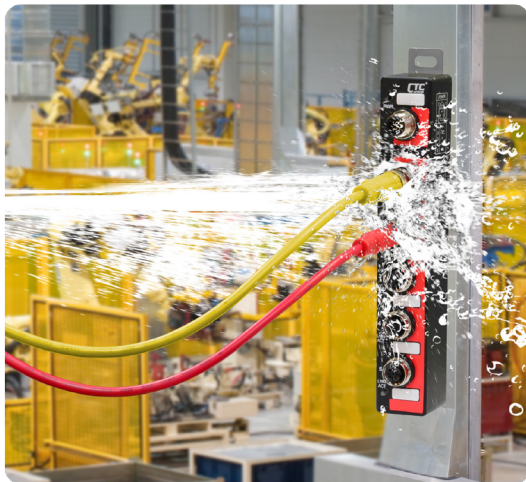



Figure 3 : Wide Range Temperature



Figure 4 : ITP Series for Industrial Automation




Figure 5 : Slim and Compact Size

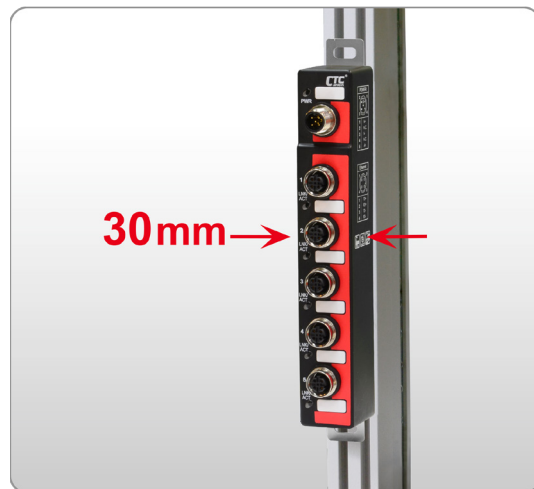


Dimensions

▶ ITP-500

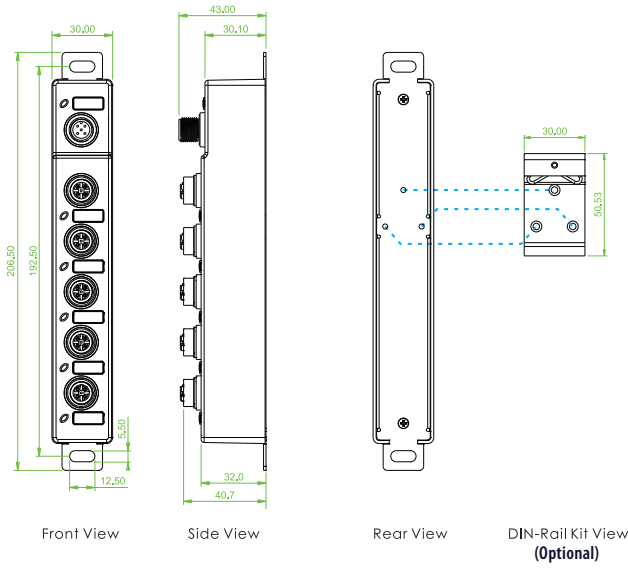


▶ ITP-800

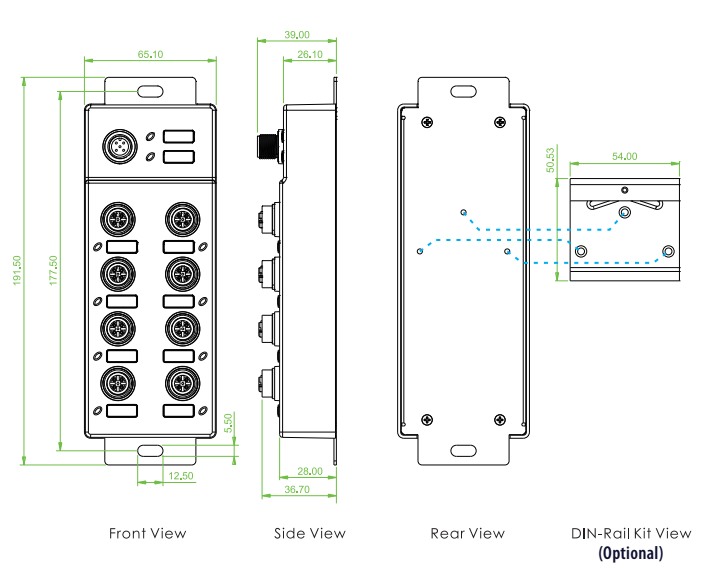

Ordering Information

Model Name	IP67	Total Port	UTP Port M12	Power Supply	Certification				Shock Vibration	Operating Temperature
			10/100 Base-TX	12/24/48VDC (8.4~60VDC)	EN50155	EN50121-4	EN61000-6-2 EN61000-6-4	CE FCC	IEC61373	
ITP-500-E	V	5	5	1	V	V	V	V	V	-40~75°C
ITP-800-E	V	8	8	2	V	V	V	V	V	-40~75°C

Model Naming Rule

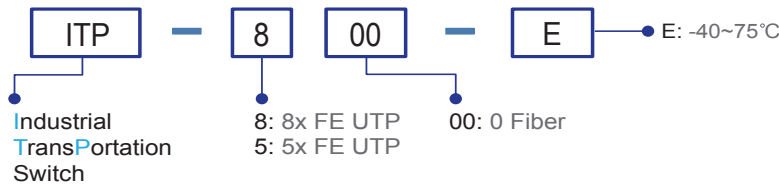

Package List

- ITP-500-E or ITP-800-E device
- Protective caps for UTP port and power
- Wall mount (bound with switch device)
- Quickly installation guide

Optional Accessories

Optional Cable/Connector

P/N: CAB-M12DM4-RJ45

M12 D-code Male (4-Pin) to RJ-45, AWG 24, IP67, 1 meter



For FE UTP

P/N: CAB-M12AF5-OPEN

M12 A-code Female (5-Pin) to open wire, AWG 22, IP67, 1 meter



For Power

P/N: M12D-M4

M12 D-code Male (4-Pin) connector, IP67



For FE UTP

P/N: M12A-F5

M12 A-code Female (5-Pin) connector, IP67



For Power

Preliminary



IGS-2408SM-24PH

24x 10/100/1000Base-T(X) + 8x 100/1000Base-X SFP with 24x PoE+ Managed Switch



CTC Industrial Rackmount PoE (Power over Ethernet) Switch IGS-2408SM-24PH is a hardened designed L2 managed Ethernet switch with PoE+/PSE for rigorous demands of centralized and critical applications. IGS- 2408SM-24PH supports 24x 10/100/1000BaseTX PoE/PoE+ ports, plus 8 dual speed (100/1000Base-X) SFP fiber optical slots, Thus providing up to 32 ports total for Ethernet connectivity. IGS-2408SM-24PH is an ideal solution for applications in Smart City, surveillance, Intelligent traffic control systems and production automation applications.

IGS-2408SM-24PH supports up to 24 PoE/PoE+ (IEEE 802.3af/IEEE 802.3at) ports which provide 15.4/30watts power output per port for connecting with heavy-duty industrial PoE devices, such as PTZ IP surveillance cameras, high-performance wireless access points, digital signage and IP phones. The IGS-2408SM-24PH is designed especially for harsh outdoor cabinet applications with 4kV surge protection to ensure the uninterrupted reliability of PoE systems.

IGS-2408SM-24PH provides up to 10KB jumbo frame support, a 32K MAC address table and 4MB memory packet buffer. The switch also supports Link Aggregation (Dynamic IEEE 802.3ad LACP) with up to 14 trunk group (maximum 8 port per group) to increase bandwidth for providing high performance quick transfers of large amounts video, voice and data across a network.

IGS-2408SM-24PH supports a variety of Ethernet ring redundancy functions, including STP/ RSTP/MSTP/ERPS and enhanced μ-Ring/ μ-Chain/Sub-Ring that provides less than 50ms recovery time with 250 nodes isolated power inputs also help to increases system reliability and the availability of your network backbone.

Features

- 24x 10/100/1000Base-T RJ-45 + 8x 100/1000Base-X SFP with 24x PoE+
- Maximum up to 24x IEEE802.3af / 802.3at PoE+ output, 30W per port, 400W PoE power budget in total
- Redundant dual input power 48VDC (44~57VDC)
- **Supports negative voltage power input**
- Rugged metal, IP30 protection & Fanless design
- UL60950-1, EN60950-1, CE, FCC, Rail Traffic EN50121-4 certified
- Heavy industrial grade EMS, EMI, EN61000-6-2, EN61000-6-4 certified
- **4KV surge protection for RJ45 and SFP ports**
- **2.25K VDC Hi-pot isolation protection for Ethernet ports and power**
- STP, RSTP, MSTP, ITU-T G.8032 Ethernet Ring Protection Switching (ERPS) for network redundancy
- Provides 5 instances each can support μ-Ring, μ-Chain or Sub-Ring for flexible networking applications
- μ-Ring redundancy, recovery time <50ms in 250 devices
- DHCP Server/Client/Relay/Snooping/Relay option 82
- QoS, Traffic classification QoS, CoS, bandwidth control for Ingress and Egress, Storm Control, DiffServ
- IEEE802.1q VLAN, MAC based VLAN, IP subnet based VLAN, Protocol based VLAN, VLAN translation, GVRP, MVR
- Dynamic IEEE 802.3ad LACP Link Aggregation, Static Link Aggregation
- IGMP snooping V1/V2/V3, IGMP Filtering/ Throttling, IGMP query, IGMP proxy reporting, MLD snooping V1/V2
- Flexibility security: Port based and MAC based IEEE802.1X, RADIUS, ACL, TACACS+, HTTP/HTTPS, SSL/SSH v2
- Software upgrade via TFTP and HTTP, redundant firmware to avoid in case of upgrade failure
- Supports IEEE1588 PTP V2 for precise time synchronization to operate in Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master, Slave mode by each port
- RMON, MIB II, Port mirroring, Event syslog, DNS, NTP 4.0, SNTP, IEEE802.1ab LLDP
- CLI, Web based management, SNMP v1/v2c/v3, Telnet server for management
- Supports Modbus/TCP protocols for management
- Provides SmartConfig for quick and easy mass Configuration*
- Supports SmartView for Centralized Management*
- Supporting Central EMS for management of up to 50 SmartView Server, and maximum up to 25,000 device*

Specifications

Standard	IEEE 802.3	10Base-T 10Mbit/s Ethernet	Standard	IEEE 802.1s	MSTP (Multiple Spanning Tree Protocol)
	IEEE 802.3u	100Base-TX, 100Base-FX, Fast Ethernet		ITU-T G.8032 / Y.1344	ERPS (Ethernet Ring Protection Switching)
	IEEE 802.3ab	1000Base-T Gbit/s Ethernet over twisted pair		IEEE 802.1Q	Virtual LANs (VLAN)
	IEEE 802.3z	1000Base-X Gbit/s Ethernet over Fiber-Optic		IEEE 802.1X	Port based and MAC based Network Access Control, Authentication
	IEEE 802.1d	STP (Spanning Tree Protocol)		IEEE802.3ac	Max frame size extended to 1522Bytes
	IEEE 802.1w	RSTP (Rapid Spanning Tree Protocol)			

Standard	IEEE 802.3ad	Link aggregation for parallel links with LACP(Link Aggregation Control Protocol)	
	IEEE802.3af	PoE (Power over Ethernet)	
	IEEE802.3at	PoE+ (Power over Ethernet enhancement)	
	IEEE802.3X	Flow control for full duplex	
	IEEE 802.1ad	Stacked VLANs, Q-in-Q	
	IEEE 802.1p	LAN Layer 2 QoS/CoS Protocol for Traffic Prioritization	
	IEEE 802.1ab	Link Layer Discovery Protocol (LLDP)	
	IEEE 802.3az	EEE (Energy Efficient Ethernet)	
	VLAN ID	4094	IEEE802.1Q VLAN VID
	Switch Architecture	Back-plane (Switching Fabric): 64Gbps (Full wire-speed)	
Data Processing	Store and Forward		
Network Connector	SFP: 8x 100/1000Base-X SFP socket Support DDMI RJ45: 24x 10/100/1000Base-T RJ-45 Support Auto negotiation speed, Auto MDI/MDI-X function PoE: 24x IEEE 802.3at /IEEE 802.3af PoE+ End-Span, Alternative A mode. Maximum 30W per port, 400W PoE power budget in total RJ45 Pin Assignment: PoE Positive (V+) : RJ-45 pin 1, 2. PoE Negative (V-) : RJ-45 pin 3, 6. Data (1,2,3,6,4,5,7,8)		
Console	RS-232 (RJ-45)		
Network Cable	UTP/STP Cat.5e cable or above EIA/TIA-568 100-ohm (100m)		
Protocols	CSMA/CD		
Reverse Polarity Protection	For input power		
Overload Current Protection	Supported		
CPU Watch Dog	Supported		
Power Supply	Redundant dual input power 48VDC (44~57VDC) (Removable terminal block) (50~57VDC input is recommended for IEEE802.3at PoE+ in 30W applications) Supports negative voltage power input (for example application in telecom system)		
Power Consumption	TBD		
LED	Per unit: Power 1 (Green), Power 2 (Green), Act /Alarm (Green/Red), Ring Master (Green)		
LED	P1~P24 Per RJ-45 port: 10/100 Link/Active (Green) 1000 Link/Active (Amber) P25~P32 Per SFP Fiber port: 100Base-X Link/Active (Green) 1000Base-X Link/Active (Amber) PoE port (P1~P24): PoE ON (Green)		

Jumbo Frame	10K Byte
MAC Address Table	32K
Memory Buffer	4M Bytes for packet buffer
Warning Message	System Syslog, SMTP/ e-mail event message, alarm relay
Alarm Relay Contact	Relay outputs with current carrying capacity of 1A @24VDC, 2-Pin removable terminal block
Operating Temperature	-10 ~ 60°C (IGS-2408SM-24PH) -40 ~ 75°C (IGS-2408SM-24PHE)
Operating Humidity	5% to 95% (Non-condensing)
Storage Temperature	-40 ~ 85°C
Housing	Rugged Metal, IP30 Protection, Fanless
Dimensions	TBD
Weight	TBD
Installation Mounting	19" rack mount
MTBF	TBD
Warranty	5 years
Certification	
EMC	CE (EN55024, EN55032)
EMI (Electromagnetic Interference)	FCC Part 15 Subpart B Class A, CE
Railway Traffic	EN50121-4
Immunity for Heavy Industrial Environment	EN61000-6-2
Emission for Heavy Industrial Environment	EN61000-6-4
EMS (Electromagnetic Susceptibility) Protection Level	EN61000-4-2 (ESD) Level 3, Criteria B EN61000-4-3 (RS) Level 3, Criteria A EN61000-4-4 (Burst) Level 3, Criteria A EN61000-4-5 (Surge) Level 3, Criteria B EN61000-4-6 (CS) Level 3, Criteria A EN61000-4-8 (PFMF, Magnetic Field) Field Strength: 300A/m, Criteria A
Safety	UL60950-1, EN60950-1
Hi pot protection	DC 2.25KV for power to chassis ground, Ethernet port to chassis ground
4KV surge protection	Supported for RJ45 and SFP ports
Shock	IEC 60068-2-27
Freefall	IEC 60068-2-32
Vibration	IEC 60068-2-6

Software Specifications

Topology	
VLAN	IEEE 802.1q VLAN, up to 4094 802.1Q VLAN VID IEEE 802.1q VLAN, up to 4094 Groups IEEE 802.1ad Q-in-Q MAC-based VLAN, up to 256 entries IP Subnet-based VLAN, up to 128 entries Protocol-based VLAN(Ethernet, SNAP, LLC), up to 128 entries VLAN Translation, up to 256 entries GVRP (GARP VLAN Registration Protocol) MVR (Multicast VLAN Registration)
Link Aggregation (Port Trunk)	Static (Hash with SA, DA, IP, TCP/UDP port), up to 14 trunk group Dynamic (IEEE 802.3ad LACP), up to 14 trunk group Per group up-to 8 port
Spanning Tree	IEEE802.1d STP, IEEE802.1w RSTP, IEEE802.1s MSTP


Multiple μ-Ring	Up to 5 instances each support μ-Ring, μ-Chain or Sub-Ring for flexible networking applications. Recovery time <50ms The maximum number of device is allowed 250 in a Ring.
Loop Protection	Supported
ITU-T G.8032 / Y.1344 ERPS (Ethernet Ring Protection)	Recovery time <50ms
QoS Features	Single Ring, Sub-Ring, Multiple ring topology
Class of Service	IEEE802.1p 8 active priorities queues for per port
Traffic Classification QoS	IEEE802.1p based CoS IP Precedence based CoS IP DSCP based CoS

Traffic Classification QoS	QCL(QoS Control List): Frame Type, Source/Destination MAC, VLAN ID, PCP, DEI Protocol, Source IP, IP Fragment, DSCP, TCP/UDP port number
Bandwidth Control for Ingress	Per port based
Bandwidth Control for Egress	Per port based Per queue / Per port shaper
DiffServ (RF 2474) Remarking	
Storm Control	for Unicast, Broadcast, Multicast
IP Multicasting Features	
IGMP / MLD Snooping	IGMP Snooping v1, v2, v3 / MLD Snooping v1, v2 Port Filtering Profile Throttling, Fast Leave Maximum Multicast Group : up to 1022 entries Query / Static Router Port
Security Features	
IEEE 802.1X	Port-Based MAC-Based
ACL	Number of rules : up to 256 entries for L2 / L3 / L4 L2 : Mac address SA/DA/VLAN L3 : IP address SA/DA, Subnet L4 : TCP/UDP
RADIUS authentication & accounting	
TACACS+ authentication & accounting, TACACS+ 3.0	
HTTPS, HTTP	Supported
SSL / SSH v2	Supported
User Name Password Authentication	Local Authentication Remote Authentication (via RADIUS / TACACS+)
Management Interface Access Filtering	Web, Telnet / SSH , CLI RS-232 console
Management Features	
CLI	Cisco® like CLI
Web Based Management	
Telnet	Server
SNMP	V1, V2c, V3
Modbus/TCP	Support for management and monitoring
SW & Configuration Upgrade	TFTP, HTTP Redundant firmware in case of upgrade failure
RMON	RMON I (1, 2, 3, 9 group), RMON II
MIB	RFC1213 MIB II, Private MIB
UPnP	Supported

DHCP	Server/Client/Relay/Relay option 82/Snooping
IP Source Guard	Supported
Mirroring	Local and Remote
Event Syslog	Syslog server (RFC3164) (Support 1 server)
Warning Message	System syslog, e-mail, alarm relay
DNS	Client, Proxy
IEEE1588 PTP V2	Supports 5 operating mode in each port : Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master, Slave
NTP V4.0, SNTP	Client
LLDP (IEEE 802.1ab)	Link Layer Discovery Protocol LLDP-MED
IPv6 Features	
IPv6 Management	Telnet Server/ICMP v6
SNMP over IPv6	Supported
HTTP over IPv6	Supported
SSH over IPv6	Supported
IPv6 Telnet	Supported
IPv6 NTP, SNTP	Client
IPv6 TFTP	Supported
IPv6 QoS	Supported
IPv6 ACL	Number of rules: up to 256 entries for L2 / L3 / L4 L2 : Mac address SA/DA/VLAN L3 : IP address SA/DA, Subnet L4 : TCP/UDP
Advanced PoE Management	PoE PD failure auto checking, and auto reset when PD fail PoE port on/off weekly scheduling PoE Configuration PoE Enable/Disable Power limit by classification Power limit by management Total PoE Power budget limitation management: Maximum 400W power budget Power feeding priority

Application


Figure : Application Example

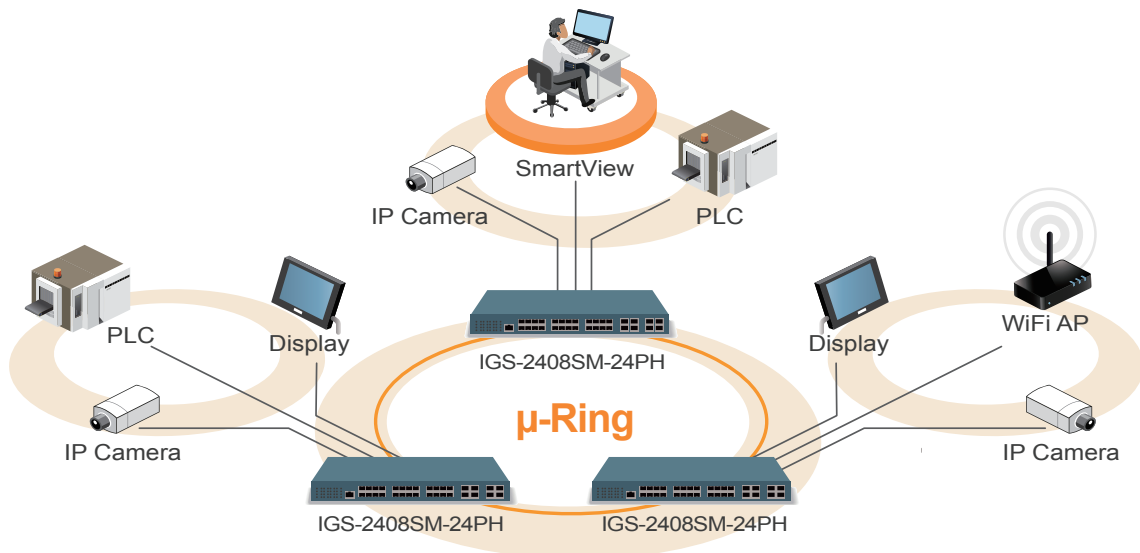

Ordering Information

Model Name	Managed	Total Port	RJ45 Port	SFP Port	PoE port		Input power 48,-48VDC	Certification				Operating Temperature
			10/100/1000 Base-T(X)	100/1000 Base-X	IEEE 802.3at	Power Budget		Safety UL60950-1 EN60950-1	EN50121-4	EN61000-6-2 EN61000-6-4	CE, FCC	
IGS-2408SM-24PH	V	32	24	8	24	400W	2	V	V	V	V	-10~60°C
IGS-2408SM-24PHE	V	32	24	8	24	400W	2	V	V	V	V	-40~75°C

Model Naming Rule

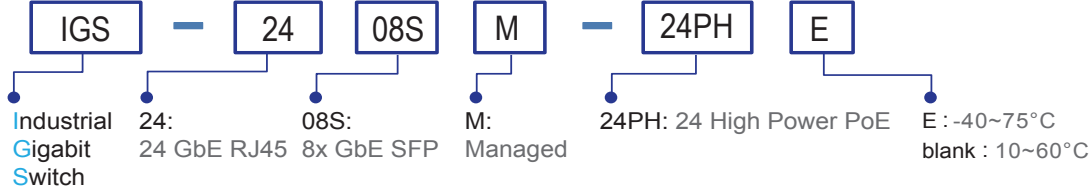


Optional Accessories

Industrial SFP Transceiver

The ISFP series of industrial grade SFP modules have been fully tested with the series product for guaranteed compatibility and performance. The best performance can be guaranteed even in mission-critical applications.

ISFP-M7000-85-D(E)	Industrial SFP GbE 1000Base-SX, M/M, 500 meter, wave length 850nm, 7.5dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-S7020-31-D(E)	Industrial SFP 1000Base-LX, S/M, 20km, wave length 1310nm, 15dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-T7T00-00-(E)	Industrial SFP 1000Base-T UTP 100meter, -10~70°C (-40~85°C)
ISFP-M5002-31-D(E)	Industrial SFP 155M 100Base-FX, MM, 2km, wave length 1310nm, 12dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-S5030-31-D(E)	Industrial SFP 155M 100Base-FX, SM, 30km, 1310nm, 19dB, LC, DDMI, -10~70°C (-40~85°C)

SFP Naming Rule

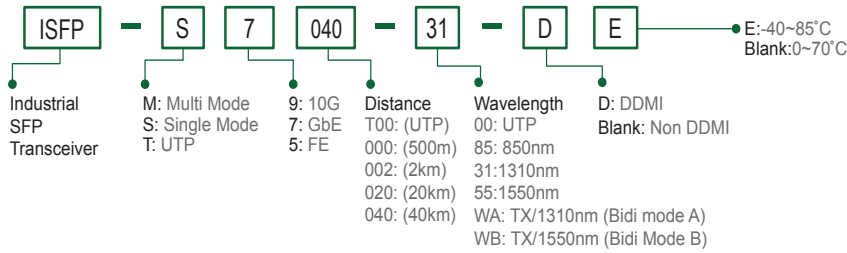



IGS-1608SM-8PH

16x 10/100/1000Base-T +
8x 100/1000Base-X SFP w/ 8x PoE+

IGS⁺803SM-8PH24

8x 10/100/1000Base-T +
3x 100/1000Base-X SFP w/ 8x PoE+

IGS⁺803SM-8PH

8x 10/100/1000Base-T +
3x 100/1000Base-X SFP w/ 8x PoE+

IGS-402SM-4PU

4x 10/100/1000Base-T +
2x 100/1000Base-X SFP w/ 4x **PoE++**, 60W



These models are managed industrial grade Gigabit PoE (Power over Ethernet) switches that provide 4/8/16x GbE UTP plus 2/3/8 GbE SFP with 4/8x PoE Ports. The PoE features enable power and data to be transferred via a single cable, thereby considerably reducing cabling and electrical wiring expenses. With dual power input design, these models can provide redundant mechanisms for critical applications that need always-on connections. These switches can also operate either at standard operating temperature range (-10 to 60°C) or at wide operating temperature range (-40 to 75°C) so as to fulfill the special needs of industrial automation applications. Housed in rugged DIN rail or wall mountable IP-30 enclosures, these switches are perfect choices for harsh environments, such as telecom network, industrial network, intelligent transportation systems (ITS) and are also suitable for many military and utility market applications where environmental conditions exceed commercial product specifications.

These managed switches also support a wide variety of Ethernet functions, including STP/RSTP/MSTP/ ITM-T G.8032 ERPS and multiple µ-Ring for redundant cabling, advanced PoE management functions such as weekly PoE power scheduling as well as device auto-checking and auto-reset. They also support layer 2 Ethernet IGMP, VLAN, QoS, Security, IPv6, bandwidth control, port mirroring, cable diagnostics and Green Ethernet. Additionally, these switches can also be managed by CTC Union's SmartView™ Element Management System which offers a user-friendly and centralized device management platform and provides network administrators the ability to monitor and configure these connected switches remotely (see figure 1).

Features

- 16x 10/100/1000Base-T RJ-45+ 8x 100/1000Base-X SFP with 8x PoE+, total 240W power budget (IGS-1608SM-8PH)
- 8x 10/100/1000Base-T RJ-45+ 3x 100/1000Base-X SFP with 8x PoE+, total 180W power budget (IGS⁺803SM-8PH24)
- 8x 10/100/1000Base-T RJ-45+ 3x 100/1000Base-X SFP with 8x PoE+, total 240W power budget (IGS⁺803SM-8PH)
- 4x 10/100/1000Base-T RJ-45 + 2x 100/1000Base-X SFP with 4x PoE++, total 240W power budget (IGS-402SM-4PU)
- 48VDC (44~57VDC) redundant dual input power (IGS-1608SM-8PH, IGS⁺803SM-8PH, IGS-402SM-4PU)
- 24/48VDC (20~57VDC) redundant dual input power with built-in very high efficiency booster (94~97%) to rise up 55 VDC for PoE output (Figure 2) (IGS⁺803SM-8PH24)
- **Supports negative voltage power input with isolated RS-232 console port (for example in telecom system)**
- Regulated PoE output voltage (55VDC) to stabilize PoE device, and guarantee delivery PoE power distance to 100meter (Figure 2) (IGS⁺803SM-8PH24)
- Provides 8 port IEEE802.3af / 802.3at PoE+ output ,30W per port (IGS-1608SM-8PH, IGS⁺803SM-8PH24, IGS⁺803SM-8PH)
- Provides 4 port IEEE802.3af / 802.3at/802.3bt PoE++ output, 60W per port (IGS-402SM-4PU)
- Advanced PoE Management, PoE PD Failure Auto Checking and auto reset when PD fail, PoE port on/off weekly scheduling, PoE configuration for power planning
- Rugged metal, IP30 protection & Fan-less design
- UL60950-1, EN60950-1, CE, FCC, Rail Traffic EN50121-4, traffic control NEMA TS2 certified
- Heavy Industrial grade EMS, EMI, EN61000-6-2, EN61000-6-4 certified
- **4KV surge protection for PoE, UTP and Fiber ports**
- **2.25K VDC Hi-pot isolation protection for Ethernet ports and power**
- Cable diagnostics, Measuring cable OK or broken point distance
- Supports Green Ethernet IEEE802.3az EEE (Energy Efficient Ethernet) management to optimize power consumption
- STP, RSTP, MSTP, ITM-T G.8032 Ethernet Ring Protection Switching (ERPS) for redundant cabling
- Provides 5 ring instances that each can support µ-Ring, µ-Chain or Sub-Ring type for flexible uses. Supports up to 5 rings in one device (Please see CTC µ-Ring white paper for more details and more topology application)
- µ-Ring for Redundant Cabling, recovery time<10ms in 250 devices
- DHCP Server/Client/Relay/Snooping/Snooping option 82/Relay option 82
- QoS, Traffic classification QoS, CoS, bandwidth control for Ingress and Egress, Storm Control, DiffServ
- IEEE802.1q VLAN, MAC based VLAN, IP subnet based VLAN, Protocol based VLAN, VLAN translation, GVRP, MVR
- Dynamic IEEE 802.3ad LACP Link Aggregation, Static Link Aggregation
- IGMP snooping V1/V2/V3, IGMP Filtering/ Throttling, IGMP query, IGMP proxy reporting, MLD snooping V1/V2
- Flexibility security: Port based and MAC based IEEE802.1X, RADIUS, ACL, TACACS+, HTTP/HTTPS, SSL/SSH v2
- Software upgrade via TFTP and HTTP, redundant firmware to avoid upgrade failure
- Supports IEEE1588 PTP V2 for precise time synchronization to operate in Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master, Slave mode by each port
- RMON, MIB II, Port mirroring, Event syslog, DNS, NTP, SNTP, IEEE802.1ab LLDP
- Supports IPv6 Telnet server /ICMP v6
- CLI, Web based management, SNMP v1/v2c/v3, Telnet server for management
- Supports Modbus/TCP protocols for management
- Provides SmartConfig for quick and easy mass configuration tool (Please see Catalog chapter 1- Software Management for more details)
- Supports SmartView for centralized management tool (Please see Catalog chapter 1- Software Management for more details)

Specifications

Standard	IEEE 802.3	10Base-T 10Mbit/s Ethernet
	IEEE 802.3u	100Base-TX, 100Base-FX, Fast Ethernet
	IEEE 802.3ab	1000Base-T Gbit/s Ethernet over twisted pair
	IEEE 802.3z	1000Base-X Gbit/s Ethernet over Fiber-Optic
	IEEE 802.3af	PoE (Power over Ethernet)
	IEEE 802.3at	PoE+ (Power over Ethernet enhancements)
	IEEE 802.3bt	PoE++(4 pairs Power over Ethernet)
	IEEE 802.1d	STP (Spanning Tree Protocol)
	IEEE 802.1w	RSTP (Rapid Spanning Tree Protocol)
	IEEE 802.1s	MSTP (Multiple Spanning Tree Protocol)
	ITM-T G.8032 / Y.1344	ERPS (Ethernet Ring Protection Switching)
	IEEE 802.1Q	Virtual LANs (VLAN)
	IEEE 802.1X	Port based and MAC based Network Access Control, Authentication
	IEEE802.3ac	Max frame size extended to 1522Bytes
	IEEE 802.3ad	Link aggregation for parallel links with LACP(Link Aggregation Control Protocol)
	IEEE 802.3x	Flow control for Full Duplex
IEEE 802.1ad	Stacked VLANs, Q-in-Q	
IEEE 802.1p	LAN Layer 2 QoS/CoS Protocol for Traffic Prioritization	
IEEE 802.1ab	Link Layer Discovery Protocol (LLDP)	
IEEE 802.3az	EEE (Energy Efficient Ethernet)	
Switch Architecture	Back-plane (Switching Fabric): 48Gbps (IGS-1608SM-8PH) 22Gbps (IGS+803SM-8PH24, IGS+803SM-8PH) 12Gbps (IGS-402SM-4PU) Full wire-speed	
	Data Processing Store and Forward	
Flow Control	IEEE 802.3x for full duplex mode Back pressure for half duplex mode	
Network Connector	16x 10/100/1000Base-T RJ-45 + 8x 100/1000Base-X SFP connector (IGS-1608SM-8PH) 8x 10/100/1000Base-T RJ-45 + 3x 100/1000Base-X SFP connector (IGS+803SM-8PH24, IGS+803SM-8PH) 4x 10/100/1000Base-T RJ-45 + 2x 100/1000Base-X SFP connector (IGS-402SM-4PU) RJ-45 UTP port support Auto negotiation speed, Auto MDI/MDI-X function, SFP port support 100/1000 dual speed with DDMI	
	Console	RS-232 (RJ-45) Isolated RS-232 port grounding for negative voltage power system, or telecom network application
PoE standard & RJ-45 Pin Assignment	IGS-1608SM-8PH, IGS+803SM-8PH24, IGS+803SM-8PH: 8x IEEE 802.3at /IEEE 802.3af PoE+ 2 pairs PoE, PoE+, 30W/port End-Span, Alternative A mode. Positive (V+) : RJ-45 pin 1, 2, 4, 5 Negative (V-) : RJ-45 pin 3, 6.	
	IGS-402SM-4PU: 4x IEEE 802.3bt /802.3at/ 802.3af PoE++ 4 pairs PoE, PoE++ , 60W/port End-Span, Alternative A and B mode. Positive (V+) : RJ-45 pin 1, 2, 4, 5 Negative (V-) : RJ-45 pin 3, 6, 7, 8	
Network Cable	UTP/STP above Cat. 5e cable EIA/TIA-568 100-ohm (100m)	
Protocols	CSMA/CD	
Reverse Polarity Protection	Supported for power input	
Overload Current Protection	Supported	
CPU Watch Dog	Supported	
Power Supply	IGS-1608SM-8PH, IGS+803SM-8PH, IGS-402SM-4PU : Redundant Dual DC 48V (44~57VDC) input power, and support negative voltage input power for telecom (Removable terminal block) (50~57V input is recommended for IEEE802.3at PoE+ in 30W applications) (50~57V input is recommended for IEEE802.3bt PoE++ in 60W applications)	

Power Supply	IGS+803SM-8PH24: Redundant Dual DC 24/48V (20~57VDC) input power, and support negative voltage input power for telecom network (Removable Terminal Block) Built-in very high efficiency booster(94~97%) to rise up 55 VDC for PoE output Regulated PoE output voltage (55VDC) to stabilize PoE device, and guarantee delivery PoE power distance to 100meter (Figure 2)				
Power Consumption	IGS-1608SM-8PH Power consumption				
	Input Voltage	Total Power Consumption	Device Power Consumption	PoE Budget	
	50VDC	255.2W	15.2W	240W	
Power Consumption	IGS+803SM-8PH24 Power consumption & Booser efficiency				
	Input Voltage	Total Power Consumption	Device Power Consumption	PoE Budget	Boost Efficiency
	24VDC	194.2W	10.8W	180W	97%
Power Consumption	IGS+803SM-8PH Power consumption & Booser efficiency				
	Input Voltage	Total Power Consumption	Device Power Consumption	PoE Budget	
	50VDC	255.5W	15.5W	240W	
Power Consumption	IGS-402SM-4PU Power consumption				
	Input Voltage	Total Power Consumption	Device Power Consumption	PoE Budget	
	50VDC	249.6W	9.6W	240W	
PoE Power Budget	Maximum PoE Output power budget 30W / Per Port 240W (IGS-1608SM-8PH, IGS+803SM-8PH) 180W (IGS+803SM-8PH24) Maximum PoE Output power budget 60W / Per Port 240W (IGS-402SM-4PU)				
LED	Per unit: Power 1 (Green), Power 2 (Green), Fault (Amber), CPU Act (Green), Ring Master (Yellow) Per RJ-45 port: 10/100 Link/Active (Green) 1000 Link/Active (Amber) SFP Fiber Per port: Link/Active (Green) PoE Port LED 1 LED /per Port : • PoE Output Power On : ON (Green) • PoE Fault (Over Load, Short Circuit,Port failed at Startup) : Flash 1times /sec (Green)				
Jumbo Frame	9.6KB				
IEEE802.3ac	Max frame size extended to 1522Bytes (allow Q-tag in packet)				
MAC Address Table	8K				
Memory Buffer	512K Bytes for packet buffer				
Warning Message	System Syslog, SMTP/ e-mail event message, alarm relay				
Alarm Relay Contact	Relay outputs with current carrying capacity of 1 A @24VDC				
Removable Terminal Block	Provide 2 redundant power, alarm relay contact, 6 Pin				
Operating Temperature	-10 ~ 60°C (IGS-1608SM-8PH , IGS+803SM-8PH24, IGS+803SM-8PH, IGS-402SM-4PU) -40 ~ 75°C (IGS-1608SM-8PHE, IGS+803SM-8PHE24, IGS+803SM-8PHE, IGS-402SM-4PUE)				
Operating Humidity	5% to 95% (Non-condensing)				
Storage Temperature	-40 ~ 85°C				
Housing	Rugged Metal, IP30 Protection, Fanless				
Dimensions	116 x 91 x 157 mm (Dx Wx H) (IGS-1608SM-8PH) 106 x 72 x 152 mm (D x W x H) (IGS+803SM-8PH24, IGS+803SM-8PH) 106 x 62.5 x 135 mm (D x W x H) (IGS-402SM-4PU)				
Weight	1.375kg (IGS-1608SM-8PH), 0.86kg (IGS+803SM-8PH24) 0.85kg (IGS+803SM-8PH) 0.7kg (IGS-402SM-4PU)				
Installation Mounting	DIN Rail mounting, or wall mounting (Optional)				
MTBF	439,881 Hours (IGS-1608SM-8PH) 528,753 Hours (IGS+803SM-8PH24) 487,189 Hours (IGS+803SM-8PH) 589,078 Hours (IGS-402SM-4PU) (MIL-HDBK-217)				
Warranty	5 years				
Certification					
EMC	CE				
EMI (Electromagnetic Interference)	FCC Part 15 Subpart B Class A, CE				
Railway Traffic	EN50121-4				

Traffic control	NEMA TS2 (IGS+803SM-8PH24, IGS+803SM-8PH)
Immunity for Heavy Industrial Environment	EN61000-6-2
Emission for Heavy Industrial Environment	EN61000-6-4
EMS (Electromagnetic Susceptibility) Protection Level	EN61000-4-2 (ESD) Level 3, Criteria B EN61000-4-3 (RS) Level 3, Criteria A EN61000-4-4 (Burst) Level 3, Criteria A EN61000-4-5 (Surge) Level 3, Criteria B

EMS (Electromagnetic Susceptibility) Protection Level	EN61000-4-6 (CS) Level 3, Criteria A EN61000-4-8 (PFMF, Magnetic Field) Field Strength: 300A/m, Criteria A
Safety	UL60950-1, EN60950-1
Hi pot protection	DC 2.25KV for power to chassis ground, Ethernet port to chassis ground
4KV surge protection	Supported for PoE, UTP and Fiber ports
Shock	IEC 60068-2-27
Freefall	IEC 60068-2-32
Vibration	IEC 60068-2-6

Software Specifications

Topology	
VLAN	IEEE 802.1q VLAN, up to 4094 802.1Q VLAN VID IEEE 802.1q VLAN, up to 4094 Groups IEEE 802.1ad Q-in-Q MAC-based VLAN, up to 256 entries IP Subnet-based VLAN, up to 128 entries Protocol-based VLAN (Ethernet, SNAP, LLC), up to 128 entries VLAN Translation, up to 256 entries GVRP (GARP VLAN Registration Protocol) MVR (Multicast VLAN Registration)
Link Aggregation (Port Trunk)	Static (Hash with SA, DA, IP, TCP/UDP port), up to 5 trunk group Dynamic (IEEE 802.3ad LACP), up to 5 trunk group
Spanning Tree	IEEE802.1d STP, IEEE802.1w RSTP, IEEE802.1s MSTP
Multiple μ-Ring	up to 5 instances that each supports μ -Ring, μ -Chain or Sub-Ring type for flexible uses, and maximum up to 5 Rings Recovery time <10ms The maximum number of devices allowed in a Ring supported ring is 250 (Please see CTC Union μ -Ring white paper for more details and more topology application)
Loop Protection	Supported
ITM-T G.8032 / Y.1344 ERPS (Ethernet Ring Protection)	Recovery time <50ms Single Ring, Sub-Ring, Multiple ring topology network
QoS Features	
Class of Service	IEEE802.1p 8 active priorities queues for per port
Traffic Classification QoS	IEEE802.1p based CoS, IP Precedence based CoS IP DSCP based CoS QCL(QoS Control List): Frame Type, Source/Destination MAC, VLAN ID, PCP, DEI QCE(QoS Control Entry): Protocol, Source IP, IP Fragment, DSCP, TCP/UDP port number
Bandwidth Control for Ingress	Rate in steps :1 kbps / Mbps / fps / kfps Range : 100 kbps to 1Gbps / 1fps to 3300kfps Rate Unit : bit or frame
Bandwidth Control for Egress	Rate in steps : 1 kbps / Mbps Range : 100 kbps to 1Gbps Rate Unit : bit Per queue / Per port shaper
DiffServ (RF 2474) Remarking	
Storm Control	for Unicast, Broadcast, Multicast
IP Multicasting Features	
IGMP / MLD Snooping	IGMP Snooping v1, v2, v3 / MLD Snooping v1, v2 Port Filtering Profile Throttling Fast Leave Maximum Multicast Group : up to 1022 entries Query / Static Router Port
Security Features	
IEEE 802.1X	Port-Based MAC-Based
ACL	Number of rules : up to 256 entries for L2 / L3 / L4 L2 : Mac address SA/DA/VLAN L3 : IP address SA/DA, Subnet L4 : TCP/UDP
RADIUS authentication & accounting	
TACACS+ authentication & accounting, TACACS+ 3.0	
HTTPS, HTTP	Supported
SSL / SSH v2	Supported

User Name Password Authentication	Local Authentication Remote Authentication (via RADIUS / TACACS+)
Management Interface Access Filtering	Web, Telnet / SSH , CLI RS-232 console
Management Features	
CLI	Cisco® like CLI
Web Based Management	
Telnet	Server
SNMP	V1, V2c, V3
Modbus/TCP	Support for management and monitoring
SW & Configuration Upgrade	TFTP, HTTP Redundant firmware in case of upgrade failure
RMON	RMON I (1, 2, 3, 9 group), RMON II
MIB	RFC1213 MIB II, Private MIB
UPnP	Supported
DHCP	Server, Client, Relay, Snooping, Snooping option 82, Relay option 82
IP Source Guard	Supported
Port Mirroring	Supported
Event Syslog	Syslog server (RFC3164) (Support 1 server)
Warning Message	System syslog, e-mail, alarm relay
DNS	Client, Proxy
IEEE1588 PTP V2	Support 5 operating mode in each port : Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master, Slave
NTP, SNTP	Client
LLDP (IEEE 802.1ab)	Link Layer Discovery Protocol LLDP-MED
IPv6 Features	
IPv6 Management	Telnet Server/ICMP v6
SNMP over IPv6	Supported
HTTP over IPv6	Supported
SSH over IPv6	Supported
IPv6 Telnet	Supported
IPv6 NTP, SNTP	Client
IPv6 TFTP	Supported
IPv6 QoS	Supported
IPv6 ACL	Number of rules: up to 256 entries for L2 / L3 / L4 L2 : Mac address SA/DA/VLAN L3 : IP address SA/DA, Subnet L4 : TCP/UDP
Others Features	
Green Ethernet	Supports IEEE802.3az EEE (Energy Efficient Ethernet) Management to optimize the power consumption Determine the cable length and lowering the power for ports with short cables Lower the power for a port when there is no link LED Power Management : Adjustment LEDs intensity
Cable Diagnostic	Measuring UTP cable normal or broken point distance
Advanced PoE Management	
	PoE PD failure auto checking, and auto reset when PD fail PoE port on/off weekly scheduling PoE Configuration PoE Enable/Disable Power limit by classification Power feeding priority Total PoE Power budge limitation: maximum 240W for IGS-1608SM-8PH, IGS+803SM-8PH, IGS-402SM-4PU, 180W for IGS+803SM-8PH24

Application

Figure 1 : Application Example


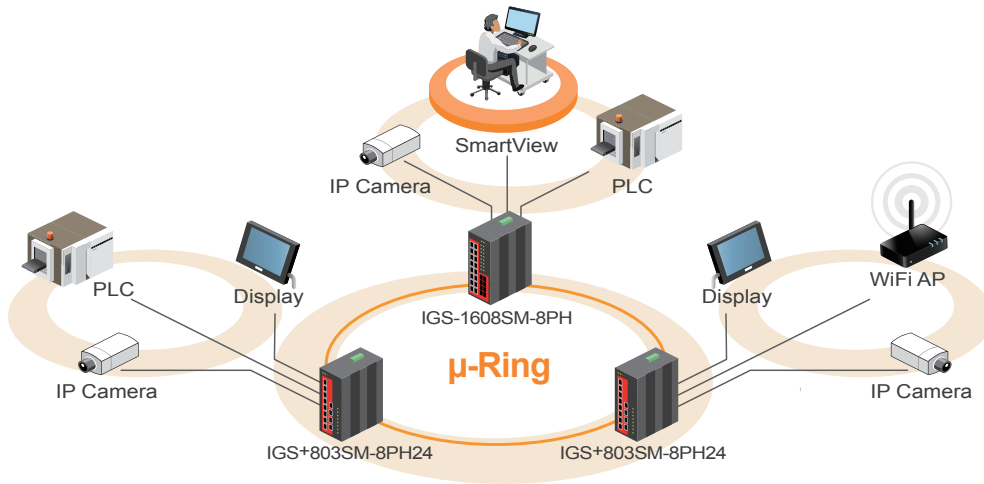



Figure 2 : High Efficiency Boost Technology for PoE

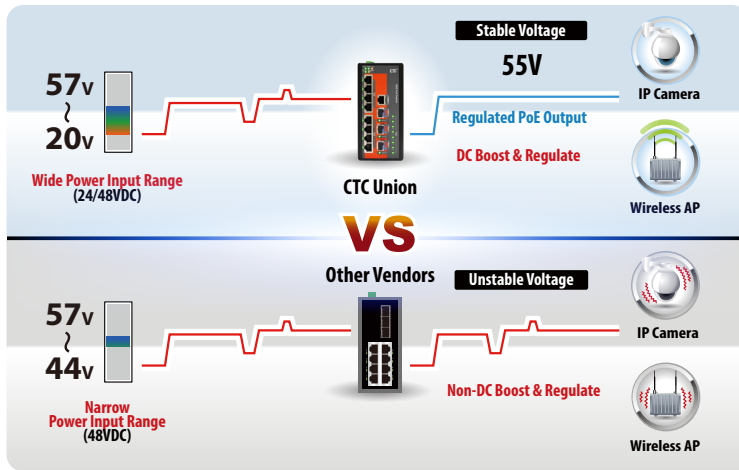


- Regulated PoE output voltage (55VDC) to stabilize PoE device
- Guarantee delivery PoE power distance to 100 meters
- Wide range input power 24/48VDC (20~57VDC)
- Built-in very high efficiency (94~97%) to boost PoE output voltage

Dimensions


► IGS-1608SM-8PH

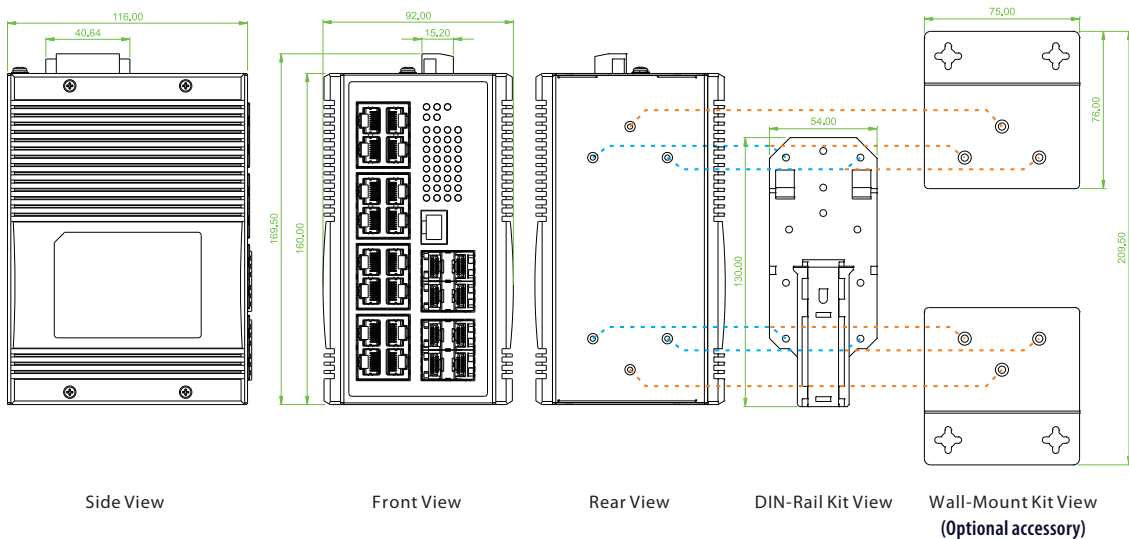


► IGS+803SM-8PH24

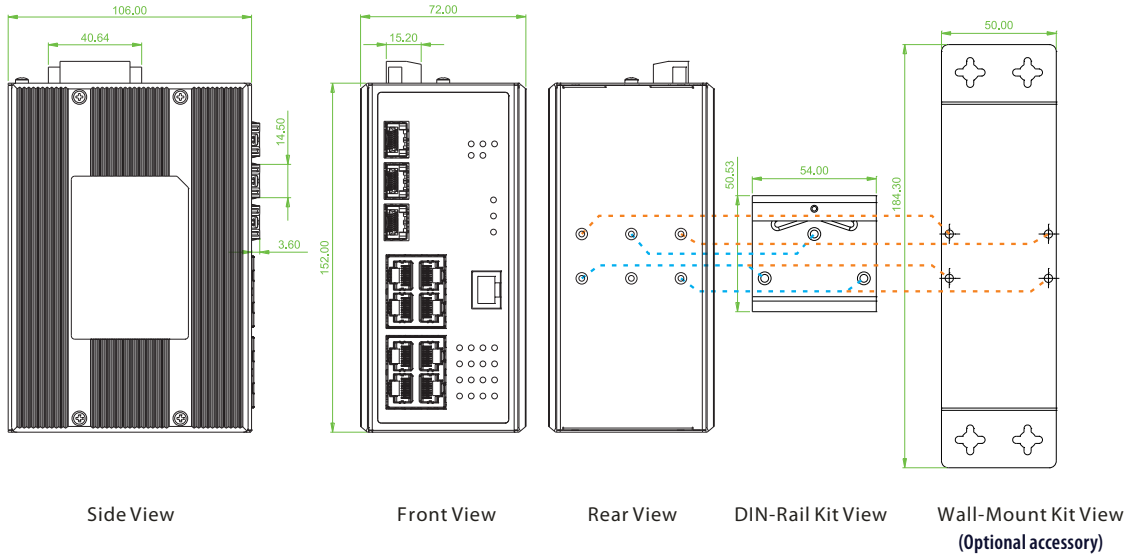

► IGS+803SM-8PH

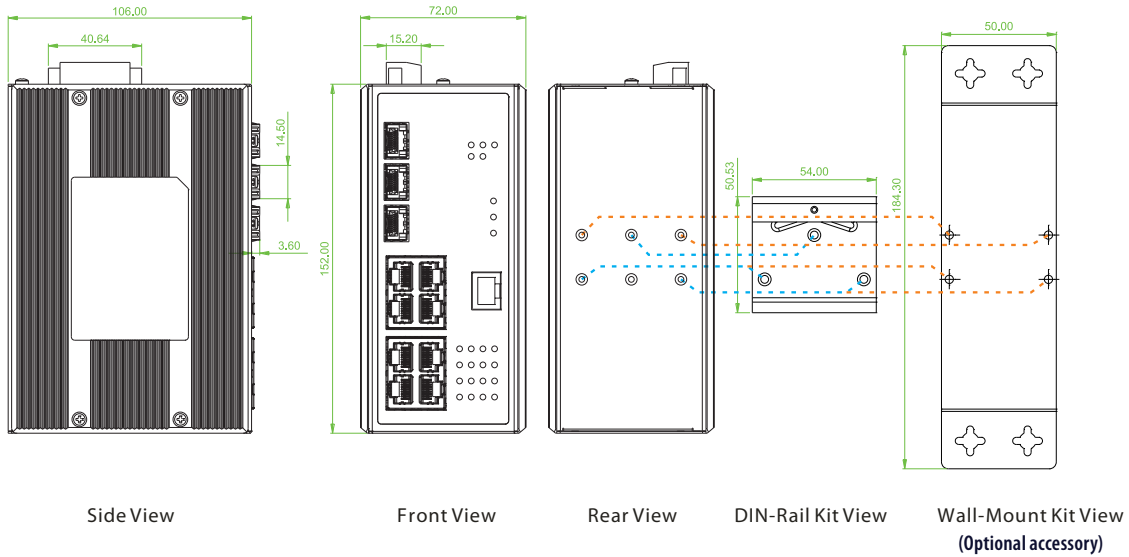


► IGS-402SM-4PU

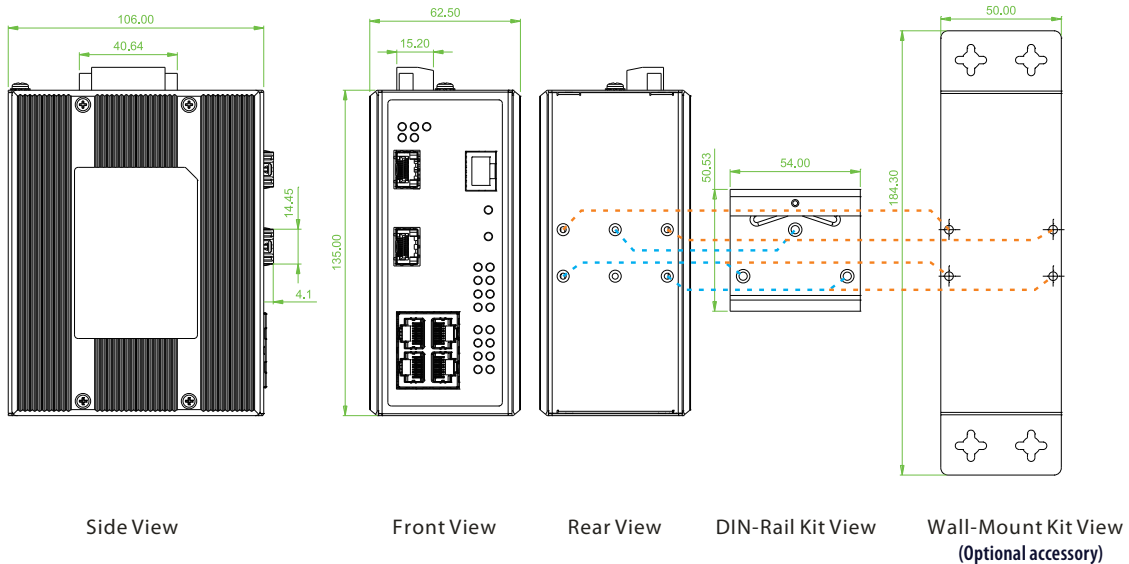

Ordering Information

Model Name	Total Port	UTP		Fiber		PoE Port			Input power		Certification				Operating Temperature
		10/100/1000 Base-T	100/1000 Base-X	IEEE802.3at	IEEE802.3bt	Power Budget	Redundant	Railway EN50121-4	NEMA TS2	Safety EN60950-1	Safety UL60950-1	CE,FCC EN61000-6-2 EN61000-6-4			
IGS-1608SM-8PH	24	16	8 SFP	8		240W	48,-48VDC	V		V	V	V	V	-10~60°C	
IGS-1608SM-8PHE	24	16	8 SFP	8		240W	48,-48VDC	V		V	V	V	V	-40~75°C	
IGS+803SM-8PH24	11	8	3 SFP	8		180W	24/48,-48VDC	V	V	V	V	V	V	-10~60°C	
IGS+803SM-8PHE24	11	8	3 SFP	8		180W	24/48,-48VDC	V	V	V	V	V	V	-40~75°C	
IGS+803SM-8PH	11	8	3 SFP	8		240W	48,-48VDC	V	V	V	V	V	V	-10~60°C	
IGS+803SM-8PHE	11	8	3 SFP	8		240W	48,-48VDC	V	V	V	V	V	V	-40~75°C	
IGS+402SM-4PU	6	4	2 SFP		4	240W	48,-48VDC	V		V	V	V	V	-10~60°C	
IGS+402SM-4PUE	6	4	2 SFP		4	240W	48,-48VDC	V		V	V	V	V	-40~75°C	

Model Naming Rule

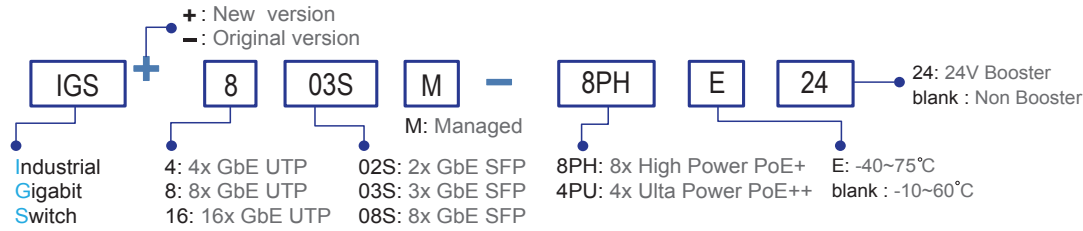

Optional Accessories

Package List

- One device of the series
- Console cable (RJ-45 to DB9)
- CD (SmartConfig, MIB file, Manual)
- Quickly installation guide
- Din Rail with screws
- Terminal block
- Protective caps for SFP ports

Wall mount kit


- IND-WMK02** Wall Mount kit for Industrial product (Wide) (184 x 50mm) (For IGS+803SM-8PH24, IGS+803SM-8PH, IGS-402SM-4PU)
- IND-WMK04** Wall Mount kit for Industrial product (Wide) (2 pcs in 1 set, 76mm x 75mm x 2pcs) (For IGS-1608SM-8PH)

Industrial SFP Transceiver

The ISFP series of industrial grade SFP modules have been fully tested with the series product for guaranteed compatibility and performance. The best performance can be guaranteed even in mission-critical applications. (Please see CTC Union's Industrial SFP datasheet for more details and more items.)

- ISFP-M7000-85-D(E)** Industrial SFP GbE 1000Base-SX, M/M, 500 meter, wave length 850nm, 7.5dB, LC, DDMI, -10~70°C (-40~85°C)
- ISFP-S7020-31-D(E)** Industrial SFP 1000Base-LX, S/M, 20km, wave length 1310nm, 15dB, LC, DDMI, -10~70°C (-40~85°C)
- ISFP-T7T00-00-(E)** Industrial SFP 1000Base-T UTP 100meter, -10~70°C (-40~85°C)
- ISFP-M5002-31-D(E)** Industrial SFP 155M 100Base-FX, MM, 2km, wave length 1310nm, 12dB, LC, DDMI, -10~70°C (-40~85°C)
- ISFP-S5030-31-D(E)** Industrial SFP 155M 100Base-FX, SM, 30km, 1310nm, 19dB, LC, DDMI, -10~70°C (-40~85°C)

SFP Naming Rule

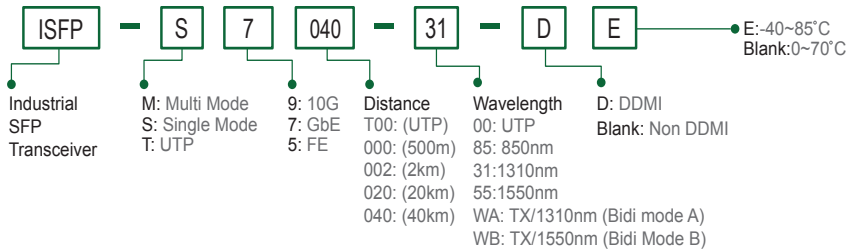



IGS-402SM-4PH24

4x 10/100/1000Base-T + 1x FE/GbE SFP +
1x FE/GbE/2.5G SFP with 4x PoE+

IGS-803SM-8PH24

8x 10/100/1000Base-T + 1x FE/GbE SFP +
2x FE/GbE/2.5G SFP with 8x PoE+



These models are managed industrial grade Gigabit PoE (Power over Ethernet) switches with 4/8 10/100/1000Base-T PoE ports and 2/3 Gigabit/Fast SFP ports with **1/2 port 2.5GbE** that provide stable and reliable Ethernet transmission. With dual power input design, these models can provide redundant mechanisms for critical applications that need always-on connections. These switches can also operate either at standard operating temperature range (-10 to 60°C) or at wide operating temperature range (-40 to 75°C) so as to fulfill the special needs of industrial automation applications. Housed in rugged DIN rail or wall mountable IP-30 enclosures, these switches are perfect choices for harsh environments, such as industrial networking, intelligent transportation systems (ITS) and are also suitable for many military and utility market applications where environmental conditions exceed commercial product specifications.

These managed switches also support a wide variety of Ethernet functions, including STP/RSTP/MSTP/ ITU-T G.8032 ERPS and multiple μ-Ring for redundant cabling, advanced PoE management functions such as weekly PoE power scheduling as well as device auto-checking and auto-reset. They also support layer 2 Ethernet IGMP, VLAN, QoS, ACL, Security, IPv6, bandwidth control, port mirroring, cable diagnostics and Green Ethernet. Additionally, these switches can also be managed by SmartView™ Element Management System which offers a user-friendly and centralized device management platform and provides network administrators the ability to monitor and configure these connected switches remotely (see figure 1).

Features

- ◆ 4x 10/100/1000Base-T RJ-45+ 1x FE/GbE SFP + **1x FE/GbE/2.5G SFP** with 4x PoE+, total 120W power budget (IGS-402SM-4PH24)
- ◆ 8x 10/100/1000Base-T RJ-45+ 1x FE/GbE SFP + **2x FE/GbE/2.5G SFP** with 8x PoE+, total 180W power budget (IGS-803SM-8PH24)
- 24/48VDC (20~57VDC) redundant dual input power with built-in very high efficiency booster (94~97%) to rise up 55 VDC for PoE output (Figure 2)
- Regulated PoE output voltage (55VDC) to stabilize PoE device, and guarantee delivery PoE power distance to 100meter (Figure 2)
- Provides 4/8 port IEEE802.3af / 802.3at PoE output (30W per Port)
- Advanced PoE Management, PoE PD Failure Auto Checking and auto reset when PD fail, PoE port on/off weekly scheduling, PoE configuration for power planning
- Rugged metal, IP30 protection & Fanless design
- UL60950-1, CE, FCC, Rail Traffic EN50121-4, Traffic control NEMA TS2 certified
- Heavy industrial grade EMS, EMI, EN61000-6-2, EN61000-6-4 certified
- Cable diagnostics, Measuring UTP cable OK or broken point distance
- Supports Green Ethernet IEEE802.3az EEE (Energy Efficient Ethernet) management to optimize power consumption
- STP, RSTP, MSTP, ITU-T G.8032 Ethernet Ring Protection Switching (ERPS) for redundant cabling
- Provides 5 ring instances that each can support μ-Ring, μ-Chain or Sub-Ring type for flexible uses. Supports up to 5 rings in one device
- μ-Ring for Redundant Cabling, recovery time<10ms in 250 devices
- DHCP Server/Client/Relay/Snooping/Snooping option 82/Relay option 82
- QoS, Traffic classification QoS, CoS, bandwidth control for Ingress and Egress, Storm Control, DiffServ
- IEEE802.1q VLAN, MAC based VLAN, IP subnet based VLAN, Protocol based VLAN, VLAN translation, GVRP, MVR
- Dynamic IEEE 802.3ad LACP Link Aggregation, Static Link Aggregation
- IGMP snooping V1/V2/V3, IGMP Filtering/ Throttling, IGMP query, IGMP proxy reporting, MLD snooping V1/V2
- Flexibility security: Port based and MAC based IEEE802.1X, RADIUS, ACL, TACACS+, HTTP/HTTPS, SSL/SSH v2
- Software upgrade via TFTP and HTTP, redundant firmware to avoid upgrade failure
- Supports IEEE1588 PTP V2 for precise time synchronization to operate in Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master, Slave mode by each port
- RMON, MIB II, Port mirroring, Event syslog, DNS, NTP, SNTP, IEEE802.1ab LLDP
- Supports IPv6 Telnet server /ICMP v6
- CLI, Web based management, SNMP v1/v2c/v3, Telnet server for management
- Supports Modbus/TCP protocols for management
- Provides SmartConfig™ for quick and easy mass configuration
- Supports SmartView™ for centralized management

Specifications

Standard		Standard	
IEEE 802.3	10Base-T 10Mbit/s Ethernet	IEEE 802.3at	PoE+ (Power over Ethernet enhancements)
IEEE 802.3u	100Base-TX, 100Base-FX, Fast Ethernet	IEEE 802.1d	STP (Spanning Tree Protocol)
IEEE 802.3ab	1000Base-T Gbit/s Ethernet over twisted pair	IEEE 802.1w	RSTP (Rapid Spanning Tree Protocol)
IEEE 802.3z	1000Base-X Gbit/s Ethernet over Fiber-Optic	IEEE 802.1s	MSTP (Multiple Spanning Tree Protocol)
IEEE802.3cb	2.5GBase-X	ITU-T G.8032 / Y.1344	ERPS (Ethernet Ring Protection Switching)
IEEE 802.3af	PoE (Power over Ethernet)	IEEE 802.1Q	Virtual LANs (VLAN)

Standard	IEEE 802.1X	Port based and MAC based Network Access Control, Authentication			
	IEEE802.3ac	Max frame size extended to 1522Bytes			
	IEEE 802.3ad	Link aggregation for parallel links with LACP(Link Aggregation Control Protocol)			
	IEEE 802.3x	Flow control for Full Duplex			
	IEEE 802.1ad	Stacked VLANs, Q-in-Q			
	IEEE 802.1p	LAN Layer 2 QoS/CoS Protocol for Traffic Prioritization			
	IEEE 802.1ab	Link Layer Discovery Protocol (LLDP)			
	IEEE 802.3az	EEE (Energy Efficient Ethernet)			
Switch Architecture	Back-plane (Switching Fabric): 15Gbps (IGS-402SM-4PH24) 28Gbps (IGS-803SM-8PH24) Full wire-speed				
Data Processing	Store and Forward				
Flow Control	IEEE 802.3x for full duplex mode Back pressure for half duplex mode				
Network Connector	4x 10/100/1000Base-T RJ-45 + 1x FE/GbE SFP slot+ 1x FE/GbE/2.5G SFP slot (IGS-402SM-4PH24) 8x 10/100/1000Base-T RJ-45 + 1x FE/GbE SFP slot + 2x FE/GbE/2.5G SFP slot (IGS-803SM-8PH24) RJ-45 UTP port support Auto negotiation speed, Auto MDI/MDI-X function, SFP ports support 100/1000 or 2.5G with DDMI				
PoE standard & RJ-45 pin assignment	4x IEEE 802.3af /IEEE 802.3at PoE+ (IGS-402SM-4PH24) 8x IEEE 802.3af /IEEE 802.3at PoE+ (IGS-803SM-8PH24) End-Span, Alternative A mode. Positive (V+) : RJ-45 pin 1, 2. Negative (V-) : RJ-45 pin 3, 6. Data (1,2,3,6,4,5,7,8)				
Console	RS-232 (RJ-45)				
Network Cable	UTP/STP above Cat. 5e cable EIA/TIA-568 100-ohm (100m)				
Protocols	CSMA/CD				
Reverse Polarity Protection	Supported for power input				
Overload Current Protection	Supported				
CPU Watch Dog	Supported				
Power Supply	Redundant Dual DC 24/48V (20~57VDC) Input power (Removable Terminal Block) Built-in very high efficiency booster(94~97%) to rise up 55 VDC for PoE output Regulated PoE output voltage (55VDC) to stabilize PoE device, and guarantee delivery PoE power distance to 100meter (Figure 2)				
Power Consumption	IGS-402SM-4PH24 Power consumption & Booser efficiency				
	Input Voltage	Total Power Consumption	Device Power Consumption	PoE Budget	Boost Efficiency
	24VDC	135.2W	7.5W	120W	94.0%
	48VDC	132.5W	9W	120W	97.2%
	IGS-803SM-8PH24 Power consumption & Booser efficiency				
	Input Voltage	Total Power Consumption	Device Power Consumption	PoE Budget	Boost Efficiency
	24VDC	200.2W	9.2W	180W	94%
	48VDC	195.1W	9.8W	180W	97%
PoE Power Budget	Maximum PoE Output power budget 30W / Per Port 120W (IGS-402SM-4PH24) 180W (IGS-803SM-8PH24)				

LED	Per unit: Power 1 (Green), Power 2 (Green), Fault (Amber), CPU Act (Green), Ring Master (Yellow) Per RJ-45 port: 10/100 Link/Active (Green) 1000 Link/Active (Amber) SFP Fiber Per port: Link/Active (Green) PoE Port LED 1 LED /per Port : • PoE Output Power On : ON (Green) • PoE Fault (Over Load, Short Circuit,Port failed at Startup) : Flash 1times /sec (Green) • PoE Output Power Off : Off
Jumbo Frame	9.6KB
IEEE802.3ac	Max frame size extended to 1522Bytes (allow Q-tag in packet)
MAC Address Table	8K
Memory Buffer	512K Bytes for packet buffer
Warning Message	System Syslog, SMTP/ e-mail event message, alarm relay
Alarm Relay Contact	Relay outputs with current carrying capacity of 1 A @24VDC
Removable Terminal Block	Provide 2 redundant power, alarm relay contact, 6 Pin
Operating Temperature	-10 ~ 60°C (IGS-402SM-4PH24, IGS-803SM-8PH24) -40 ~ 75°C (IGS-402SM-4PHE24, IGS-803SM-8PHE24)
Operating Humidity	5% to 95% (Non-condensing)
Storage Temperature	-40 ~ 85°C
Housing	Rugged Metal, IP30 Protection, Fanless
Dimensions	106 x 62.5 x 135 mm (D x W x H) (IGS-402SM-4PH24) 106 x 72 x 152 mm (D x W x H) (IGS-803SM-8PH24)
Weight	0.715kg (IGS-402SM-4PH24) 0.96kg (IGS-803SM-8PH24)
Installation Mounting	DIN Rail mounting, or wall mounting (Optional)
MTBF	674,963 Hours (IGS-402SM-4PH24) 466,542 Hours (IGS-803SM-8PH24) (MIL-HDBK-217)
Warranty	5 years
Certification	
EMC	CE
EMI (Electromagnetic Interference)	FCC Part 15 Subpart B Class A,CE
Railway Traffic	EN50121-4
Traffic control	NEMA TS2
Immunity for Heavy Industrial Environment	EN61000-6-2
Emission for Heavy Industrial Environment	EN61000-6-4
EMS (Electromagnetic Susceptibility) Protection Level	EN61000-4-2 (ESD) Level 3, Criteria B EN61000-4-3 (RS) Level 3, Criteria A EN61000-4-4 (Burst) Level 3, Criteria A EN61000-4-5 (Surge) Level 3, Criteria B EN61000-4-6 (CS) Level 3, Criteria A EN61000-4-8 (PFMF, Magnetic Field) Field Strength: 300A/m, Criteria A
Safety	UL60950-1
Shock	IEC 60068-2-27
Freefall	IEC 60068-2-32
Vibration	IEC 60068-2-6

Software Specifications

Topology	
VLAN	IEEE 802.1q VLAN, up to 4094 802.1Q VLAN VID IEEE 802.1q VLAN, up to 4094 Groups IEEE 802.1ad Q-in-Q MAC-based VLAN, up to 256 entries IP Subnet-based VLAN, up to 128 entries Protocol-based VLAN(Ethernet, SNAP, LLC), up to 128 entries VLAN Translation, up to 256 entries GVRP (GARP VLAN Registration Protocol) MVR (Multicast VLAN Registration)
Link Aggregation (Port Trunk)	Static (Hash with SA, DA, IP, TCP/UDP port), up to 5 trunk group Dynamic (IEEE 802.3ad LACP), up to 5 trunk group

Spanning Tree	IEEE802.1d STP IEEE802.1w RSTP IEEE802.1s MSTP
Multiple μ-Ring	up to 5 instances that each supports μ-Ring, μ-Chain or Sub-Ring type for flexible uses, and maximum up to 5 Rings. Recovery time <10ms The maximum number of devices allowed in a Ring supported ring is 250.
Loop Protection	Supported
ITM-T G.8032 / Y.1344 ERPS (Ethernet Ring Protection)	Recovery time <50ms Single Ring, Sub-Ring, Multiple ring topology network

QoS Features	
Class of Service	IEEE802.1p 8 active priorities queues for per port
Traffic Classification	IEEE802.1p based CoS
QoS	IP Precedence based CoS
	IP DSCP based CoS
	QCL(QoS Control List): Frame Type, Source/Destination MAC, VLAN ID, PCP, DEI
	QCE(QoS Control Entry): Protocol, Source IP, IP Fragment, DSCP, TCP/UDP port number
Bandwidth Control for Ingress	Rate in steps :1 kbps / Mbps / fps / kfps Range : 100 kbps to 1Gbps / 1fps to 3300kfps Rate Unit : bit or frame
Bandwidth Control for Egress	Rate in steps : 1 kbps / Mbps Range : 100 kbps to 1Gbps Rate Unit : bit Per queue / Per port shaper
DiffServ (RF 2474) Remarking	
Storm Control	for Unicast, Broadcast, Multicast
IP Multicasting Features	
IGMP / MLD Snooping	IGMP Snooping v1, v2, v3 / MLD Snooping v1, v2 Port Filtering Profile Throttling, Fast Leave Maximum Multicast Group : up to 1022 entries Query / Static Router Port
Security Features	
IEEE 802.1X	Port-Based MAC-Based
ACL	Number of rules : up to 256 entries for L2 / L3 / L4 L2 : Mac address SA/DA/VLAN L3 : IP address SA/DA, Subnet L4 : TCP/UDP
RADIUS authentication & accounting	
TACACS+ authentication & accounting, TACACS+ 3.0	
HTTPS, HTTP	Supported
SSL / SSH v2	Supported
User Name Password Authentication	Local Authentication Remote Authentication (via RADIUS / TACACS+)
Management Interface Access	Web, Telnet / SSH, CLI RS-232 console
Filtering	
Management Features	
CLI	Cisco® like CLI
Web Based Management	
Telnet	Server
SNMP	V1, V2c, V3
ModBus/TCP	Supports management and monitoring
SW & Configuration Upgrade	TFTP, HTTP Redundant firmware in case of upgrade failure

RMON	RMON I (1, 2, 3, 9 group), RMON II
MIB	RFC1213 MIB II, Private MIB
UPnP	Supported
DHCP	Server, Client, Relay, Snooping Snooping option 82 Relay option 82
IP Source Guard	Supported
Port Mirroring	Supported
Event Syslog	Syslog server (RFC3164) (Support 1 server)
Warning Message	System syslog, e-mail, alarm relay
DNS	Client, Proxy
IEEE1588 PTP V2	Support 5 operating mode in each port : Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master, Slave
NTP, SNTP	Client
LLDP (IEEE 802.1ab)	Link Layer Discovery Protocol LLDP-MED
IPv6 Features	
IPv6 Management	Telnet Server/ICMP v6
SNMP over IPv6	Supported
HTTP over IPv6	Supported
SSH over IPv6	Supported
IPv6 Telnet	Supported
IPv6 NTP, SNTP	Client
IPv6 TFTP	Supported
IPv6 QoS	Supported
IPv6 ACL	Number of rules: up to 256 entries for L2 / L3 / L4 L2 : Mac address SA/DA/VLAN L3 : IP address SA/DA, Subnet L4 : TCP/UDP
Others Features	
Green Ethernet	Supports IEEE802.3az EEE (Energy Efficient Ethernet) Management to optimize the power consumption Determine the cable length and lowering the power for ports with short cables Lower the power for a port when there is no link LED Power Management : Adjustment LEDs intensity
Cable Diagnostic	Measuring UTP cable normal or broken point distance
Advanced PoE Management	
	PoE PD failure auto checking ,and auto reset when PD fail PoE port on/off weekly scheduling PoE Configuration PoE Enable/Disable Power limit by classification Power limit by management Power feeding priority Total PoE Power budge limitation (maximum 120W for IGS-402SM-4PH24, 180W for IGS-803SM-8PH24)

Application

Figure 1 : Application Example


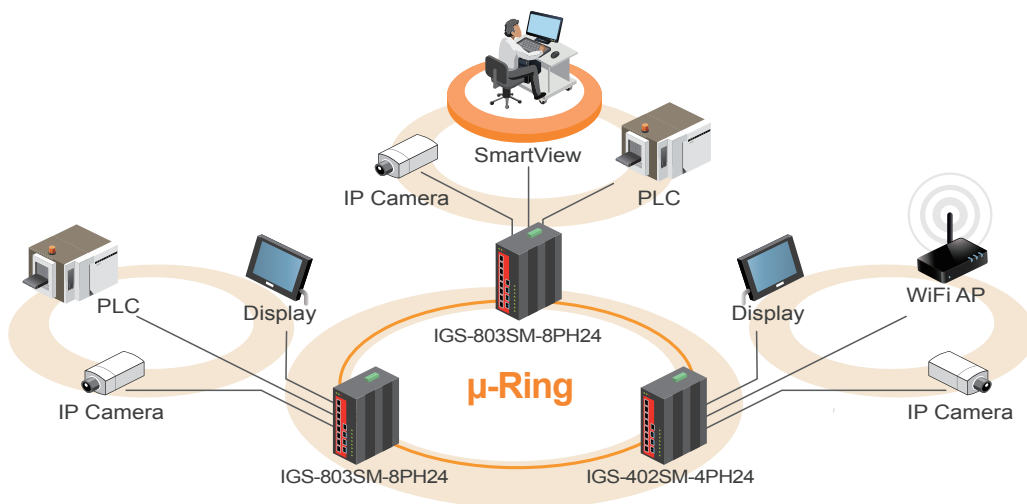



Figure 2 : High Efficiency Boost Technology for PoE

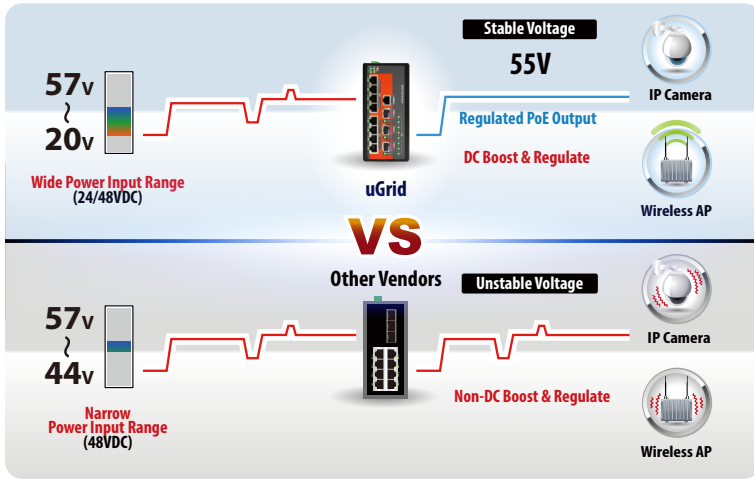


- Regulated PoE output voltage (55VDC) to stabilize PoE device
- Guarantee delivery PoE power distance to 100 meters
- Wide range input power 24/48VDC (20~57VDC)
- Built-in very high efficiency (94~97%) to boost PoE output voltage

Dimensions

► IGS-402SM-4PH24

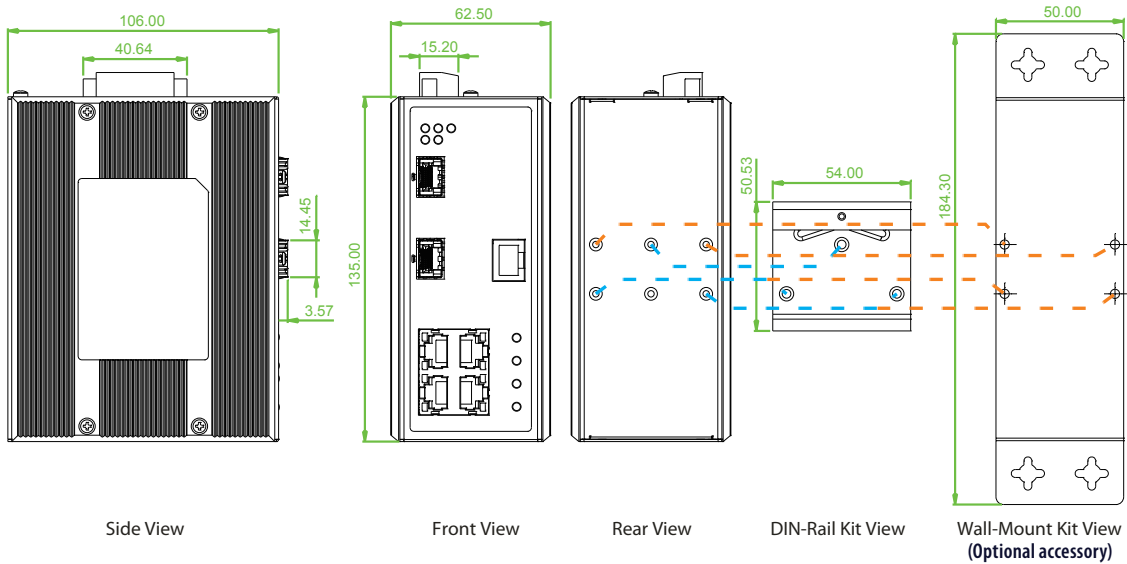


► IGS-803SM-8PH24

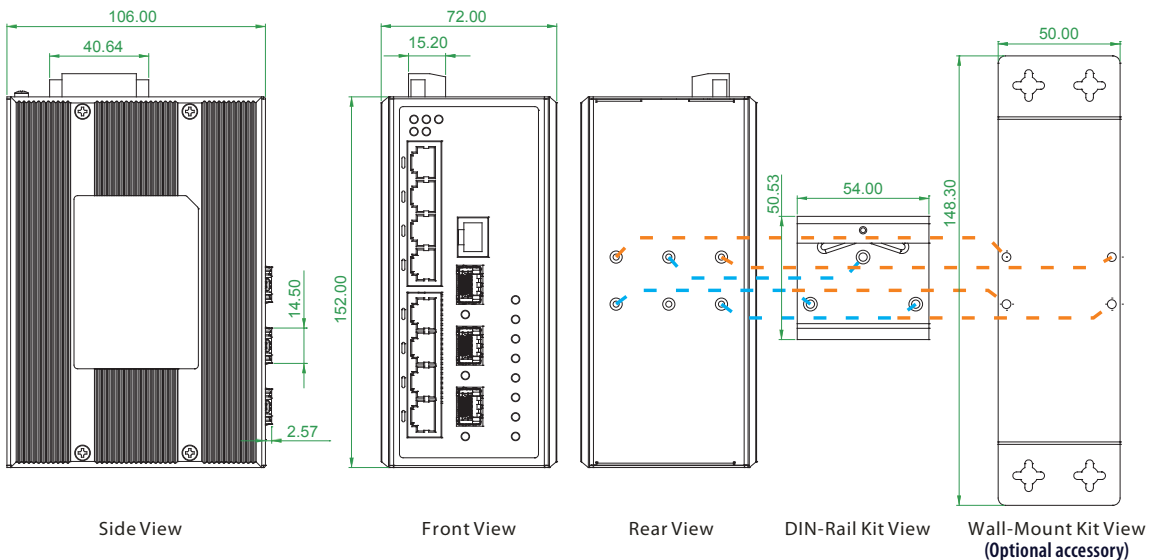

Ordering Information

Model Name	Total Port	UTP		Fiber		PoE Port		Input power		Certification				Operating Temperature
		10/100/1000 Base-T	100/1000 Base-X	100/1000/2.5GBase-X	IEEE802.3at	Power Budget	Redundant	Railway EN50121-4	Traffic Control NEMA TS2	Safety EN60950-1	Safety UL60950-1	CE, FCC EN61000-6-2 EN61000-6-4		
IGS-402SM-4PH24	6	4	1 SFP	1 SFP	4	120W	24/48VDC	V	V	V	V	V	-10~60°C	
IGS-402SM-4PHE24	6	4	1 SFP	1 SFP	4	120W	24/48VDC	V	V	V	V	V	-40~75°C	
IGS-803SM-8PH24	11	8	1 SFP	2 SFP	8	180W	24/48VDC	V	V	V	V	V	-10~60°C	
IGS-803SM-8PHE24	11	8	1 SFP	2 SFP	8	180W	24/48VDC	V	V	V	V	V	-40~75°C	

Model Naming Rule

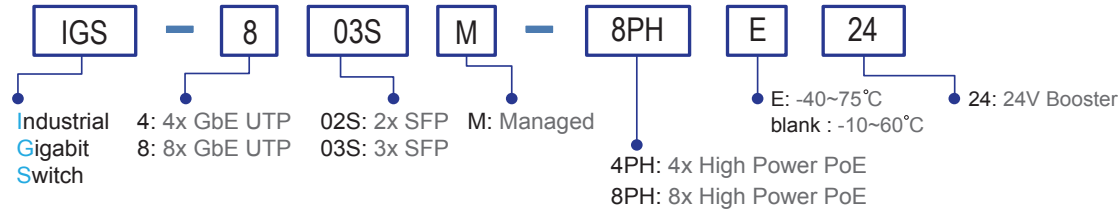

Optional Accessories

Package List

- One device of the series
- Console cable (RJ-45 to DB9)
- CD (SmartConfig, MIB file, Manual)
- Quickly installation guide
- Din Rail with screws
- Terminal block
- Protective caps for SFP ports

Wall mount kit


IND-WMK02 Wall Mount kit for Industrial product (Wide) (184 x 50mm)

Industrial SFP Transceiver

The ISFP series of industrial grade SFP modules have been fully tested with the series product for guaranteed compatibility and performance. The best performance can be guaranteed even in mission-critical applications.

ISFP-M7000-85-D(E)	Industrial SFP GbE 1000Base-SX, M/M, 500 meter, wave length 850nm, 7.5dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-S7020-31-D(E)	Industrial SFP 1000Base-LX, S/M, 20km, wave length 1310nm, 15dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-T7T00-00-(E)	Industrial SFP 1000Base-T UTP 100meter, -10~70°C (-40~85°C)
ISFP-M5002-31-D(E)	Industrial SFP 155M 100Base-FX, MM, 2km, wave length 1310nm, 12dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-S5030-31-D(E)	Industrial SFP 155M 100Base-FX, SM, 30km, 1310nm, 19dB, LC, DDMI, -10~70°C (-40~85°C)

SFP Naming Rule

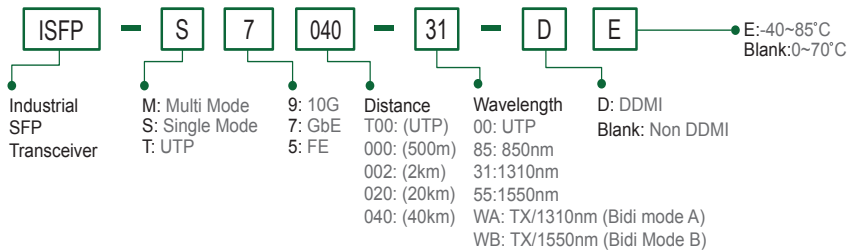



IFS-1608GSM-8PH

16x 10/100Base-TX + 8x 100/1000Base-X SFP w/ 8x PoE+

IFS⁺803GSM-8PH24

8x 10/100Base-TX + 3x 100/1000Base-X SFP w/ 8x PoE+

IFS-402GSM-4PU

4x 10/100Base-TX + 2x 100/1000Base-X SFP w/ 4x **PoE++**, 60W



These models are managed industrial grade PoE (Power over Ethernet) switches that provide 4/8/16x FE UTP plus 2/3/8 GbE SFP with 4/8x PoE Ports. The PoE features enable power and data to be transferred via a single cable, hereby considerably reducing cabling and electrical wiring expenses. With dual power input design, these models can provide redundant mechanisms for critical applications that need always-on connections. These switches can also operate either at standard operating temperature range (-10 to 60°C) or at wide operating temperature range (-40 to 75°C) so as to fulfill the special needs of industrial automation applications. Housed in rugged DIN rail or wall mountable IP-30 enclosures, these switches are perfect choices for harsh environments, such as telecom network, industrial network, intelligent transportation systems (ITS) and are also suitable for many military and utility market applications where environmental conditions exceed commercial product specifications.

These managed switches also support a wide variety of Ethernet functions, including STP/RSTP/MSTP/ITM-T G.8032 ERPS and multiple μ-Ring for redundant cabling, advanced PoE management functions such as weekly PoE power scheduling as well as device auto-checking and auto-reset. They also support layer 2 Ethernet IGMP, VLAN, QoS, Security, IPv6, bandwidth control, port mirroring, cable diagnostics and Green Ethernet. Additionally, these switches can also be managed by CTC Union's SmartView™ Element Management System which offers a user-friendly and centralized device management platform and provides network administrators the ability to monitor and configure these connected switches remotely (see figure).

Features

- 16x 10/100Base-TX RJ-45 + 8x 100/1000Base-X SFP with 8x PoE+, total 240W power budget (IFS-1608GSM-8PH)
- 8x 10/100Base-TX RJ-45 + 3x 100/1000Base-X SFP with 8x PoE+, total 180W power budget (IFS+803GSM-8PH24)
- 4x 10/100Base-TX RJ-45 + 2x 100/1000Base-X SFP with 4x **PoE++**, total 240W power budget (IFS-402GSM-4PU)
- 48VDC (44~57VDC) redundant dual input power (IFS-1608GSM-8PH, IFS-402GSM-4PU)
- 24/48VDC (20~57VDC) redundant dual input power with built-in very high efficiency booster (94~97%) to rise up 55 VDC for PoE output (Figure 2) (IFS+803GSM-8PH24)
- Regulated PoE output voltage (55VDC) to stabilize PoE device, and guarantee delivery PoE power distance to 100meter (Figure 2) (IFS+803GSM-8PH24)
- **Supports negative voltage power input with isolated RS-232 console port (for example in telecom system)**
- Provides 8 port IEEE802.3af / 802.3at PoE+ output, 30W per port (IFS-1608GSM-8PH, IFS-803GSM-8PH24)
- Provides 4 port IEEE802.3af / 802.3at/802.3bt **PoE++ output, 60W** per port (IFS-402GSM-4PU)
- Advanced PoE Management, PoE PD Failure Auto Checking and auto reset when PD fail, PoE port on/off weekly scheduling, PoE configuration for power planning
- Rugged metal, IP30 protection & Fan-less design
- UL60950-1, EN60950-1, CE, FCC, Rail Traffic EN50121-4, traffic control NEMA TS2 certified
- Heavy Industrial grade EMS, EMI, EN61000-6-2, EN61000-6-4 certified
- **4KV surge protection for UTP, PoE and Fiber ports**
- **2.25K VDC Hi-pot isolation protection for Ethernet ports and power**
- Cable diagnostics, Measuring cable OK or broken point distance
- Supports Green Ethernet IEEE802.3az EEE (Energy Efficient Ethernet) management to optimize power consumption
- STP, RSTP, MSTP, ITM-T G.8032 Ethernet Ring Protection Switching (ERPS) for redundant cabling
- Provides 5 ring instances that each can support μ-Ring, μ-Chain or Sub-Ring type for flexible uses. Supports up to 5 rings in one device (Please see CTC μ-Ring white paper for more details and more topology application)
- μ-Ring for Redundant Cabling, recovery time<10ms in 250 devices
- DHCP Server/Client/Relay/Snooping/Snooping option 82/Relay option 82
- QoS, Traffic classification QoS, CoS, bandwidth control for Ingress and Egress, Storm Control, DiffServ
- IEEE802.1q VLAN, MAC based VLAN, IP subnet based VLAN, Protocol based VLAN, VLAN translation, GVRP, MVR
- Dynamic IEEE 802.3ad LACP Link Aggregation, Static Link Aggregation
- IGMP snooping V1/V2/V3, IGMP Filtering/Throttling, IGMP query, IGMP proxy reporting, MLD snooping V1/V2
- Flexibility security: Port based and MAC based IEEE802.1X, RADIUS, ACL, TACACS+, HTTP/HTTPS, SSL/SSH v2
- Software upgrade via TFTP and HTTP, redundant firmware to avoid upgrade failure
- Supports IEEE1588 PTP V2 for precise time synchronization to operate in Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master, Slave mode by each port
- RMON, MIB II, Port mirroring, Event syslog, DNS, NTP, SNMP, IEEE802.1ab LLDP
- Supports IPv6 Telnet server /ICMP v6
- CLI, Web based management, SNMP v1/v2c/v3, Telnet server for management
- Supports Modbus/TCP protocols for management
- Provides SmartConfig for quick and easy mass configuration tool (Please see Catalog chapter 1- Software Management for more details)
- Supports SmartView for centralized management tool (Please see Catalog chapter 1- Software Management for more details)

Specifications

Standard	IEEE 802.3	10Base-T 10Mbit/s Ethernet
	IEEE 802.3u	100Base-TX, 100Base-FX, Fast Ethernet
	IEEE 802.3z	1000Base-X Gbit/s Ethernet over Fiber-Optic
	IEEE 802.3af	PoE (Power over Ethernet)
	IEEE 802.3at	PoE+ (Power over Ethernet enhancements)
	IEEE 802.3bt	PoE++(4 pairs Power over Ethernet)
	IEEE 802.1d	STP (Spanning Tree Protocol)
	IEEE 802.1w	RSTP (Rapid Spanning Tree Protocol)
	IEEE 802.1s	MSTP (Multiple Spanning Tree Protocol)
	ITM-T G.8032 / Y.1344	ERPS (Ethernet Ring Protection Switching)
	IEEE 802.1Q	Virtual LANs (VLAN)
	IEEE 802.1X	Port based and MAC based Network Access Control, Authentication
	IEEE802.3ac	Max frame size extended to 1522Bytes
	IEEE 802.3ad	Link aggregation for parallel links with LACP(Link Aggregation Control Protocol)
	IEEE 802.3x	Flow control for Full Duplex
	IEEE 802.1ad	Stacked VLANs, Q-in-Q
	IEEE 802.1p	LAN Layer 2 QoS/CoS Protocol for Traffic Prioritization
IEEE 802.1ab	Link Layer Discovery Protocol (LLDP)	
IEEE 802.3az	EEE (Energy Efficient Ethernet)	
Switch Architecture	Back-plane (Switching Fabric): 19.2Gbps (IFS-1608GSM-8PH) 7.6Gbps (IFS+803GSM-8PH24) 4.8Gbps (IFS-402GSM-4PU) Full wire-speed	
	Data Processing	Store and Forward
Flow Control	IEEE 802.3x for full duplex mode Back pressure for half duplex mode	
Network Connector	16x 10/100Base-TX RJ-45 + 8x 100/1000Base-X SFP connector (IFS-1608GSM-8PH)	
	8x 10/100Base-TX RJ-45 + 3x 100/1000Base-X SFP connector (IFS+803GSM-8PH24)	
	4x 10/100Base-TX RJ-45 + 2x 100/1000Base-X SFP connector (IFS-402GSM-4PU)	
	RJ-45 UTP port support Auto negotiation speed, Auto MDI/MDI-X function, SFP port support 100/1000M dual speed with DDMI	
Console	RS-232 (RJ-45) Isolated RS-232 port grounding for negative voltage power system, or telecom network application	
PoE standard & RJ-45 Pin Assignment	IFS-1608GSM-8PH, IFS+803GSM-8PH24: 8x IEEE 802.3at /IEEE 802.3af PoE+ 2 pairs PoE, PoE+, 30W/port End-Span, Alternative A mode. Positive (V+): RJ-45 pin 1, 2. Negative (V-): RJ-45 pin 3, 6.	
	IFS-402GSM-4PU: 4x IEEE 802.3bt /802.3at/ 802.3af PoE++ 4 pairs PoE, PoE++ , 60W/port End-Span, Alternative A and B mode. Positive (V+): RJ-45 pin 1, 2, 4, 5 Negative (V-): RJ-45 pin 3, 6, 7, 8	
Network Cable	UTP/STP above Cat. 5e cable EIA/TIA-568 100-ohm (100m)	
Protocols	CSMA/CD	
Reverse Polarity Protection	Supported for power input	
Overload Current Protection	Supported	
CPU Watch Dog	Supported	
Power Supply	IFS-1608GSM-8PH, IFS-402GSM-4PU: Redundant Dual DC 48V (44~57VDC) input power, and support negative voltage input power for telecom (Removable terminal block) (50~57V input is recommended for IEEE802.3at PoE+ in 30W applications) (50~57V input is recommended for IEEE802.3bt PoE++ in 60W applications)	

Power Supply	IFS+803GSM-8PH24: Redundant Dual DC 24/48V (20~57VDC) Input power (Removable Terminal Block) Built-in very high efficiency booster(94~97%) to rise up 55 VDC for PoE output Regulated PoE output voltage (55VDC) to stabilize PoE device, and guarantee delivery PoE power distance to 100meter (Figure 2)				
Power Consumption	IFS-1608GSM-8PH Power consumption				
	Input Voltage	Total Power Consumption	Device Power Consumption	PoE Budget	
	50VDC	254.2W	14.2W	240W	
Power Consumption	IFS+803GSM-8PH24 Power consumption & Booster efficiency				
	Input Voltage	Total Power Consumption	Device Power Consumption	PoE Budget	Boost efficiency
	24VDC	191.2W	7.8W	180W	97.00%
Power Consumption	IFS-402GSM-4PU Power consumption				
	Input Voltage	Total Power Consumption	Device Power Consumption	PoE Budget	
	50VDC	248.5W	8.5W	240W	
PoE Power Budget	Maximum PoE Output power budget 30W / Per Port 240W for total (IFS-1608GSM-8PH) Maximum PoE Output power budget 30W / Per Port 180W for total (IFS+803GSM-8PH24) Maximum PoE Output power budget 60W / Per Port 240W for total (IFS-402GSM-4PU)				
LED	Per unit: Power 1 (Green), Power 2 (Green), Fault (Amber), CPU Act (Green), Ring Master (Yellow) Per RJ-45 port: 10/100 Link/Active (Green) SFP Fiber Per port: Link/Active (Green) PoE Port LED 1 LED /per Port : • PoE Output Power On : ON (Green) • PoE Fault (Over Load, Short Circuit,Port failed at Startup) : Flash 1times /sec (Green)				
Jumbo Frame	9.6KB				
IEEE802.3ac	Max frame size extended to 1522Bytes (allow Q-tag in packet)				
MAC Address Table	8K				
Memory Buffer	512K Bytes for packet buffer				
Warning Message	System Syslog, SMTP/ e-mail event message, alarm relay				
Alarm Relay Contact	Relay outputs with current carrying capacity of 1 A @24VDC				
Removable Terminal Block	Provide 2 redundant power, alarm relay contact, 6 Pin				
Operating Temperature	-10 ~ 60°C (IFS-1608GSM-8PH, IFS+803GSM-8PH24, IFS-402GSM-4PU)				
	-40 ~ 75°C (IFS-1608GSM-8PHE, IFS+803GSM-8PHE24, IFS-402GSM-4PUE)				
Operating Humidity	5% to 95% (Non-condensing)				
Storage Temperature	-40 ~ 85°C				
Housing	Rugged Metal, IP30 Protection, Fanless				
Dimensions	116 x 91 x 157 mm (Dx Wx H) (IFS-1608GSM-8PH)				
	106 x 72 x 152 mm (D x W x H) (IFS+803GSM-8PH24)				
	106 x 62.5 x 135 mm (D x W x H) (IFS-402GSM-4PU)				
Weight	1.375kg (IFS-1608GSM-8PH),				
	0.86kg (IFS+803GSM-8PH24)				
	0.7kg (IFS-402GSM-4PU)				
Installation Mounting	DIN Rail mounting, or wall mounting (Optional)				
MTBF	439,881 Hours (IFS-1608GSM-8PH)				
	528,753 Hours (IFS+803GSM-8PH24)				
	589,078 hours (IFS-402GSM-4PU)				
	(MIL-HDBK-217)				
Warranty	5 years				
Certification					
EMC	CE				
EMI (Electromagnetic Interference)	FCC Part 15 Subpart B Class A, CE				
Railway Traffic	EN50121-4				
Traffic control	NEMA TS2 (IFS+803GSM-8PH24)				
Immunity for Heavy Industrial Environment	EN61000-6-2				

Emission for Heavy Industrial Environment	EN61000-6-4
EMS (Electromagnetic Susceptibility) Protection Level	EN61000-4-2 (ESD) Level 3, Criteria B EN61000-4-3 (RS) Level 3, Criteria A EN61000-4-4 (Burst) Level 3, Criteria A EN61000-4-5 (Surge) Level 3, Criteria B
EMS (Electromagnetic Susceptibility) Protection Level	EN61000-4-6 (CS) Level 3, Criteria A EN61000-4-8 (PFMF, Magnetic Field) Field Strength: 300A/m, Criteria A

Software Specifications

Topology	
VLAN	IEEE 802.1q VLAN, up to 4094 802.1Q VLAN VID IEEE 802.1q VLAN, up to 4094 Groups IEEE 802.1ad Q-in-Q MAC-based VLAN, up to 256 entries IP Subnet-based VLAN, up to 128 entries Protocol-based VLAN (Ethernet, SNAP, LLC), up to 128 entries VLAN Translation, up to 256 entries GVRP (GARP VLAN Registration Protocol) MVR (Multicast VLAN Registration)
Link Aggregation (Port Trunk)	Static (Hash with SA, DA, IP, TCP/UDP port), up to 5 trunk group Dynamic (IEEE 802.3ad LACP), up to 5 trunk group
Spanning Tree	IEEE802.1d STP, IEEE802.1w RSTP, IEEE802.1s MSTP
Multiple μ-Ring	up to 5 instances that each supports μ-Ring, μ-Chain or Sub-Ring type for flexible uses, and maximum up to 5 Rings Recovery time <10ms The maximum number of devices allowed in a Ring supported ring is 250 (Please see CTC Union μ-Ring white paper for more details and more topology application)
Loop Protection	Supported
ITM-T G.8032 / Y.1344 ERPS (Ethernet Ring Protection)	Recovery time <50ms Single Ring, Sub-Ring, Multiple ring topology network
QoS Features	
Class of Service	IEEE802.1p 8 active priorities queues for per port
Traffic Classification QoS	IEEE802.1p based CoS, IP Precedence based CoS IP DSCP based CoS QCL(QoS Control List): Frame Type, Source/Destination MAC, VLAN ID, PCP, DEI QCE(QoS Control Entry): Protocol, Source IP, IP Fragment, DSCP, TCP/UDP port number
Bandwidth Control for Ingress	Rate in steps: 1 kbps / Mbps / fps / kfps Range : 100 kbps to 1Gbps / 1fps to 3300kfps Rate Unit : bit or frame
Bandwidth Control for Egress	Rate in steps : 1 kbps / Mbps Range : 100 kbps to 1Gbps Rate Unit : bit Per queue / Per port shaper
DiffServ (RF 2474) Remarking	
Storm Control	for Unicast, Broadcast, Multicast
IP Multicasting Features	
IGMP / MLD Snooping	IGMP Snooping v1, v2, v3 / MLD Snooping v1, v2 Port Filtering Profile Throttling Fast Leave Maximum Multicast Group : up to 1022 entries Query / Static Router Port
Security Features	
IEEE 802.1X	Port-Based MAC-Based
ACL	Number of rules : up to 256 entries for L2 / L3 / L4 L2 : Mac address SA/DA/VLAN L3: IP address SA/DA, Subnet L4: TCP/UDP
RADIUS authentication & accounting	
TACACS+ authentication & accounting, TACACS+ 3.0	
HTTPS, HTTP	Supported
SSL / SSH v2	Supported

Safety	UL60950-1, EN60950-1
Hi pot protection	DC 2.25KV for power to chassis ground, Ethernet port to chassis ground
4KV surge protection	Supported for PoE, UTP and Fiber ports
Shock	IEC 60068-2-27
Freefall	IEC 60068-2-32
Vibration	IEC 60068-2-6

User Name	Local Authentication
Password Authentication	Remote Authentication (via RADIUS / TACACS+)
Management Interface Access Filtering	Web, Telnet / SSH , CLI RS-232 console
Management Features	
CLI	Cisco® like CLI
Web Based Management	
Telnet	Server
SNMP	V1, V2c, V3
Modbus/TCP	Support for management and monitoring
SW & Configuration Upgrade	TFTP, HTTP Redundant firmware in case of upgrade failure
RMON	RMON I (1, 2, 3, 9 group), RMON II
MIB	RFC1213 MIB II, Private MIB
UPnP	Supported
DHCP	Server, Client, Relay, Snooping, Snooping option 82, Relay option 82
IP Source Guard	Supported
Port Mirroring	Supported
Event Syslog	Syslog server (RFC3164) (Support 1 server)
Warning Message	System syslog, e-mail, alarm relay
DNS	Client, Proxy
IEEE1588 PTP V2	Support 5 operating mode in each port : Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master, Slave
NTP, SNTP	Client
LLDP (IEEE 802.1ab)	Link Layer Discovery Protocol LLDP-MED
IPv6 Features	
IPv6 Management	Telnet Server/ICMP v6
SNMP over IPv6	Supported
HTTP over IPv6	Supported
SSH over IPv6	Supported
IPv6 Telnet	Supported
IPv6 NTP, SNTP	Client
IPv6 TFTP	Supported
IPv6 QoS	Supported
IPv6 ACL	Number of rules: up to 256 entries for L2 / L3 / L4 L2 : Mac address SA/DA/VLAN L3: IP address SA/DA, Subnet L4: TCP/UDP
Others Features	
Green Ethernet	Supports IEEE802.3az EEE (Energy Efficient Ethernet) Management to optimize the power consumption Determine the cable length and lowering the power for ports with short cables Lower the power for a port when there is no link LED Power Management :Adjustment LEDs intensity
Cable Diagnostic	Measuring UTP cable normal or broken point distance
Advanced PoE Management	
PoE PD failure auto checking, and auto reset when PD fail PoE port on/off weekly scheduling PoE Configuration PoE Enable/Disable Power limit by classification Power feeding priority Total PoE Power budge limitation: maximum 240W for IFS-1608GSM-8PH, IFS-402GSM-4PU, 180W for IFS+803GSM-8PH24	

Application

Figure : Application Example


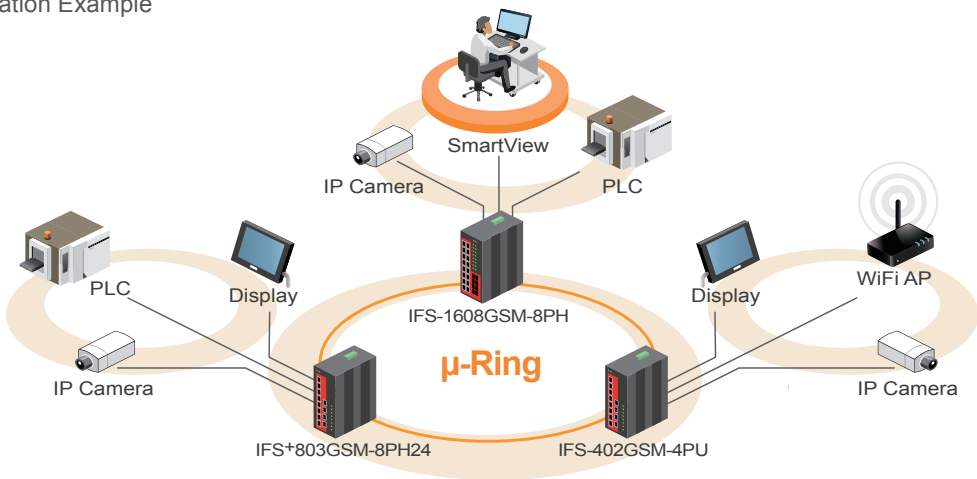



Figure 2 : High Efficiency Boost Technology for PoE

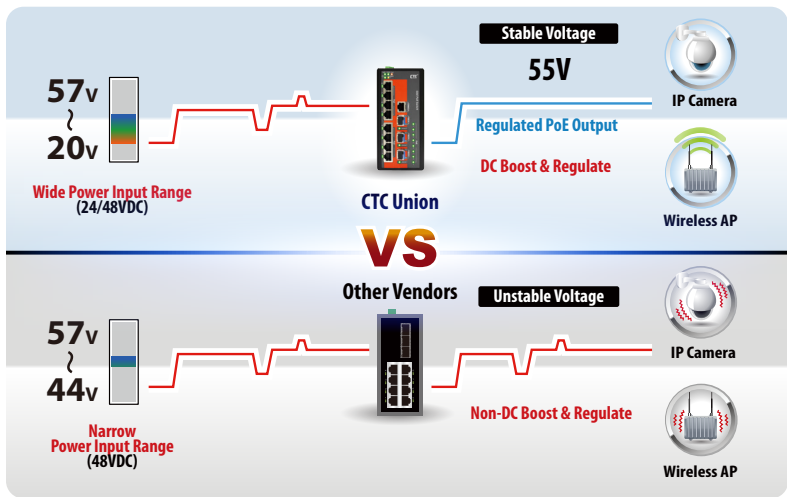


- Regulated PoE output voltage (55VDC) to stabilize PoE device
- Guarantee delivery PoE power distance to 100 meters
- Wide range input power 24/48VDC (20~57VDC)
- Built-in very high efficiency (94~97%) to boost PoE output voltage

Dimensions


► IFS-1608GSM-8PH

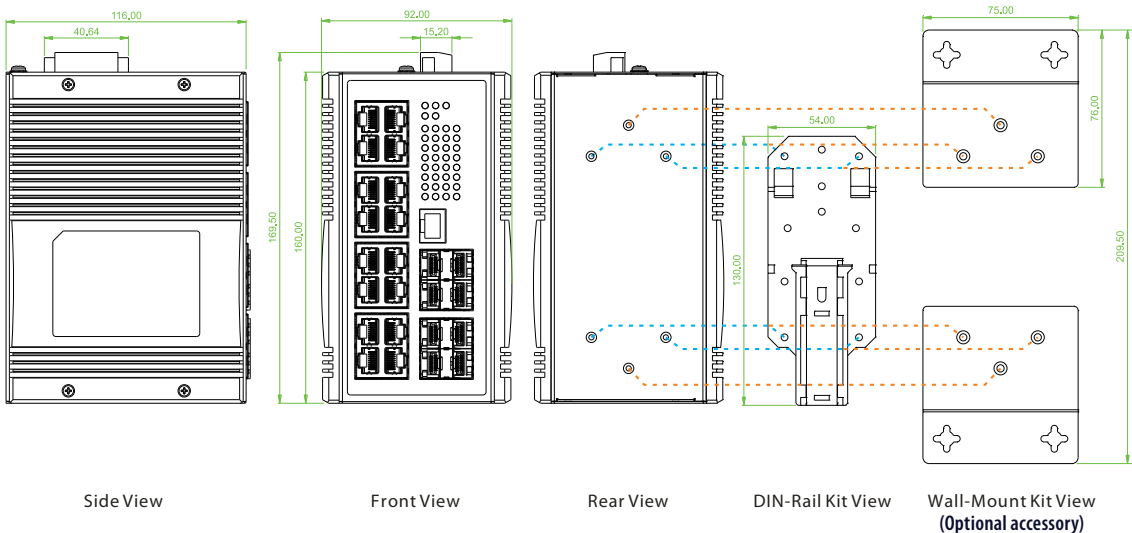

► IFS+803GSM-8PH24

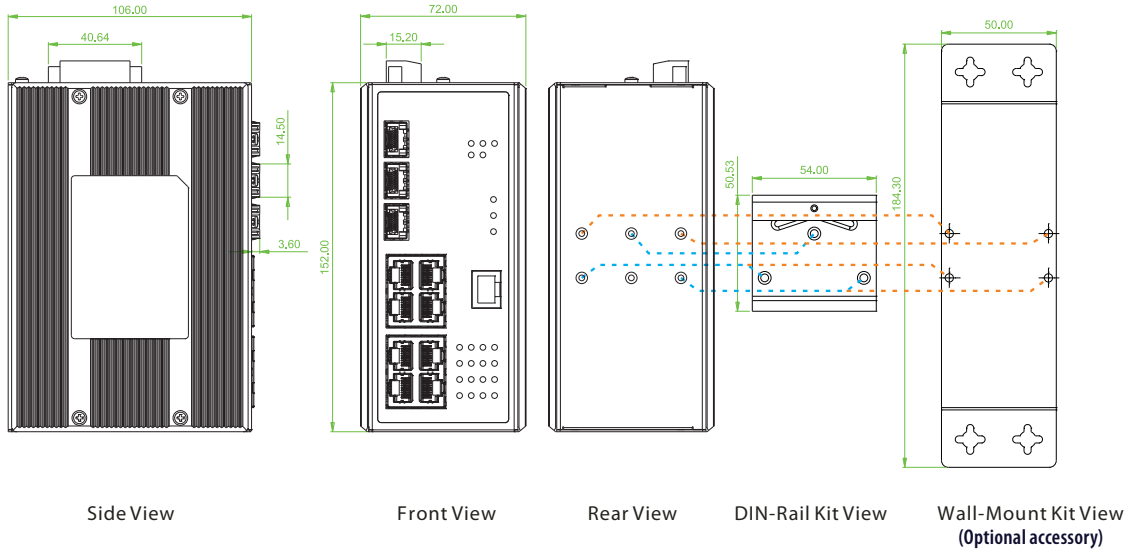


► IFS-402GSM-4PU

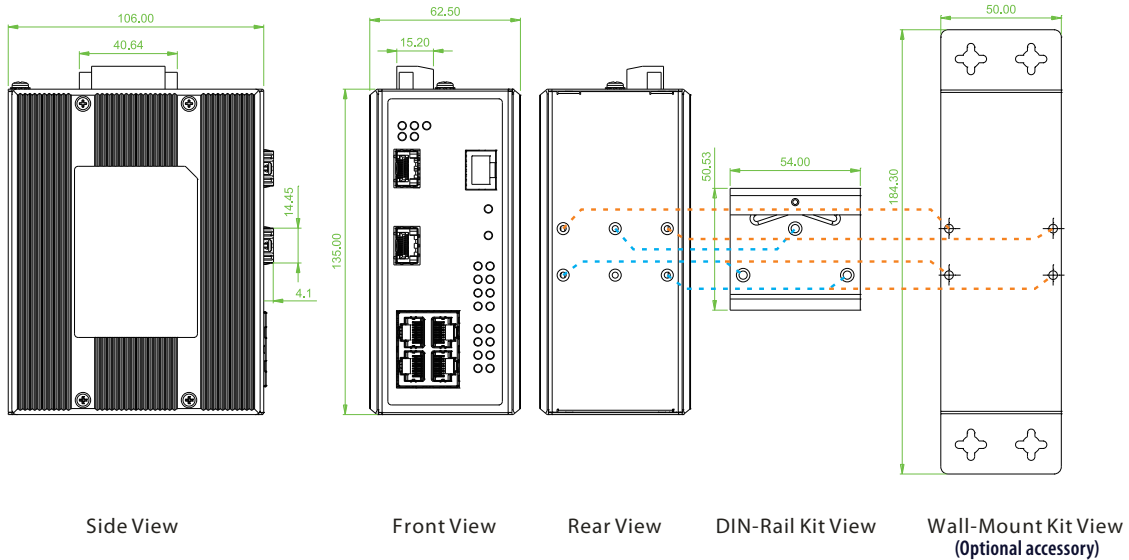

Ordering Information

Model Name	Total Port	UTP		Fiber	PoE Port			Input power		Certification				Operating Temperature
		10/100 Base-TX	100/1000 Base-X	IEEE802.3at	IEEE802.3bt	Power Budget	Redundant	Railway EN50121-4	NEMA TS2	Safety UL60950-1 EN60950-1	EN61000-6-2 EN61000-6-4	CE, FCC		
IFS-1608GSM-8PH	24	16	8 SFP	8	8	240W	48, -48VDC	V	V	V	V	V	-10~60°C	
IFS-1608GSM-8PHE	24	16	8 SFP	8	8	240W	48, -48VDC	V	V	V	V	V	-40~75°C	
IFS+803GSM-8PH24	11	8	3 SFP	8	8	180W	24/48, -48VDC	V	V	V	V	V	-10~60°C	
IFS+803GSM-8PHE24	11	8	3 SFP	8	8	180W	24/48, -48VDC	V	V	V	V	V	-40~75°C	
IFS+402GSM-4PU	6	4	2 SFP		4	240W	48, -48VDC	V	V	V	V	V	-10~60°C	
IFS+402GSM-4PUE	6	4	2 SFP		4	240W	48, -48VDC	V	V	V	V	V	-40~75°C	

Model Naming Rule

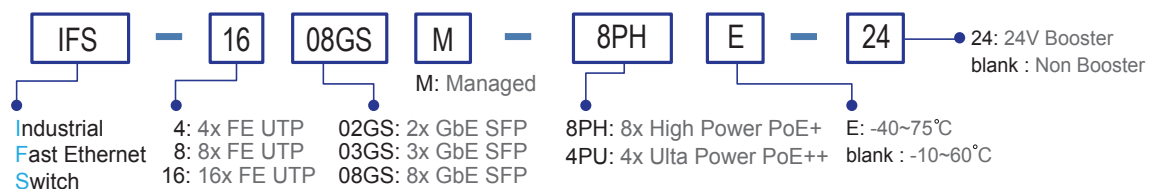

■ Package List

- One device of the series
- Console cable (RJ-45 to DB9)
- CD (SmartConfig, MIB file, Manual)
- Quickly installation guide
- Din Rail with screws
- Terminal block
- Protective caps for SFP ports

Optional Accessories

■ Wall mount kit


- IND-WMK02** Wall Mount kit for Industrial product (Wide) (184 x 50mm) (For IFS+803GSM-8PH24, IFS-402GSM-4PU)
- IND-WMK04** Wall Mount kit for Industrial product (Wide) (2 pcs in 1 set, 76mm x 75mmx 2pcs) (For IFS-1608GSM-8PH)

■ Industrial SFP Transceiver

The ISFP series of industrial grade SFP modules have been fully tested with the series product for guaranteed compatibility and performance. The best performance can be guaranteed even in mission-critical applications. (Please see CTC Union's Industrial SFP datasheet for more details and more items.)

- ISFP-M7000-85-D(E)** Industrial SFP GbE 1000Base-SX, M/M, 500 meter, wave length 850nm, 7.5dB, LC, DDMI, -10~70°C (-40~85°C)
- ISFP-S7020-31-D(E)** Industrial SFP 1000Base-LX, S/M, 20km, wave length 1310nm, 15dB, LC, DDMI, -10~70°C (-40~85°C)
- ISFP-T7T00-00-(E)** Industrial SFP 1000Base-T UTP 100meter, -10~70°C (-40~85°C)
- ISFP-M5002-31-D(E)** Industrial SFP 155M 100Base-FX, MM, 2km, wave length 1310nm, 12dB, LC, DDMI, -10~70°C (-40~85°C)
- ISFP-S5030-31-D(E)** Industrial SFP 155M 100Base-FX, SM, 30km, 1310nm, 19dB, LC, DDMI, -10~70°C (-40~85°C)

SFP Naming Rule

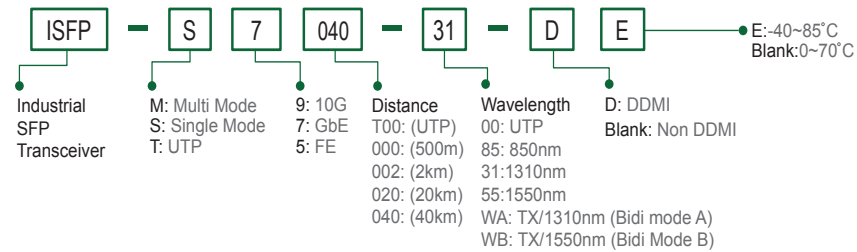



IFS-402GSM-4PH24

4x 10/100Base-TX + 1x FE/GbE SFP +
1x FE/GbE/2.5G SFP with 4x PoE+

IFS-803GSM-8PH24

8x 10/100Base-TX + 2x FE/GbE SFP +
1x FE/GbE/2.5G SFP with 8x PoE+



These models are managed industrial grade Fast Ethernet PoE (Power over Ethernet) switches with 4/8 10/100Base-TX PoE ports and 2/3 Gigabit/Fast SFP ports with **1 port 2.5GbE** that provide stable and reliable Ethernet transmission. With dual power input design, these models can provide redundant mechanisms for critical applications that need always-on connections. These switches can also operate either at standard operating temperature range (-10 to 60°C) or at wide operating temperature range (-40 to 75°C) so as to fulfill the special needs of industrial automation applications. Housed in rugged DIN rail or wall mountable IP-30 enclosures, these switches are perfect choices for harsh environments, such as industrial networking, intelligent transportation systems (ITS) and are also suitable for many military and utility market applications where environmental conditions exceed commercial product specifications.

These managed switches also support a wide variety of Ethernet functions, including STP/RSTP/MSTP/ITU-T G.8032 ERPS and multiple μ-Ring for redundant cabling, advanced PoE management functions such as weekly PoE power scheduling as well as device auto-checking and auto-reset. They also support layer 2 Ethernet IGMP, VLAN, QoS, ACL, Security, IPv6, bandwidth control, port mirroring, cable diagnostics and Green Ethernet. Additionally, these switches can also be managed by SmartView™ Element Management System which offers a user-friendly and centralized device management platform and provides network administrators the ability to monitor and configure these connected switches remotely (see figure 1).

Features

- 4x 10/100Base-TX RJ-45+ 1x FE/GbE SFP + **1x FE/GbE/2.5G** SFP with 4x PoE+, total 120W power budget (IFS-402GSM-4PH24)
- 8x 10/100Base-TX RJ-45+ 2x FE/GbE SFP + **1x FE/GbE/2.5G** SFP with 8x PoE+, total 180W power budget (IFS-803GSM-8PH24)
- 24/48VDC (20~57VDC) redundant dual input power with built-in very high efficiency booster (94~97%) to rise up 55 VDC for PoE output (Figure 2)
- Regulated PoE output voltage (55VDC) to stabilize PoE device, and guarantee delivery PoE power distance to 100meter (Figure 2)
- Provides 4/8 port IEEE802.3af / 802.3at PoE output (30W per Port)
- Advanced PoE Management, PoE PD Failure Auto Checking and auto reset when PD fail, PoE port on/off weekly scheduling, PoE configuration for power planning
- Rugged metal, IP30 protection & Fanless design
- UL60950-1, CE, FCC, Rail Traffic EN50121-4, Traffic control NEMA TS2 certified
- Heavy industrial grade EMS, EMI, EN61000-6-2, EN61000-6-4 certified
- Cable diagnostics, Measuring UTP cable OK or broken point distance
- Supports Green Ethernet IEEE802.3az EEE (Energy Efficient Ethernet) management to optimize power consumption
- STP, RSTP, MSTP, ITU-T G.8032 Ethernet Ring Protection Switching (ERPS) for redundant cabling
- Provides 5 ring instances that each can support μ-Ring, μ-Chain or Sub-Ring type for flexible uses. Supports up to 5 rings in one device
- μ-Ring for Redundant Cabling, recovery time<10ms in 250 devices
- DHCP Server/Client/Relay/Snooping/Snooping option 82/Relay option 82
- QoS, Traffic classification QoS, CoS, bandwidth control for Ingress and Egress, Storm Control, DiffServ
- IEEE802.1q VLAN, MAC based VLAN, IP subnet based VLAN, Protocol based VLAN, VLAN translation, GVRP, MVR
- Dynamic IEEE 802.3ad LACP Link Aggregation, Static Link Aggregation
- IGMP snooping V1/V2/V3, IGMP Filtering/ Throttling, IGMP query, IGMP proxy reporting, MLD snooping V1/V2
- Flexibility security: Port based and MAC based IEEE802.1X, RADIUS, ACL, TACACS+, HTTP/HTTPS, SSL/SSH v2
- Software upgrade via TFTP and HTTP, redundant firmware to avoid upgrade failure
- Supports IEEE1588 PTP V2 for precise time synchronization to operate in Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master, Slave mode by each port
- RMON, MIB II, Port mirroring, Event syslog, DNS, NTP, SNTP, IEEE802.1ab LLDP
- Supports IPv6 Telnet server /ICMP v6
- CLI, Web based management, SNMP v1/v2c/v3, Telnet server for management
- Provides SmartConfig™ for quick and easy mass configuration
- Supports SmartView™ for centralized management

Specifications

Standard		Standard	
IEEE 802.3	10Base-T 10Mbit/s Ethernet	IEEE 802.3at	PoE+ (Power over Ethernet enhancements)
IEEE 802.3u	100Base-TX, 100Base-FX, Fast Ethernet	IEEE 802.1d	STP (Spanning Tree Protocol)
IEEE 802.3ab	1000Base-T Gbit/s Ethernet over twisted pair	IEEE 802.1w	RSTP (Rapid Spanning Tree Protocol)
IEEE 802.3z	1000Base-X Gbit/s Ethernet over Fiber-Optic	IEEE 802.1s	MSTP (Multiple Spanning Tree Protocol)
IEEE803.3cb	2.5GBase-X	ITM-T G.8032 / Y.1344	ERPS (Ethernet Ring Protection Switching)
IEEE 802.3af	PoE (Power over Ethernet)	IEEE 802.1Q	Virtual LANs (VLAN)

Standard	IEEE 802.1X	Port based and MAC based Network Access Control, Authentication			
	IEEE802.3ac	Max frame size extended to 1522Bytes			
	IEEE 802.3ad	Link aggregation for parallel links with LACP(Link Aggregation Control Protocol)			
	IEEE 802.3x	Flow control for Full Duplex			
	IEEE 802.1ad	Stacked VLANs, Q-in-Q			
	IEEE 802.1p	LAN Layer 2 QoS/CoS Protocol for Traffic Prioritization			
	IEEE 802.1ab	Link Layer Discovery Protocol (LLDP)			
	IEEE 802.3az	EEE (Energy Efficient Ethernet)			
Switch Architecture	Back-plane (Switching Fabric): 7.8Gbps (IFS-402GSM-4PH24) 10.6Gbps (IFS-803GSM-8PH24) Full wire-speed				
Data Processing	Store and Forward				
Flow Control	IEEE 802.3x for full duplex mode Back pressure for half duplex mode				
Network Connector	4x 10/100Base-TX RJ-45 + 1x 100/1000Base-X SFP slot + 1x 100/1000/2.5GBase-X SFP slot (IFS-402GSM-4PH24)				
	8x 10/100Base-TX RJ-45 + 2x 100/1000Base-X SFP slot + 1x 100/1000/2.5GBase-X SFP slot (IFS-803GSM-8PH24)				
	RJ-45 UTP port support Auto negotiation speed, Auto MDI/MDI-X function, SFP ports support 100/1000 or 2.5G with DDMI				
PoE standard & RJ-45 pin assignment	4x IEEE 802.3af /IEEE 802.3at PoE+ (IFS-402GSM-4PH24) 8x IEEE 802.3af /IEEE 802.3at PoE+ (IFS-803GSM-8PH24) End-Span, Alternative A mode. Positive (V+): RJ-45 pin 1, 2. Negative (V-): RJ-45 pin 3, 6. Data (1,2,3,6,4,5,7,8)				
Console	RS-232 (RJ-45)				
Network Cable	UTP/STP above Cat. 5e cable EIA/TIA-568 100-ohm (100m)				
Protocols	CSMA/CD				
Reverse Polarity Protection	Supported for power input				
Overload Current Protection	Supported				
CPU Watch Dog	Supported				
Power Supply	Redundant Dual DC 24/48V (20~57VDC) Input power (Removable Terminal Block) Built-in very high efficiency booster(94~97%) to rise up 55 VDC for PoE output Regulated PoE output voltage (55VDC) to stabilize PoE device, and guarantee delivery PoE power distance to 100meter (Figure 2)				
Power Consumption	IFS-402GSM-4PH24 Power consumption & Booser efficiency				
	Input Voltage	Total Power Consumption	Device Power Consumption	PoE Budget	Boost Efficiency
	24VDC	134.8W	7.1W	120W	94.0%
	48VDC	132.2W	8.5W	120W	97.2%
	IFS-803GSM-8PH24 Power consumption & Booser efficiency				
	Input Voltage	Total Power Consumption	Device Power Consumption	PoE Budget	Boost Efficiency
	24VDC	198.3W	7.3W	180W	94%
	48VDC	193.2W	7.9W	180W	97%
PoE Power Budget	Maximum PoE Output power budget 30W / Per Port 120W (IFS-402GSM-4PH24) 180W (IFS-803GSM-8PH24)				

LED	Per unit: Power 1 (Green), Power 2 (Green), Fault (Amber), CPU Act (Green), Ring Master (Yellow) Per RJ-45 port: 10/100 Link/Active (Green) SFP Fiber Per port: Link/Active (Green) PoE Port LED 1 LED /per Port : • PoE Output Power On : ON (Green) • PoE Fault (Over Load, Short Circuit,Port failed at Startup) : Flash 1times /sec (Green) • PoE Output Power Off : Off
Jumbo Frame	9.6KB
IEEE802.3ac	Max frame size extended to 1522Bytes (allow Q-tag in packet)
MAC Address Table	8K
Memory Buffer	512K Bytes for packet buffer
Warning Message	System Syslog, SMTP/ e-mail event message, alarm relay
Alarm Relay Contact	Relay outputs with current carrying capacity of 1 A @24VDC
Removable Terminal Block	Provide 2 redundant power, alarm relay contact, 6 Pin
Operating Temperature	-10 ~ 60°C (IFS-402GSM-4PH24, IFS-803GSM-8PH24) -40 ~ 75°C (IFS-402GSM-4PHE24, IFS-803GSM-8PHE24)
Operating Humidity	5% to 95% (Non-condensing)
Storage Temperature	-40 ~ 85°C
Housing	Rugged Metal, IP30 Protection, Fanless
Dimensions	106 x 62.5 x 135 mm (D x W x H) (IFS-402GSM-4PH24) 106 x 72 x 152 mm (D x W x H) (IFS-803GSM-8PH24)
Weight	0.715kg (IFS-402GSM-4PH24) 0.96kg (IFS-803GSM-8PH24)
Installation Mounting	DIN Rail mounting, or wall mounting (Optional)
MTBF	674,963 Hours (IFS-402GSM-4PH24) 466,542 Hours (IFS-803GSM-8PH24) (MIL-HDBK-217)
Warranty	5 years
Certification	
EMC	CE
EMI (Electromagnetic Interference)	FCC Part 15 Subpart B Class A,CE
Railway Traffic	EN50121-4
Traffic control	NEMA TS2
Immunity for Heavy Industrial Environment	EN61000-6-2
Emission for Heavy Industrial Environment	EN61000-6-4
EMS (Electromagnetic Susceptibility) Protection Level	EN61000-4-2 (ESD) Level 3, Criteria B EN61000-4-3 (RS) Level 3, Criteria A EN61000-4-4 (Burst) Level 3, Criteria A EN61000-4-5 (Surge) Level 3, Criteria B EN61000-4-6 (CS) Level 3, Criteria A EN61000-4-8 (PFMF, Magnetic Field) Field Strength: 300A/m, Criteria A
Safety	UL60950-1
Shock	IEC 60068-2-27
Freefall	IEC 60068-2-32
Vibration	IEC 60068-2-6

Software Specifications

Topology	
VLAN	IEEE 802.1q VLAN, up to 4094 IEEE 802.1q VLAN, up to 4094 Groups IEEE 802.1ad Q-in-Q MAC-based VLAN, up to 256 entries IP Subnet-based VLAN, up to 128 entries Protocol-based VLAN(Ethernt, SNAP, LLC), up to 128 entries VLAN Translation, up to 256 entries GVRP (GARP VLAN Registration Protocol) MVR (Multicast VLAN Registration)
Link Aggregation (Port Trunk)	Static (Hash with SA, DA, IP, TCP/UDP port), up to 5 trunk group Dynamic (IEEE 802.3ad LACP), up to 5 trunk group

Spanning Tree	IEEE802.1d STP IEEE802.1w RSTP IEEE802.1s MSTP
Multiple μ-Ring	up to 5 instances that each supports μ-Ring, μ-Chain or Sub-Ring type for flexible uses, and maximum up to 5 Rings. Recovery time <10ms The maximum number of devices allowed in a Ring supported ring is 250.
Loop Protection	Supported
ITM-T G.8032 / Y.1344 ERPS (Ethernet Ring Protection)	Recovery time <50ms Single Ring, Sub-Ring, Multiple ring topology network

QoS Features	
Class of Service	IEEE802.1p 8 active priorities queues for per port
Traffic Classification	IEEE802.1p based CoS
QoS	IP Precedence based CoS
	IP DSCP based CoS
	QCL(QoS Control List): Frame Type, Source/Destination MAC, VLAN ID, PCP, DEI
	QCE(QoS Control Entry): Protocol, Source IP, IP Fragment, DSCP, TCP/UDP port number
Bandwidth Control for Ingress	Rate in steps :1 kbps / Mbps / fps / kfps Range : 100 kbps to 1Gbps / 1fps to 3300kfps Rate Unit : bit or frame
Bandwidth Control for Egress	Rate in steps : 1 kbps / Mbps Range : 100 kbps to 1Gbps Rate Unit : bit Per queue / Per port shaper
DiffServ (RF 2474) Remarking	
Storm Control	for Unicast, Broadcast, Multicast
IP Multicasting Features	
IGMP / MLD Snooping	IGMP Snooping v1, v2, v3 / MLD Snooping v1, v2 Port Filtering Profile Throttling, Fast Leave Maximum Multicast Group : up to 1022 entries Query / Static Router Port
Security Features	
IEEE 802.1X	Port-Based MAC-Based
ACL	Number of rules : up to 256 entries for L2 / L3 / L4 L2 : Mac address SA/DA/VLAN L3 : IP address SA/DA, Subnet L4 : TCP/UDP
RADIUS authentication & accounting	
TACACS+ authentication & accounting, TACACS+ 3.0	
HTTPS, HTTP	Supported
SSL / SSH v2	Supported
User Name Password Authentication	Local Authentication Remote Authentication (via RADIUS / TACACS+)
Management Interface Access Filtering	Web, Telnet / SSH, CLI RS-232 console
Management Features	
CLI	Cisco® like CLI
Web Based Management	
Telnet	Server
SNMP	V1, V2c, V3
SW & Configuration Upgrade	TFTP, HTTP Redundant firmware in case of upgrade failure
RMON	RMON I (1, 2, 3, 9 group), RMON II

MIB	RFC1213 MIB II, Private MIB
UPnP	Supported
DHCP	Server, Client, Relay, Snooping Snooping option 82 Relay option 82
IP Source Guard	Supported
Port Mirroring	Supported
Event Syslog	Syslog server (RFC3164) (Support 1 server)
Warning Message	System syslog, e-mail, alarm relay
DNS	Client, Proxy
IEEE1588 PTP V2	Support 5 operating mode in each port : Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master, Slave
NTP, SNTP	Client
LLDP (IEEE 802.1ab)	Link Layer Discovery Protocol LLDP-MED
IPv6 Features	
IPv6 Management	Telnet Server/ICMP v6
SNMP over IPv6	Supported
HTTP over IPv6	Supported
SSH over IPv6	Supported
IPv6 Telnet	Supported
IPv6 NTP, SNTP	Client
IPv6 TFTP	Supported
IPv6 QoS	Supported
IPv6 ACL	Number of rules: up to 256 entries for L2 / L3 / L4 L2 : Mac address SA/DA/VLAN L3 : IP address SA/DA, Subnet L4 : TCP/UDP
Others Features	
Green Ethernet	Supports IEEE802.3az EEE (Energy Efficient Ethernet) Management to optimize the power consumption Determine the cable length and lowering the power for ports with short cables Lower the power for a port when there is no link LED Power Management : Adjustment LEDs intensity
Cable Diagnostic	Measuring UTP cable normal or broken point distance
Advanced PoE Management	
	PoE PD failure auto checking ,and auto reset when PD fail PoE port on/off weekly scheduling PoE Configuration PoE Enable/Disable Power limit by classification Power limit by management Total PoE Power budge limitation (maximum 120W for IFS-402GSM-4PH24-2.5G, 180W for IFS-803GSM-8PH24-2.5G) Power feeding priority

Application

Figure 1 : Application Example


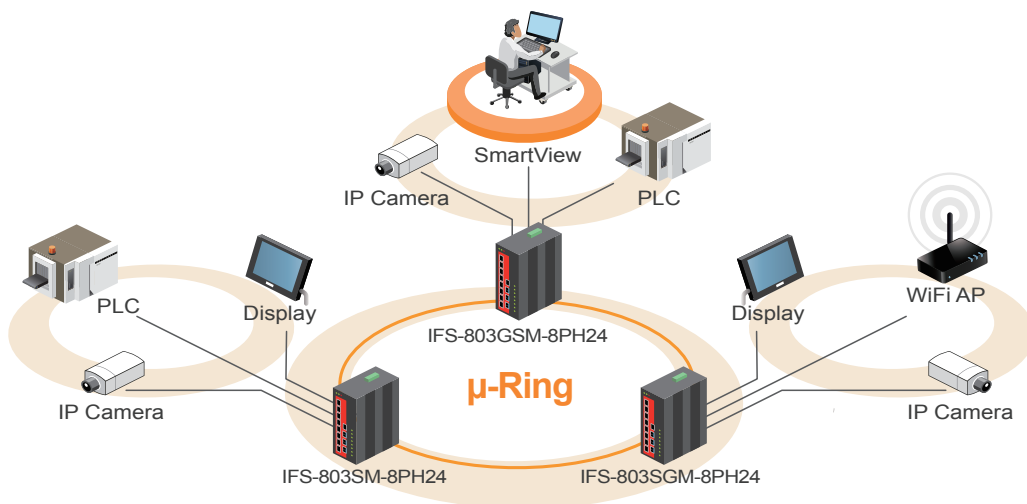



Figure 2 : High Efficiency Boost Technology for PoE

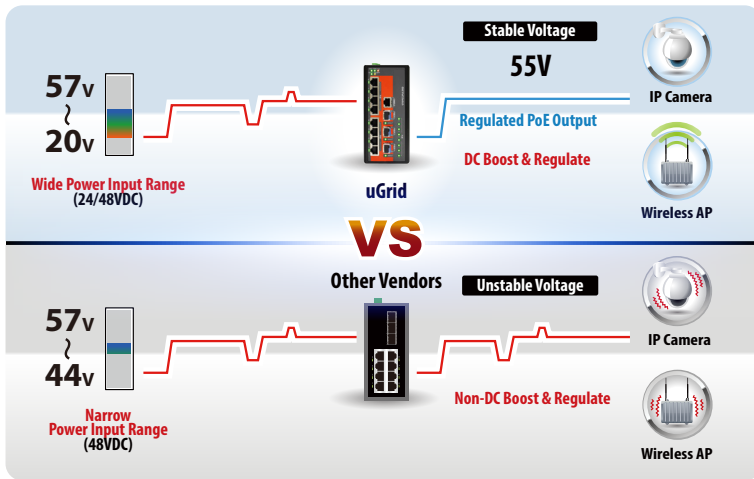


- Regulated PoE output voltage (55VDC) to stabilize PoE device
- Guarantee delivery PoE power distance to 100 meters
- Wide range input power 24/48VDC (20~57VDC)
- Built-in very high efficiency (94~97%) to boost PoE output voltage

Dimensions

► IFS-402GSM-4PH24

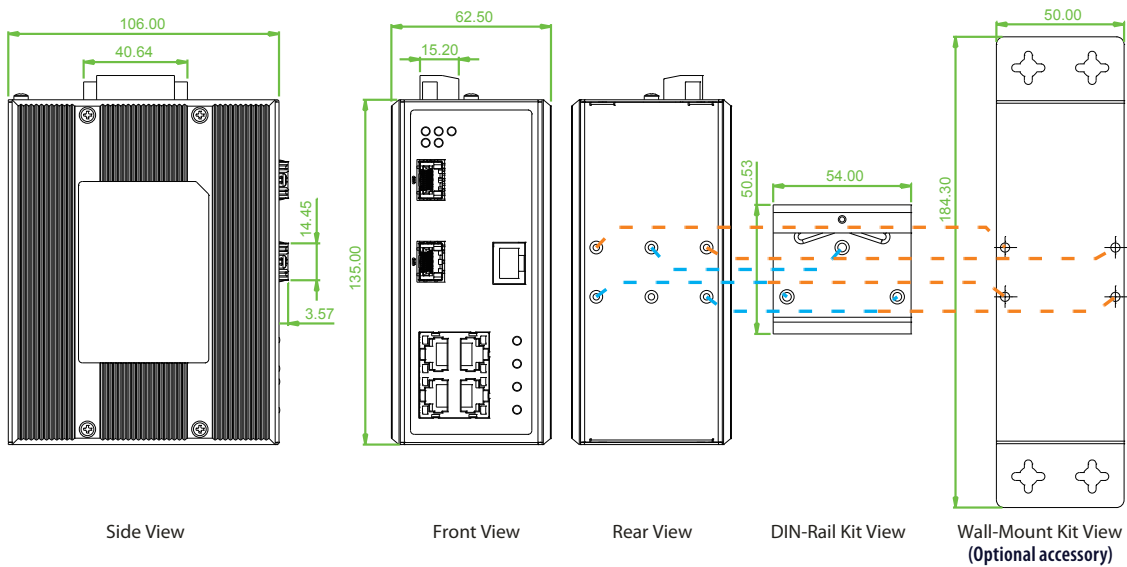


► IFS-803GSM-8PH24

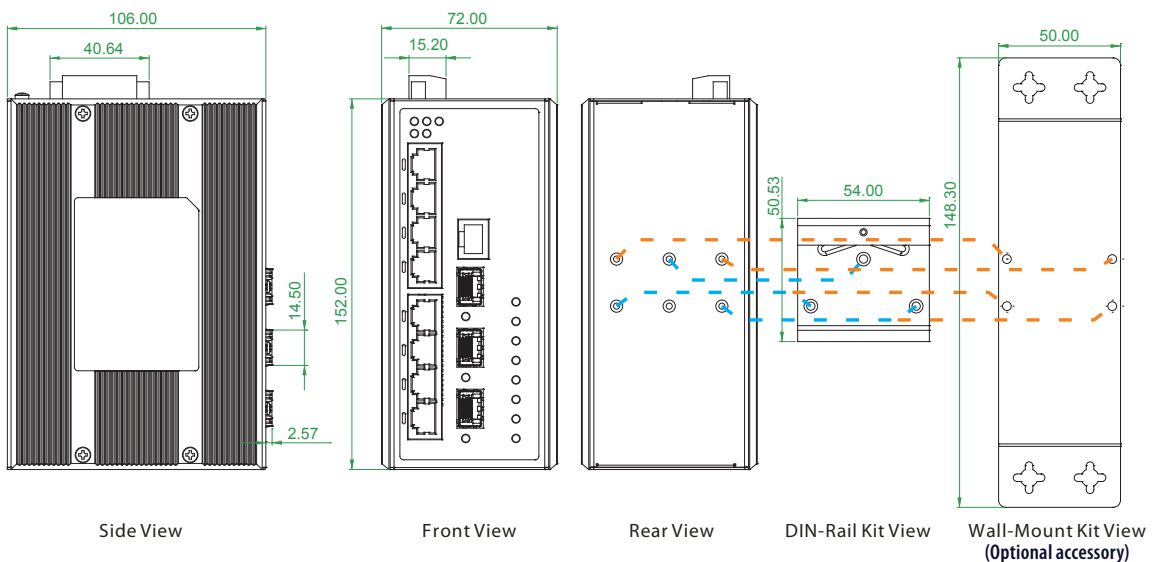

Ordering Information

Model Name	Total Port	UTP		Fiber		PoE Port		Input power		Certification					Operating Temperature
		10/100 Base-TX	100/1000 Base-X	100/1000 Base-X	100/1000/2.5GBase-X	IEEE802.3at	Power Budget	Redundant	Railway EN50121-4	Traffic Control NEMA TS2	Safety EN60950-1	Safety UL60950-1	CE,FCC EN61000-6-2 EN61000-6-4		
IFS-402GSM-4PH24	6	4	1 SFP	1 SFP	1 SFP	4	120W	24/48VDC	V	V	V	V	V	-10~60°C	
IFS-402GSM-4PHE24	6	4	1 SFP	1 SFP	1 SFP	4	120W	24/48VDC	V	V	V	V	V	-40~75°C	
IFS-803GSM-8PH24	11	8	2 SFP	1 SFP	1 SFP	8	180W	24/48VDC	V	V	V	V	V	-10~60°C	
IFS-803GSM-8PHE24	11	8	2 SFP	1 SFP	1 SFP	8	180W	24/48VDC	V	V	V	V	V	-40~75°C	

Model Naming Rule

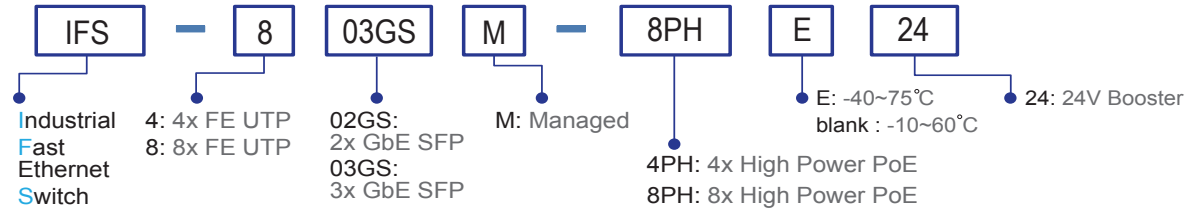

Optional Accessories

Package List

- One device of the series
- Console cable (RJ-45 to DB9)
- CD (SmartConfig, MIB file, Manual)
- Quickly installation guide
- Din Rail with screws
- Terminal block
- Protective caps for SFP ports

Wall mount kit


IND-WMK02 Wall Mount kit for Industrial product (Wide) (184 x 50mm)

Industrial SFP Transceiver

The ISFP series of industrial grade SFP modules have been fully tested with the series product for guaranteed compatibility and performance. The best performance can be guaranteed even in mission-critical applications.

ISFP-M7000-85-D(E)	Industrial SFP GbE 1000Base-SX, M/M, 500 meter, wave length 850nm, 7.5dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-S7020-31-D(E)	Industrial SFP 1000Base-LX, S/M, 20km, wave length 1310nm, 15dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-T7T00-00-(E)	Industrial SFP 1000Base-T UTP 100meter, -10~70°C (-40~85°C)
ISFP-M5002-31-D(E)	Industrial SFP 155M 100Base-FX, MM, 2km, wave length 1310nm, 12dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-S5030-31-D(E)	Industrial SFP 155M 100Base-FX, SM, 30km, 1310nm, 19dB, LC, DDMI, -10~70°C (-40~85°C)

SFP Naming Rule

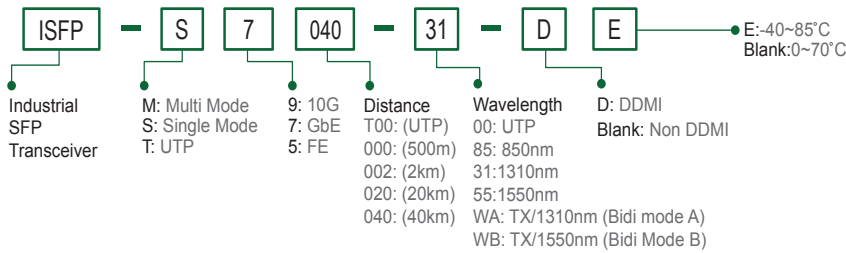



IGS-402S-4PU

4x 10/100/1000Base-T +
2x 100/1000Base-X SFP w/ 4x **PoE++**
(240W, **60W/per port**)

IGS-402S-4PH24

4x 100/1000Base-T +
2x 100/1000Base-X SFP w/ 4x PoE+
(120W, 24V Booster)

IGS-402F-4PH24

4x 10/100/1000Base-T +
2x 1000Base-SX/LX Fiber w/ 4x PoE+
(120W, 24V Booster)

IGS-600-4PH24

6x 10/100/1000Base-T with 4x PoE+
(120W, 24V Booster)



These models are 6 port unmanaged industrial grade Gigabit PoE switches with 4x 10/100/1000Base-T PoE ports that provide stable and reliable Ethernet transmission. Housed in rugged DIN rail or wall mountable enclosures, these switches are designed for harsh environments, such as industrial networking, security automation applications, IP Surveillance, intelligent transportation systems (ITS) and are also suitable for many military and utility market applications where environmental conditions exceed commercial product specifications (See figure 1). Standard operating temperature range models (-10 to 60°C) and wide operating temperature range models (-40 to 75°C) fulfill the special needs of industrial automation applications.

Features

- 4x 10/100/1000Base-T RJ-45+ 2x 100/1000Base-X SFP (Total 6 Port) with **4x PoE++**, total 240W power budget (IGS-402S-4PU)
- 4x10/100/1000Base-T RJ-45+ 2x 100/1000Base-X SFP (Total 6 Port)with 4x PoE+, total 120W power budget (IGS-402S-4PH24)
- 4x 10/100/1000Base-T RJ-45+ 2x 1000Base-X SC (Total 6 Port) with 4x PoE+, total 120W power budget (IGS-402F-4PH24)
- 6x 10/100/1000Base-T RJ-45 (Total 6 Port) with 4x PoE+, total 120W power budget (IGS-600-4PH24)
- Provides 4-port IEEE802.3bt/at/af **PoE++** output, **60W/per port** (IGS-402S-4PU)
- Provides 4-port IEEE802.3at/af PoE+ output, 30W/per port (IGS-402S-4PH24, IGS-402F-4PH24, IGS-600-4PH24)
- 48VDC (44~57VDC) redundant dual input power (IGS-402S-4PU)
- 24/48VDC (20~57VDC) redundant dual input power with built-in very high efficiency booster(94~97%) to rise up 55 VDC for PoE output (IGS-402S-4PH24, IGS-402F-4PH24, IGS-600-4PH24)
- Regulate PoE output voltage (55VDC) to stabilize PoE device, and guarantee delivery PoE power distance to 100meter (IGS-402S-4PH24, IGS-402F-4PH24, IGS-600-4PH24) (Figure 2)
- Supports broadcast storm protection
- Supports power failure alarm message by relay
- Supports flow control
- Jumbo frame support
- Supports DIN Rail or wall mounting installation
- IP30 rugged metal housing and fanless
- Wide operating temperature -40 ~ 75°C ("E" model)
- UL60950-1, CE, FCC, EN50121-4 certification
- Heavy industrial grade EMS, EMI, EN61000-6-2, EN61000-6-4 certified

Specifications

IEEE Standard	IEEE 802.3 10Base-T Ethernet IEEE 802.3u 100Base-TX Fast Ethernet IEEE 802.3ab 1000Base-T Gigabit Ethernet IEEE 802.3z 1000Base-X Gigabit Ethernet IEEE 802.3x Flow Control and Back Pressure IEEE 802.3af PoE (Power over Ethernet) IEEE 802.3at PoE+ (Power over Ethernet enhancements) IEEE 802.3bt PoE++(4 pairs Power over Ethernet)	Network Connector	4 x RJ-45 (IGS-402S-4PU, IGS-402S-4PH24, IGS-402F-4PH24) 6 x RJ-45 (IGS-600-4PH24) 10/100/1000Base-T auto negotiation speed, Auto MDI/MDI-X function, Full/Half duplex 2x 100/1000Base-X SFP (IGS-402S-4PU, IGS-402S-4PH24) 2x1000Base-X Fiber connector: SC Muti Mode or Single Mode (IGS-402F-4PH24)
Switch Architecture	Back-plane (Switching Fabric): 12Gbps Full wire-speed	Network Cable	UTP/STP above Cat. 5e cable EIA/TIA-568 100-ohm (100m) Fiber Cable (Multi-mode): 50/125um, 62.5/125um Fiber Cable (Single-mode): 9/125um
Data Processing	Store and Forward	Protocols	CSMA/CD
Flow Control	IEEE 802.3x flow control, back pressure flow control	LED	Per unit: Power 1 (Green), Power 2 (Green), Fault (Amber) Fiber Per port: Link/Active (Green) Per Port PoE LED • Active : ON • Inactive : OFF • Fault : Flash (Fault: Over Load, Short Circuit, Port failed at Startup)
Provides Broadcast Storm Protection	Enable / Disable set by DIP SW	DIP SW	DIP 1 ON : Disable power failure alarm OFF : Enable power failure alarm DIP 2 ON : Disables broadcast storm protection OFF : Enable broadcast storm protection DIP 3 ON : Fiber 2 for 100Base-FX SFP OFF : Fiber 2 for Gigabit SFP (for IGS-402S-4PU, IGS-402S-4PH24) DIP 4 ON : Fiber 1 for 100Base-FX SFP OFF : Fiber 1 for Gigabit SFP (for IGS-402S-4PU, IGS-402S-4PH24)
Jumbo Frame	10K Bytes		
MAC Address Table	8K		
Packet Buffer Size	1Mbits		
PoE standard & RJ-45 Pin Assignment	IGS-402S-4PU: 4x IEEE 802.3bt/at/af PoE++ 4 pairs PoE, PoE++ Positive (V+) : RJ-45 pin 1, 2, 4, 5 Negative (V-) : RJ-45 pin 3, 6, 7, 8 Data (1,2,3,6,4,5,7,8) IGS-402S-4PH24, IGS-402F-4PH24, IGS-600-4PH24: 4x IEEE 802.3at/af PoE+ 2 pairs PoE, PoE+ Positive (V+) : RJ-45 pin 1, 2. Negative (V-) : RJ-45 pin 3, 6. Data (1,2,3,6,4,5,7,8)		

Reverse Polarity Protection	Supported for Power Input
Overload Current Protection	Supported
Power Supply	<p>IGS-402S-4PU: Redundant Dual DC 48V (44~57VDC) input power (Removable terminal block) (50~57V input is recommended for IEEE802.3at PoE+ in 30W applications) (50~57V input is recommended for IEEE802.3bt PoE++ in 60W applications)</p> <p>IGS-402S-4PH24, IGS-402F-4PH24, IGS-600-4PH24: Redundant Dual DC 24/48V (20~57VDC) input power (Removable Terminal Block) Built-in very high efficiency booster(94~97%) to rise up 55 VDC for PoE output Regulated PoE output voltage (55VDC) to stabilize PoE device, and guarantee delivery PoE power distance to 100meter (Figure 2)</p>

Power Consumption	Input Voltage	IGS-402S-4PH24	IGS-402F-4PH24	IGS-600-4PH24
	24VDC	143.3W	143.2W	142.9W
	48VDC	138.2W	138.2W	139.6W
(Include full load 120W PoE output)				
IGS-402S-4PU Power consumption				
	Input Voltage	Total Power Consumption	Device Power Consumption	PoE Budget
	50VDC	250.3W	8W	240W

PoE Power Budget	Maximum PoE Output power budget 240W, 60W/ per port (IGS-402S-4PU) Maximum PoE Output power budget 120W, 30W/ per port (IGS-402S-4PH24, IGS-402F-4PH24, IGS-600-4PH24)
Alarm Relay Contact	Relay outputs with current carrying capacity of 1A @24VDC
Removable Terminal Block	Provides 2 Redundant power, Alarm relay contact, 6 Pin
Operating Temperature	-10 ~ 60°C (IGS-402S-4PU, IGS-402S-4PH24, IGS-402F-4PH24, IGS-600-4PH24) -40 ~ 75°C (IGS-402S-4PUE, IGS-402S-4PHE24, IGS-402F-4PHE24, IGS-600-4PHE24)

Operating Humidity	5% to 95% (Non-condensing)
Dimensions	106 x 62.5 x 134.8mm (D X W X H) (IGS-402S-4PH24, IGS-402F-4PH24, IGS-600-4PH24) 106 x 62.5 x 135mm (IGS-402S-4PU)
Housing	Rugged Metal, IP30 Protection, Fanless
Weight	0.84kg (IGS-402S-4PH24) 0.68kg (IGS-402F-4PH24) 0.84kg (IGS-600-4PH24) 0.74kg (IGS-402S-4PU)
Installation Mounting	DIN Rail mounting, or wall mounting (Optional accessories)
MTBF	736,988 Hours @25°C (IGS-402S-4PH24) 635,099 Hours @25°C (IGS-402F-4PH24) 649,579 Hours @25°C (IGS-600-4PH24) 688,499Hours (IGS-402S-4PU) (MIL-HDBK-217)
Warranty	5 years
Certification	
EMC	CE
EMI (Electromagnetic Interference)	FCC Part 15 Subpart B Class A, CE EN55022 Class A
Railway Traffic	EN50121-4
Immunity for Heavy Industrial Environment	EN61000-6-2
Emission for Heavy Industrial Environment	EN61000-6-4
EMS (Electromagnetic Susceptibility) Protection Level	EN61000-4-2 (ESD) Level 3, Criteria B EN61000-4-3 (RS) Level 3, Criteria A EN61000-4-4 (Burst) Level 3, Criteria A EN61000-4-5 (Surge) Level 3, Criteria B EN61000-4-6 (CS) Level 3, Criteria A EN61000-4-8 (PFMF, Magnetic Field) Field Strength: 300A/m, Criteria A
Safety	UL60950-1 (IGS-402S-4PH24, IGS-402F-4PH24, IGS-600-4PH24)
Shock	IEC 60068-2-27
Freefall	IEC 60068-2-32
Vibration	IEC 60068-2-6

Application

Figure 1 : PoE Gigabit Ethernet Switch Transmission


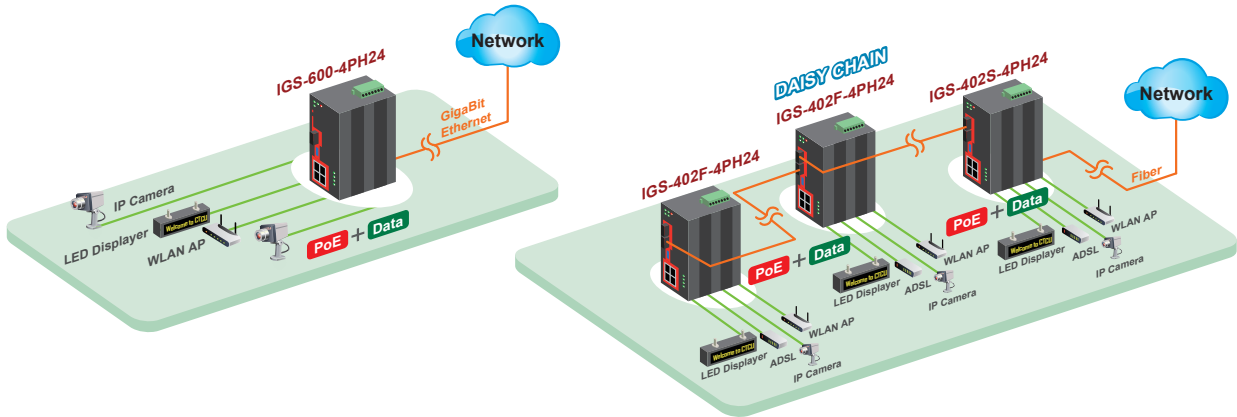



Figure 2 : High efficiency boost technology for PoE

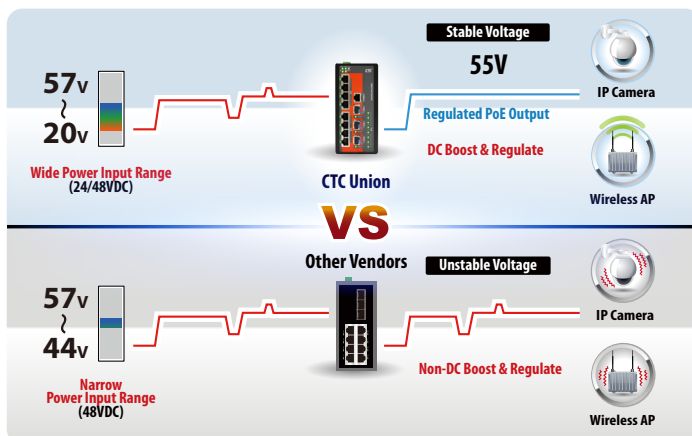


- Regulated PoE output voltage (55VDC) to stabilize PoE device
- Guarantee delivery PoE power distance to 100 meters
- Wide range input power 24/48VDC (20~57VDC)
- Built-in very high efficiency (94~97%) to boost PoE output voltage

Dimensions


► IGS-402S-4PU

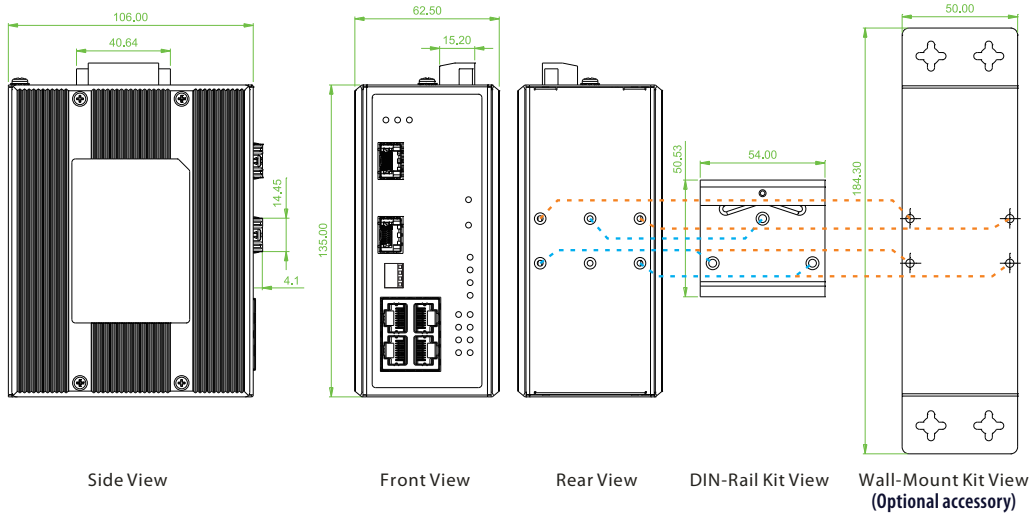


► IGS-402S-4PH24

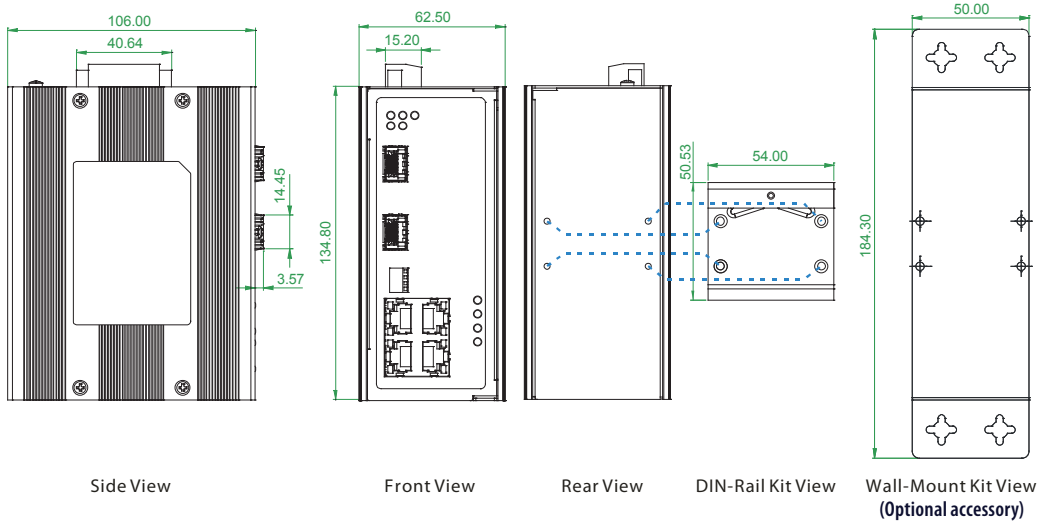

► IGS-402F-4PH24

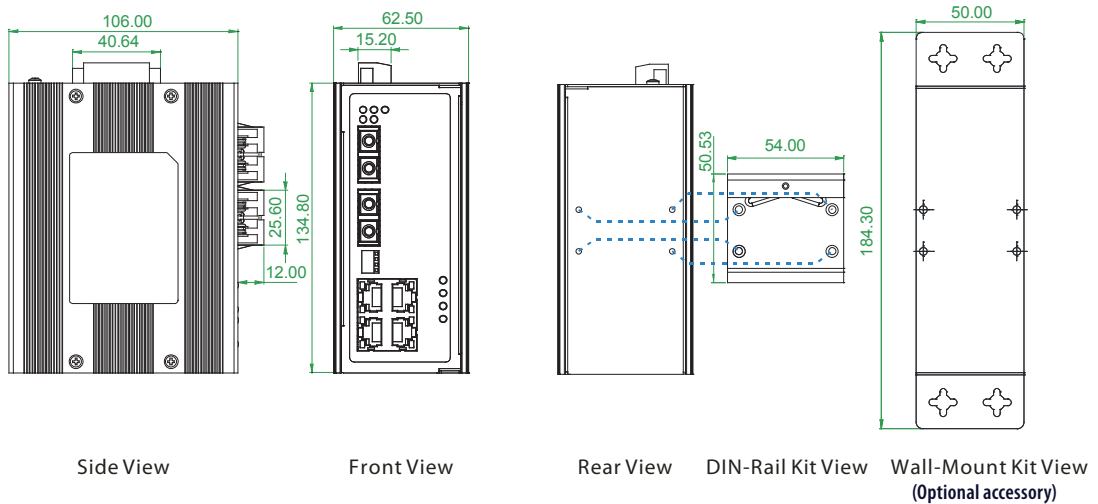


► IGS-600-4PH24

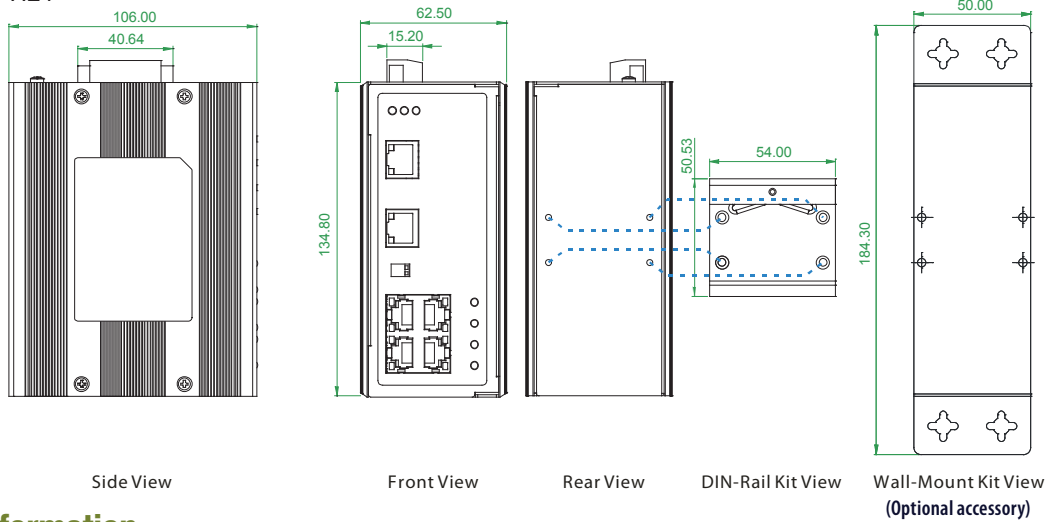

Ordering Information

Model Name	Total Port	RJ45 UTP Port		Fiber Port		PoE port			Input power		Certification			Operating Temperature
		10/100/1000 Base-T(X)	1000Base-X Base-X	100/1000 Base-X	IEEE 802.3at	IEEE 802.3bt (60W)	Power Budget	Redundant	Railway EN50121-4	Safety UL60950-1	CE, FCC EN61000-6-2 EN61000-6-4			
IGS-402S-4PU	6	4		2 SFP		4	240W	48VDC	V		V		-10~60°C	
IGS-402S-4PUE	6	4		2 SFP		4	240W	48VDC	V		V		-40~75°C	
IGS-402S-4PH24	6	4		2 SFP	4		120W	24/48VDC	V	V	V		-10~60°C	
IGS-402S-4PHE24	6	4		2 SFP	4		120W	24/48VDC	V	V	V		-40~75°C	
IGS-402F-4PH24	6	4	2 SC		4		120W	24/48VDC	V	V	V		-10~60°C	
IGS-402F-4PHE24	6	4	2 SC		4		120W	24/48VDC	V	V	V		-40~75°C	
IGS-600-4PH24	6	6			4		120W	24/48VDC	V	V	V		-10~60°C	
IGS-600-4PHE24	6	6			4		120W	24/48VDC	V	V	V		-40~75°C	

Model Naming Rule

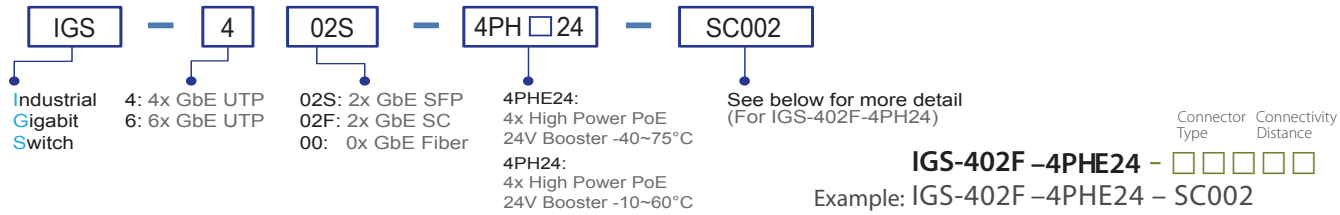

Fiber Connector Type	Connectivity Distance
SC	SC001: 500m (SC, M/M) SC002: 2km (SC, M/M) SC020: 20km (SC, S/M) SC040: 40km (SC, S/M)
(IGS-402F-4PH24)	SC020A: WDM 20km A type (TX: 1310nm) SC020B: WDM 20km B type (TX: 1550nm)

Optional Accessories

■ Wall mount kit accessories

IND-WMK02	Wall Mount kit for Industrial product (Wide) (184*50mm)
-----------	---

■ Package List


- One of the series device
- Terminal block
- Quickly installation guide
- Protective caps for SFP ports
- Din Rail with screws

■ Industrial SFP Transceiver

The ISFP series of industrial grade SFP modules have been fully tested with the series product for guaranteed compatibility and performance. The best performance can be guaranteed even in mission-critical applications. (Please see CTC Union's Industrial SFP datasheet for more details and more items.)

ISFP-M7000-85-D(E)	Industrial SFP GbE 1000Base-SX, M/M, 500 meter, wave length 850nm, 7.5dB, LC, DDML, -10~70°C (-40~85°C)
ISFP-S7020-31-D(E)	Industrial SFP 1000Base-LX, S/M, 20km, wave length 1310nm, 15dB, LC, DDML, -10~70°C (-40~85°C)
ISFP-T7T00-00-(E)	Industrial SFP 1000Base-T UTP 100meter, -10~70°C (-40~85°C)
ISFP-M5002-31-D(E)	Industrial SFP 155M 100Base-FX, MM, 2km, wave length 1310nm, 12dB, LC, DDML, -10~70°C (-40~85°C)
ISFP-S5030-31-D(E)	Industrial SFP 155M 100Base-FX, SM, 30km, 1310nm, 19dB, LC, DDML, -10~70°C (-40~85°C)

SFP Naming Rule

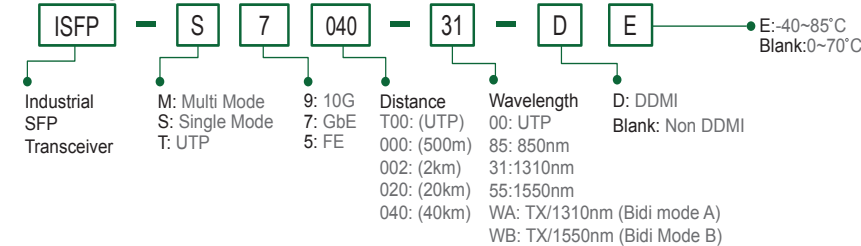



IFS-802GS-8PH

8x 10/100Base-TX + 2x 1000Base-X SFP w/ 8x PoE+ (240W)

IFS-1602GS-8PH

16x 10/100Base-TX+ 2x 1000Base-X SFP with 8x PoE+ (240W)



The IFS-802GS-8PH and IFS-1602GS-8PH are 10/18 Ports unmanaged industrial grade Ethernet PoE switches with 8x 10/100Base-TX PoE that provide stable and reliable Ethernet transmission. Housed in rugged DIN rail or wall mountable enclosures, these switches are designed for harsh environments, such as industrial networking, security automation applications, IP Surveillance, intelligent transportation systems (ITS) and are also suitable for many military and utility market applications where environmental conditions exceed commercial product specifications (See figure 1). Standard operating temperature range models (-10 to 60°C) and wide operating temperature range models (-40 to 75°C) fulfill the special needs of industrial automation applications.

Features

- 8x 10/100Base-TX RJ45 + 2x1000Base-X SFP with 8x PoE (IFS-802GS-8PH)
- 16x 10/100Base-TX RJ45 + 2x 1000Base-X SFP with 8x PoE (IFS-1602GS-8PH)
- Provides 8-port IEEE802.3at/af PoE output (30W/Per Port)
- Maximum PoE output power budget 240W
- 48VDC (44~57VDC) redundant dual input power
- Wide operating temperature -40 ~ 75°C ("E" model)
- Supports power failure alarm message by relay
- Supports flow control
- Provides broadcast storm protection (IFS-1602GS-8PH)
- IP30 rugged metal housing and fanless
- DIN Rail mounting or wall mounting
- CE, FCC, railway EN50121-4 certification
- Heavy industrial grade EMS, EMI, EN61000-6-2, EN61000-6-4 certification
- 4KV surge protection for UTP and PoE ports (IFS-1602GS-8PH)
- 2.25K VDC Hi-pot isolation protection for Ethernet ports and power (IFS-1602GS-8PH)

Specifications

IEEE Standard	IEEE 802.3 10Base-T Ethernet IEEE 802.3u 100Base-TX Fast Ethernet IEEE 802.3z 1000Base-X Gigabit Ethernet IEEE 802.3x Flow Control and Back Pressure IEEE 802.3at PoE+ (Power over Ethernet enhancements) IEEE802.3af PoE (Power over Ethernet)
Switch Architecture	Back-plane (Switching Fabric): 5.6Gbps (IFS-802GS-8PH) 7.2Gbps (IFS-1602GS-8PH)
Data Processing	Store and Forward
Flow Control	IEEE 802.3x flow control, back pressure flow control
MAC Address Table	8K (IFS-802GS-8PH) 16K (IFS-1602GS-8PH)
Packet Buffer Size	1Mbits (IFS-802GS-8PH) 4Mbits (IFS-1602GS-8PH)
Max Frame Size	1632 Bytes (IFS-802GS-8PH) 1664 Byte (IFS-1602GS-8PH)
PoE standard	IEEE 802.3at/af
PoE RJ-45 pin Assignment	RJ-45 port #1~# 8 support IEEE 802.3at/af (IFS-802GS-8PH) RJ-45 port #9~# 16 support IEEE 802.3at/af (IFS-1602GS-8PH) End-Span, Alternative A mode Positive (V+): RJ-45 pin 1, 2. Negative (V-): RJ-45 pin 3, 6. Data (1, 2, 3, 6)
Network Connector	8x RJ-45 for 10/100Base-TX (IFS-802GS-8PH) 16x RJ-45 for 10/100Base-TX (IFS-1602GS-8PH) auto negotiation speed, Auto MDI/MDI-X function, Full/Half duplex 2x 1000Base-X SFP
Network Cable	UTP/STP above Cat. 5e cable EIA/TIA-568 100-ohm (100m)
Network Cable	Fiber Cable (Multi-mode): 50/125um, 62.5/125um Fiber Cable (Single-mode): 9/125um


Protocols	CSMA/CD								
LED	Per unit: Power 1 (Green), Power 2 (Green), Fault (Amber) Per RJ-45 port : Link/Active (Green) Speed 100 (Yellow)								
LED	Fiber Per port: Link/Active (Green) Per PoE Port LED : • Active : ON • Inactive : OFF								
DIP SW	DIP 1 Power failure alarm OFF : Enable ON : Disable DIP 2 Broadcast Protection (IFS-1602GS-8PH) OFF : Enable ON : Disable								
Reverse Polarity Protection	Supported for Power Input								
Overload Current Protection	Supported								
Power Supply	Redundant dual 48VDC (44~57VDC) input power (Removable terminal block) (50~57V input is recommended for IEEE802.3at in 30W applications)								
Power Consumption	IFS-802GS-8PH power consumption								
	<table border="1"> <thead> <tr> <th>Input Voltage</th> <th>Total Power Consumption</th> <th>Device Power Consumption</th> <th>PoE Power Budget</th> </tr> </thead> <tbody> <tr> <td>50 VDC</td> <td>251W</td> <td>5.2W</td> <td>240W</td> </tr> </tbody> </table>	Input Voltage	Total Power Consumption	Device Power Consumption	PoE Power Budget	50 VDC	251W	5.2W	240W
Input Voltage	Total Power Consumption	Device Power Consumption	PoE Power Budget						
50 VDC	251W	5.2W	240W						
	IFS-1602GS-8PH power consumption								
	<table border="1"> <thead> <tr> <th>Input Voltage</th> <th>Total Power Consumption</th> <th>Device Power Consumption</th> <th>PoE Power Budget</th> </tr> </thead> <tbody> <tr> <td>50 VDC</td> <td>253.2W</td> <td>8.9W</td> <td>240W</td> </tr> </tbody> </table>	Input Voltage	Total Power Consumption	Device Power Consumption	PoE Power Budget	50 VDC	253.2W	8.9W	240W
Input Voltage	Total Power Consumption	Device Power Consumption	PoE Power Budget						
50 VDC	253.2W	8.9W	240W						
PoE Power Budget	Maximum PoE Output power budget 240W (30W/Per Port)								
Alarm Relay Contact	Relay outputs with current carrying capacity of 1A @24VDC								

Removable Terminal Block	Provides 2 Redundant power, Alarm relay contact, 6 Pin
Operating Temperature	-10 ~ 60°C (IFS-802GS-8PH, IFS-1602GS-8PH) -40 ~ 75°C (IFS-802GS-8PHE, IFS-1602GS-8PHE)
Operating Humidity	5% to 95% (Non-condensing)
Storage Temperature	-40 ~ 85°C
Housing	Rugged metal, IP30 Protection and fanless
Dimensions	106 x 72 x 152 mm (D X W X H)
Weight	765g (IFS-802GS-8PH) 850g (IFS-1602GS-8PH)
Installation Mounting	DIN Rail mounting, or wall mounting (Optional)
MTBF	635,446Hours (IFS-802GS-8PH) 493,382 Hours (IFS-1602GS-8PH) (MIL-HDBK-217)
Warranty	5 years
Certification	
EMC	CE
EMI (Electromagnetic Interference)	FCC Part 15 Subpart B Class A, CE

Railway Traffic	EN50121-4
Immunity for Heavy Industrial Environment	EN61000-6-2
Emission for Heavy Industrial Environment	EN61000-6-4
EMS (Electromagnetic Susceptibility) Protection Level	EN61000-4-2 (ESD) Level 3, Criteria B EN61000-4-3 (RS) Level 3, Criteria A EN61000-4-4 (Burst) Level 3, Criteria A EN61000-4-5 (Surge) Level 3, Criteria B EN61000-4-6 (CS) Level 3, Criteria A EN61000-4-8 (PFMF, Magnetic Field) Field Strength: 300A/m, Criteria A
Safety	UL60950-1 (Pending)
Hi-pot isolation protection	DC 2.25KV for power to chassis ground, and UTP/PoE port to chassis ground (IFS-1602GS-8PH)
4KV surge protection	Supported for PoE, UTP and SFP port (IFS-1602GS-8PH)
Shock	IEC 60068-2-27
Freefall	IEC 60068-2-32
Vibration	IEC 60068-2-6


Application

Figure 1 : IFS-802GS-8PH & IFS-1602GS-8PH PoE Ethernet Switch Transmission

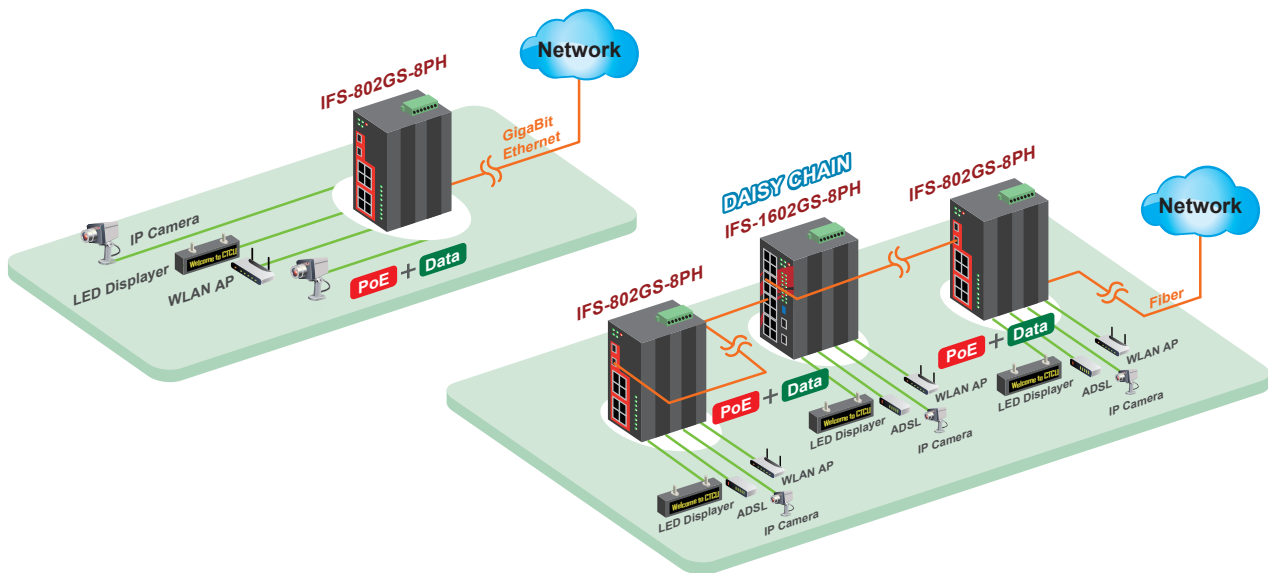


Dimensions

► IFS-802GS-8PH

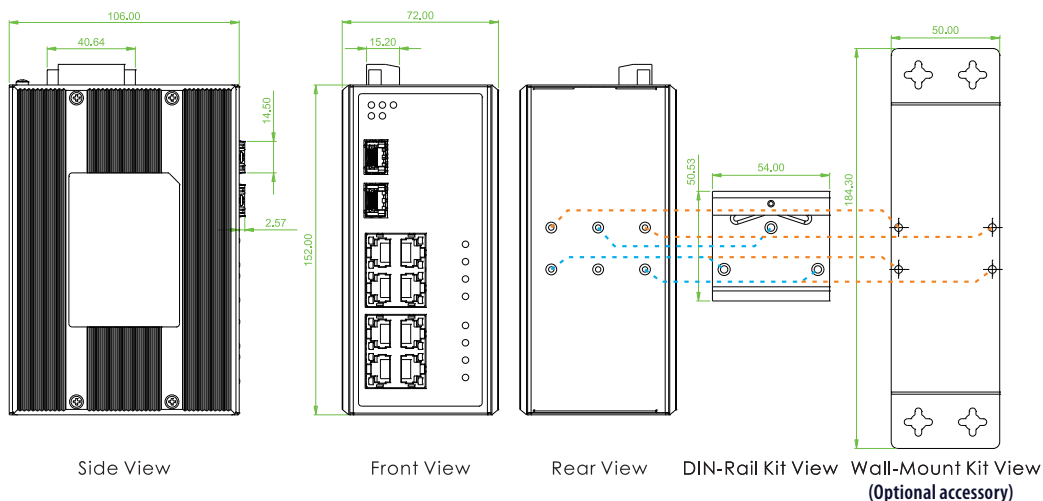


► IFS-1602GS-8PH

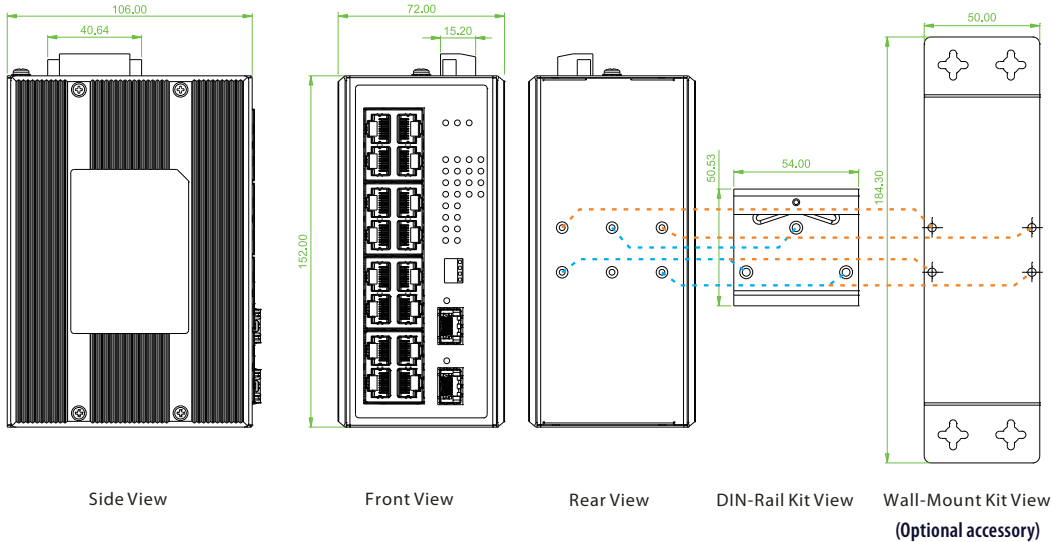

Ordering Information

Model Name	Total port	RJ45 UTP Port		Fiber Port		PoE Port		Certification			Operating Temperature
		10/100 Base-T(X)	1000 Base-X	IEEE802.3at	Power Budget	Railway EN50121-4	EN61000-6-2 EN61000-6-4	CE, FCC			
IFS-802GS-8PH	10	8	2 SFP	8	240W	48VDC	V	V	V	-10~60°C	
IFS-802GS-8PHE	10	8	2 SFP	8	240W	48VDC	V	V	V	-40~75°C	
IFS-1602GS-8PH	18	16	2 SFP	8	240W	48VDC	V	V	V	-10~60°C	
IFS-1602GS-8PHE	18	16	2 SFP	8	240W	48VDC	V	V	V	-40~75°C	

Model Naming Rule

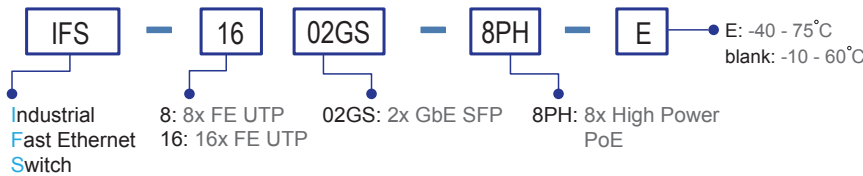

Package List

- IFS-802GS-8PH or IFS-1602GS-8PH Device
- Quickly installation guide
- Din Rail with screws
- Terminal block
- Protective caps for SFP ports

Optional Accessories

Wall mount kit accessories


IND-WMK02 Wall Mount kit for Industrial product (Wide) (184 x 50mm)

Industrial SFP Transceiver

The ISFP series of industrial grade SFP modules have been fully tested with the series product for guaranteed compatibility and performance. The best performance can be guaranteed even in mission-critical applications. (Please see CTC Union's Industrial SFP datasheet for more details and more items.)

- ISFP-M7000-85-(E) Industrial SFP GbE 1000Base-SX, M/M, 500 meter, wave length 850nm, 7.5dB, LC, -10~70°C (-40~85°C)
- ISFP-S7020-31-(E) Industrial SFP 1000Base-LX, S/M, 20km, wave length 1310nm, 15dB, LC, -10~70°C (-40~85°C)
- ISFP-T7T00-00-(E) Industrial SFP 1000Base-T UTP 100meter, -10~70°C (-40~85°C)

SFP Naming Rule

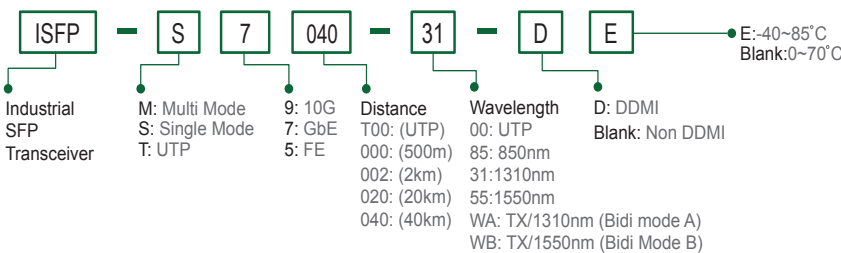



IMC-1000MS-PH12

100/1000Base-T to 100/1000Base-X SFP with PoE+ (PSE) Managed Fiber Converter (30W, 12V Booster)



IMC-1000MS-PH12 is a 10/100/1000Base-T to 100/1000Base-X manageable Gigabit Ethernet media converter which not only offers dual-speed fixed fiber transceiver or SFP cage module options for the optical interface, but also injects PoE+ power through the electrical RJ-45 port. Housed in rugged DIN rail or wall mountable enclosures, IMC-1000MS-PH12 converters are designed for harsh environments, such as IP surveillance, industrial networking, intelligent transportation systems (ITS) and are also suitable for many military and utility market applications where environmental conditions exceed commercial product specifications.

IMC-1000MS-PH12 also provides many advanced Ethernet functions (VLAN, storm filter, ingress/egress bandwidth control, etc.) and can be managed via an easy-to-use GUI or standard SNMP manager such as CTC SmartView™. With built-in OAM (Operation, Administration, Maintenance & Provisioning) functions such as loop-back test and dying gasp, IMC-1000MS-PH12 can be monitored from a centrally located OAM-enabled FRM220-1000MS via remote in-band management which helps to reduce operational expenditures by keeping truck rolls to a minimum.

Features

- Conversion between 10/100/1000Base-T and 100/1000Base-X fiber cable interface
- Supports Dual Rate (100/1000) SFP for selectable fast or gigabit speed on fiber port
- 12/24/48VDC (9.6~57VDC) redundant dual input power with built-in very high efficiency booster(97~99%) to rise up 55 VDC for PoE output
- Regulate PoE output voltage (55VDC) to stabilize PoE device, and guarantee delivery PoE power distance to 100meter (Figure 4)
- Provides IEEE802.3at PoE output (30W)
- IP30 rugged metal housing and fanless
- Wide operating temperature -20~75°C
- CE, FCC, Railway traffic EN50121-4 certification
- Heavy industrial grade EMS, EMI EN61000-6-2, EN61000-6-4 certification
- Supports Jumbo frame 9K bytes packet
- Ingress/Egress bandwidth control with 64K granularity
- PoE configuration and monitor
- Auto Laser Shutdown (ALS)
- Supports LFPT (Link Fault Pass Through)
- Supports Digital Diagnostic Monitor Interface (DDMI) for SFP
- Supports 16 IEEE802.1Q Tag VLAN Group
- MIB counters
- SNMP alarm trap for power loss and port link down
- Web based and SNMP for management (Figure 1, 3)
- Remote Loop-Back test
- Supports in-band management from FRM220 Chassis with FRM220-1000MS (Figure 2)
- Supports SmartView for centralized management (Please see Catalog chapter 1- Software Management for more details)
- Supporting Central EMS for management of up to 50 SmartView Server, and 25,000 device (maximum) (Please see Catalog chapter 1- Software Management for more details)

Specifications

Standard	IEEE802.3 10Base-T 10Mbit/s Ethernet IEEE802.3u 100Base-TX, 100Base-FX, Fast Ethernet IEEE802.3ab 1000Base-T Gbit/s Ethernet over twisted pair IEEE802.3z 1000Base-X Gbit/s Ethernet over Fiber-Optic IEEE802.3x Flow Control and Back pressure IEEE802.3at PoE+ (Power over Ethernet enhancement) IEEE802.3af PoE (Power over Ethernet) IEEE802.1q Tag VLAN
Fiber Ports	SFP slot for 100Base-X or 1000Base-X, 100M/1000M speed set by Web
RJ45 Ports	10/100/1000Base-T Auto MDI/MDI-X and Auto-Negotiation Function Supports UTP CAT.5e Twisted Pair cable
Push Button	Reset, Load default setting
Data Process Architecture	Pass through mode
Jumbo Frame	9K bytes

Fiber Parameters	Fiber Cable (Multi-mode): 50/125um,62.5/125um Fiber Cable (Single-mode): 9/125um SFP, Distance depending on plugged-in Fiber Transceiver
LFPT (Link Fault Pass Through)	TX- Fiber: If TX port link down, the media converter will force Fiber port to link down Fiber-TX: If Fiber port link down, the media converter will force TX port to link down
Connector and Pin Assignment	SFP Slot RJ-45 Socket: Cat 5e (10/100/1000Mbps) Twisted Pair cable Auto MDI/MDI-X and Auto-Negotiation Function Support
Connector and Pin Assignment	RJ-45 Port support IEEE 802.3at/af End-Span, Alternative A mode PoE (V+): RJ-45 pin 1, 2 PoE (V-): RJ-45 pin 3, 6 Data (1,2,3,6,4,5,7,8)

LED	Per Unit: Power 1 (Green), Power 2 (Green), Fault (Amber) Fiber LNK/ACT (Green): ON : Connected to network, OFF: Not connected to network, BLK : Receive /Transmit Data Fiber Speed: Yellow : 1000Base-X, Green : 100Base-X RJ-45 port: Speed: 10 (OFF), 100 (Green), 1000 (Yellow) LNK/ACT for RJ45(Green): ON : Connected to network, OFF: Not connected to network, BLK : Networking is active PoE Status (Green): Flash : PoE Fault (Over-load or short), ON : PoE normal working, OFF : PoE No Power output
Reverse Polarity Protection	Supported for Power Input
Overload Current Protection	Supported
Alarm Relay Contact	Relay outputs with current carrying capacity of 1 A @24VDC
Removable Terminal Block	Provides 2 redundant power, alarm relay contact, 6 Pin
Operating Humidity	5%~95% (Non-condensing)
Operating Temperature	-20°C ~ 75°C
Storage Temperature	-40°C ~ 85°C
Housing	Rugged Metal, IP30 Protection and fanless
Dimensions	106 x 62.5 x 135 mm (D X W X H)
Weight	650g
Installation	DIN Rail mounting, or wall mounting (Optional)
Power Supply	12/24/48VDC (9.6~57VDC), Redundant power with polarity reverse protect function and removable terminal block Built-in very high efficiency booster(97~99%) to rise up 55 VDC for PoE output Regulated PoE output voltage (55VDC) to stabilize PoE device, and guarantee delivery PoE power distance to 100meter (Figure 4)

PoE Power budget	30W																									
Power Consumption	<table border="1"> <thead> <tr> <th colspan="5">Power consumption & Boost efficiency</th> </tr> <tr> <th>Input Voltage</th> <th>Total Power Consumption</th> <th>Device Power Consumption</th> <th>PoE Budget</th> <th>Boost Efficiency</th> </tr> </thead> <tbody> <tr> <td>12VDC</td> <td>34.2W</td> <td>3.9W</td> <td>30W</td> <td>99.0%</td> </tr> <tr> <td>24VDC</td> <td>34.7W</td> <td>4.4W</td> <td>30W</td> <td>99.0%</td> </tr> <tr> <td>48VDC</td> <td>35.4W</td> <td>4.7W</td> <td>30W</td> <td>97.7%</td> </tr> </tbody> </table>	Power consumption & Boost efficiency					Input Voltage	Total Power Consumption	Device Power Consumption	PoE Budget	Boost Efficiency	12VDC	34.2W	3.9W	30W	99.0%	24VDC	34.7W	4.4W	30W	99.0%	48VDC	35.4W	4.7W	30W	97.7%
Power consumption & Boost efficiency																										
Input Voltage	Total Power Consumption	Device Power Consumption	PoE Budget	Boost Efficiency																						
12VDC	34.2W	3.9W	30W	99.0%																						
24VDC	34.7W	4.4W	30W	99.0%																						
48VDC	35.4W	4.7W	30W	97.7%																						
MTBF	864,121 Hours MIL-HDBK-217																									
Warranty	5 years																									
Certifications																										
EMC	CE																									
EMI	FCC Part 15 Subpart B Class A, CE																									
Rail Way Traffic	EN50121-4																									
Immunity for Heavy Industrial environment	EN 61000-6-2																									
Emission for Heavy industrial environment	EN 61000-6-4																									
EMS (Electromagnetic Susceptibility) Protection Level	EN61000-4-2 (ESD) Level 3, Criteria B EN61000-4-3 (RS) Level 3, Criteria A EN61000-4-4 (EFT) Level 3, Criteria A EN61000-4-5 (Surge) Level 3, Criteria B EN61000-4-6 (CS) Level 3, Criteria A EN61000-4-8 (PFMF) Field strength 300A/m Criteria A																									
Safety	UL60950-1 (pending)																									
Shock	IEC 60068-2-27																									
Freefall	IEC 60068-2-32																									
Vibration	IEC 60068-2-6																									

Software Specifications

SNMP or Web Mode (figure 1, 3)	
Management	Ingress/Egress bandwidth control with 64K granularity Web management, Firmware upgrade via Web Supports SNMP, MIB for management Supports DHCP client for automatic IP configuration Supports 802.1Q tag VLAN, 16 Tag VLAN group, MIB counters display
Configuration	IP configuration, password setting, converter configuration port configuration, MIB counter, SNMP configuration VLAN group configuration, alarm configuration PoE Configuration
Diagnostic & Monitor	Supports Link Fault Pass-Through (LFPT) Function Broadcast/Multicast/Unicast storm filter SNMP alarm trap for power loss and port link Up/Down PoE Status

In-Band Remote mode (Figure 2)	
Management	Supports in-band management from FRM220 Chassis With FRM220-1000MS card Ingress/Egress bandwidth control with 64K granularity
Configuration	IP configuration, converter configuration, port configuration, MIB counter VLAN group configuration, alarm configuration, PoE Configuration
Diagnostic & Monitor	Remote loop back test Supports Link Fault Pass-Through (LFPT) Function Broadcast/Multicast/Unicast storm filter PoE Status

Application

Figure 1 : IMC-1000MS-PH12 Management by SNMP, SmartView

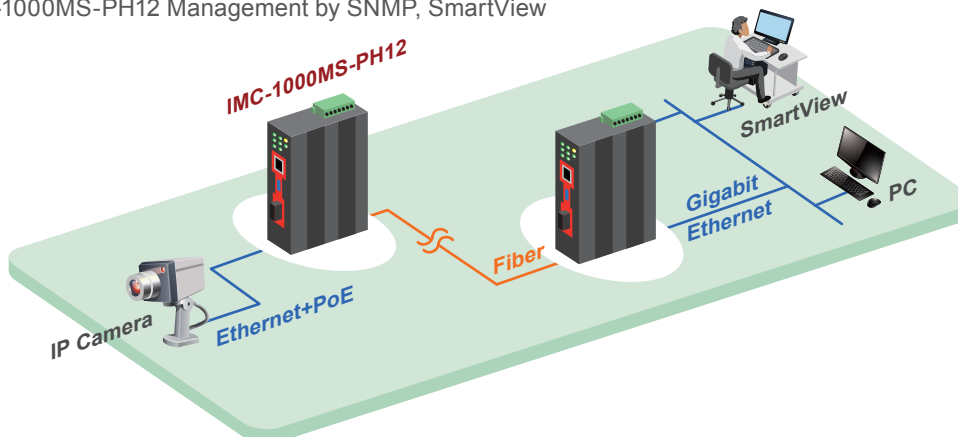


Figure 2 : IMC-1000MS-PH12 Application in Remote, In-Band Management

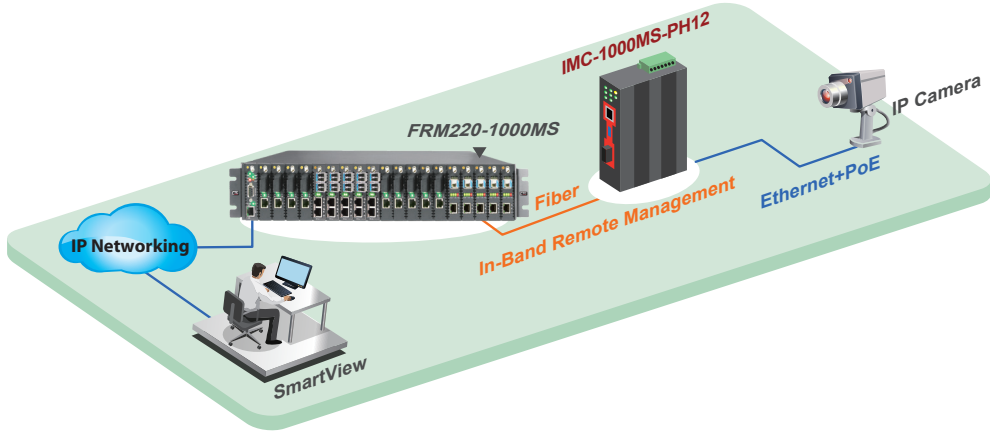


Figure 3 : IMC-1000MS-PH12 Application in Web Management



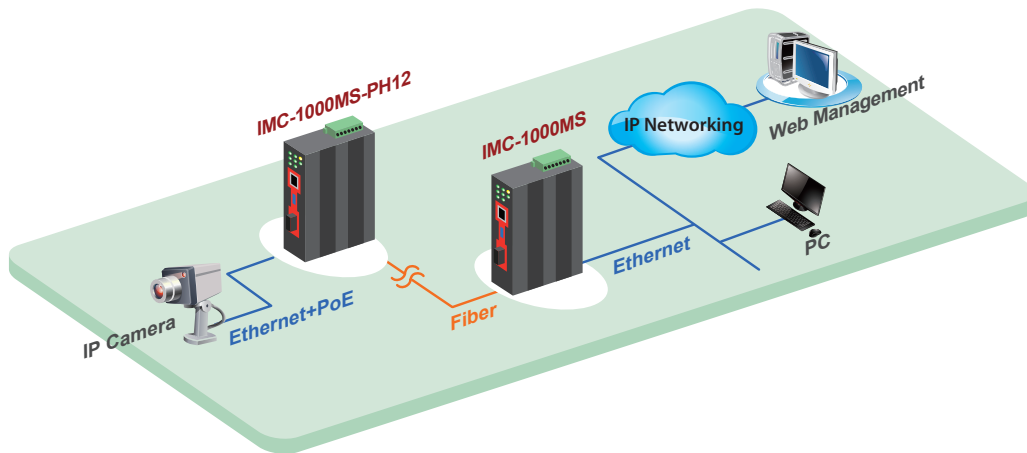


Figure 4 : High efficiency boost technology for PoE

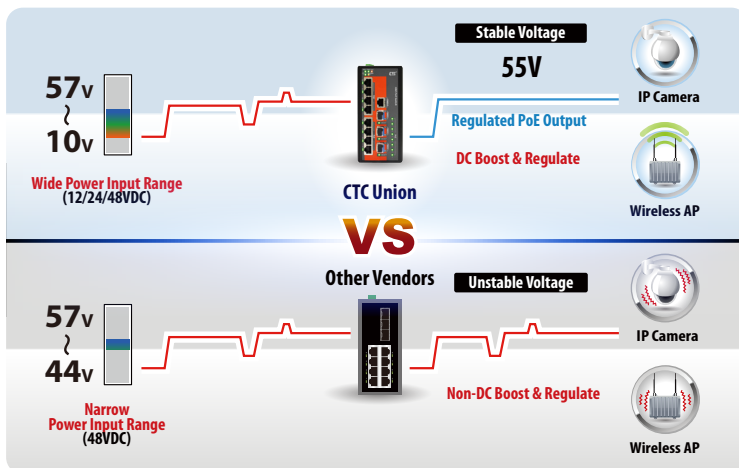

- Regulated PoE output voltage (55VDC) to stabilize PoE device
- Guarantee delivery PoE power distance to 100 meters
- Wide range input power 24/48VDC (20~57VDC)
- Built-in very high efficiency (94~97%) to boost PoE output voltage


Dimensions

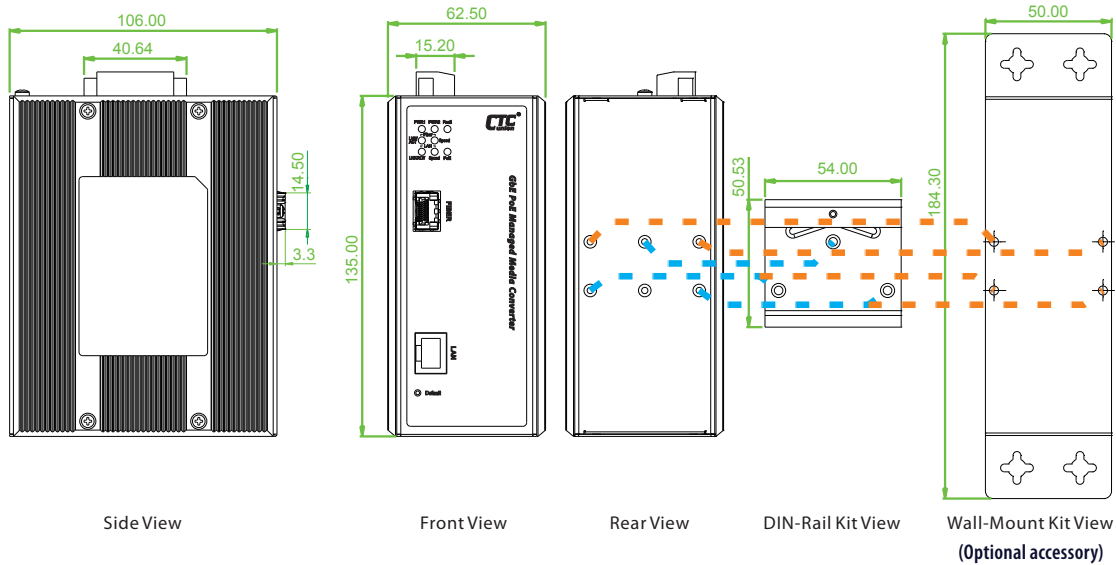

Ordering Information

Model Name	Managed	RJ45 UTP	Fiber	PoE Port		Power Input	Certification			Operating Temperature
		10/100/1000 Base-T	Dual Speed 100/1000Base-X	IEEE802.3at (PSE)	Power Budget	Redundant	Railway EN50121-4	EN61000-6-2 EN61000-6-4	CE, FCC	
IMC-1000MS-PHE12	V	1	1 SFP	1	30W	12/24/48VDC	V	V	V	-20~75°C

Model Naming Rule

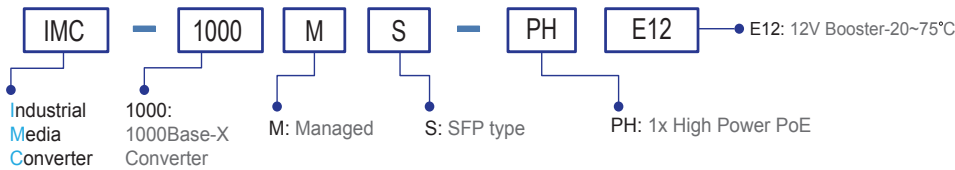

Package List

- IMC-1000MS-PH12
- CD (MIB file, Manual)
- Quickly installation guide
- Din Rail bracket with screws
- Terminal block
- Protective caps for SFP ports

Optional Accessories

Wall mount kit accessories


IND-WMK02 Wall Mount kit for Industrial product, 184 x 50mm

Industrial SFP Transceiver

The ISFP series of industrial grade SFP modules have been fully tested with the IMC-1000MS-PH12 product for guaranteed compatibility and performance. The best performance can be guaranteed even in mission-critical applications. (Please see CTC Union's Industrial SFP datasheet for more details and more items.)

ISFP-M7000-85-D(E)	Industrial SFP GbE 1000Base-SX, M/M, 500 meter, wave length 850nm, 7.5dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-S7020-31-D(E)	Industrial SFP 1000Base-LX, S/M, 20km, wave length 1310nm, 15dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-T7T00-00-(E)	Industrial SFP 1000Base-T UTP 100meter, -10~70°C (-40~85°C)
ISFP-M5002-31-D(E)	Industrial SFP 155M 100Base-FX, MM, 2km, wave length 1310nm, 12dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-S5030-31-D(E)	Industrial SFP 155M 100Base-FX, SM, 30km, 1310nm, 19dB, LC, DDMI, -10~70°C (-40~85°C)

SFP Naming Rule

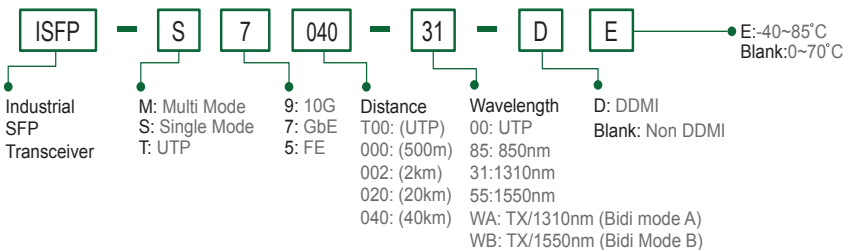



IMC-1000S-PH12

100/1000Base-T to 100/1000Base-X SFP with PoE+ (PSE) Fiber Converter (30W, 12V Booster)



IMC-1000S-PH12 is a family of unmanaged Gigabit Ethernet media converters that support conversion between electrical 10/100/1000Base-T and optical 1000Base-X Ethernet and as PSE (Power Source Equipment) provide PoE+ power over Ethernet. The IMC-1000S-PH12 provides an SFP cage for 100/1000Base-X compatible SFP modules. Housed in rugged DIN rail or wall mountable enclosures, these converters are designed for harsh environments, such as industrial networking, intelligent transportation systems (ITS) and are also suitable for many military and utility market applications where environmental conditions exceed commercial product specifications (See Figure 1).

Features

- Conversion between 10/100/1000Base-T and 100/1000Base-X Fiber cable interface
- Supports dual rate (100/1000) SFP for selectable Fast or Gigabit speed on fiber
- 12/24/48VDC (9.6~57VDC) redundant dual input power with built-in very high efficiency booster (97~99%) to rise up 55 VDC for PoE output
- Regulate PoE output voltage (55VDC) to stabilize PoE device, and guarantee delivery PoE power distance to 100meter (Figure 2)
- Provides IEEE802.3at PoE output (30Watts)
- Supports Remote PD reset by fiber port link down (Figure 3)
- Supports LFPT (Link Fault Pass Through)
- IP30 rugged metal housing and fanless
- Wide operating temperature -20~75°C
- CE, FCC, Railway traffic EN50121-4 certification
- Heavy industrial grade EMS,EMI EN61000-6-2, EN61000-6-4 certification
- Supports Jumbo frame 9K bytes packet

Specifications

Standard	IEEE802.3 10Base-T 10Mbit/s Ethernet IEEE802.3u 100Base-TX, 100Base-FX, Fast Ethernet IEEE802.3ab 1000Base-T Gbit/s Ethernet over twisted pair IEEE802.3z 1000Base-X Gbit/s Ethernet over Fiber-Optic IEEE802.3x Flow Control and Back pressure IEEE802.3at PoE+ (Power over Ethernet enhancement) IEEE802.3af PoE (Power over Ethernet) IEEE802.1q Tag VLAN	DIP Switch	PoE Output: OFF: Enable PoE output ON: Disable PoE output Remote PD reset (Figure 3) Off : Disable Remote PD reset On: Enable Remote PD reset by fiber port link down
RJ45 Ports	10/100/1000Base-T Auto MDI/MDI-X and Auto-Negotiation Function Supports UTP CAT.5e Twisted Pair cable	Connector and Pin Assignment	SFP Slot RJ-45 Socket: CAT.5e (10/100/1000Mbps) Twisted Pair cable Auto MDI/MDI-X and Auto-Negotiation Function Support RJ-45 Port support IEEE 802.3at/af End-Span, Alternative A mode.
Fiber Ports	100Base-X or 1000Base-X SFP slot 100Base-X or 1000Base-X set by DIP SW	Connector and Pin Assignment	PoE (V+): RJ-45 pin 1, 2. PoE (V-): RJ-45 pin 3, 6. Data (1,2,3,6,4,5,7,8)
Data Process Architecture	Store and Forward mode or Pass Through mode Set by DIP SW	LED	Per Unit :Power 1 (Green) ,Power 2 (Green) ,Fault (Amber) Fiber LNK/ACT (Green): ON: Connected to network, OFF: Not connected to network , BLK: Receive /Transmit Data Fiber Speed: Yellow : 1000Base-X, Green : 100 Base- X RJ-45 Port: Speed: 10 (OFF), 100 (Green), 1000 (Yellow) LNK/ACT for RJ45(Green): ON: Connected to network, OFF: Not connected to network, BLK: Networking is active PoE Status (Green): Flash: PoE Fault (Over-load or short), ON: PoE normal working, OFF : PoE No Power output
Jumbo Frame	9K bytes	Reverse Polarity Protection	Supported for Power Input
Fiber Parameters	Fiber Cable (Multi-mode): 50/125um, 62.5/125um Fiber Cable (Single-mode): 9/125um Wavelength: 1310nm (Multi-mode/Single-mode) Available distance: • SFP, Distance depend on plug-in Fiber Transceiver	Overload Current Protection	Supported
Link Fault Pass Through (LFPT)	TX- Fiber: If TX port link down, the media converter will force Fiber port to link down Fiber-TX: If Fiber port link down, the media converter will force TX port to link down	Power Supply	12/24/48VDC (9.6~57VDC), Redundant power with polarity reverse protect function and removable terminal block Built-in very high efficiency booster(97~99%) to rise up 55 VDC for PoE output Regulated PoE output voltage (55VDC) to stabilize PoE device, and guarantee delivery PoE power distance to 100meter (Figure 2)
DIP Switch	ON: Disable Alarm For Power Loss OFF: Enable Alarm For Power Loss ON: Disable Alarm For Port Link-Failure OFF: Enable Alarm For Port Link-Failure ON: LFPT Enable, OFF: LFPT Disable Data process Architecture : ON : Pass through mode OFF : Store and Forward Switch mode Fiber Speed: OFF: 1000Base-X ON: 100Base-X	PoE Power budget	30W

Power Consumption	Power consumption & Boost efficiency				
	Input Voltage	Total Power Consumption	Device Power Consumption	PoE Budget	Boost Efficiency
	12VDC	34.2W	3.9W	30W	99.0%
	24VDC	34.7W	4.4W	30W	99.0%
	48VDC	35.4W	4.7W	30W	97.7%

Alarm Relay Contact	Relay outputs with current carrying capacity of 1 A @24VDC
Removable Terminal Block	Provides 2 redundant power, alarm relay contact, 6 Pin
Operating Humidity	5%~95% (Non-condensing)
Operating Temperature	-20°C ~ 75°C
Storage Temperature	-40°C ~ 85°C
Housing	Rugged Metal, IP30 Protection and fanless
Dimensions	106 x 38.6 x 142 mm (D x W x H)
Weight	650g
Installation	DIN Rail mounting, or wall mounting (Optional)
MTBF	881,372 Hours MIL-HDBK-217
Warranty	5 years

Certification	
EMC	CE
EMI	FCC Part 15 Subpart B Class A, CE
Railway Traffic	EN50121-4
Immunity for Heavy Industrial environment	EN 61000-6-2
Emission for Heavy industrial environment	EN 61000-6-4
EMS (Electromagnetic Susceptibility) Protection Level	EN61000-4-2 (ESD) Level 3, Criteria B EN61000-4-3 (RS) Level 3, Criteria A EN61000-4-4 (EFT) Level 3, Criteria A EN 61000-4-5 (Surge) Level 3, Criteria B EN 61000-4-6 (CS) Level 3, Criteria A EN61000-4-8 (PFMF) Field strength 300A/m Criteria A
Safety	UL60950-1 (pending)
Shock	IEC 60068-2-27
Freefall	IEC 60068-2-32
Vibration	IEC 60068-2-6

Application

Figure 1 : IMC-1000S-PH12 Industrial PoE Transmission



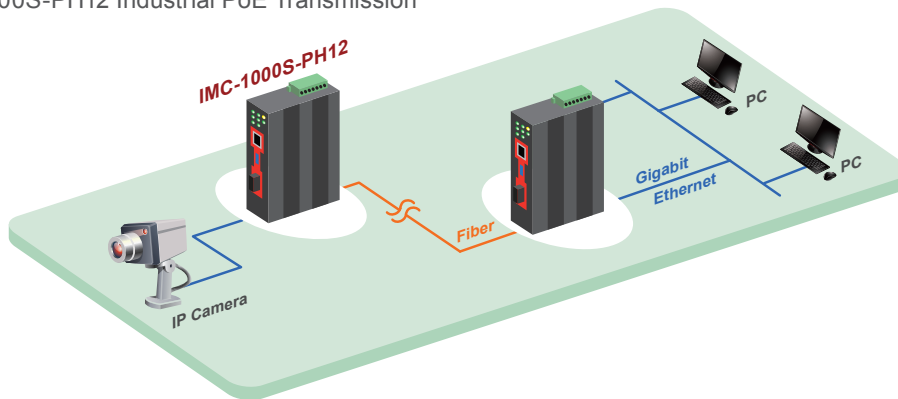


Figure 2 : High efficiency boost technology for PoE

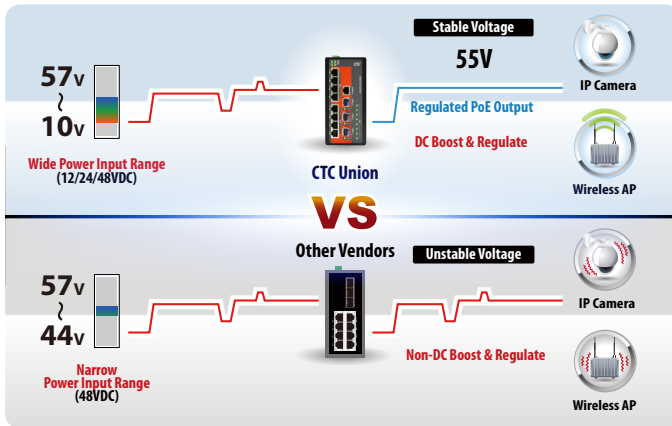


- Regulated PoE output voltage (55VDC) to stabilize PoE device
- Guarantee delivery PoE power distance to 100 meters
- Wide range input power 24/48VDC (20~57VDC)
- Built-in very high efficiency (94~97%) to boost PoE output voltage

Figure 3 : Remote PD Reset Application

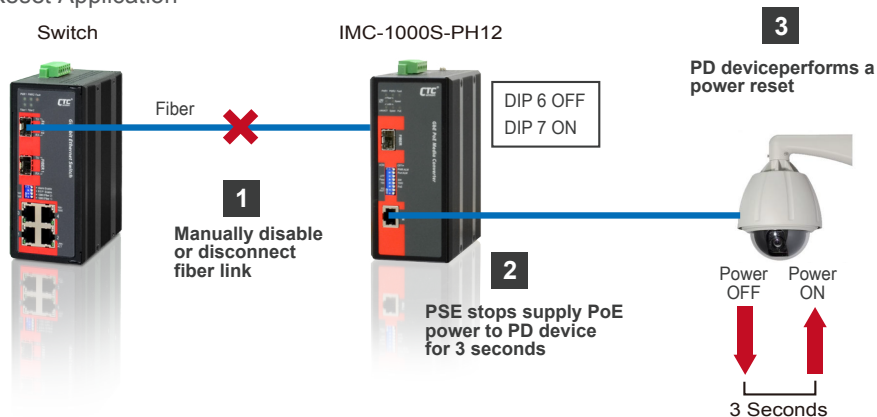


Dimensions

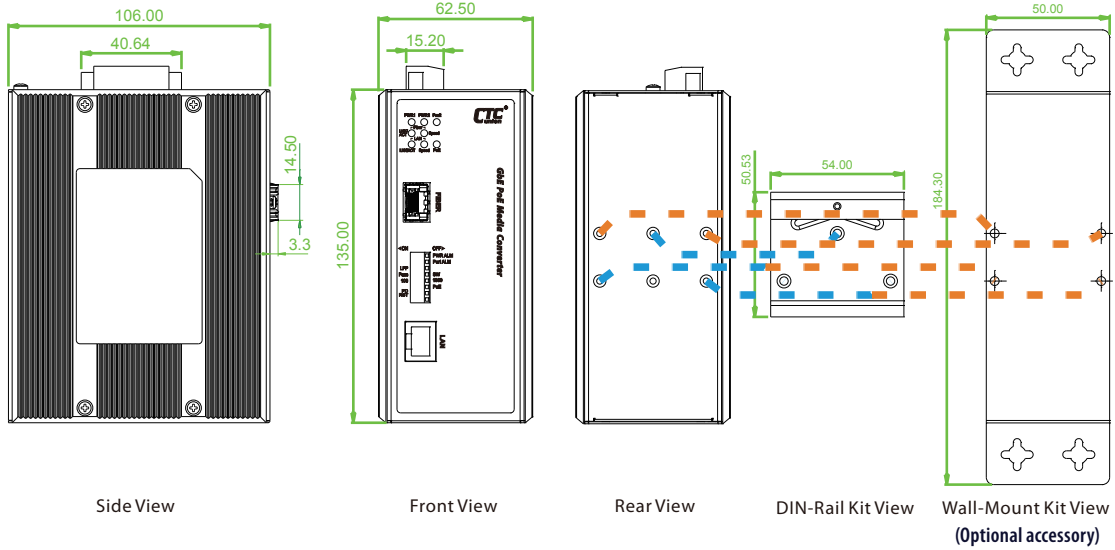

Ordering Information

Model Name	RJ45 UTP	Fiber	PoE Port		Power Input	Certification				Operating Temperature
	10/100/1000 Base-T	Dual Speed 100/1000Base-X	IEEE802.3at (PSE)	Power Budget	Redundant	Railway EN50121-4	EN61000-6-2 EN61000-6-4	CE	FCC	
IMC-1000S-PHE12	1	1 SFP	1	30W	12/24/48VDC	V	V	V	V	-20~75°C

Model Naming Rule

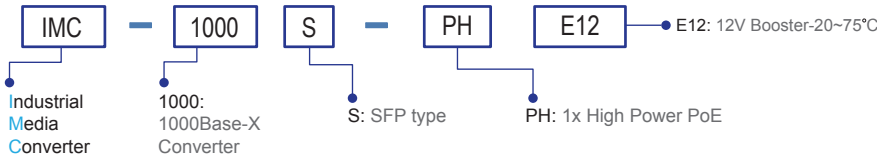

Package List

- IMC-1000S-PH12
- Quickly installation guide
- Din Rail bracket with screws
- Terminal block
- Protective caps for SFP ports

Optional Accessories

Wall mount kit accessories


IND-WMK02 Wall Mount kit for Industrial product, 184 x 50mm

Industrial SFP Transceiver

The ISFP series of industrial grade SFP modules have been fully tested with the IMC-1000S-PH12 product for guaranteed compatibility and performance. The best performance can be guaranteed even in mission-critical applications. (Please see CTC Union's Industrial SFP datasheet for more details and more items.)

ISFP-M7000-85-D(E)	Industrial SFP GbE 1000Base-SX, M/M, 500 meter, wave length 850nm, 7.5dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-S7020-31-D(E)	Industrial SFP 1000Base-LX, S/M, 20km, wave length 1310nm, 15dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-T7T00-00-(E)	Industrial SFP 1000Base-T UTP 100meter, -10~70°C (-40~85°C)
ISFP-M5002-31-D(E)	Industrial SFP 155M 100Base-FX, MM, 2km, wave length 1310nm, 12dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-S5030-31-D(E)	Industrial SFP 155M 100Base-FX, SM, 30km, 1310nm, 19dB, LC, DDMI, -10~70°C (-40~85°C)

SFP Naming Rule

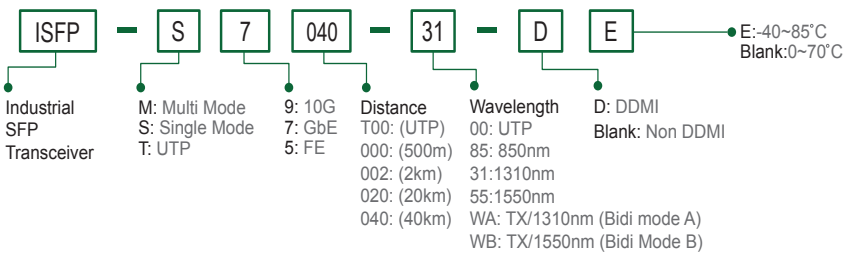



IMC-100-PH12

100/1000Base-T to 100/1000Base-X SFP with PoE+ (PSE) Fiber Converter (30W, 12V Booster)



IMC-100-PH12 is a 10/100Base-TX to 100Base-FX unmanaged Ethernet media converter that also injects PoE+ power through the electrical RJ-45 port. Housed in rugged DIN rail or wall mountable enclosures, these converters are designed for harsh environments, such as industrial networking, intelligent transportation systems (ITS) and are also suitable for many military and utility market applications where environmental conditions exceed commercial product specifications (See Figure 1).

Features

- Conversion between 10/100Base-TX and 100Base-FX SC or ST Fiber interface
- 12/24/48VDC (9.6~57VDC) redundant dual input power with built-in very high efficiency booster (98~99%) to rise up 55 VDC for PoE output
- Regulate PoE output voltage (55VDC) to stabilize PoE device, and guarantee delivery PoE power distance to 100meter (Figure 2)
- Provides IEEE802.3at PoE output (30Watts)
- Supports Remote PD reset by fiber port link down (Figure 3)
- Supports LFPT (Link Fault Pass Through)
- IP30 rugged metal housing and fanless
- Wide operating temperature -20~75°C
- CE, FCC, Railway traffic EN50121-4 certification
- Heavy industrial grade EMS,EMI EN61000-6-2, EN61000-6-4 certification
- Supports Jumbo frame 9K bytes packet

Specifications

Standard	IEEE802.3 10Base-T 10Mbit/s Ethernet IEEE802.3u 100Base-TX, 100Base-FX, Fast Ethernet IEEE802.3x Flow Control and Back pressure IEEE802.3at PoE+ (Power over Ethernet enhancement) IEEE802.3af PoE (Power over Ethernet) IEEE802.1q Tag VLAN
RJ45 Ports	10/100Base-TX Auto MDI/MDI-X and Auto-Negotiation Function Supports UTP CAT.5e Twisted Pair cable
Fiber Ports	100Base-FX with SC or ST connector
Data Process Architecture	Store and Forward mode or Pass Through mode (Set by DIP SW)
Jumbo Frame	9K bytes
Fiber Parameters	Fiber Cable (Multi-mode): 50/125um, 62.5/125um Fiber Cable (Single-mode): 9/125um Wavelength: 1310nm (Multi-mode/Single-mode) Available Distance: 2KM (Multi-mode), 30KM (Single-mode), 50KM(Single-mode)
Link Fault Pass Through (LFPT)	TX- Fiber: If TX port link down, the media converter will force Fiber port to link down Fiber-TX: If Fiber port link down, the media converter will force TX port to link down
DIP Switch	ON: Disable Alarm For Power Loss OFF: Enable Alarm For Power Loss ON: Disable Alarm For Port Link-Failure OFF: Enable Alarm For Port Link-Failure ON: LFPT Enable, OFF: LFPT Disable Data process Architecture : ON : Pass through mode OFF : Store and Forward Switch mode PoE Output OFF: Enable PoE output ON: Disable PoE output Remote PD reset (Figure 3) OFF : Disable Remote PD reset ON: Enable Remote PD reset by fiber port link down
Fiber Connector	Fiber: SC / ST (Multi-mode, 2KM), SC / ST (Single-mode, 30KM, 50KM)

RJ45 Connector and Pin Assignment	RJ-45 Socket: CAT.5e (10/100Mbps) Twisted Pair cable Auto MDI/MDI-X and Auto-Negotiation Function Support RJ-45 Port support IEEE 802.3at/af End-Span, Alternative A mode. PoE (V+): RJ-45 pin 1, 2. PoE (V-): RJ-45 pin 3, 6. Data (1,2,3,6)
LED	Per Unit : Power 1 (Green), Power 2 (Green), Fault (Amber) Fiber LNK/ACT (Green): ON: Connected to network OFF: Not connected to network BLK: Receive / Transmit Data Fiber Speed :Green : 100 Base- X RJ-45 Port: Speed: 10 (OFF), 100 (Green) LNK/ACT for RJ45(Green): ON: Connected to network OFF: Not connected to network BLK: Networking is active PoE States (Green) Flash: PoE Fault (Over-load or short) ON: PoE normal working, OFF : PoE No Power output
Reverse Polarity Protection	Supported for Power Input
Overload Current Protection	Supported
Power Supply	12/24/48VDC (9.6~57VDC), Redundant power with polarity reverse protect function and removable terminal block Built-in very high efficiency booster(97~99%) to rise up 55 VDC for PoE output Regulated PoE output voltage (55VDC) to stabilize PoE device, and guarantee delivery PoE power distance to 100meter (Figure 2)
PoE Power budget	30W

Power Consumption	Power consumption & Boost efficiency				
	Input Voltage	Total Power Consumption	Device Power Consumption	PoE Budget	Boost Efficiency
	12VDC	34W	3.5W	30W	98.4%
	24VDC	34.4W	4.1W	30W	99.0%
48VDC	34.9W	4.3W	30W	98.0%	

Alarm Relay Contact	Relay outputs with current carrying capacity of 1 A @24VDC
Removable Terminal Block	Provide 2 redundant power, alarm relay contact, 6 Pin
Operating Humidity	5%~95% (Non-condensing)
Operating Temperature	-20°C ~ 75°C
Storage Temperature	-40°C ~ 85°C
Housing	Rugged Metal, IP30 Protection and fanless
Dimensions	106 x 62.5 x 135 mm (D x W x H)
Weight	655g
Installation	DIN Rail mounting, or wall mounting (Optional)
MTBF	801,948 Hours MIL-HDBK-217
Warranty	5 years

Certifications	
EMC	CE
EMI	FCC Part 15 Subpart B Class A, CE
Railway Traffic	EN50121-4
Immunity for Heavy Industrial environment	EN 61000-6-2
Emission for Heavy industrial environment	EN 61000-6-4
EMS (Electromagnetic Susceptibility) Protection Level	EN61000-4-2 (ESD) Level 3, Criteria B EN61000-4-3 (RS) Level 3, Criteria A EN61000-4-4 (EFT) Level 3, Criteria A EN61000-4-5 (Surge) Level 3, Criteria B EN61000-4-6 (CS) Level 3, Criteria A EN61000-4-8 (PFMF) Field strength 300A/m Criteria A
Safety	UL60950-1 (pending)
Shock	IEC 60068-2-27
Freefall	IEC 60068-2-32
Vibration	IEC 60068-2-6

Application

Figure 1 : IMC-100-PH12 Industrial PoE Transmission



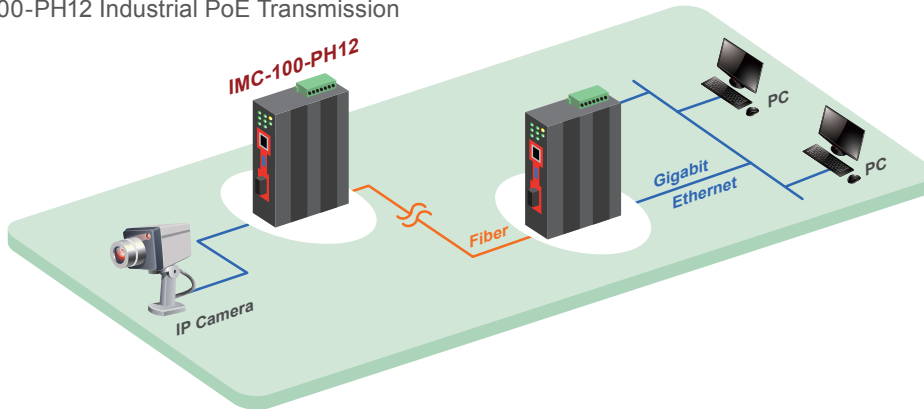


Figure 2 : High efficiency boost technology for PoE

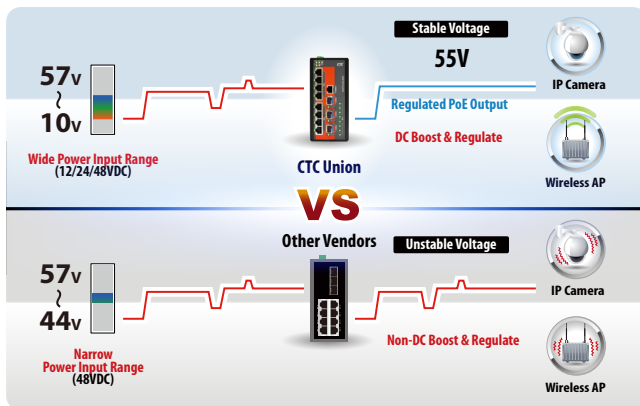


- Regulated PoE output voltage (55VDC) to stabilize PoE device
- Guarantee delivery PoE power distance to 100 meters
- Wide range input power 24/48VDC (20~57VDC)
- Built-in very high efficiency (94~97%) to boost PoE output voltage

Figure 3 : Remote PD Reset Application

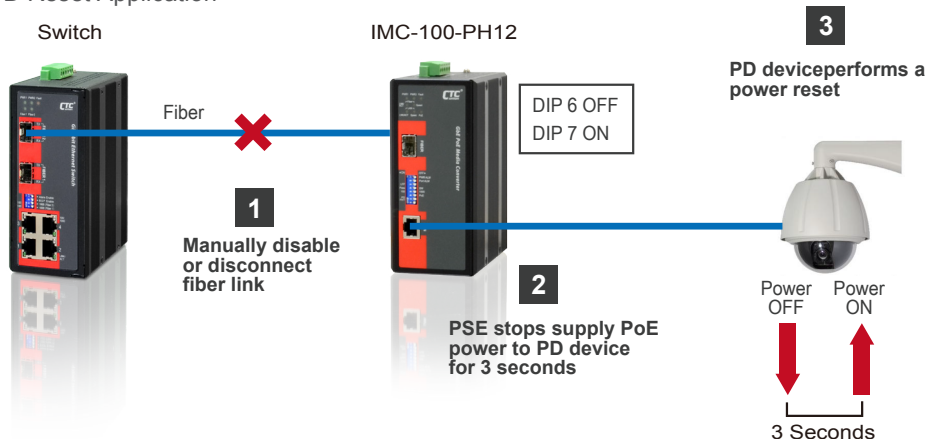


Dimensions

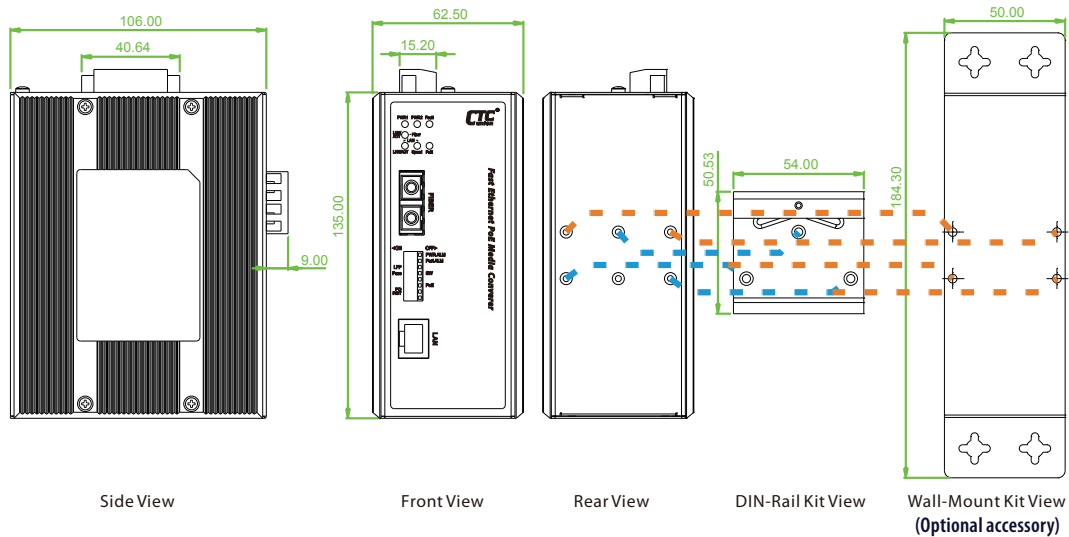

Ordering Information

Model Name	RJ45 UTP	Fiber	PoE Port		Power Input	Certification				Operating Temperature
	10/100 Base-TX	100Base-FX	IEEE802.3at (PSE)	Power Budget	Redundant	Railway EN50121-4	EN61000-6-2 EN61000-6-4	CE	FCC	
IMC-100-PHE12	1	1 SC/ST	1	30W	12/24/48VDC	V	V	V	V	-20~75°C

Model Naming Rule

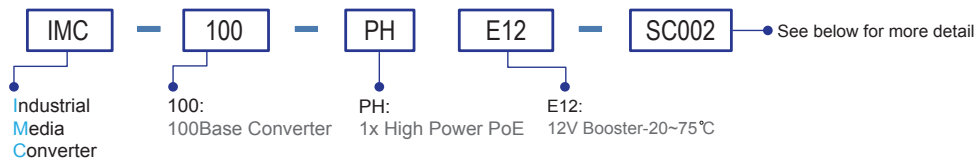

Fiber Connector Type	Connectivity Distance
SC,ST	002: 2km (M/M) 030: 30km (S/M) 050: 50km (S/M) 020A: WDM Bidi 20km A Type (TX:1310nm) 020B: WDM Bidi 20km B Type (TX:1550nm)

Temperature Connector Type Connectivity Distance
IMC-100 -PH 12 -
 Example: IMC-100 - PHE12 - SC002

Package List

- IMC-100-PH12 device
- Quickly installation guide
- Din Rail bracket with screws
- Terminal block

Optional Accessories

Wall mount kit accessories

IND-WMK02	Wall Mount kit for Industrial product, 184 x 50mm
-----------	---

Preliminary



IGS-R2408SM

24x 10/100/1000Base-T(X) + 8x 100/1000Base-X SFP
Layer 3 Switch

IGS-2408SM

24x 10/100/1000Base-T(X) + 8x 100/1000Base-X SFP
Layer 2 Switch



CTC Industrial Rackmount Ethernet Switch IGS-R2408SM/ IGS-2408SM is a hardened design Layer 3/ Layer 2 managed Ethernet switch for rigorous demands of centralize and critical applications. CTC Industrial Rackmount Ethernet Switch supports full Gigabit Ethernet come with 24 (10/100/1000BaseTX) RJ-45 port plus 8 dual speed (100/1000Base-X) SFP fiber optical slots, thus providing up to 32 ports of Ethernet connectivity. IGS-R2408SM/ IGS-2408SM is an ideal solution of Industrial automation as smart city & surveillance, Intelligent traffic control systems and production automation applications.

IGS-R2408SM/ IGS-2408SM provides 10KB jumbo frame, 32K MAC address table and 4MB memory buffer, moreover, the full Gigabit capability supports Link Aggregation (Dynamic IEEE 802.3ad LACP) up to 14 trunk groups (maximum 8port per group) to increase bandwidth for providing high performance and the ability to quickly transfer of large amounts video, voice, and data across a network.

IGS-R2408SM/ IGS-2408SM supports a variety of Ethernet ring redundant functions, including STP/RSTP/MSTP/ERPS and enhanced μ-Ring/μ-Chain/Sub-Ring provide less than 50ms recovery time 250 nodes and its redundant power input to increases system reliability and the availability of your network backbone.

Features

- 24x 10/100/1000Base-T RJ-45 + 8x100/1000Base-X SFP
- Redundant isolated 24/48VDC, or/and isolated 110/220VAC power inputs
- **Supports negative voltage power input**
- Rugged metal, IP30 protection & Fanless design
- UL60950-1, EN60950-1, CE, FCC, Rail Traffic EN50121-4 certified
- Heavy industrial grade EMS, EMI, EN61000-6-2, EN61000-6-4 certified
- **4KV surge protection for RJ45 and SFP ports**
- **2.25K VDC Hi-pot isolation protection for Ethernet ports and power**
- Supports Static Routing ,RIP v1, RIP v2, OSPF v2, OSPF v3 (IGS-R2408SM)
- Supports Layer 3 redundancy VRRP v3 (IGS-R2408SM)
- STP, RSTP, MSTP, ITU-T G.8032 Ethernet Ring Protection Switching (ERPS) for network redundancy
- Provides 5 instances each can support μ-Ring, μ-Chain or Sub-Ring for flexible networking applications
- μ-Ring redundancy, recovery time <50ms in 250 devices
- DHCP Server/Client/Relay/Snooping/Relay option 82
- QoS, Traffic classification QoS, CoS, bandwidth control for Ingress and Egress, Storm Control, DiffServ
- IEEE802.1q VLAN, MAC based VLAN, IP subnet based VLAN, Protocol based VLAN, VLAN translation, GVRP, MVR
- Dynamic IEEE 802.3ad LACP Link Aggregation, Static Link Aggregation
- IGMP snooping V1/V2/V3, IGMP Filtering/ Throttling, IGMP query, IGMP proxy reporting, MLD snooping V1/V2
- Flexibility security: Port based and MAC based IEEE802.1X, RADIUS, ACL, TACACS+, HTTP/HTTPS, SSL/SSH v2
- Software upgrade via TFTP and HTTP, redundant firmware to avoid in case of upgrade failure
- Supports IEEE1588 PTP V2 for precise time synchronization to operate in Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master, Slave mode by each port
- RMON, MIB II, Port mirroring, Event syslog, DNS, NTP V4.0, SNTP, IEEE802.1ab LLDP
- CLI, Web based management, SNMP v1/v2c/v3, Telnet server for management
- Supports Modbus/TCP protocols for management
- Provides SmartConfig for quick and easy mass Configuration*
- Supports SmartView for Centralized Management*
- Supporting Central EMS for management of up to 50 SmartView Server, and maximum up to 25,000 device*

Specifications

Standard	Specification	Standard	Specification
IEEE 802.3	10Base-T 10Mbit/s Ethernet	IEEE 802.1X	Port based and MAC based Network Access Control, Authentication
IEEE 802.3u	100Base-TX, 100Base-FX, Fast Ethernet	IEEE802.3ac	Max frame size extended to 1522Bytes
IEEE 802.3ab	1000Base-T Gbit/s Ethernet over twisted pair	IEEE 802.3ad	Link aggregation for parallel links with LACP(Link Aggregation Control Protocol)
IEEE 802.3z	1000Base-X Gbit/s Ethernet over Fiber-Optic	IEEE802.3X	Flow control for full duplex
IEEE 802.1d	STP (Spanning Tree Protocol)	IEEE 802.1ad	Stacked VLANs, Q-in-Q
IEEE 802.1w	RSTP (Rapid Spanning Tree Protocol)	IEEE 802.1p	LAN Layer 2 QoS/CoS Protocol for Traffic Prioritization
IEEE 802.1s	MSTP (Multiple Spanning Tree Protocol)	IEEE 802.1ab	Link Layer Discovery Protocol (LLDP)
ITU-T G.8032 / Y.1344	ERPS (Ethernet Ring Protection Switching)	IEEE 802.3az	EEE (Energy Efficient Ethernet)
IEEE 802.1Q	Virtual LANs (VLAN)		

VLAN ID	4094 IEEE802.1Q VLAN VID
Switch Architecture	Back-plane (Switching Fabric): 64Gbps (Full wire-speed)
Data Processing	Store and Forward
Network Connector	SFP: 8x 100/1000Base-X SFP socket Support DDMI RJ45: 24x 100/1000Base-T RJ-45 Support Auto negotiation speed, Auto MDI/MDI-X function
Console	RS-232 (RJ-45)
Network Cable	UTP/STP Cat.5e cable or above EIA/TIA-568 100-ohm (100m)
Protocols	CSMA/CD
Reverse Polarity Protection	For input power
Overload Current Protection	Supported
CPU Watch Dog	Supported
Power Supply	Redundant 2x AC input power (-AA model) 1x AC input power (-A model) Redundant 1x AC and 1x DC input power (-AD model) Redundant 2x DC input power (-DD model) 1x DC input power (-D model) AC input power (A) : Isolated 110/220VAC (88VAC~264VAC) DC input power (D) : Isolated 24/48VDC (18~60VDC), Removable Terminal Block Supports negative voltage power input
Power Consumption	TBD
LED	Per unit: Power 1 (Green), Power 2 (Green), Act /Alarm (Green/Red), Ring Master (Green) P1~P24 Per RJ-45 port: 10/100 Link/Active (Green) 1000 Link/Active (Amber) P25~P32 Per SFP Fiber port: 100Base-X Link/Active (Green) 1000Base-X Link/Active (Amber)
Jumbo Frame	10K Byte
MAC Address Table	32K
Memory Buffer	4M Bytes for packet buffer

Software Specifications

Topology	
Layer 3 Routing	Static Routing ,RIP v1, RIP v2, OSPF v2, OSPF v3 (IGS-R2408SM)
Layer 3 redundancy	VRRP v3 (IGS-R2408SM)
VLAN	IEEE 802.1q VLAN, up to 4094 802.1Q VLAN VID IEEE 802.1q VLAN, up to 4094 Groups IEEE 802.1ad Q-in-Q MAC-based VLAN, up to 256 entries IP Subnet-based VLAN, up to 128 entries Protocol-based VLAN(Ethernet, SNAP, LLC), up to 128 entries VLAN Translation, up to 256 entries GVRP (GARP VLAN Registration Protocol) MVR (Multicast VLAN Registration)
Link Aggregation (Port Trunk)	Static (Hash with SA, DA, IP, TCP/UDP port), up to 14 trunk group Dynamic (IEEE 802.3ad LACP), up to 14 trunk group Per group up-to 8 port
Spanning Tree	IEEE802.1d STP, IEEE802.1w RSTP, IEEE802.1s MSTP
Multiple μ-Ring	Up to 5 instances each support μ-Ring, μ-Chain or Sub-Ring for flexible networking applications. Recovery time <50ms The maximum number of device is allowed 250 in a Ring.
Loop Protection	Supported
ITU-T G.8032 / Y.1344 ERPS (Ethernet Ring Protection)	Recovery time <50ms
QoS Features	Single Ring, Sub-Ring, Multiple ring topology
Class of Service	IEEE802.1p 8 active priorities queues for per port


Warning Message	System Syslog, SMTP/ e-mail event message, alarm relay
Alarm Relay Contact	Relay outputs with current carrying capacity of 1A @24VDC, 2-Pin removable terminal block
Operating Temperature	-10 ~ 60°C (IGS-2408SM) -40 ~ 75°C (IGS-2408SM-E)
Operating Humidity	5% to 95% (Non-condensing)
Storage Temperature	-40 ~ 85°C
Housing	Rugged Metal, IP30 Protection, Fanless
Dimensions	TBD
Weight	TBD
Installation Mounting	19" rack mount
MTBF	TBD
Warranty	5 years
Certification	
EMC	CE (EN55024, EN55032)
EMI (Electromagnetic Interference)	FCC Part 15 Subpart B Class A, CE
Railway Traffic	EN50121-4
Immunity for Heavy Industrial Environment	EN61000-6-2
Emission for Heavy Industrial Environment	EN61000-6-4
EMS (Electromagnetic Susceptibility) Protection Level	EN61000-4-2 (ESD) Level 3, Criteria B EN61000-4-3 (RS) Level 3, Criteria A EN61000-4-4 (Burst) Level 3, Criteria A EN61000-4-5 (Surge) Level 3, Criteria B EN61000-4-6 (CS) Level 3, Criteria A EN61000-4-8 (PFMF, Magnetic Field) Field Strength: 300A/m, Criteria A
Safety	UL60950-1, EN60950-1
Hi pot protection	DC 2.25KV for power to chassis ground, Ethernet port to chassis ground
4KV surge protection	Supported for RJ45 and SFP ports
Shock	IEC 60068-2-27
Freefall	IEC 60068-2-32
Vibration	IEC 60068-2-6
Traffic Classification QoS	
Traffic Classification QoS	IEEE802.1p based CoS IP Precedence based CoS IP DSCP based CoS
Traffic Classification QoS	
Traffic Classification QoS	QCL(QoS Control List): Frame Type, Source/ Destination MAC, VLAN ID, PCP, DEI Protocol, Source IP, IP Fragment, DSCP, TCP/UDP port number
Bandwidth Control for Ingress	Per port based
Bandwidth Control for Egress	Per port based Per queue / Per port shaper
DiffServ (RF 2474) Remarking	
Storm Control	for Unicast, Broadcast, Multicast
IP Multicasting Features	
IGMP / MLD Snooping	IGMP Snooping v1, v2, v3 / MLD Snooping v1, v2 Port Filtering Profile Throttling, Fast Leave Maximum Multicast Group : up to 1022 entries Query / Static Router Port
Security Features	
IEEE 802.1X	Port-Based MAC-Based
ACL	Number of rules : up to 256 entries for L2 / L3 / L4 L2 : Mac address SA/DA/VLAN L3 : IP address SA/DA, Subnet L4 : TCP/UDP
RADIUS authentication & accounting	
TACACS+ authentication & accounting, TACACS+ 3.0	
HTTPS, HTTP	Supported

SSL / SSH v2	Supported
User Name Password Authentication	Local Authentication Remote Authentication (via RADIUS / TACACS+)
Management Interface Access Filtering	Web, Telnet / SSH , CLI RS-232 console
Management Features	
CLI	Cisco® like CLI
Web Based Management	
Telnet	Server
SNMP	V1, V2c, V3
Modbus/TCP	Support for management and monitoring
SW & Configuration Upgrade	TFTP, HTTP Redundant firmware in case of upgrade failure
RMON	RMON I (1, 2, 3, 9 group), RMON II
MIB	RFC1213 MIB II, Private MIB
UPnP	Supported
DHCP	Server/Client/Relay/Relay option 82/Snooping
Warning Message	System syslog, e-mail, alarm relay
DNS	Client, Proxy

IP Source Guard	Supported
Mirroring	Local and Remote
Event Syslog	Syslog server (RFC3164) (Support 1 server)
IEEE1588 PTP V2	Supports 5 operating mode in each port : Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master, Slave
NTP V4.0, SNTP	Client
LLDP (IEEE 802.1ab)	Link Layer Discovery Protocol LLDP-MED
IPv6 Features	
IPv6 Management	Telnet Server/ICMP v6
SNMP over IPv6	Supported
HTTP over IPv6	Supported
SSH over IPv6	Supported
IPv6 Telnet	Supported
IPv6 NTP, SNTP	Client
IPv6 TFTP	Supported
IPv6 QoS	Supported
IPv6 ACL	Number of rules: up to 256 entries for L2 / L3 / L4 L2 : Mac address SA/DA/VLAN L3 : IP address SA/DA, Subnet L4 : TCP/UDP

Application


Figure : Application Example

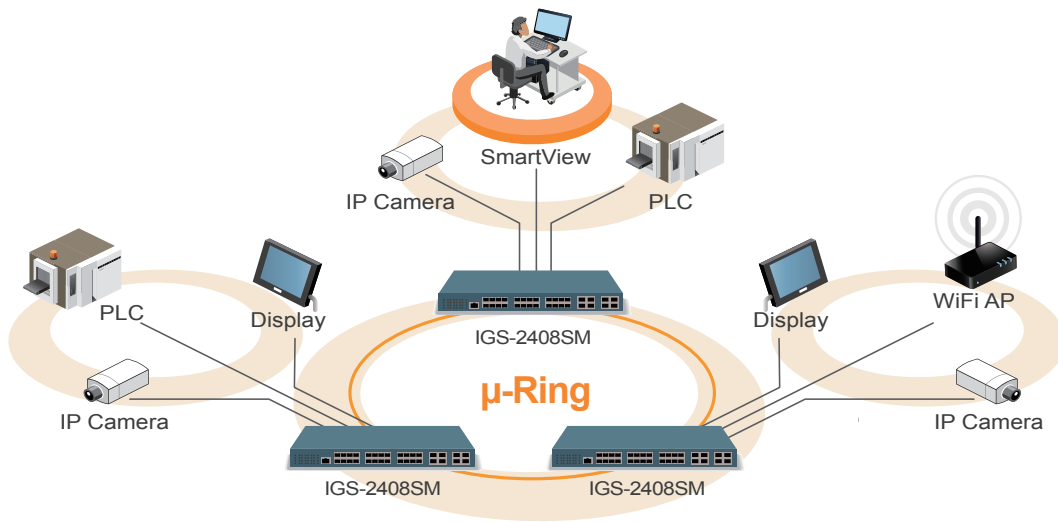

Ordering Information

Model Name	Managed	Total Port	UTP		Fiber	Input power		Certification			Operating Temperature	
			10/100/1000 Base-T	100/1000 Base-X	24/48VDC	110/220V AC	Safety U/L60950-1 EN60950-1	EN50121-4	EN61000-6-2 EN61000-6-4	CE, FCC		
IGS-R2408SM-AA	Layer 3	32	24	8		2		V	V	V	V	-10~60°C
IGS-R2408SM-AD	Layer 3	32	24	8	1	1		V	V	V	V	-10~60°C
IGS-R2408SM-DD	Layer 3	32	24	8	2			V	V	V	V	-10~60°C
IGS-R2408SM-E-AA	Layer 3	32	24	8		2		V	V	V	V	-40~75°C
IGS-R2408SM-E-AD	Layer 3	32	24	8	1	1		V	V	V	V	-40~75°C
IGS-R2408SM-E-DD	Layer 3	32	24	8	2			V	V	V	V	-40~75°C
IGS-2408SM-AA	V	32	24	8		2		V	V	V	V	-10~60°C
IGS-2408SM-AD	V	32	24	8	1	1		V	V	V	V	-10~60°C
IGS-2408SM-DD	V	32	24	8	2			V	V	V	V	-10~60°C
IGS-2408SM-E-AA	V	32	24	8		2		V	V	V	V	-40~75°C
IGS-2408SM-E-AD	V	32	24	8	1	1		V	V	V	V	-40~75°C
IGS-2408SM-E-DD	V	32	24	8	2			V	V	V	V	-40~75°C

Model Naming Rule

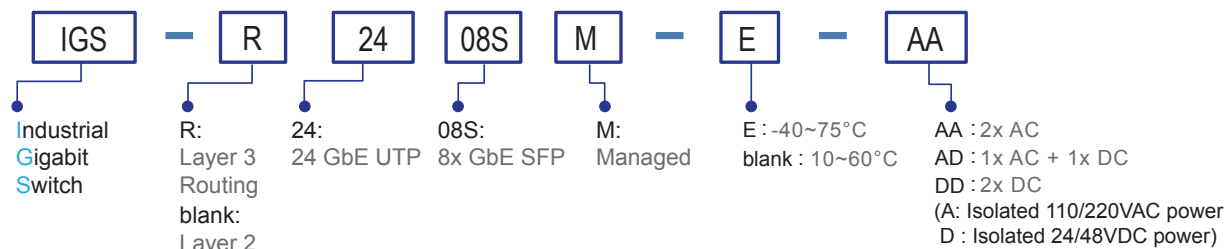


Optional Accessories

Industrial SFP Transceiver

The ISFP series of industrial grade SFP modules have been fully tested with the series product for guaranteed compatibility and performance. The best performance can be guaranteed even in mission-critical applications.

ISFP-M7000-85-D(E)	Industrial SFP GbE 1000Base-SX, M/M, 500 meter, wave length 850nm, 7.5dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-S7020-31-D(E)	Industrial SFP 1000Base-LX, S/M, 20km, wave length 1310nm, 15dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-T7T00-00-(E)	Industrial SFP 1000Base-T UTP 100meter, -10~70°C (-40~85°C)
ISFP-M5002-31-D(E)	Industrial SFP 155M 100Base-FX, MM, 2km, wave length 1310nm, 12dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-S5030-31-D(E)	Industrial SFP 155M 100Base-FX, SM, 30km, 1310nm, 19dB, LC, DDMI, -10~70°C (-40~85°C)

SFP Naming Rule

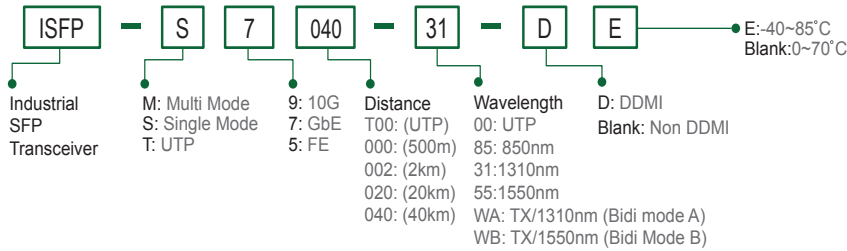



IGS-S2804TM

28x 100/1000Base-X SFP with 4x GbE Combo Managed Switch (Rack)



IGS-S2804TM is a industrial grade Ethernet Switch that is equipped with 28 gigabit SFP ports with 4 combo gigabit ports. The model is fanless designs with redundant, isolated power supplies (2 AC, 2 DC, AC + DC) and can be mounted in 19 inch EIA standard rack. This series offers various layer 2 Ethernet functions (IGMP, VLAN, QoS , Security, IPv6, bandwidth control, and port mirroring) and also support μ-Ring redundancy protocol that can establish 5 independent rings for flexible applications, especially when employed in backbone infrastructure. The switch can also be managed centrally and conveniently by CTC Union’s SmartView™ Element Management System and mass configured by SmartConfig™. Housed in rugged rack mountable enclosures, the model are certified with many industrial-grade standards and are ideal for deployments in harsh environments to deliver mission-critical network services. (See figure).

Features

- 28x GbE SFP with 4x Combo (SFP+RJ-45) Ethernet switch
- Redundancy isolated low voltage 24/48VDC, or/and isolated High voltage AC/DC (110/220 VAC/VDC) power inputs
- Supports negative voltage power input with isolated RS-232 console port (for example in telecom system)
- Rugged metal, IP30 protection & Fanless design
- UL60950-1, CE, FCC, Rail Traffic EN50121-4 certified
- Heavy industrial grade EMS, EMI, EN61000-6-2, EN61000-6-4 certified
- STP, RSTP, MSTP, ITU-T G.8032 Ethernet Ring Protection Switching (ERPS) for redundant cabling
- Provides 5 instances that each can support μ-Ring, μ-Chain or Sub-Ring type for flexible uses. Supports up to 5 rings in one device (Please see CTC Union μ-Ring white paper for more details and more topology application)
- μ-Ring for Redundant Cabling, recovery time<50ms in 250 devices
- DHCP Server/Client/Relay/Snooping/Snooping option 82/Relay option 82
- QoS, Traffic classification QoS, CoS, bandwidth control for Ingress and Egress, Storm Control, DiffServ
- IEEE802.1q VLAN, MAC based VLAN, IP subnet based VLAN, Protocol based VLAN, VLAN translation, GVRP, MVR
- Dynamic IEEE 802.3ad LACP Link Aggregation, Static Link Aggregation
- IGMP snooping V1/V2/V3, IGMP Filtering/ Throttling, IGMP query, IGMP proxy reporting, MLD snooping V1/V2
- Flexibility security: Port based and MAC based IEEE802.1X, RADIUS, ACL, TACACS+, HTTP/HTTPS, SSL/SSH v2
- Software upgrade via TFTP and HTTP, redundant firmware to avoid in case of upgrade failure
- Supports IEEE1588 PTP V2 for precise time synchronization to operate in Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master, Slave mode by each port
- RMON, MIB II, Port mirroring, Event syslog, DNS, NTP, SNTP, IEEE802.1ab LLDP
- Supports IPv6 Telnet server /ICMP v6
- CLI, Web based management, SNMP v1/v2c/v3, Telnet server for management
- Provides SmartConfig for quick and easy mass configuration (Please see Catalog chapter 1- Software Management for more details)
- Supports SmartView for Centralized Management (Please see Catalog chapter 1- Software Management for more details)
- Supporting Central EMS for management of up to 50 SmartView Server, and maximum up to 25,000 device (Please see Catalog chapter 1- Software Management for more details)

Specifications

Standard	IEEE 802.3	10Base-T 10Mbit/s Ethernet
	IEEE 802.3u	100Base-TX, 100Base-FX, Fast Ethernet
	IEEE 802.3ab	1000Base-T Gbit/s Ethernet over twisted pair
	IEEE 802.3z	1000Base-X Gbit/s Ethernet over Fiber-Optic
	IEEE 802.1d	STP (Spanning Tree Protocol)
	IEEE 802.1w	RSTP (Rapid Spanning Tree Protocol)
	IEEE 802.1s	MSTP (Multiple Spanning Tree Protocol)
	ITU-T G.8032 / Y.1344	ERPS (Ethernet Ring Protection Switching)
	IEEE 802.1Q	Virtual LANs (VLAN)
	IEEE 802.1X	Port based and MAC based Network Access Control, Authentication
	IEEE 802.3ad	Link aggregation for parallel links with LACP(Link Aggregation Control Protocol)
	IEEE 802.1ad	Stacked VLANs, Q-in-Q
	IEEE 802.1p	LAN Layer 2 QoS/CoS Protocol for Traffic Prioritization
	IEEE 802.1ab	Link Layer Discovery Protocol (LLDP)

VLAN ID	4094 IEEE802.1Q VLAN VID
Switch Architecture	Back-plane (Switching Fabric): 56Gbps (Full wire-speed)
Data Processing	Store and Forward
Network Connector	28x 100/1000Base-X SFP with 4x GbE Combo (UTP/ SFP)
Network Connector	Port 25~28 GbE SFP support 1000M Port 21~24 GbE SFP/RJ45 UTP combo (dual speed 100/1000M) Port 1~20 GbE SFP support dual speed (100/1000M) SFP support 100/1000M dual speed with DDMI RJ-45 UTP port support 10/100/1000Base-T(X), Auto negotiation speed, Auto MDI/MDI-X function
Console	RS-232 (RJ-45) Isolated RS-232 port grounding for negative voltage power system, or telecom application
Network Cable	UTP/STP above Cat. 5e cable EIA/TIA-568 100-ohm (100m)
Protocols	CSMA/CD
Reverse Polarity Protection	Supported

Overload Current Protection	Supported										
CPU Watch Dog	Supported										
Power Supply	Redundant 2x isolated High Voltage AC/DC input power (-AA model) Redundant 2x Isolated Low Voltage DC Input power (-DD model)										
Power Supply	Redundant 1x isolated Low Voltage DC and 1x High Voltage AC/DC input power (-AD model) Low Voltage DC (D): Isolated 24/48V (18~60VDC), Removable Terminal Block High voltage AC/DC (A): Isolated 110/220VAC (88VAC~264VAC), isolated 110/220DC (88~300VDC) Supports negative voltage power input with isolated RS-232 console port (for example in telecom system)										
Power Consumption	<table border="1"> <thead> <tr> <th>Input Voltage</th> <th>IGS-S2804TM</th> </tr> </thead> <tbody> <tr> <td>24VDC</td> <td>33.1W</td> </tr> <tr> <td>48VDC</td> <td>33.4</td> </tr> <tr> <td>110VAC/VDC</td> <td>34.4W</td> </tr> <tr> <td>220VAC/VDC</td> <td>34.4W</td> </tr> </tbody> </table>	Input Voltage	IGS-S2804TM	24VDC	33.1W	48VDC	33.4	110VAC/VDC	34.4W	220VAC/VDC	34.4W
	Input Voltage	IGS-S2804TM									
	24VDC	33.1W									
	48VDC	33.4									
110VAC/VDC	34.4W										
220VAC/VDC	34.4W										
LED	Per unit: Power 1 (Green), Power 2 (Green), Act /Alarm (Green/Red), Ring Master (Green) Per RJ-45 port: 10/100 Link/Active (Green) 1000 Link/Active (Yellow) SFP (P1~24) Fiber Per port: 100Base-X Link/Active (Green) 1000Base-X Link/Active (Yellow) SFP+ (P25~P28) Fiber Per port: 1000Base-X Link/Active (Amber)										
Jumbo Frame	10K										
MAC Address Table	32K										
Memory Buffer	4M Bytes for packet buffer										
Warning Message	System Syslog, SMTP/ e-mail event message, alarm relay										
Alarm Relay Contact	Relay outputs with current carrying capacity of 1 A @24VDC, 2-Pin removable terminal block										
Operating Temperature	-10 ~ 60°C (IGS-S2804TM) -40 ~ 75°C (IGS-S2804TM-E)										
Operating Humidity	5% to 95% (Non-condensing)										

Software Specifications

Topology	
VLAN	IEEE 802.1q VLAN, up to 4094 802.1Q VLAN VID IEEE 802.1q VLAN, up to 4094 Groups IEEE 802.1ad Q-in-Q MAC-based VLAN, up to 256 entries IP Subnet-based VLAN, up to 128 entries Protocol-based VLAN (Ethernt, SNAP, LLC), up to 128 entries VLAN Translation, up to 256 entries GVRP (GARP VLAN Registration Protocol) MVR (Multicast VLAN Registration)
Link Aggregation (Port Trunk)	Static (Hash with SA, DA, IP, TCP/UDP port), up to 14 trunk group Dynamic (IEEE 802.3ad LACP), up to 14 trunk group Per group up-to 8 port
Spanning Tree	IEEE802.1d STP, IEEE802.1w RSTP, IEEE802.1s MSTP
Multiple μ-Ring	up to 5 instances that each supports μ-Ring, μ-Chain or Sub-Ring type for flexible uses, and maximum up to 5 Rings. Recovery time <50ms The maximum number of devices allowed in a Ring supported ring is 250.
Loop Protection	Supported
ITU-T G.8032 / Y.1344 ERPS (Ethernet Ring Protection)	Recovery time <50ms Single Ring, Sub-Ring, Multiple ring topology network
QoS Features	
Class of Service	IEEE802.1p 8 active priorities queues for per port
Traffic Classification QoS	IEEE802.1p based CoS IP Precedence based CoS IP DSCP based CoS QCL(QoS Control List): Frame Type, Source/Destination MAC, VLAN ID, PCP, DEI QCE(QoS Control Entry): Protocol, Source IP, IP Fragment, DSCP, TCP/UDP port number
Bandwidth Control for Ingress	Per port based
Bandwidth Control for Egress	Per port based Per queue / Per port shaper
DiffServ (RF 2474) Remarkings	
Storm Control	for Unicast, Broadcast, Multicast

Storage Temperature	-40 ~ 85°C
Housing	Rugged Metal, IP30 Protection, Fanless
Dimensions	315 x 440 x 44 mm (D x W x H)
Weight	4.755kg (IGS-S2804TM-AA) 4.26kg (IGS-S2804TM-DD) 4.51kg (IGS-S2804TM-AD)
Installation Mounting	19" rack mount
MTBF	208,975 Hours (IGS-S2804TM-AA) 230,276 Hours (IGS-S2804TM-DD) 287,541 Hours (IGS-S2804TM-AD)
Warranty	5 years
Certification	
EMC	CE
EMI (Electromagnetic Interference)	FCC Part 15 Subpart B Class A, CE
Railway Traffic	EN50121-4
Immunity for Heavy Industrial Environment	EN61000-6-2
Emission for Heavy Industrial Environment	EN61000-6-4
EMS (Electromagnetic Susceptibility) Protection Level	EN61000-4-2 (ESD) Level 3, Criteria B EN61000-4-3 (RS) Level 3, Criteria A EN61000-4-4 (Burst) Level 3, Criteria A EN61000-4-5 (Surge) Level 3, Criteria B EN61000-4-6 (CS) Level 3, Criteria A EN61000-4-8 (PFMF, Magnetic Field) Field Strength: 300A/m, Criteria A
Safety	UL60950-1
Shock	IEC 60068-2-27
Freefall	IEC 60068-2-32
Vibration	IEC 60068-2-6


IP Multicasting Features	
IGMP / MLD Snooping	IGMP Snooping v1, v2, v3 / MLD Snooping v1, v2 Port Filtering Profile
IGMP / MLD Snooping	Throttling, Fast Leave Maximum Multicast Group : up to 1022 entries Query / Static Router Port
Security Features	
IEEE 802.1X	Port-Based, MAC-Based
ACL	Number of rules : up to 256 entries for L2 / L3 / L4 L2 : Mac address SA/DA/VLAN L3: IP address SA/DA, Subnet L4: TCP/UDP
RADIUS authentication & accounting, TACACS+ 3.0	
HTTPS, HTTP	Supported
SSL / SSH v2	Supported
User Name Password Authentication	Local Authentication Remote Authentication (via RADIUS / TACACS+)
Management Interface Access Filtering	Web, Telnet / SSH , CLI RS-232 console
Management Features	
CLI	Cisco® like CLI
Web Based Management	
Telnet	Server
SNMP	V1, V2c, V3
SW & Configuration Upgrade	TFTP, HTTP Redundant firmware in case of upgrade failure
RMON	RMON I (1, 2, 3, 9 group), RMON II
MIB	RFC1213 MIB II, Private MIB
UPnP	Supported
DHCP	Server, Client, Relay, Snooping Snooping option 82 Relay option 82
IP Source Guard	Supported
Port Mirroring	Supported
Event Syslog	Syslog server (RFC3164) (Support 1 server)

Warning Message	System syslog, e-mail, alarm relay
DNS	Client, Proxy
IEEE1588 PTP V2	Supports 5 operating mode in each port : Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master, Slave
NTP, SNTP	Client
LLDP (IEEE 802.1ab)	Link Layer Discovery Protocol LLDP-MED
IPv6 Features	
IPv6 Management	Telnet Server/ICMP v6
SNMP over IPv6	Supported

HTTP over IPv6	Supported
SSH over IPv6	Supported
IPv6 Telnet	Supported
IPv6 NTP, SNTP	Client
IPv6 TFTP	Supported
IPv6 QoS	Supported
IPv6 ACL	Number of rules: up to 256 entries for L2 / L3 / L4 L2 : Mac address SA/DA/VLAN L3: IP address SA/DA, Subnet L4: TCP/UDP


Application

Figure : Application Example

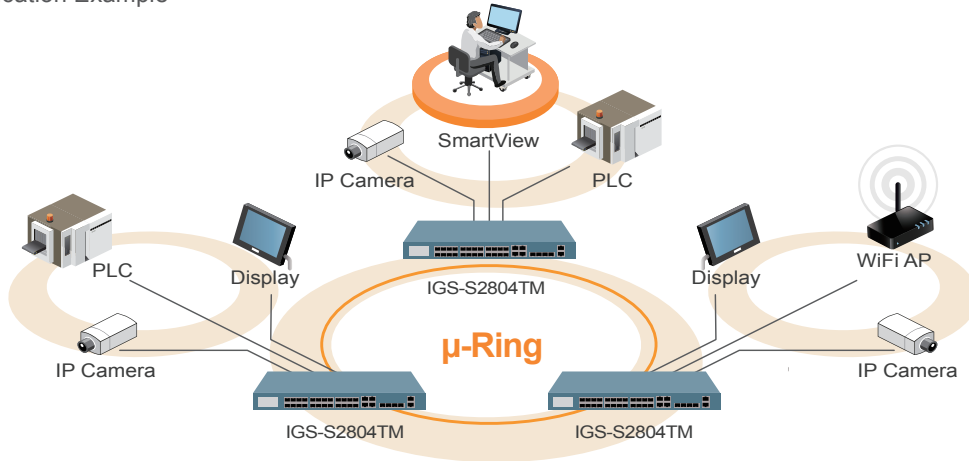


Dimensions


Rear View

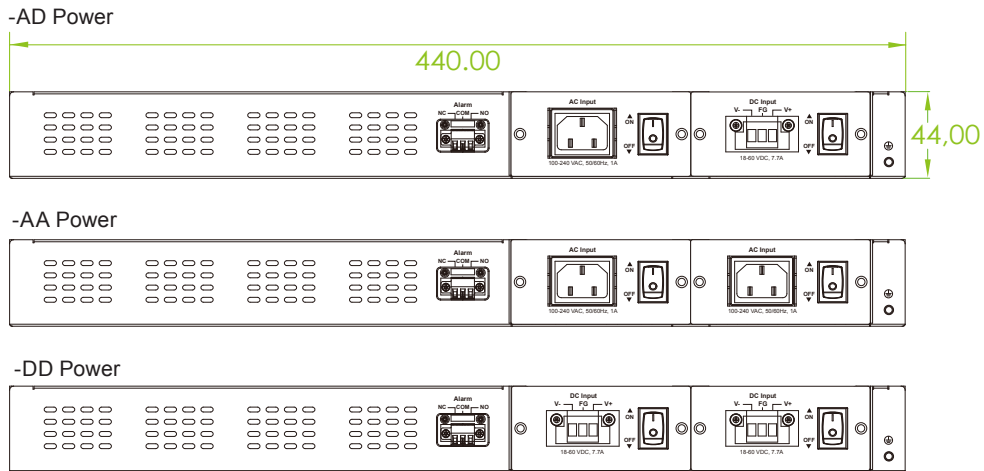


Side View

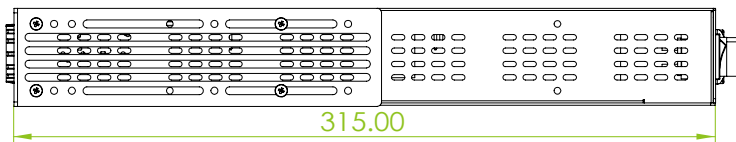

Front View

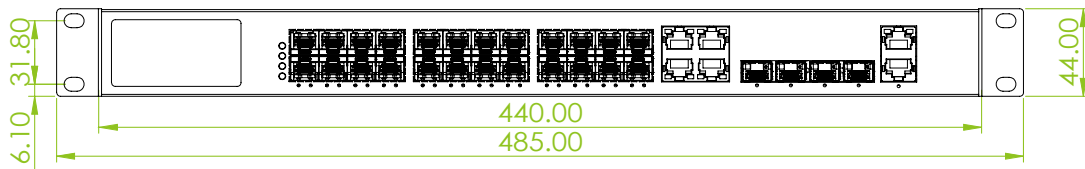


Top View

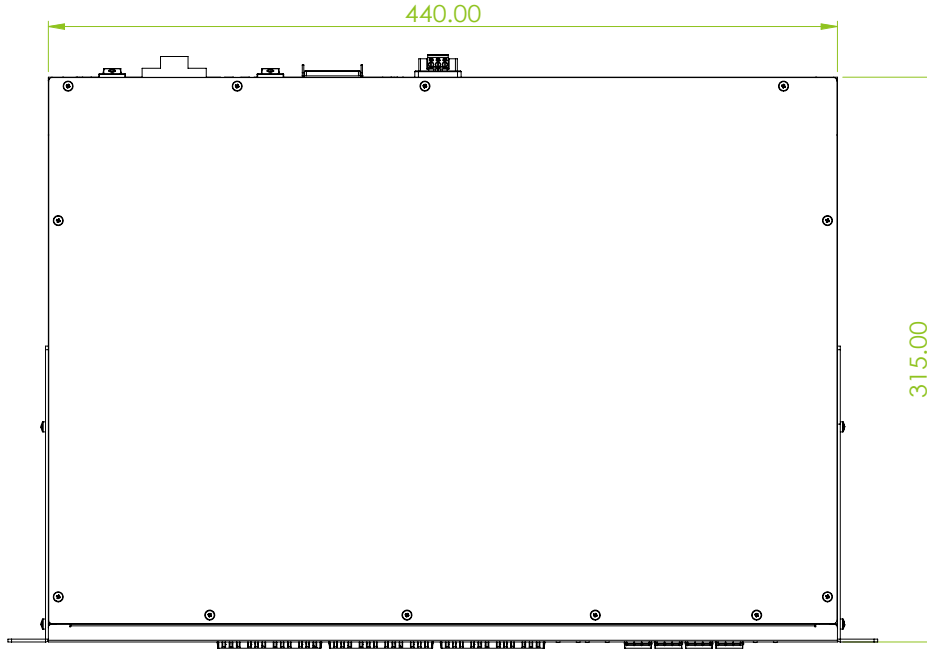

Ordering Information

Model Name	Managed	Total Port	SFP (1~20)	Combo Port (21~24)	Extension Port (25~28)	Input Power		Certification				Operating Temperature
			100/1000Base-X SFP	10/100/1000Base-T UTP or 100/1000Base-X SFP	1000 Base-X SFP	DC (Low Volt) isolated 24/48VDC	High Volt 110/240VAC or 110/220VDC	Railway EN50121-4	Safety UL60950-1	EN61000-6-2 EN61000-6-4	CE FCC	
IGS-S2804TM-AA	V	28	20	4	4 SFP	2	V	V	V	V	-10~60°C	
IGS-S2804TM-DD	V	28	20	4	4 SFP	2	V	V	V	V	-10~60°C	
IGS-S2804TM-AD	V	28	20	4	4 SFP	1	1	V	V	V	-10~60°C	
IGS-S2804TM-EAA	V	28	20	4	4 SFP	2	V	V	V	V	-40~75°C	
IGS-S2804TM-EDD	V	28	20	4	4 SFP	2	V	V	V	V	-40~75°C	
IGS-S2804TM-EAD	V	28	20	4	4 SFP	1	1	V	V	V	-40~75°C	

Model Naming Rule

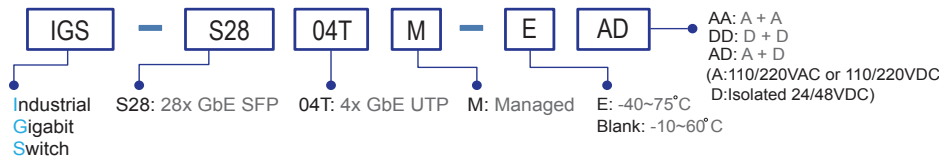

Package List

- IGS-S2804TM device
- Console cable (RJ-45 to DB9)
- CD (SmartConfig, MIB file, Manual)
- Quickly installation guide
- Rack mount ear with screws
- Power cord (for-A model)


Optional Accessories

Industrial SFP Transceiver

The ISFP series of industrial grade SFP modules have been fully tested with the product for guaranteed compatibility and performance. The best performance can be guaranteed even in mission-critical applications. (Please see CTC Union's Industrial SFP datasheet for more details and more items.)

ISFP-M7000-85-D(E)	Industrial SFP GbE 1000Base-SX, M/M, 500 meter, wave length 850nm, 7.5dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-S7020-31-D(E)	Industrial SFP 1000Base-LX, S/M, 20km, wave length 1310nm, 15dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-T7T00-00-(E)	Industrial SFP 1000Base-T UTP 100meter, -10~70°C (-40~85°C)
ISFP-M5002-31-D(E)	Industrial SFP 155M 100Base-FX, MM, 2km, wave length 1310nm, 12dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-S5030-31-D(E)	Industrial SFP 155M 100Base-FX, SM, 30km, 1310nm, 19dB, LC, DDMI, -10~70°C (-40~85°C)

SFP Naming Rule

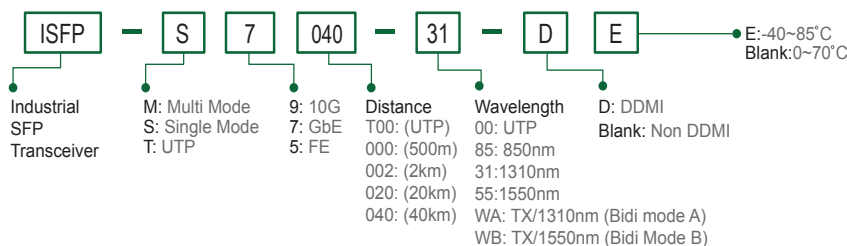



IGS-812SM

8x 10/100/1000Base-T + 12x 100/1000Base-X SFP

IGS-1604SM

16x 10/100/1000Base-T + 4x 100/1000Base-X SFP



These models are managed industrial grade Gigabit switches with 8~16 10/100/1000Base-T ports and 4~12 Gigabit/Fast Ethernet SFP ports that provide stable and reliable Ethernet transmission. These switches support a variety of Ethernet functions, including STP/RSTP/MSTP/ ITU-T G.8032 ERPS and multiple μ-Ring for redundant cabling, layer 2 Ethernet IGMP, VLAN, QoS, ACL, Security, IPv6, bandwidth control, port mirroring, cable diagnostic and Green Ethernet. Housed in rugged DIN rail or wall mountable enclosures, these switches are designed for harsh environments, such as industrial networking, security automation applications, intelligent transportation systems (ITS) and are also suitable for many military and utility market applications where environmental conditions exceed commercial product specifications (See figure). Standard operating temperature range models (-10 to 60°C) and wide operating temperature range models (-40 to 75°C) fulfill the special needs of industrial automation applications.

Features

- 8x 10/100/1000Base-T RJ-45 and 12x 100/1000Base-X SFP Fiber (IGS-812SM)
- 16x 10/100/1000Base-T RJ-45 and 4x 100/1000Base-X SFP Fiber (IGS-1604SM)
- UL60950-1, CE, FCC, Rail Traffic EN50121-4 certified
- Heavy industrial grade EMS, EMI, EN61000-6-2, EN61000-6-4 certified
- Cable diagnostic, Measuring cable normal or broken point distance
- Rugged Metal, IP30 Protection & Fanless design
- Supports Green Ethernet IEEE802.3az EEE (Energy Efficient Ethernet) management to optimize the power Consumption
- STP, RSTP, MSTP, ITU-T G.8032 Ethernet Ring Protection Switching (ERPS) for redundant cabling
- Provides 5 instances that each can support μ-Ring, μ-Chain or Sub-Ring type for flexible uses. Supports up to 5 rings in one device (Please see CTC μ-Ring white paper for more details and more topology application)
- μ-Ring for Redundant Cabling, recovery time<10ms in 250 devices
- DHCP Server/Client/Relay/Snooping/Snooping option 82/Relay option 82
- QoS, Traffic classification QoS, CoS, bandwidth control for Ingress and Egress, Storm Control, DiffServ
- IEEE802.1q VLAN, MAC based VLAN, IP subnet based VLAN, Protocol based VLAN, VLAN translation, GVRP, MVR
- Dynamic IEEE 802.3ad LACP Link Aggregation, Static Link Aggregation
- IGMP snooping V1/V2/V3, IGMP Filtering/ Throttling, IGMP query, IGMP proxy reporting, MLD snooping V1/V2
- Security : Port based and MAC based IEEE802.1X, RADIUS, ACL, TACACS+, HTTP/HTTPS, SSL/SSH v2
- Software upgrade via TFTP and HTTP, redundant firmware to avoid in case of upgrade failure
- Supports IEEE1588 PTP V2 for precise time synchronization to operate in Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master, Slave mode by each port
- RMON, MIB II, Port mirroring, Event syslog, DNS, NTP, SNTP, IEEE802.1ab LLDP
- Supports IPv6 Telnet server /ICMP v6
- CLI, Web based management, SNMP v1/v2c/v3, Telnet server for management
- Supports Modbus/TCP protocols for management
- Provides SmartConfig for quick and easy mass configuration tool (Please see Catalog chapter 1- Software Management for more details)
- Supports SmartView for Centralized management (Please see Catalog chapter 1- Software Management for more details)
- Supporting Central EMS for management of up to 50 SmartView Server, and maximum up to 25,000 device (Please see Catalog chapter 1- Software Management for more details)

Specifications

Standard	IEEE 802.3	10Base-T 10Mbit/s Ethernet
	IEEE 802.3u	100Base-TX, 100Base-FX, Fast Ethernet
	IEEE 802.3ab	1000Base-T Gbit/s Ethernet over twisted pair
	IEEE 802.3z	1000Base-X Gbit/s Ethernet over Fiber-Optic
	IEEE 802.1d	STP (Spanning Tree Protocol)
	IEEE 802.1w	RSTP (Rapid Spanning Tree Protocol)
	IEEE 802.1s	MSTP (Multiple Spanning Tree Protocol)
	ITU-T G.8032 / Y.1344	ERPS (Ethernet Ring Protection Switching)
	IEEE 802.1Q	Virtual LANs (VLAN)
	IEEE 802.1X	Port based and MAC based Network Access Control, Authentication
	IEEE802.3ac	Max frame size extended to 1522Bytes.
	IEEE 802.3ad	Link aggregation for parallel links with LACP(Link Aggregation Control Protocol)
	IEEE 802.3x	Flow control for Full Duplex

Standard	IEEE 802.1ad	Stacked VLANs, Q-in-Q
	IEEE 802.1p	LAN Layer 2 QoS/CoS Protocol for Traffic Prioritization
	IEEE 802.1ab	Link Layer Discovery Protocol (LLDP)
VLAN ID	IEEE 802.3az	EEE (Energy Efficient Ethernet)
	4094	IEEE802.1Q VLAN VID
Switch Architecture	Back-plane (Switching Fabric): 40Gbps (IGS-812SM, IGS-1604SM) Full wire-speed	
	Data Processing	Store and Forward
Flow Control	IEEE 802.3x for full duplex mode Back pressure for half duplex mode	
Network Connector	8x 10/100/1000Base-T RJ-45+ 12x 100/1000Base-X SFP connector (IGS-812SM)	
	16x 10/100/1000Base-T RJ-45+ 4x 100/1000Base-X SFP connector (IGS-1604SM)	
RJ-45 UTP port support Auto negotiation speed, Auto MDI/MDI-X function, SFP port support dual speed with DDMI		

Console	RS-232 (RJ-45)												
Network Cable	UTP/STP above Cat. 5e cable EIA/TIA-568 100-ohm (100m)												
Protocols	CSMA/CD												
Reverse Polarity Protection	Supported for power input												
Overload Current Protection	Supported												
CPU Watch Dog	Supported												
Power Supply	Redundant Dual DC 12/24/48V (9.6~60VDC) Input power (Removable Terminal Block)												
Power Consumption	<table border="1"> <thead> <tr> <th>Input Voltage</th> <th>IGS-812SM</th> <th>IGS-1604SM</th> </tr> </thead> <tbody> <tr> <td>12VDC</td> <td>14.3W</td> <td>14.5W</td> </tr> <tr> <td>24VDC</td> <td>14.2W</td> <td>14.4W</td> </tr> <tr> <td>48VDC</td> <td>15.8W</td> <td>16.3W</td> </tr> </tbody> </table>	Input Voltage	IGS-812SM	IGS-1604SM	12VDC	14.3W	14.5W	24VDC	14.2W	14.4W	48VDC	15.8W	16.3W
	Input Voltage	IGS-812SM	IGS-1604SM										
	12VDC	14.3W	14.5W										
	24VDC	14.2W	14.4W										
48VDC	15.8W	16.3W											
LED	Per unit: Power 1 (Green), Power 2 (Green), Fault (Amber), CPU Act (Green), Ring Master (Yellow) Per RJ-45 port: 10/100 Link/Active (Green) 1000 Link/Active (Amber) SFP Fiber Per port: Link/Active (Green)												
Jumbo Frame	9.6KB												
IEEE802.3ac	Max frame size extended to 1522Bytes (allow Q-tag in packet)												
MAC Address Table	8K												
Memory Buffer	512K Bytes for packet buffer												
Warning Message	System Syslog, SMTP/ e-mail event message, alarm relay												
Alarm Relay Contact	Relay outputs with current carrying capacity of 1 A @24VDC												
Removable Terminal Block	Provide 2 redundant power, alarm relay contact, 6 Pin												
Operating Temperature	-10 ~ 60°C (IGS-812SM, IGS-1604SM) -40 ~ 75°C (IGS-812SM-E, IGS-1604SM-E)												
Operating Humidity	5% to 95% (Non-condensing)												

Software Specifications

Topology	
VLAN	IEEE 802.1q VLAN, up to 4094 802.1Q VLAN VID IEEE 802.1q VLAN, up to 4094 Groups IEEE 802.1ad Q-in-Q MAC-based VLAN, up to 256 entries IP Subnet-based VLAN, up to 128 entries Protocol-based VLAN(Ethernet, SNAP, LLC), up to 128 entries VLAN Translation, up to 256 entries GVRP (GARP VLAN Registration Protocol) MVR (Multicast VLAN Registration)
Link Aggregation (Port Trunk)	Static (Hash with SA, DA, IP, TCP/UDP port), up to 5 trunk group Dynamic (IEEE 802.3ad LACP), up to 5 trunk group
Spanning Tree	IEEE802.1d STP IEEE802.1w RSTP IEEE802.1s MSTP
Multiple μ-Ring	up to 5 instances that each supports μ-Ring, μ-Chain or Sub-Ring type for flexible uses, and maximum up to 5 Rings. Recovery time <10ms The maximum number of devices allowed in a Ring supported ring is 250. (Please see CTC Union μ-Ring white paper for more details and more topology applications)
Loop Protection	Supported
ITU-T G.8032 / Y.1344 ERPS (Ethernet Ring Protection)	Recovery time <50ms Single Ring, Sub-Ring, Multiple ring topology network
QoS Features	
Class of Service	IEEE802.1p 8 active priorities queues for per port
Traffic Classification QoS	IEEE802.1p based CoS IP Precedence based CoS IP DSCP based CoS
Traffic Classification QoS	QCL(QoS Control List): Frame Type, Source/Destination MAC, VLAN ID, PCP, DEI QCE(QoS Control Entry): Protocol, Source IP, IP Fragment, DSCP, TCP/UDP port number

Storage Temperature	-40 ~ 85°C
Housing	Rugged Metal, IP30 Protection, Fanless
Dimensions	106 x 72 x152 mm (D x W x H) (IGS-812SM, IGS-1604SM)
Weight	0.795kg (IGS-812SM) 0.82kg (IGS-1604SM)
Installation Mounting	DIN Rail mounting or wall mounting (optional)
MTBF	517,181 Hours (IGS-812SM) 412,015 Hours (IGS-1604SM) (MIL-HDBK-217)
Warranty	5 years
Certification	
EMC	CE
EMI (Electromagnetic Interference)	FCC Part 15 Subpart B Class A, CE EN55022 Class A
Railway Traffic	EN50121-4
Immunity for Heavy Industrial Environment	EN61000-6-2
Emission for Heavy Industrial Environment	EN61000-6-4
EMS (Electromagnetic Susceptibility) Protection Level	EN61000-4-2 (ESD) Level 3, Criteria B EN61000-4-3 (RS) Level 3, Criteria A EN61000-4-4 (Burst) Level 3, Criteria A EN61000-4-5 (Surge) Level 3, Criteria B EN61000-4-6 (CS) Level 3, Criteria A EN61000-4-8 (PFMF, Magnetic Field) Field Strength: 300A/m, Criteria A
Safety	UL60950-1
Shock	IEC 60068-2-27
Freefall	IEC 60068-2-32
Vibration	IEC 60068-2-6

Bandwidth Control for Ingress	Rate in steps : 1 kbps / Mbps / fps / kfps Range : 100 kbps to 1Gbps / 1fps to 3300kfps Rate Unit : bit or frame Rate in steps : 1 kbps / Mbps
Bandwidth Control for Egress	Range : 100 kbps to 1Gbps Rate Unit : bit Per queue / Per port shaper
DiffServ (RF 2474) Remarking	
Storm Control	for Unicast, Broadcast, Multicast
IP Multicasting Features	
IGMP / MLD Snooping	IGMP Snooping v1, v2, v3 / MLD Snooping v1, v2 Port Filtering Profile Throttling, Fast Leave Maximum Multicast Group : up to 1022 entries Query / Static Router Port
Security Features	
IEEE 802.1X	Port-Based MAC-Based
ACL	Number of rules : up to 256 entries for L2 / L3 / L4 L2 : Mac address SA/DA/VLAN L3 : IP address SA/DA, Subnet L4 : TCP/UDP
RADIUS authentication & accounting	
TACACS+ authentication & accounting, TACACS+ 3.0	
HTTPS, HTTP	Supported
SSL / SSH v2	Supported
User Name Password Authentication	Local Authentication Remote Authentication (via RADIUS / TACACS+)
Management Interface Access Filtering	Web, Telnet / SSH , CLI RS-232 console
Management Features	
CLI	Cisco® like CLI
Web Based Management	
Telnet	Server
SNMP	V1, V2c, V3

Modbus/TCP	Support for management and monitoring
SW & Configuration Upgrade	TFTP, HTTP Redundant firmware in case of upgrade failure
RMON	RMON I (1, 2, 3, 9 group), RMON II
MIB	RFC1213 MIB II, Private MIB
UPnP	Supported
DHCP	Server, Client, Relay, Snooping Snooping option 82 Relay option 82
IP Source Guard	Supported
Port Mirroring	Supported
Event Syslog	Syslog server (RFC3164) (Support 1 server)
Warning Message	System syslog, e-mail, alarm relay
DNS	Client, Proxy
IEEE1588 PTP V2	Support 5 operating mode in each port : Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master, Slave
NTP, SNTP	Client
LLDP (IEEE 802.1ab)	Link Layer Discovery Protocol LLDP-MED
IPv6 Features	
IPv6 Management	Telnet Server/ICMP v6

SNMP over IPv6	Supported
HTTP over IPv6	Supported
SSH over IPv6	Supported
IPv6 Telnet	Supported
IPv6 NTP, SNTP	Client
IPv6 TFTP	Supported
IPv6 QoS	Supported
IPv6 ACL	Number of rules: up to 256 entries for L2 / L3 / L4 L2 : Mac address SA/DA/VLAN L3: IP address SA/DA, Subnet L4: TCP/UDP
Others Features	

Green Ethernet	Supports IEEE802.3az EEE (Energy Efficient Ethernet) Management to optimize the power consumption Determine the cable length and lowering the power for ports with short cables Lower the power for a port when there is no link LED Power Management :Adjustment LEDs intensity
Cable Diagnostic	Measuring UTP cable normal or broken point distance


Application

Figure : Application Example




Dimensions

► IGS-812SM

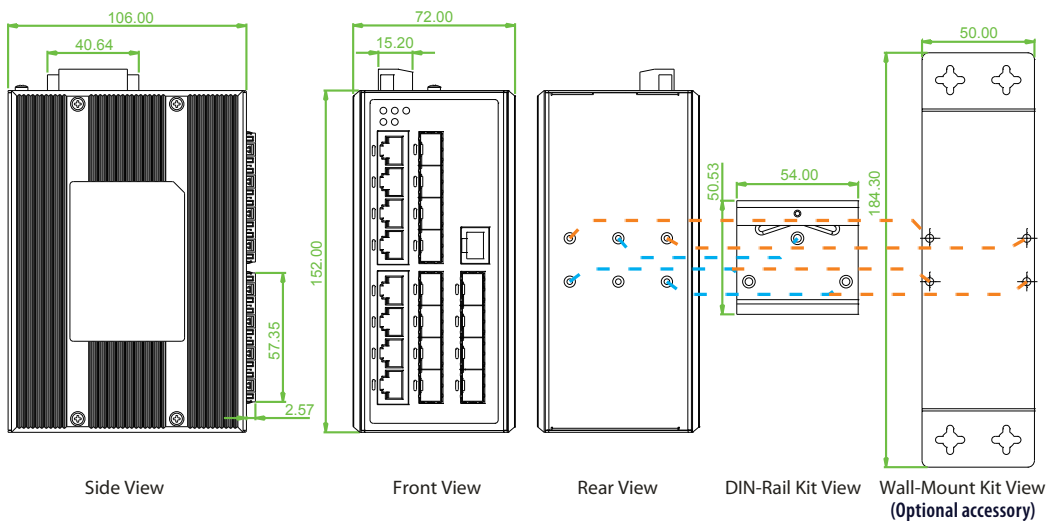


► IGS-1604SM

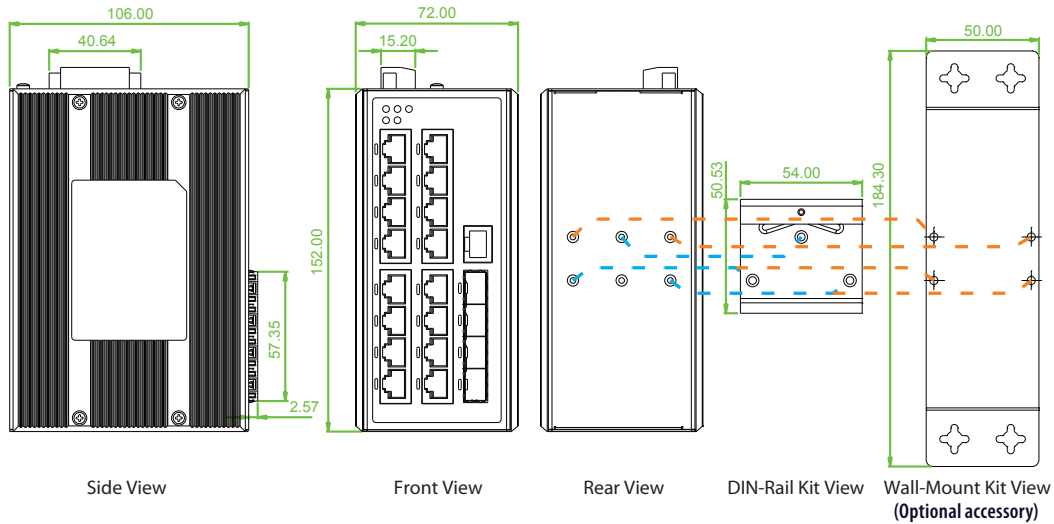

Ordering Information

Model Name	Managed	Total Port	RJ45 UTP port		Fiber Port	Power Input		Certification				Operating Temperature
			10/100/1000 Base-T	100/1000 Base-X		Redundant	Railway EN50121-4	Safety UL60950-1	EN61000-6-2 EN61000-6-4	CE FCC		
IGS-812SM	V	20	8	12 SFP	12/24/48VDC	V	V	V	V	V	-10~60°C	
IGS-812SM-E	V	20	8	12 SFP	12/24/48VDC	V	V	V	V	V	-40~75°C	
IGS-1604SM	V	20	16	4 SFP	12/24/48VDC	V	V	V	V	V	-10~60°C	
IGS-1604SM-E	V	20	16	4 SFP	12/24/48VDC	V	V	V	V	V	-40~75°C	

Model Naming Rule

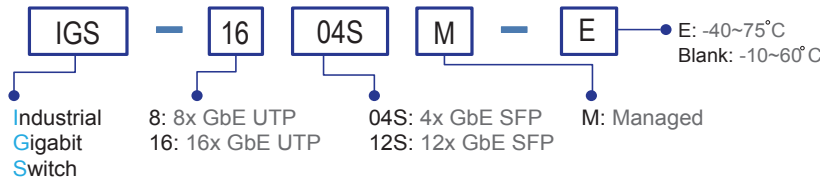

Package List

- One device of the series
- Console cable (RJ-45 to DB9)
- CD (SmartConfig, MIB file, Manual)
- Quickly installation guide
- Din Rail with screws
- Terminal block
- Protective caps for SFP ports

Optional Accessories

Wall mount kit


IND-WMK02 Wall Mount kit for Industrial product (Wide) (184 x 50mm)

Industrial SFP Transceiver

The ISFP series of industrial grade SFP modules have been fully tested with the series product for guaranteed compatibility and performance. The best performance can be guaranteed even in mission-critical applications. (Please see CTC Union's Industrial SFP datasheet for more details and more items.)

ISFP-M7000-85-D(E)	Industrial SFP GbE 1000Base-SX, M/M, 500 meter, wave length 850nm, 7.5dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-S7020-31-D(E)	Industrial SFP 1000Base-LX, S/M, 20km, wave length 1310nm, 15dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-T7T00-00(E)	Industrial SFP 1000Base-T UTP 100meter, -10~70°C (-40~85°C)
ISFP-M5002-31-D(E)	Industrial SFP 155M 100Base-FX, MM, 2km, wave length 1310nm, 12dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-S5030-31-D(E)	Industrial SFP 155M 100Base-FX, SM, 30km, 1310nm, 19dB, LC, DDMI, -10~70°C (-40~85°C)

SFP Naming Rule

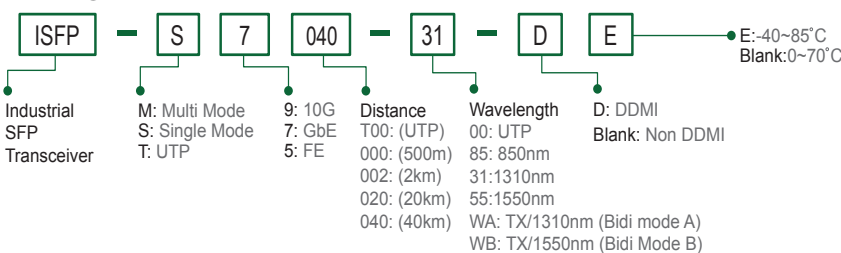



IGS⁺404SM

4x 10/100/1000Base-T + 4x 100/1000Base-X SFP

IGS⁺803SM

8x 10/100/1000Base-T + 3x 100/1000Base-X SFP



These models are managed industrial grade Gigabit switches with 4/8 10/100/1000Base-T ports plus 4/3 Gigabit/Fast Ethernet SFP ports that provide stable and reliable Ethernet transmission. These switches support a variety of Ethernet functions, including STP/RSTP/MSTP/ ITU-T G.8032 ERPS and multiple μ-Ring for redundant cabling, layer 2 Ethernet IGMP, VLAN, QoS, ACL, Security, IPv6, bandwidth control, port mirroring, cable diagnostic and Green Ethernet. Housed in rugged DIN rail or wall mountable enclosures, these switches are designed for harsh environments, such as telecom network, industrial network, security automation applications, intelligent transportation systems (ITS) and are also suitable for many military and utility market applications where environmental conditions exceed commercial product specifications (See Figure 1). Standard operating temperature range models (-10 to 60°C) and wide operating temperature range models (-40 to 75°C) fulfill the special needs of industrial automation applications.

Features

- 4x 10/100/1000Base-T RJ-45 and 4x 100/1000Base-X SFP Fiber (IGS⁺404SM)
- 8x 10/100/1000Base-T RJ-45 and 3x 100/1000Base-X SFP Fiber (IGS⁺803SM)
- Redundant dual DC input power 12/24/48VDC (9.6~60VDC)
- **Supports negative voltage power input with isolated RS-232 console port (for example in telecom system)**
- UL60950-1, EN60950-1, CE, FCC, Rail Traffic EN50121-4, traffic control NEMA TS2 certified
- Heavy industrial grade EMS, EMI, EN61000-6-2, EN61000-6-4 certified
- **2.25KVDC Hi-pot isolation protection for Ethernet ports and power**
- **4KV surge protection for UTP and fiber ports**
- Cable diagnostic, Measuring cable normal or broken point distance
- Rugged Metal, IP30 Protection & Fanless design
- Supports Green Ethernet IEEE802.3az EEE (Energy Efficient Ethernet) management to optimize the power Consumption
- STP, RSTP, MSTP, ITU-T G.8032 Ethernet Ring Protection Switching (ERPS) for redundant cabling
- Provides 5 instances that each can support μ-Ring, μ-Chain or Sub-Ring type for flexible uses. Supports up to 5 rings in one device (Please see CTC μ-Ring white paper for more details and more topology application)
- μ-Ring for Redundant Cabling, recovery time < 10ms in 250 devices
- DHCP Server/Client/Relay/Snooping option 82/Relay option 82
- QoS, Traffic classification QoS, CoS, bandwidth control for Ingress and Egress, Storm Control, DiffServ
- IEEE802.1q VLAN, MAC based VLAN, IP subnet based VLAN, Protocol based VLAN, VLAN translation, GVRP, MVR
- Dynamic IEEE 802.3ad LACP Link Aggregation, Static Link Aggregation
- IGMP snooping V1/V2/V3, IGMP Filtering/ Throttling, IGMP query, IGMP proxy reporting, MLD snooping V1/V2
- Security : Port based and MAC based IEEE802.1X, RADIUS, ACL, TACACS+, HTTP/HTTPS, SSL/SSH v2
- Software upgrade via TFTP and HTTP, redundant firmware to avoid in case of upgrade failure
- Supports IEEE1588 PTP V2 for precise time synchronization to operate in Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master, Slave mode by each port
- RMON, MIB II, Port mirroring, Event syslog, DNS, NTP, SNMP, IEEE802.1ab LLDP
- Supports IPv6 Telnet server /ICMP v6
- CLI, Web based management, SNMP v1/v2c/v3, Telnet server for management
- Supports Modbus/TCP protocols for management
- Provides SmartConfig for quick and easy mass configuration tool (Please see Catalog chapter 1- Software Management for more details)
- Supports SmartView for Centralized management (Please see Catalog chapter 1- Software Management for more details)

Specifications

Standard	IEEE 802.3	10Base-T 10Mbit/s Ethernet
	IEEE 802.3u	100Base-TX, 100Base-FX, Fast Ethernet
	IEEE 802.3ab	1000Base-T Gbit/s Ethernet over twisted pair
	IEEE 802.3z	1000Base-X Gbit/s Ethernet over Fiber-Optic
	IEEE 802.1d	STP (Spanning Tree Protocol)
	IEEE 802.1w	RSTP (Rapid Spanning Tree Protocol)
	IEEE 802.1s	MSTP (Multiple Spanning Tree Protocol)
	ITU-T G.8032 / Y.1344	ERPS (Ethernet Ring Protection Switching)
	IEEE 802.1Q	Virtual LANs (VLAN)
	IEEE 802.1X	Port based and MAC based Network Access Control, Authentication

Standard	IEEE802.3ac	Max frame size extended to 1522Bytes.
	IEEE 802.3ad	Link aggregation for parallel links with LACP(Link Aggregation Control Protocol)
	IEEE 802.3x	Flow control for Full Duplex
	IEEE 802.1ad	Stacked VLANs, Q-in-Q
	IEEE 802.1p	LAN Layer 2 QoS/CoS Protocol for Traffic Prioritization
	IEEE 802.1ab	Link Layer Discovery Protocol (LLDP)
	IEEE 802.3az	EEE (Energy Efficient Ethernet)
VLAN ID	4094	IEEE802.1Q VLAN VID
Switch Architecture	Back-plane (Switching Fabric): 16Gbps (IGS ⁺ 404SM) 22Gbps (IGS ⁺ 803SM) Full wire-speed	

Data Processing	Store and Forward			
Flow Control	IEEE 802.3x for full duplex mode Back pressure for half duplex mode			
Network Connector	4x 10/100/1000Base-T RJ-45 + 4x 100/1000Base-X SFP connector (IGS+404SM) 8x 10/100/1000Base-T RJ-45 + 3x 100/1000Base-X SFP connector (IGS+803SM) RJ-45 UTP port support Auto negotiation speed, Auto MDI/MDI-X function, SFP port support dual speed with DDMI			
Console	RS-232 (RJ-45) Isolated RS-232 port grounding for negative voltage power system, or telecom application			
Network Cable	UTP/STP above Cat. 5e cable EIA/TIA-568 100-ohm (100m)			
Protocols	CSMA/CD			
Reverse Polarity Protection	Supported			
Overload Current Protection	Supported			
CPU Watch Dog	Supported			
Power Supply	Redundant Dual DC 12/24/48V (9.6~60VDC) Input power (Removable Terminal Block) Supports negative voltage power input power for telecom			
Power Consumption	IGS+404SM			
	Input Voltage	12VDC	24VDC	48VDC
	IGS+404SM	7.7W	8W	9.2W
	IGS+803SM			
Input Voltage	12VDC	24VDC	48VDC	
IGS+803SM	8.6W	10.8W	11.5W	
LED	Per unit: Power 1 (Green), Power 2 (Green), Fault (Amber), CPU Act (Green), Ring Master (Yellow) Per RJ-45 port: 10/100 Link/Active (Green) 1000 Link/Active (Amber) SFP Fiber Per port: Link/Active (Green)			
Jumbo Frame	9.6KB			
IEEE802.3ac	Max frame size extended to 1522Bytes (allow Q-tag in packet)			
MAC Address Table	8K			
Memory Buffer	512K Bytes for packet buffer			
Warning Message	System Syslog, SMTP/ e-mail event message, alarm relay			
Alarm Relay Contact	Relay outputs with current carrying capacity of 1 A @24VDC			
Removable Terminal Block	Provide 2 redundant power, alarm relay contact, 6 Pin			

Software Specifications

Topology	
VLAN	IEEE 802.1q VLAN, up to 4094 802.1Q VLAN VID IEEE 802.1q VLAN, up to 4094 Groups IEEE 802.1ad Q-in-Q MAC-based VLAN, up to 256 entries IP Subnet-based VLAN, up to 128 entries Protocol-based VLAN (Ethernet, SNAP, LLC), up to 128 entries VLAN Translation, up to 256 entries GVRP (GARP VLAN Registration Protocol) MVR (Multicast VLAN Registration)
Link Aggregation (Port Trunk)	Static (Hash with SA, DA, IP, TCP/UDP port), up to 5 trunk group Dynamic (IEEE 802.3ad LACP), up to 5 trunk group
Spanning Tree	IEEE802.1d STP IEEE802.1w RSTP IEEE802.1s MSTP
Multiple μ-Ring	up to 5 instances that each supports μ-Ring, μ-Chain or Sub-Ring type for flexible uses, and maximum up to 5 Rings. Recovery time <10ms The maximum number of devices allowed in a Ring supported ring is 250. (Please see CTC Union μ-Ring white paper for more details and more topology applications)
Loop Protection	Supported
ITU-T G.8032 / Y.1344 ERPS (Ethernet Ring Protection)	Recovery time <50ms Single Ring, Sub-Ring, Multiple ring topology network
QoS Features	
Class of Service	IEEE802.1p 8 active priorities queues for per port

Operating Temperature	-10 ~ 60°C (IGS+404SM, IGS+803SM) -40 ~ 75°C (IGS+404SM-E, IGS+803SM-E)
Operating Humidity	5% to 95% (Non-condensing)
Storage Temperature	-40 ~ 85°C
Housing	Rugged Metal, IP30 Protection, Fanless
Dimensions	106 x 62.5 x 135 mm (D x W x H) (IGS+404SM) 106 x 72 x 152 mm (D x W x H) (IGS+803SM)
Weight	0.65kg (IGS+404SM) 0.81kg (IGS+803SM)
Installation Mounting	DIN Rail mounting, or wall mounting (optional)
MTBF	861,962 Hours (IGS+404SM) 688,248 Hours (IGS+803SM) (MIL-HDBK-217)
Warranty	5 years
Certification	
EMC	CE
EMI (Electromagnetic Interference)	FCC Part 15 Subpart B Class A, CE EN55022 Class A
Railway Traffic	EN50121-4
Traffic control	NEMA TS2 (IGS+803SM)
Immunity for Heavy Industrial Environment	EN61000-6-2
Emission for Heavy Industrial Environment	EN61000-6-4
EMS (Electromagnetic Susceptibility) Protection Level	EN61000-4-2 (ESD) Level 3, Criteria B
	EN61000-4-3 (RS) Level 3, Criteria A
	EN61000-4-4 (Burst) Level 3, Criteria A
	EN61000-4-5 (Surge) Level 3, Criteria B
	EN61000-4-6 (CS) Level 3, Criteria A
	EN61000-4-8 (PFMF, Magnetic Field) Field Strength: 300A/m, Criteria A
Safety	UL60950-1, EN60950-1
Hi pot protection	DC 2.25KV for power to chassis ground, Ethernet ports to chassis ground
4KV surge protection	Supported for UTP and Fiber port
Shock	IEC 60068-2-27
Freefall	IEC 60068-2-32
Vibration	IEC 60068-2-6


Traffic Classification QoS	IEEE802.1p based CoS IP Precedence based CoS IP DSCP based CoS
Traffic Classification QoS	QCL(QoS Control List): Frame Type, Source/Destination MAC, VLAN ID, PCP, DEI QCE(QoS Control Entry): Protocol, Source IP, IP Fragment, DSCP, TCP/UDP port number
Bandwidth Control for Ingress	Rate in steps : 1 kbps / Mbps / fps / kfps Range : 100 kbps to 1Gbps / 1fps to 3300kfps Rate Unit : bit or frame Rate in steps : 1 kbps / Mbps
Bandwidth Control for Egress	Range : 100 kbps to 1Gbps Rate Unit : bit Per queue / Per port shaper
DiffServ (RF 2474) Remarking	
Storm Control	for Unicast, Broadcast, Multicast
IP Multicasting Features	
IGMP / MLD Snooping	IGMP Snooping v1, v2, v3 / MLD Snooping v1, v2 Port Filtering Profile Throttling, Fast Leave Maximum Multicast Group : up to 1022 entries Query / Static Router Port
Security Features	
IEEE 802.1X	Port-Based MAC-Based
ACL	Number of rules : up to 256 entries for L2 / L3 / L4 L2 : Mac address SA/DA/VLAN L3 : IP address SA/DA, Subnet L4 : TCP/UDP

RADIUS authentication & accounting	
TACACS+ authentication & accounting, TACACS+ 3.0	
HTTPS, HTTP	Supported
SSL / SSH v2	Supported
User Name	Local Authentication
Password	
Authentication	Remote Authentication (via RADIUS / TACACS+)
Management	
Interface Access	Web, Telnet / SSH , CLI RS-232 console
Filtering	
Management Features	
CLI	Cisco® like CLI
Web Based Management	
Telnet	Server
SNMP	V1, V2c, V3
Modbus/TCP	Support for management and monitoring
SW & Configuration Upgrade	TFTP, HTTP
Upgrade	Redundant firmware in case of upgrade failure
RMON	RMON I (1, 2, 3, 9 group), RMON II
MIB	RFC1213 MIB II, Private MIB
UPnP	Supported
DHCP	Server, Client, Relay, Snooping
	Snooping option 82
	Relay option 82
IP Source Guard	Supported
Port Mirroring	Supported
Event Syslog	Syslog server (RFC3164) (Support 1 server)
Warning Message	System syslog, e-mail, alarm relay

DNS	Client, Proxy
IEEE1588 PTP V2	Support 5 operating mode in each port : Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master, Slave
NTP, SNTP	Client
LLDP (IEEE 802.1ab)	Link Layer Discovery Protocol LLDP-MED
IPv6 Features	
IPv6 Management	Telnet Server/ICMP v6
SNMP over IPv6	Supported
HTTP over IPv6	Supported
SSH over IPv6	Supported
IPv6 Telnet	Supported
IPv6 NTP, SNTP	Client
IPv6 TFTP	Supported
IPv6 QoS	Supported
IPv6 ACL	Number of rules: up to 256 entries for L2 / L3 / L4 L2 : Mac address SA/DA/VLAN L3 : IP address SA/DA, Subnet L4 : TCP/UDP
Others Features	
Green Ethernet	Supports IEEE802.3az EEE (Energy Efficient Ethernet) Management to optimize the power consumption Determine the cable length and lowering the power for ports with short cables Lower the power for a port when there is no link LED Power Management :Adjustment LEDs intensity
Cable Diagnostic	Measuring UTP cable normal or broken point distance


Application

Figure : Application Example

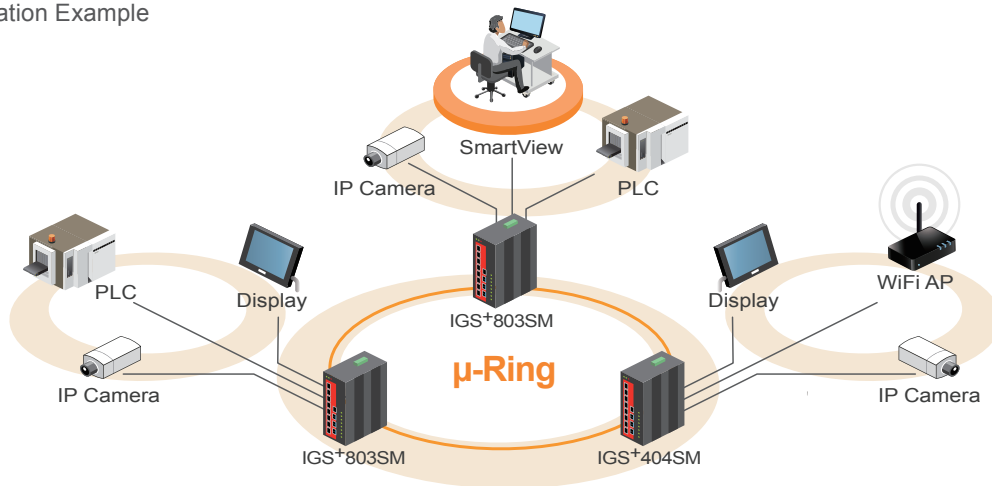


Dimensions

► IGS+404SM

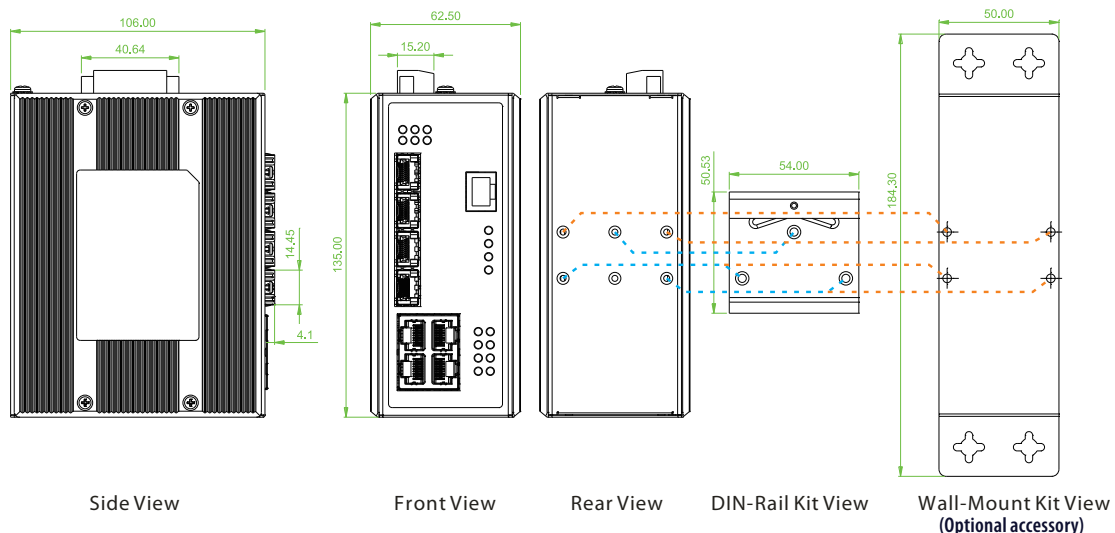


► IGS+803SM

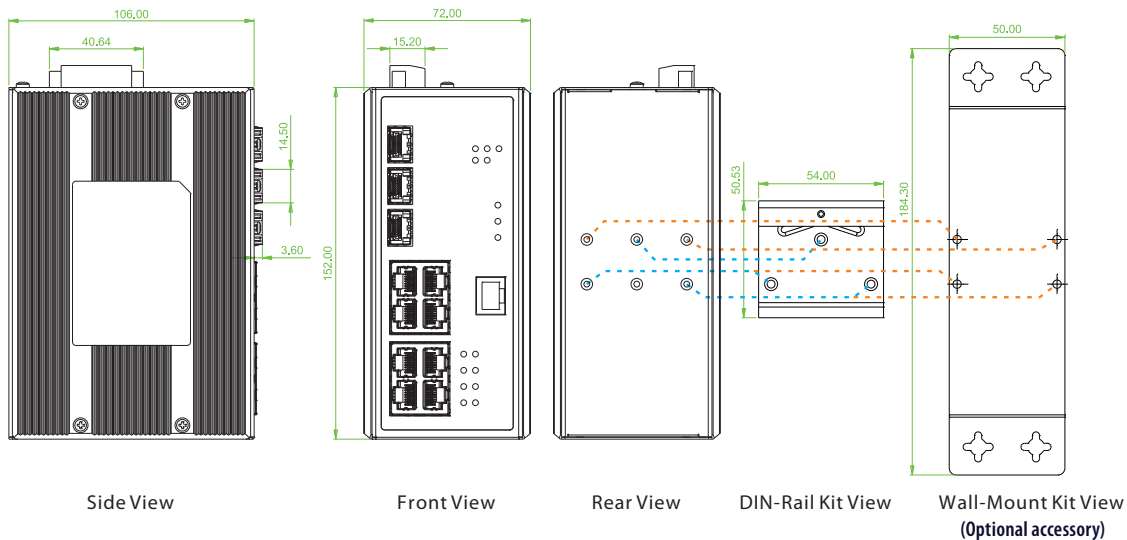

Ordering Information

Model Name	Managed	Total Port	RJ45 UTP port		Fiber Port	Power Input		Certification				Operating Temperature	
			10/100/1000 Base-T	100/1000 Base-X	100/1000 Base-X	Redundant	Railway EN50121-4	NEMA TS2	Safety UL60950-1	Safety EN60950-1	EN61000-6-2		EN61000-6-4
IGS+404SM	V	8	4	4	4 SFP	12/24/48, -48VDC	V	V	V	V	V	V	-10~60°C
IGS+404SM-E	V	8	4	4	4 SFP	12/24/48, -48VDC	V		V	V	V	V	-40~75°C
IGS+803SM	V	11	8	3	3 SFP	12/24/48, -48VDC	V	V	V	V	V	V	-10~60°C
IGS+803SM-E	V	11	8	3	3 SFP	12/24/48, -48VDC	V	V	V	V	V	V	-40~75°C

Model Naming Rule

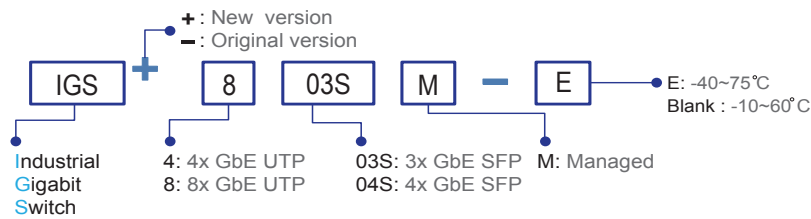

Package List

- One device of the series
- Console cable (RJ-45 to DB9)
- CD (SmartConfig, MIB file, Manual)
- Quickly installation guide
- Din Rail with screws
- Terminal block
- Protective caps for SFP ports

Optional Accessories

Wall mount kit


IND-WMK02 Wall Mount kit for Industrial product (Wide.) (184 x 50mm)

Industrial SFP Transceiver

The ISFP series of industrial grade SFP modules have been fully tested with the series product for guaranteed compatibility and performance. The best performance can be guaranteed even in mission-critical applications. (Please see CTC Union's Industrial SFP datasheet for more details and more items.)

ISFP-M7000-85-D(E)	Industrial SFP GbE 1000Base-SX, M/M, 500 meter, wave length 850nm, 7.5dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-S7020-31-D(E)	Industrial SFP 1000Base-LX, S/M, 20km, wave length 1310nm, 15dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-T7T00-00-(E)	Industrial SFP 1000Base-T UTP 100meter, -10~70°C (-40~85°C)
ISFP-M5002-31-D(E)	Industrial SFP 155M 100Base-FX, MM, 2km, wave length 1310nm, 12dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-S5030-31-D(E)	Industrial SFP 155M 100Base-FX, SM, 30km, 1310nm, 19dB, LC, DDMI, -10~70°C (-40~85°C)

SFP Naming Rule

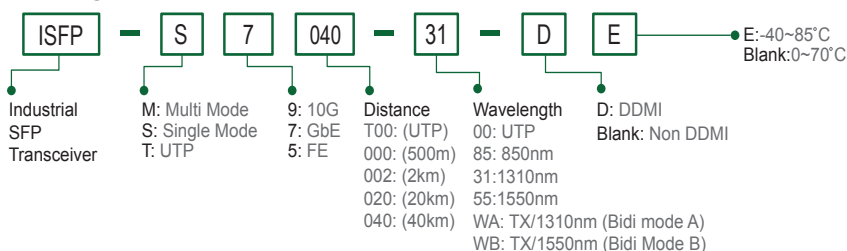



1G/2.5G

IGS-404SM

4x 10/100/1000Base-T+ 2x FE/GbE SFP +
2x FE/GbE/2.5G SFP

IGS-803SM

8x 10/100/1000Base-T+ 1x FE/GbE SFP +
2x FE/GbE/2.5G SFP



These models are managed industrial grade Gigabit switches with 4/8 10/100/1000Base-T ports and 4/3 Gigabit/Fast with **2 port 2.5GbE SFP** ports that provide stable and reliable Ethernet transmission. These switches support a variety of Ethernet functions, including STP/RSTP/MSTP/ ITU-T G.8032 ERPS and multiple μ-Ring for redundant cabling, layer 2 Ethernet IGMP, VLAN, QoS, ACL, Security, IPv6, bandwidth control, port mirroring, cable diagnostic and Green Ethernet. Housed in rugged DIN rail or wall mountable enclosures, these switches are designed for harsh environments, such as industrial networking, security automation applications, intelligent transportation systems (ITS) and are also suitable for many military and utility market applications where environmental conditions exceed commercial product specifications (See figure 1). Standard operating temperature range models (-10 to 60°C) and wide operating temperature range models (-40 to 75°C) fulfill the special needs of industrial automation applications.

Features

- ◆ 4x 10/100/1000Base-T RJ-45 and 2x FE/GbE SFP + **2x FE/GbE/2.5G SFP** Fiber (IGS-404SM)
- ◆ 8x 10/100/1000Base-T RJ-45 and 1x FE/GbE SFP + **2x FE/GbE/2.5G SFP** Fiber (IGS-803SM)
- UL60950-1, CE, FCC, Rail Traffic EN50121-4, Traffic control NEMA TS2 certified
- Heavy industrial grade EMS, EMI, EN61000-6-2, EN61000-6-4 certified
- Cable diagnostic, Measuring cable normal or broken point distance
- Rugged Metal, IP30 Protection & Fanless design
- Supports Green Ethernet IEEE802.3az EEE (Energy Efficient Ethernet) management to optimize the power Consumption
- STP, RSTP, MSTP, ITU-T G.8032 Ethernet Ring Protection Switching (ERPS) for redundant cabling
- Provides 5 instances that each can support μ-Ring, μ-Chain or Sub-Ring type for flexible uses. Supports up to 5 rings in one device (Please see CTC μ-Ring white paper for more details and more topology application)
- μ-Ring for Redundant Cabling, recovery time < 10ms in 250 devices
- DHCP Server/Client/Relay/Snooping/Snooping option 82/Relay option 82
- QoS, Traffic classification QoS, CoS, bandwidth control for Ingress and Egress, Storm Control, DiffServ
- IEEE802.1q VLAN, MAC based VLAN, IP subnet based VLAN, Protocol based VLAN, VLAN translation, GVRP, MVR
- Dynamic IEEE 802.3ad LACP Link Aggregation, Static Link Aggregation
- IGMP snooping V1/V2/V3, IGMP Filtering/ Throttling, IGMP query, IGMP proxy reporting, MLD snooping V1/V2
- Security : Port based and MAC based IEEE802.1X, RADIUS, ACL, TACACS+, HTTP/HTTPS, SSL/SSH v2
- Software upgrade via TFTP and HTTP, redundant firmware to avoid in case of upgrade failure
- Supports IEEE1588 PTP V2 for precise time synchronization to operate in Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master, Slave mode by each port
- RMON, MIB II, Port mirroring, Event syslog, DNS, NTP, SNTP, IEEE802.1ab LLDP
- Supports IPv6 Telnet server /ICMP v6
- CLI, Web based management, SNMP v1/v2c/v3, Telnet server for management
- Supports Modbus/TCP protocols for management
- Provides SmartConfig for quick and easy mass configuration tool (Please see Catalog chapter 1- Software Management for more details)
- Supports SmartView for Centralized management (Please see Catalog chapter 1- Software Management for more details)

Specifications

Standard	IEEE 802.3	10Base-T 10Mbit/s Ethernet
	IEEE 802.3u	100Base-TX, 100Base-FX, Fast Ethernet
	IEEE 802.3ab	1000Base-T Gbit/s Ethernet over twisted pair
	IEEE 802.3z	1000Base-X Gbit/s Ethernet over Fiber-Optic
	IEEE802.3cb	2.5GBase-X
	IEEE 802.1d	STP (Spanning Tree Protocol)
	IEEE 802.1w	RSTP (Rapid Spanning Tree Protocol)
	IEEE 802.1s	MSTP (Multiple Spanning Tree Protocol)
	ITU-T G.8032 / Y.1344	ERPS (Ethernet Ring Protection Switching)
	IEEE 802.1Q	Virtual LANs (VLAN)
	IEEE 802.1X	Port based and MAC based Network Access Control, Authentication
	IEEE802.3ac	Max frame size extended to 1522Bytes.

Standard	IEEE 802.3ad	Link aggregation for parallel links with LACP(Link Aggregation Control Protocol)
	IEEE 802.3x	Flow control for Full Duplex
	IEEE 802.1ad	Stacked VLANs, Q-in-Q
	IEEE 802.1p	LAN Layer 2 QoS/CoS Protocol for Traffic Prioritization
	IEEE 802.1ab	Link Layer Discovery Protocol (LLDP)
	IEEE 802.3az	EEE (Energy Efficient Ethernet)
VLAN ID	4094	IEEE802.1Q VLAN VID
Switch Architecture	Back-plane (Switching Fabric): 22Gbps (IGS-404SM) 28Gbps (IGS-803SM) Full wire-speed	
Data Processing	Store and Forward	
Flow Control	IEEE 802.3x for full duplex mode Back pressure for half duplex mode	

Network Connector	4x 10/100/1000Base-T RJ-45 + 2x FE/GbE SFP slot + 2x FE/GbE/2.5GbE SFP slot (IGS-404SM) 8x 10/100/1000Base-T RJ-45 + 1x FE/GbE SFP slot + 2x FE/GbE/2.5GbE SFP slot (IGS-803SM) RJ-45 UTP port support Auto negotiation speed, Auto MDI/MDI-X function, SFP port support dual speed with DDMI			
Console	RS-232 (RJ-45)			
Network Cable	UTP/STP above Cat. 5e cable EIA/TIA-568 100-ohm (100m)			
Protocols	CSMA/CD			
Reverse Polarity Protection	Supported for power input			
Overload Current Protection	Supported			
CPU Watch Dog	Supported			
Power Supply	Redundant Dual DC 12/24/48V (9.6~60VDC) Input power (Removable Terminal Block)			
Power Consumption	IGS-404SM			
	Input Voltage	12VDC	24VDC	48VDC
	IGS-404SM	8.2W	8.1W	9.6W
	IGS-803SM			
Input Voltage	12VDC	24VDC	48VDC	
IGS-803SM	8.6W	10.8W	11.5W	
LED	Per unit: Power 1 (Green), Power 2 (Green), Fault (Amber), CPU Act (Green), Ring Master (Yellow) Per RJ-45 port: 10/100 Link/Active (Green) 1000 Link/Active (Amber) SFP Fiber Per port: Link/Active (Green)			
Jumbo Frame	9.6KB			
IEEE802.3ac	Max frame size extended to 1522Bytes (allow Q-tag in packet)			
MAC Address Table	8K			
Memory Buffer	512K Bytes for packet buffer			
Warning Message	System Syslog, SMTP/ e-mail event message, alarm relay			
Alarm Relay Contact	Relay outputs with current carrying capacity of 1 A @24VDC			
Removable Terminal Block	Provide 2 redundant power, alarm relay contact, 6 Pin			
Operating Temperature	-10 ~ 60°C (IGS-404SM, IGS-803SM) -40 ~ 75°C (IGS-404SM-E, IGS-803SM-E)			

Operating Humidity	5% to 95% (Non-condensing)
Storage Temperature	-40 ~ 85°C
Housing	Rugged Metal, IP30 Protection, Fanless
Dimensions	106 x 62.5 x 135 mm (D x W x H) (IGS-404SM) 106 x 72 x 152 mm (D x W x H) (IGS-803SM)
Weight	0.725kg (IGS-404SM) 0.78kg (IGS-803SM)
Installation Mounting	DIN Rail mounting, or wall mounting (optional)
MTBF	861,962 Hours (IGS-404SM) 612,523 Hours (IGS-803SM) (MIL-HDBK-217)
Warranty	5 years
Certification	
EMC	CE
EMI (Electromagnetic Interference)	FCC Part 15 Subpart B Class A, CE EN55022 Class A
Railway Traffic	EN50121-4
Traffic control	NEMA TS2
Immunity for Heavy Industrial Environment	EN61000-6-2
Emission for Heavy Industrial Environment	EN61000-6-4
EMS (Electromagnetic Susceptibility) Protection Level	EN61000-4-2 (ESD) Level 3, Criteria B EN61000-4-3 (RS) Level 3, Criteria A EN61000-4-4 (Burst) Level 3, Criteria A EN61000-4-5 (Surge) Level 3, Criteria B EN61000-4-6 (CS) Level 3, Criteria A EN61000-4-8 (PFMF, Magnetic Field) Field Strength: 300A/m, Criteria A
Safety	UL60950-1
Shock	IEC 60068-2-27
Freefall	IEC 60068-2-32
Vibration	IEC 60068-2-6

Software Specifications

Topology	
VLAN	IEEE 802.1q VLAN, up to 4094 802.1Q VLAN VID IEEE 802.1q VLAN, up to 4094 Groups IEEE 802.1ad Q-in-Q MAC-based VLAN, up to 256 entries IP Subnet-based VLAN, up to 128 entries Protocol-based VLAN(Ethernet, SNAP, LLC), up to 128 entries VLAN Translation, up to 256 entries GVRP (GARP VLAN Registration Protocol) MVR (Multicast VLAN Registration)
Link Aggregation (Port Trunk)	Static (Hash with SA, DA, IP, TCP/UDP port), up to 5 trunk group Dynamic (IEEE 802.3ad LACP), up to 5 trunk group
Spanning Tree	IEEE802.1d STP IEEE802.1w RSTP IEEE802.1s MSTP
Multiple μ-Ring	up to 5 instances that each supports μ-Ring, μ-Chain or Sub-Ring type for flexible uses, and maximum up to 5 Rings. Recovery time <10ms The maximum number of devices allowed in a Ring supported ring is 250. (Please see CTC Union μ-Ring white paper for more details and more topology applications)
Loop Protection	Supported
ITU-T G.8032 / Y.1344 ERPS (Ethernet Ring Protection)	Recovery time <50ms Single Ring, Sub-Ring, Multiple ring topology network
QoS Features	
Class of Service	IEEE802.1p 8 active priorities queues for per port


Traffic Classification QoS	IEEE802.1p based CoS IP Precedence based CoS IP DSCP based CoS QCL(QoS Control List): Frame Type, Source/Destination MAC, VLAN ID, PCP, DEI QCE(QoS Control Entry): Protocol, Source IP, IP Fragment, DSCP, TCP/UDP port number
Bandwidth Control for Ingress	Rate in steps : 1 kbps / Mbps / fps / kfps Range : 100 kbps to 1Gbps / 1fps to 3300kfps Rate Unit : bit or frame Rate in steps : 1 kbps / Mbps
Bandwidth Control for Egress	Range : 100 kbps to 1Gbps Rate Unit : bit Per queue / Per port shaper
DiffServ (RF 2474) Remarking	
Storm Control	for Unicast, Broadcast, Multicast
IP Multicasting Features	
IGMP / MLD Snooping	IGMP Snooping v1, v2, v3 / MLD Snooping v1, v2 Port Filtering Profile Throttling, Fast Leave Maximum Multicast Group : up to 1022 entries Query / Static Router Port
Security Features	
IEEE 802.1X	Port-Based MAC-Based
ACL	Number of rules : up to 256 entries for L2 / L3 / L4 L2 : Mac address SA/DA/VLAN L3 : IP address SA/DA, Subnet L4 : TCP/UDP

RADIUS authentication & accounting	
TACACS+ authentication & accounting, TACACS+ 3.0	
HTTPS, HTTP	Supported
SSL / SSH v2	Supported
User Name	Local Authentication
Password	
Authentication	Remote Authentication (via RADIUS / TACACS+)
Management	
Interface Access	Web, Telnet / SSH , CLI RS-232 console
Filtering	
Management Features	
CLI	Cisco® like CLI
Web Based Management	
Telnet	Server
SNMP	V1, V2c, V3
Modbus/TCP	Support for management and monitoring
SW & Configuration Upgrade	TFTP, HTTP
Upgrade	Redundant firmware in case of upgrade failure
RMON	RMON I (1, 2, 3, 9 group), RMON II
MIB	RFC1213 MIB II, Private MIB
UPnP	Supported
DHCP	Server, Client, Relay, Snooping
	Snooping option 82
	Relay option 82
IP Source Guard	Supported
Port Mirroring	Supported
Event Syslog	Syslog server (RFC3164) (Support 1 server)
Warning Message	System syslog, e-mail, alarm relay

DNS	Client, Proxy
IEEE1588 PTP V2	Support 5 operating mode in each port : Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master, Slave
NTP, SNTP	Client
LLDP (IEEE 802.1ab)	Link Layer Discovery Protocol LLDP-MED
IPv6 Features	
IPv6 Management	Telnet Server/ICMP v6
SNMP over IPv6	Supported
HTTP over IPv6	Supported
SSH over IPv6	Supported
IPv6 Telnet	Supported
IPv6 NTP, SNTP	Client
IPv6 TFTP	Supported
IPv6 QoS	Supported
IPv6 ACL	Number of rules: up to 256 entries for L2 / L3 / L4 L2 : Mac address SA/DA/VLAN L3: IP address SA/DA, Subnet L4: TCP/UDP
Others Features	
Green Ethernet	Supports IEEE802.3az EEE (Energy Efficient Ethernet) Management to optimize the power consumption Determine the cable length and lowering the power for ports with short cables Lower the power for a port when there is no link LED Power Management :Adjustment LEDs intensity
Cable Diagnostic	Measuring UTP cable normal or broken point distance


Application

Figure : Application Example

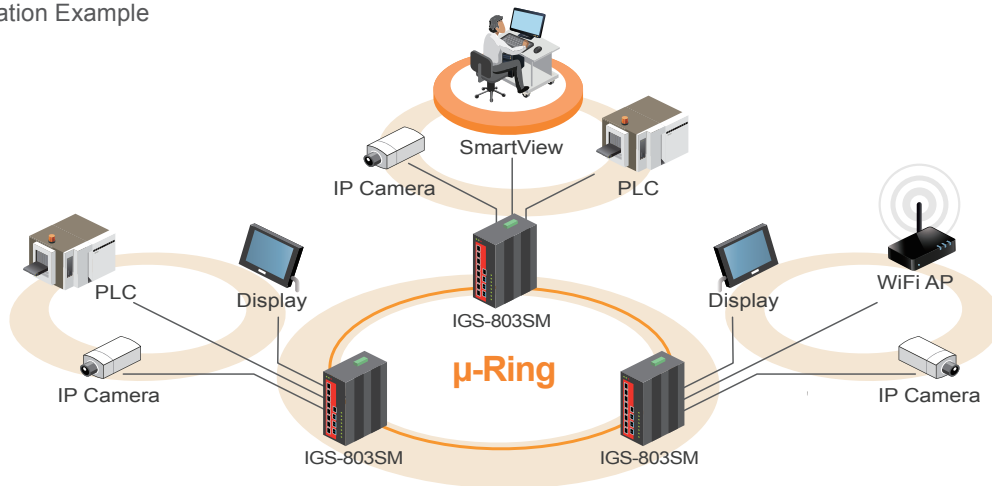


Dimensions

► IGS-404SM

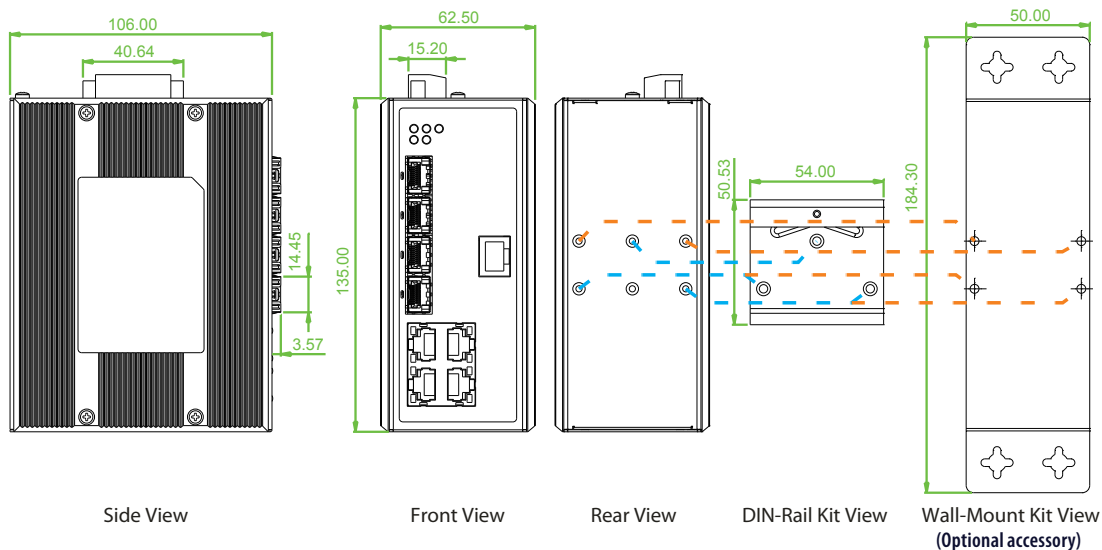


► IGS-803SM

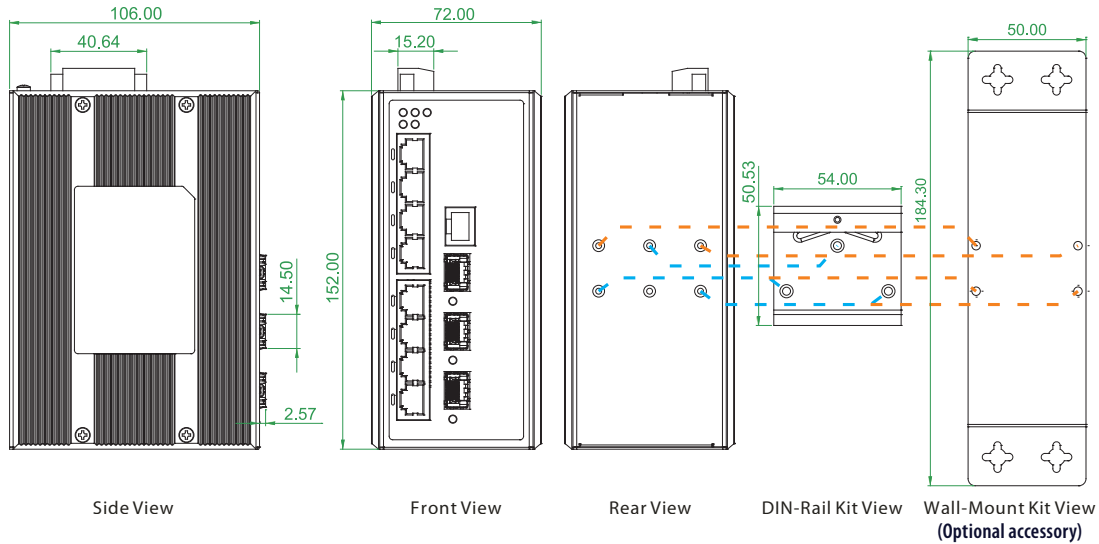

Ordering Information

Model Name	Total Port	UTP port		Fiber Port		Power Input	Certification					Operating Temperature
		10/100/1000 Base-T	100/1000 Base-X	100/1000 2.5G Base-X	Redundant		Railway EN50121-4	Traffic Control NEMA TS2	Safety UL60950-1	EN61000-6-2 EN61000-6-4	CE FCC	
IGS-404SM	6	4	2 SFP	2 SFP	12/24/48VDC	V	V	V	V	V	-10~60°C	
IGS-404SM-E	6	4	2 SFP	2 SFP	12/24/48VDC	V	V	V	V	V	-40~75°C	
IGS-803SM	11	8	1 SFP	2 SFP	12/24/48VDC	V	V	V	V	V	-10~60°C	
IGS-803SM-E	11	8	1 SFP	2 SFP	12/24/48VDC	V	V	V	V	V	-40~75°C	

Model Naming Rule

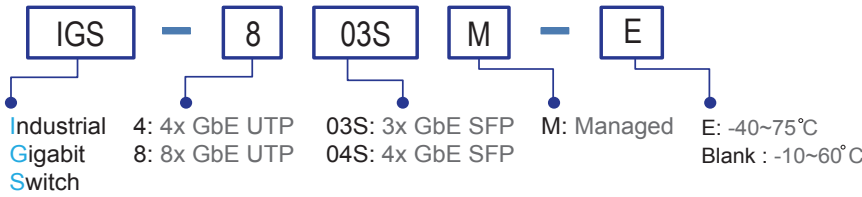

Package List

- One device of the series
- Console cable (RJ-45 to DB9)
- CD (SmartConfig, MIB file, Manual)
- Quickly installation guide
- Din Rail with screws
- Terminal block
- Protective caps for SFP ports

Optional Accessories

Wall mount kit


IND-WMK02 Wall Mount kit for Industrial product (Wide) (184 x 50mm)

Industrial SFP Transceiver

The ISFP series of industrial grade SFP modules have been fully tested with the series product for guaranteed compatibility and performance. The best performance can be guaranteed even in mission-critical applications. (Please see CTC Union's Industrial SFP datasheet for more details and more items.)

ISFP-M7000-85-D(E)	Industrial SFP GbE 1000Base-SX, M/M, 500 meter, wave length 850nm, 7.5dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-S7020-31-D(E)	Industrial SFP 1000Base-LX, S/M, 20km, wave length 1310nm, 15dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-T7T00-00-(E)	Industrial SFP 1000Base-T UTP 100meter, -10~70°C (-40~85°C)
ISFP-M5002-31-D(E)	Industrial SFP 155M 100Base-FX, MM, 2km, wave length 1310nm, 12dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-S5030-31-D(E)	Industrial SFP 155M 100Base-FX, SM, 30km, 1310nm, 19dB, LC, DDMI, -10~70°C (-40~85°C)

SFP Naming Rule

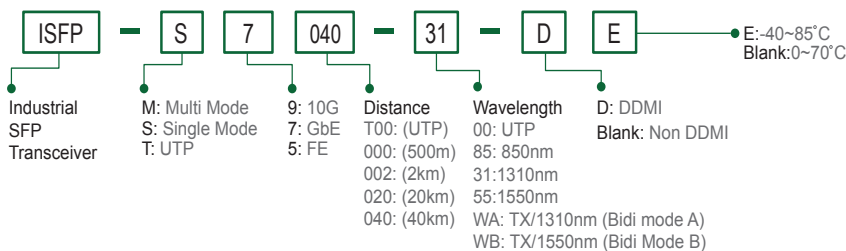

New



IFS+803GSM

8x 10/100Base-TX + 3x 100/1000Base-X SFP



These models are managed industrial grade switches with 8 10/100Base-TX ports and 3 Gigabit/Fast Ethernet SFP ports that provide stable and reliable Ethernet transmission. These switches support a variety of Ethernet functions, including STP/RSTP/MSTP/ ITU-T G.8032 ERPS and multiple μ-Ring for redundant cabling, layer 2 Ethernet IGMP, VLAN, QoS, Security, IPv6, bandwidth control, port mirroring, cable diagnostic and Green Ethernet. Housed in rugged DIN rail or wall mountable enclosures, these switches are designed for harsh environments, such as industrial networking, security automation applications, intelligent transportation systems (ITS) and are also suitable for many military and utility market applications where environmental conditions exceed commercial product specifications (See Figure). Standard operating temperature range models (-10 to 60°C) and wide operating temperature range models (-40 to 75°C) fulfill the special needs of industrial automation applications.

Features

- 8x 10/100Base-TX RJ-45 and 3x 100/1000Base-X SFP Fiber
- Redundant dual DC input power 12/24/48VDC (9.6~60VDC)
- **Supports negative voltage power input with isolated RS-232 console port (for example in telecom system)**
- UL60950-1, EN60950-1, CE, FCC, Rail Traffic EN50121-4, traffic control NEMA TS2 certified
- Heavy industrial grade EMS, EMI, EN61000-6-2, EN61000-6-4 certified
- **2.25K VDC Hi-pot isolation protection for Ethernet ports and power**
- **4KV surge protection for UTP and fiber ports**
- Cable diagnostic, Measuring cable normal or broken point distance
- Rugged Metal, IP30 Protection & Fanless design
- Supports Green Ethernet IEEE802.3az EEE (Energy Efficient Ethernet) management to optimize the power Consumption
- STP, RSTP, MSTP, ITU-T G.8032 Ethernet Ring Protection Switching (ERPS) for redundant cabling
- Provides 5 instances that each can support μ-Ring, μ-Chain or Sub-Ring type for flexible uses.Supports up to 5 rings in one device (Please see CTC μ-Ring white paper for more details and more topology application)
- μ-Ring for Redundant Cabling, recovery time<10ms in 250 devices
- DHCP Server/Client/Relay/Snooping/Snooping option 82/Relay option 82
- QoS, Traffic classification QoS, CoS, bandwidth control for Ingress and Egress, Storm Control, DiffServ
- IEEE802.1q VLAN, MAC based VLAN, IP subnet based VLAN, Protocol based VLAN, VLAN translation, GVRP, MVR
- Dynamic IEEE 802.3ad LACP Link Aggregation, Static Link Aggregation
- IGMP snooping V1/V2/V3, IGMP Filtering/ Throttling, IGMP query, IGMP proxy reporting, MLD snooping V1/V2
- Security : Port based and MAC based IEEE802.1X, RADIUS, ACL, TACACS+, HTTP/HTTPS, SSL/SSH v2
- Software upgrade via TFTP and HTTP, redundant firmware to avoid in case of upgrade failure
- Supports IEEE1588 PTP V2 for precise time synchronization to operate in Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master, Slave mode by each port
- RMON, MIB II, Port mirroring, Event syslog, DNS, NTP, SNTP, IEEE802.1ab LLDP
- Supports IPv6 Telnet server /ICMP v6
- CLI, Web based management, SNMP v1/v2c/v3, Telnet server for management
- Supports Modbus/TCP protocols for management
- Provides SmartConfig for quick and easy mass configuration tool (Please see Catalog chapter 1- Software Management for more details)
- Supports SmartView for Centralized management (Please see Catalog chapter 1- Software Management for more details)

Specifications

Standard	IEEE 802.3	10Base-T 10Mbit/s Ethernet
	IEEE 802.3u	100Base-TX, 100Base-FX, Fast Ethernet
	IEEE 802.3z	1000Base-X Gbit/s Ethernet over Fiber-Optic
	IEEE 802.1d	STP (Spanning Tree Protocol)
	IEEE 802.1w	RSTP (Rapid Spanning Tree Protocol)
	IEEE 802.1s	MSTP (Multiple Spanning Tree Protocol)
	ITU-T G.8032 / Y.1344	ERPS (Ethernet Ring Protection Switching)
	IEEE 802.1Q	Virtual LANs (VLAN)
	IEEE 802.1X	Port based and MAC based Network Access Control, Authentication
	IEEE802.3ac	Max frame size extended to 1522Bytes.

Standard	IEEE 802.3ad	Link aggregation for parallel links with LACP(Link Aggregation Control Protocol)
	IEEE 802.3x	Flow control for Full Duplex
	IEEE 802.1ad	Stacked VLANs, Q-in-Q
	IEEE 802.1p	LAN Layer 2 QoS/CoS Protocol for Traffic Prioritization
	IEEE 802.1ab	Link Layer Discovery Protocol (LLDP)
	IEEE 802.3az	EEE (Energy Efficient Ethernet)
VLAN ID	4094	IEEE802.1Q VLAN VID
Switch Architecture		Back-plane (Switching Fabric): 7.6Gbps Full wire-speed
Data Processing		Store and Forward

Flow Control	IEEE 802.3x for full duplex mode Back pressure for half duplex mode	
Network Connector	8x 10/100Base-TX RJ-45 and 3x 100/1000Base-X SFP Slot	
Network Connector	RJ-45 UTP port support Auto negotiation speed, Auto MDI/MDI-X function, SFP port support 100/1000M dual speed with DDMI	
Console	RS-232 (RJ-45)	
Network Cable	UTP/STP above Cat. 5e cable EIA/TIA-568 100-ohm (100m)	
Protocols	CSMA/CD	
Reverse Polarity Protection	Supported	
Overload Current Protection	Supported	
CPU Watch Dog	Supported	
Power Supply	Redundant Dual DC 12/24/48V (9.6~60VDC) Input power (Removable Terminal Block)	
Power Consumption	Input Voltage	IFS⁺803GSM
	12VDC	7.4W
	24VDC	7.8W
	48VDC	8.9W
LED	Per unit: Power 1 (Green), Power 2 (Green), Fault (Amber), CPU Act (Green), Ring Master (Yellow) Per RJ-45 port: 10/100 Link/Active (Green) SFP Fiber Per port: Link/Active (Green)	
Jumbo Frame	9.6KB	
IEEE802.3ac	Max frame size extended to 1522Bytes (allow Q-tag in packet)	
MAC Address Table	8K	
Memory Buffer	512K Bytes for packet buffer	
Warning Message	System Syslog, SMTP/ e-mail event message, alarm relay	
Alarm Relay Contact	Relay outputs with current carrying capacity of 1 A @24VDC	
Removable Terminal Block	Provide 2 redundant power, alarm relay contact, 6 Pin	
Operating Temperature	-10 ~ 60°C (IFS ⁺ 803GSM) -40 ~ 75°C (IFS ⁺ 803GSM-E)	
Operating Humidity	5% to 95% (Non-condensing)	

Software Specifications

Topology	
VLAN	IEEE 802.1q VLAN, up to 4094 802.1Q VLAN VID IEEE 802.1q VLAN, up to 4094 Groups IEEE 802.1ad Q-in-Q MAC-based VLAN, up to 256 entries IP Subnet-based VLAN, up to 128 entries Protocol-based VLAN(Ethernet, SNAP, LLC), up to 128 entries VLAN Translation, up to 256 entries GVRP (GARP VLAN Registration Protocol) MVR (Multicast VLAN Registration)
Link Aggregation (Port Trunk)	Static (Hash with SA, DA, IP, TCP/UDP port), up to 5 trunk group Dynamic (IEEE 802.3ad LACP), up to 5 trunk group
Spanning Tree	IEEE802.1d STP IEEE802.1w RSTP IEEE802.1s MSTP
Multiple μ-Ring	up to 5 instances that each supports μ-Ring, μ-Chain or Sub-Ring type for flexible uses, and maximum up to 5 Rings. Recovery time <10ms The maximum number of devices allowed in a Ring supported ring is 250. (Please see CTC Union μ-Ring white paper for more details and more topology applications)
Loop Protection	Supported
ITU-T G.8032 / Y.1344 ERPS (Ethernet Ring Protection)	Recovery time <50ms Single Ring, Sub-Ring, Multiple ring topology network
QoS Features	
Class of Service	IEEE802.1p 8 active priorities queues for per port
Traffic Classification QoS	IEEE802.1p based CoS
	IP Precedence based CoS
	IP DSCP based CoS

Storage Temperature	-40 ~ 85°C
Housing	Rugged Metal, IP30 Protection, Fanless
Dimensions	106 x 72 x 152 mm (D x W x H)
Weight	0.81kg
Installation Mounting	DIN Rail mounting or wall mounting (optional)
MTBF	688,248 hours (MIL-HDBK-217)
Warranty	5 years
Certification	
EMC	CE
EMI (Electromagnetic Interference)	FCC Part 15 Subpart B Class A, CE EN55022 Class A
Railway Traffic	EN50121-4
Traffic control	NEMA TS2
Immunity for Heavy Industrial Environment	EN61000-6-2
Emission for Heavy Industrial Environment	EN61000-6-4
EMS (Electromagnetic Susceptibility) Protection Level	EN61000-4-2 (ESD) Level 3, Criteria B
	EN61000-4-3 (RS) Level 3, Criteria A
	EN61000-4-4 (Burst) Level 3, Criteria A
	EN61000-4-5 (Surge) Level 3, Criteria B
	EN61000-4-6 (CS) Level 3, Criteria A
EN61000-4-8 (PFMF, Magnetic Field) Field Strength: 300A/m, Criteria A	
Safety	UL60950-1, EN60950-1
Hi pot protection	DC 2.25KV for power to chassis ground, Ethernet ports to chassis ground
4KV surge protection	Supported for UTP and Fiber port
Shock	IEC 60068-2-27
Freefall	IEC 60068-2-32
Vibration	IEC 60068-2-6


Traffic Classification QoS	QCL(QoS Control List): Frame Type, Source/ Destination MAC, VLAN ID, PCP, DEI QCE(QoS Control Entry): Protocol, Source IP, IP Fragment, DSCP, TCP/UDP port number
Bandwidth Control for Ingress	Rate in steps : 1 kbps / Mbps / fps / kfps Range : 100 kbps to 1Gbps / 1fps to 3300kfps Rate Unit : bit or frame
Bandwidth Control for Egress	Rate in steps : 1 kbps / Mbps Range : 100 kbps to 1Gbps Rate Unit : bit Per queue / Per port shaper
DiffServ (RF 2474) Remarking	
Storm Control	for Unicast, Broadcast, Multicast
IP Multicasting Features	
IGMP / MLD Snooping	IGMP Snooping v1, v2, v3 / MLD Snooping v1, v2 Port Filtering Profile Throttling, Fast Leave Maximum Multicast Group : up to 1022 entries Query / Static Router Port
Security Features	
IEEE 802.1X	Port-Based MAC-Based
ACL	Number of rules : up to 256 entries for L2 / L3 / L4 L2 : Mac address SA/DA/VLAN L3 : IP address SA/DA, Subnet L4 : TCP/UDP
RADIUS authentication & accounting	
TACACS+ authentication & accounting, TACACS+ 3.0	
HTTPS, HTTP	Supported
SSL / SSH v2	Supported
User Name Password Authentication	Local Authentication Remote Authentication (via RADIUS / TACACS+)

Management Interface Access Filtering	Web, Telnet / SSH , CLI RS-232 console
Management Features	
CLI	Cisco® like CLI
Web Based Management	
Telnet	Server
SNMP	V1, V2c, V3
Modbus/TCP	Support for management and monitoring
SW & Configuration Upgrade	TFTP, HTTP
	Redundant firmware in case of upgrade failure
RMON	RMON I (1, 2, 3, 9 group), RMON II
MIB	RFC1213 MIB II, Private MIB
UPnP	Supported
DHCP	Server, Client, Relay, Snooping Snooping option 82 Relay option 82
IP Source Guard	Supported
Port Mirroring	Supported
Event Syslog	Syslog server (RFC3164) (Support 1 server)
Warning Message	System syslog, e-mail, alarm relay
DNS	Client, Proxy
IEEE1588 PTP V2	Support 5 operating mode in each port : Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master, Slave
NTP, SNTP	Client


LLDP (IEEE 802.1ab)	Link Layer Discovery Protocol LLDP-MED
IPv6 Features	
IPv6 Management	Telnet Server/ICMP v6
SNMP over IPv6	Supported
HTTP over IPv6	Supported
SSH over IPv6	Supported
IPv6 Telnet	Supported
IPv6 NTP, SNTP	Client
IPv6 TFTP	Supported
IPv6 QoS	Supported
IPv6 ACL	Number of rules: up to 256 entries for L2 / L3 / L4 L2 : Mac address SA/DA/VLAN L3: IP address SA/DA, Subnet L4: TCP/UDP
Others Features	
Green Ethernet	Supports IEEE802.3az EEE (Energy Efficient Ethernet) Management to optimize the power consumption Determine the cable length and lowering the power for ports with short cables Lower the power for a port when there is no link LED Power Management :Adjustment LEDs intensity
Cable Diagnostic	Measuring UTP cable normal or broken point distance

Application

Figure : Application Example

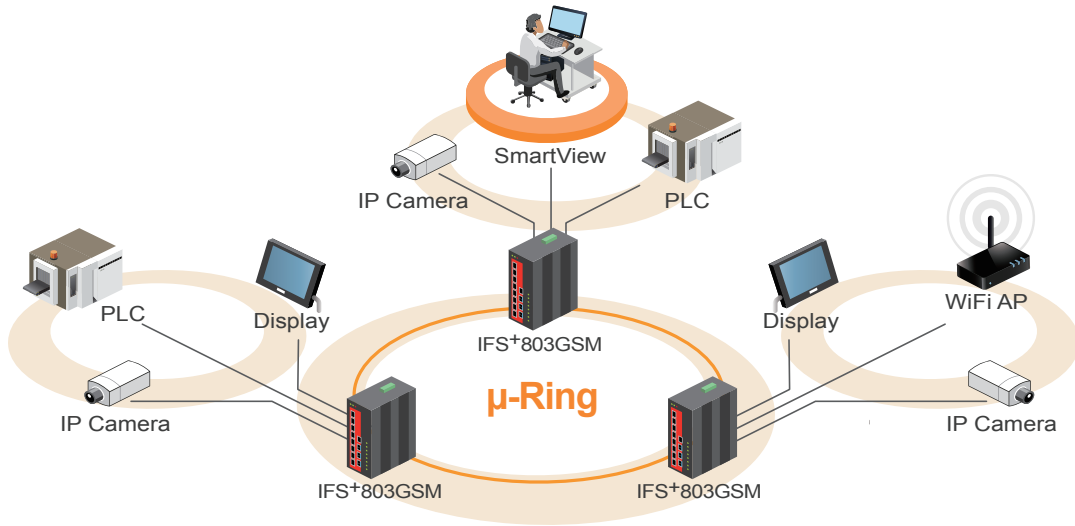


Dimensions

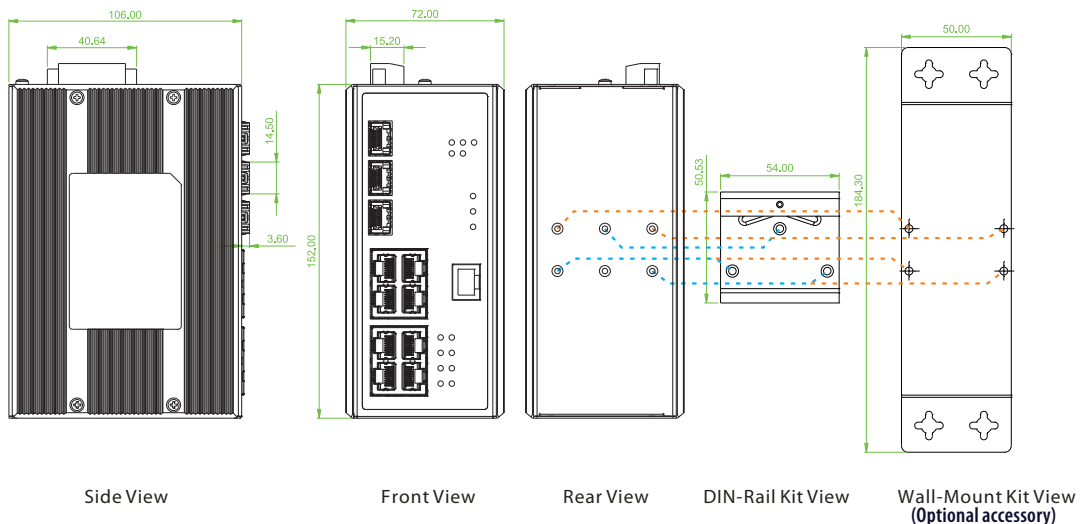

Ordering Information

Model Name	Managed	Total Port	RJ45 UTP Port	Fiber Port	Power Input	Certification					Operating Temperature	
			10/100 Base-TX	100/1000 Base-X	Redundant	Railway EN50121-4	NEMATS2	Safety EN60950-1	Safety UL60950-1	EN61000-6-2 EN61000-6-4		CE FCC
IFS ⁺ 803GSM	V	11	8	3 SFP	12/24/48, -48VDC	V	V	V	V	V	V	-10~60°C
IFS ⁺ 803GSM-E	V	11	8	3 SFP	12/24/48, -48VDC	V	V	V	V	V	V	-40~75°C

Model Naming Rule

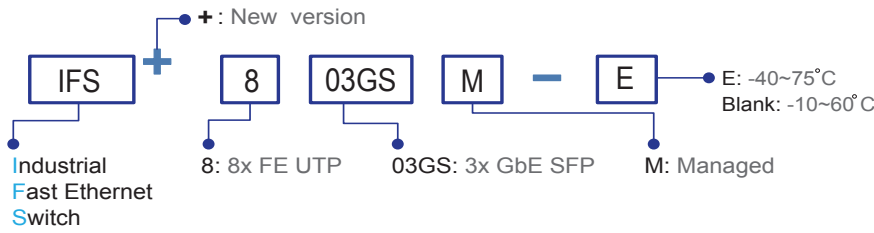

Package List

- One device of the series
- Console cable (RJ-45 to DB9)
- CD (SmartConfig, MIB file, Manual)
- Quickly installation guide
- Din Rail with screws
- Terminal block
- Protective caps for SFP ports

Optional Accessories

Industrial Power Supply


IND-WMK02	Wall Mount kit for Industrial product (Wide) (184 x 50mm)
-----------	---

Industrial SFP Transceiver

The ISFP series of industrial grade SFP modules have been fully tested with the series product for guaranteed compatibility and performance. The best performance can be guaranteed even in mission-critical applications. (Please see CTC Union's Industrial SFP datasheet for more details and more items.)

ISFP-M7000-85-D(E)	Industrial SFP GbE 1000Base-SX, M/M, 500 meter, wave length 850nm, 7.5dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-S7020-31-D(E)	Industrial SFP 1000Base-LX, S/M, 20km, wave length 1310nm, 15dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-T7T00-00-(E)	Industrial SFP 1000Base-T UTP 100meter, -10~70°C (-40~85°C)
ISFP-M5002-31-D(E)	Industrial SFP 155M 100Base-FX, MM, 2km, wave length 1310nm, 12dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-S5030-31-D(E)	Industrial SFP 155M 100Base-FX, SM, 30km, 1310nm, 19dB, LC, DDMI, -10~70°C (-40~85°C)

SFP Naming Rule

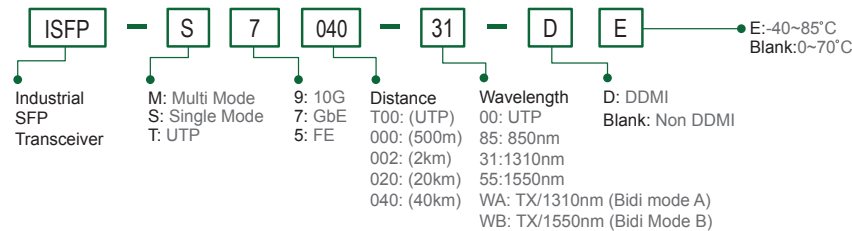



IFS-402GSM

4x 10/100Base-TX + 2x 100/1000Base-X SFP

IFS-803GSM

8x 10/100Base-TX + 3x 100/1000Base-X SFP

IFS-1604GSM

16x 10/100Base-TX + 4x 100/1000Base-X SFP



These models are managed industrial grade switches with 4/8/16 10/100Base-TX ports and 2/3/4 Gigabit/Fast Ethernet SFP ports that provide stable and reliable Ethernet transmission. These switches support a variety of Ethernet functions, including STP/RSTP/MSTP/ITU-T G.8032 ERPS and multiple μ -Ring for redundant cabling, layer 2 Ethernet IGMP, VLAN, QoS, Security, IPv6, bandwidth control, port mirroring, cable diagnostic and Green Ethernet. Housed in rugged DIN rail or wall mountable enclosures, these switches are designed for harsh environments, such as industrial networking, security automation applications, intelligent transportation systems (ITS) and are also suitable for many military and utility market applications where environmental conditions exceed commercial product specifications (See Figure 1). Standard operating temperature range models (-10 to 60°C) and wide operating temperature range models (-40 to 75°C) fulfill the special needs of industrial automation applications.

Features

- 4x 10/100Base-TX RJ-45 and 2x 100/1000Base-X SFP Fiber (IFS-402GSM)
- 8x 10/100Base-TX RJ-45 and 3x 100/1000Base-X SFP Fiber (IFS-803GSM)
- 16x 10/100Base-TX RJ-45 and 4x 100/1000Base-X SFP Fiber (IFS-1604GSM)
- UL60950-1, CE, FCC, Rail Traffic EN50121-4, Traffic control NEMA TS2 certified
- Heavy industrial grade EMS, EMI, EN61000-6-2, EN61000-6-4 certified
- Cable diagnostic, Measuring cable normal or broken point distance
- Rugged Metal, IP30 Protection & Fanless design
- Supports Green Ethernet IEEE802.3az EEE (Energy Efficient Ethernet) management to optimize the power Consumption
- STP, RSTP, MSTP, ITU-T G.8032 Ethernet Ring Protection Switching (ERPS) for redundant cabling
- Provides 5 instances that each can support μ -Ring, μ -Chain or Sub-Ring type for flexible uses. Supports up to 5 rings in one device (Please see CTC u-Ring white paper for more details and more topology application)
- μ -Ring for Redundant Cabling, recovery time < 10ms in 250 devices
- DHCP Server/Client/Relay/Snooping/Snooping option 82/Relay option 82
- QoS, Traffic classification QoS, CoS, bandwidth control for Ingress and Egress, Storm Control, DiffServ
- IEEE802.1q VLAN, MAC based VLAN, IP subnet based VLAN, Protocol based VLAN, VLAN translation, GVRP, MVR
- Dynamic IEEE 802.3ad LACP Link Aggregation, Static Link Aggregation
- IGMP snooping V1/V2/V3, IGMP Filtering/ Throttling, IGMP query, IGMP proxy reporting, MLD snooping V1/V2
- Security : Port based and MAC based IEEE802.1X, RADIUS, ACL, TACACS+, HTTP/HTTPS, SSL/SSH v2
- Software upgrade via TFTP and HTTP, redundant firmware to avoid in case of upgrade failure
- Supports IEEE1588 PTP V2 for precise time synchronization to operate in Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master, Slave mode by each port
- RMON, MIB II, Port mirroring, Event syslog, DNS, NTP, SNTP, IEEE802.1ab LLDP
- Supports IPv6 Telnet server /ICMP v6
- CLI, Web based management, SNMP v1/v2c/v3, Telnet server for management
- Supports Modbus/TCP protocols for management
- Provides SmartConfig for quick and easy mass configuration tool (Please see Catalog chapter 1- Software Management for more details)
- Supports SmartView for Centralized management (Please see Catalog chapter 1- Software Management for more details)

Specifications

Standard	IEEE 802.3	10Base-T 10Mbit/s Ethernet
	IEEE 802.3u	100Base-TX, 100Base-FX, Fast Ethernet
	IEEE 802.3z	1000Base-X Gbit/s Ethernet over Fiber-Optic
	IEEE 802.1d	STP (Spanning Tree Protocol)
	IEEE 802.1w	RSTP (Rapid Spanning Tree Protocol)
	IEEE 802.1s	MSTP (Multiple Spanning Tree Protocol)
	ITU-T G.8032 / Y.1344	ERPS (Ethernet Ring Protection Switching)
	IEEE 802.1Q	Virtual LANs (VLAN)
	IEEE 802.1X	Port based and MAC based Network Access Control, Authentication
	IEEE802.3ac	Max frame size extended to 1522Bytes.
	IEEE 802.3ad	Link aggregation for parallel links with LACP(Link Aggregation Control Protocol)
	IEEE 802.3x	Flow control for Full Duplex
	IEEE 802.1ad	Stacked VLANs, Q-in-Q
	IEEE 802.1p	LAN Layer 2 QoS/CoS Protocol for Traffic Prioritization

Standard	IEEE 802.1ab	Link Layer Discovery Protocol (LLDP)
	IEEE 802.3az	EEE (Energy Efficient Ethernet)
VLAN ID	4094	IEEE802.1Q VLAN VID
Switch Architecture	Back-plane (Switching Fabric): 4.8Gbps (IFS-402GSM), 7.6Gbps (IFS-803GSM) 11.2Gbps (IFS-1604GSM) Full wire-speed	
Data Processing	Store and Forward	
Flow Control	IEEE 802.3x for full duplex mode Back pressure for half duplex mode	
Network Connector	4x 10/100Base-TX RJ-45 + 2x 100/1000Base-X SFP Slot (IFS-402GSM) 8x 10/100Base-TX RJ-45 and 3x 100/1000Base-X SFP Slot (IFS-803GSM) 16x 10/100Base-TX RJ-45 and 4x 100/1000Base-X SFP Slot (IFS-1604GSM) RJ-45 UTP port support Auto negotiation speed, Auto MDI/MDI-X function, SFP port support 100/1000M dual speed with DDMI	
Console	RS-232 (RJ-45)	

Network Cable	UTP/STP above Cat. 5e cable EIA/TIA-568 100-ohm (100m)			
Protocols	CSMA/CD			
Reverse Polarity Protection	Supported			
Overload Current Protection	Supported			
CPU Watch Dog	Supported			
Power Supply	Redundant Dual DC 12/24/48V (9.6~60VDC) Input power (Removable Terminal Block)			
Power Consumption	Input Voltage	IFS-402GSM	IFS-803GSM	IFS-1604GSM
	12VDC	5.7W	6.5W	10.8W
	24VDC	5.8W	7W	10.6W
	48VDC	8.5W	8.6W	12.5W
LED	Per unit: Power 1 (Green), Power 2 (Green), Fault (Amber), CPU Act (Green), Ring Master (Yellow) Per RJ-45 port: 10/100 Link/Active (Green) SFP Fiber Per port: Link/Active (Green)			
Jumbo Frame	9.6KB			
IEEE802.3ac	Max frame size extended to 1522Bytes (allow Q-tag in packet)			
MAC Address Table	8K			
Memory Buffer	512K Bytes for packet buffer			
Warning Message	System Syslog, SMTP/ e-mail event message, alarm relay			
Alarm Relay Contact	Relay outputs with current carrying capacity of 1 A @24VDC			
Removable Terminal Block	Provide 2 redundant power, alarm relay contact, 6 Pin			
Operating Temperature	-10 ~ 60°C (IFS-402GSM, IFS-803GSM, IFS-1604GSM) -40 ~ 75°C (IFS-402GSM-E, IFS-803GSM-E, IFS-1604GSM-E)			
Operating Humidity	5% to 95% (Non-condensing)			
Storage Temperature	-40 ~ 85°C			

Software Specifications

Topology	
VLAN	IEEE 802.1q VLAN, up to 4094 802.1Q VLAN VID IEEE 802.1q VLAN, up to 4094 Groups IEEE 802.1ad Q-in-Q MAC-based VLAN, up to 256 entries IP Subnet-based VLAN, up to 128 entries Protocol-based VLAN(Ethernet, SNAP, LLC), up to 128 entries VLAN Translation, up to 256 entries GVRP (GARP VLAN Registration Protocol) MVR (Multicast VLAN Registration)
Link Aggregation (Port Trunk)	Static (Hash with SA, DA, IP, TCP/UDP port), up to 5 trunk group Dynamic (IEEE 802.3ad LACP), up to 5 trunk group
Spanning Tree	IEEE802.1d STP, IEEE802.1w RSTP, IEEE802.1s MSTP
Multiple u-Ring	up to 5 instances that each supports u-Ring, u-Chain or Sub-Ring type for flexible uses, and maximum up to 5 Rings. Recovery time <10ms The maximum number of devices allowed in a Ring supported ring is 250. (Please see CTC Union μ-Ring white paper for more details and more topology applications)
Loop Protection	Supported
ITU-T G.8032 / Y.1344 ERPS (Ethernet Ring Protection)	Recovery time <50ms Single Ring, Sub-Ring, Multiple ring topology network
QoS Features	
Class of Service	IEEE802.1p 8 active priorities queues for per port
Traffic Classification QoS	IEEE802.1p based CoS IP Precedence based CoS IP DSCP based CoS QCL(QoS Control List): Frame Type, Source/Destination MAC, VLAN ID, PCP, DEI QCE(QoS Control Entry): Protocol, Source IP, IP Fragment, DSCP, TCP/UDP port number
Bandwidth Control for Ingress	Rate in steps :1 kbps / Mbps / fps / kfps Range : 100 kbps to 1Gbps / 1fps to 3300kfps Rate Unit : bit or frame

Housing	Rugged Metal, IP30 Protection, Fanless	
Dimensions	106 x 62.5 x 135 mm (D x W x H) (IFS-402GSM) 106 x 72 x 152 mm (D x W x H) (IFS-803GSM, IFS-1604GSM)	
Weight	0.715kg (IFS-402GSM), 0.79kg (IFS-803GSM) 0.82kg (IFS-1604GSM)	
Installation Mounting	DIN Rail mounting or wall mounting (optional)	
MTBF	861,962hrs (IFS-402GSM)	612,523hrs (IFS-803GSM)
	419,048hrs (IFS-1604GSM)	(MIL-HDBK-217)
Warranty	5 years	
Certification		
EMC	CE	
EMI (Electromagnetic Interference)	FCC Part 15 Subpart B Class A, CE EN55022 Class A	
Railway Traffic	EN50121-4	
Traffic control	NEMA TS2 (IFS-402GSM, IFS-803GSM)	
Immunity for Heavy Industrial Environment	EN61000-6-2	
Emission for Heavy Industrial Environment	EN61000-6-4	
EMS (Electromagnetic Susceptibility) Protection Level	EN61000-4-2 (ESD) Level 3, Criteria B EN61000-4-3 (RS) Level 3, Criteria A EN61000-4-4 (Burst) Level 3, Criteria A EN61000-4-5 (Surge) Level 3, Criteria B EN61000-4-6 (CS) Level 3, Criteria A EN61000-4-8 (PFMF, Magnetic Field) Field Strength: 300A/m, Criteria A	
Safety	UL60950-1	
Shock	IEC 60068-2-27	
Freefall	IEC 60068-2-32	
Vibration	IEC 60068-2-6	

Bandwidth Control for Egress	Rate in steps : 1 kbps / Mbps Range : 100 kbps to 1Gbps Rate Unit : bit Per queue / Per port shaper
DiffServ (RF 2474) Marking	
Storm Control	for Unicast, Broadcast, Multicast
IP Multicasting Features	
IGMP / MLD Snooping	IGMP Snooping v1, v2, v3 / MLD Snooping v1, v2 Port Filtering Profile Throttling, Fast Leave Maximum Multicast Group : up to 1022 entries Query / Static Router Port
Security Features	
IEEE 802.1X	Port-Based, MAC-Based
ACL	Number of rules : up to 256 entries for L2 / L3 / L4 L2 : Mac address SA/DA/VLAN L3: IP address SA/DA, Subnet L4: TCP/UDP
RADIUS authentication & accounting	
TACACS+ authentication & accounting, TACACS+ 3.0	
HTTPS, HTTP	Supported
SSL / SSH v2	Supported
User Name Password Authentication	Local Authentication Remote Authentication (via RADIUS / TACACS+)
Management Interface Access Filtering	Web, Telnet / SSH , CLI RS-232 console
Management Features	
CLI	Cisco® like CLI
Web Based Management	
Telnet	Server
SNMP	V1, V2c, V3
ModBus/TCP	Support management and monitoring
SW & Configuration Upgrade	TFTP, HTTP Redundant firmware in case of upgrade failure
RMON	RMON I (1, 2, 3, 9 group), RMON II
MIB	RFC1213 MIB II, Private MIB


UPnP	Supported
DHCP	Server, Client, Relay, Snooping Snooping option 82 Relay option 82
IP Source Guard	Supported
Port Mirroring	Supported
Event Syslog	Syslog server (RFC3164) (Support 1 server)
Warning Message	System syslog, e-mail, alarm relay
DNS	Client, Proxy
IEEE1588 PTP V2	Support 5 operating mode in each port : Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master, Slave
NTP, SNTP	Client
LLDP (IEEE 802.1ab)	Link Layer Discovery Protocol LLDP-MED
IPv6 Features	
IPv6 Management	Telnet Server/ICMP v6
SNMP over IPv6	Supported
HTTP over IPv6	Supported

SSH over IPv6	Supported
IPv6 Telnet	Supported
IPv6 NTP, SNTP	Client
IPv6 TFTP	Supported
IPv6 QoS	Supported
IPv6 ACL	Number of rules: up to 256 entries for L2 / L3 / L4 L2 : Mac address SA/DA/VLAN L3: IP address SA/DA, Subnet L4: TCP/UDP

Others Features	
Green Ethernet	Supports IEEE802.3az EEE (Energy Efficient Ethernet) Management to optimize the power consumption Determine the cable length and lowering the power for ports with short cables Lower the power for a port when there is no link LED Power Management :Adjustment LEDs intensity
Cable Diagnostic	Measuring UTP cable normal or broken point distance


Application

Figure : Application Example

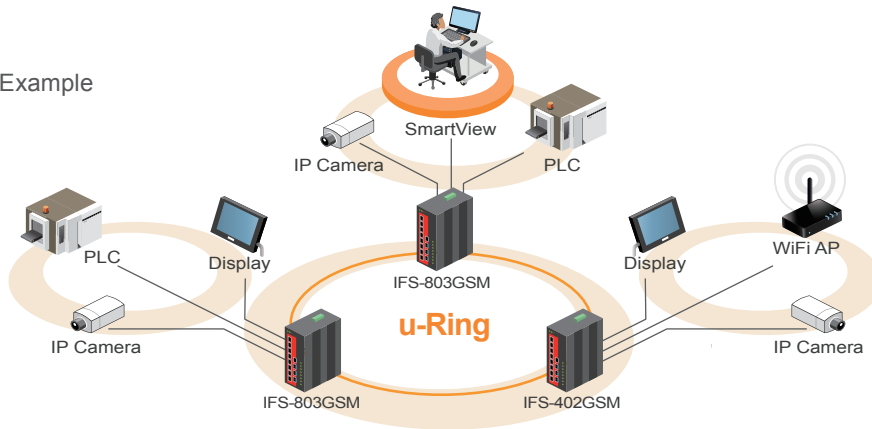


Dimensions


► IFS-402GSM

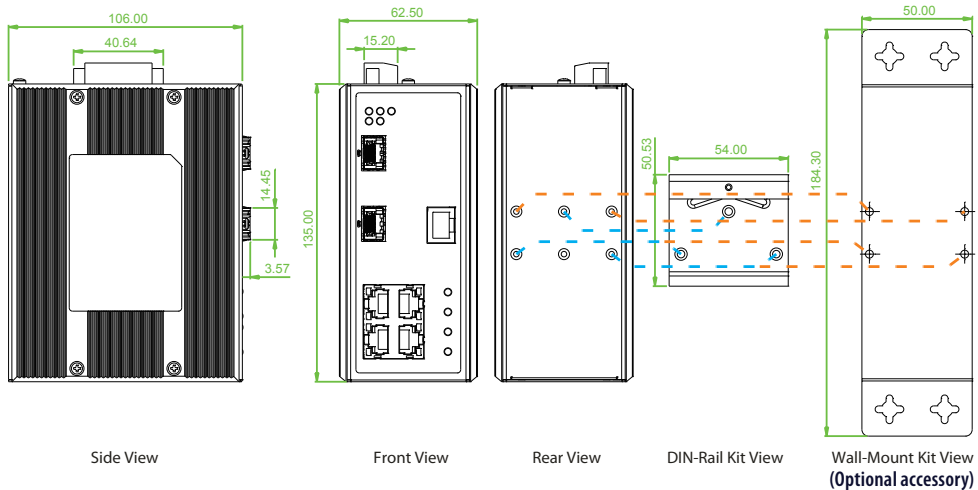

► IFS-803GSM

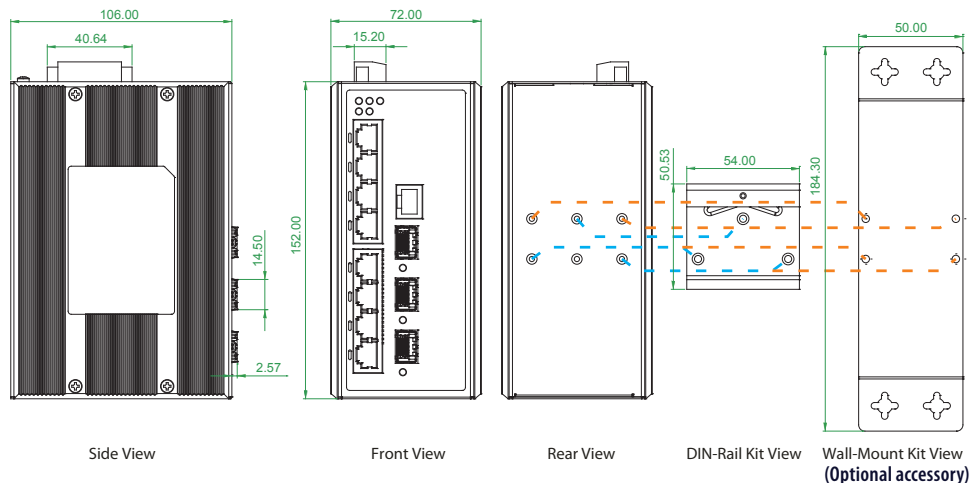


► IFS-1604GSM

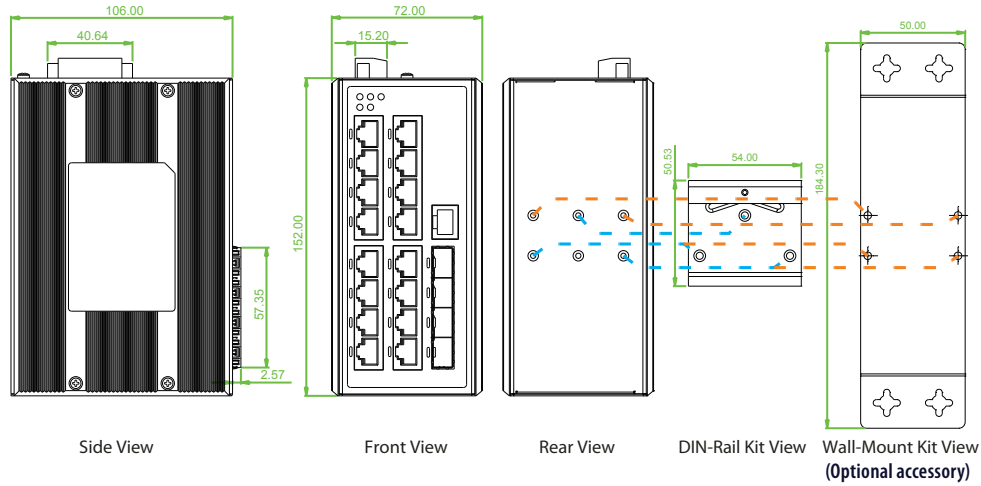

Ordering Information

Model Name	Managed	Total Port	RJ45 UTP Port	FiberPort	Power Input	Certification				Operating Temperature	
			10/100 Base-TX	100/1000 Base-X		Redundant	Railway EN50121-4	NEMATS 2	Safety UL60950-1		EN61000-6-2 EN61000-6-4
IFS-402GSM	V	6	4	2 SFP	12/24/48VDC	V	V	V	V	V	-10~60°C
IFS-402GSM-E	V	6	4	2 SFP	12/24/48VDC	V	V	V	V	V	-40~75°C
IFS-803GSM	V	11	8	3 SFP	12/24/48VDC	V	V	V	V	V	-10~60°C
IFS-803GSM-E	V	11	8	3 SFP	12/24/48VDC	V	V	V	V	V	-40~75°C
IFS-1604GSM	V	20	16	4 SFP	12/24/48VDC	V	V	V	V	V	-10~60°C
IFS-1604GSM-E	V	20	16	4 SFP	12/24/48VDC	V	V	V	V	V	-40~70°C

Model Naming Rule

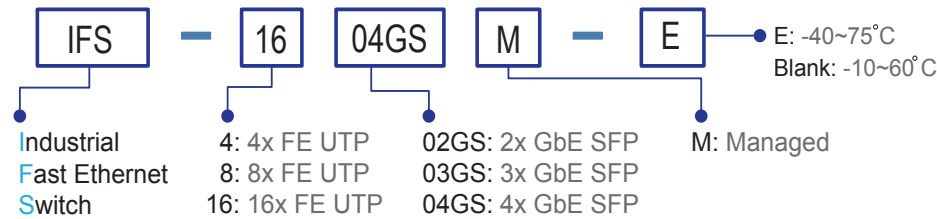

Package List

- One device of the series
- Console cable (RJ-45 to DB9)
- CD (SmartConfig, MIB file, Manual)
- Quickly installation guide
- Din Rail with screws
- Terminal block
- Protective caps for SFP ports

Optional Accessories

Industrial Power Supply


IND-WMK02	Wall Mount kit for Industrial product (Wide) (184 x 50mm)
-----------	---

Industrial SFP Transceiver

The ISFP series of industrial grade SFP modules have been fully tested with the series product for guaranteed compatibility and performance. The best performance can be guaranteed even in mission-critical applications. (Please see CTC Union's Industrial SFP datasheet for more details and more items.)

ISFP-M7000-85-D(E)	Industrial SFP GbE 1000Base-SX, M/M, 500 meter, wave length 850nm, 7.5dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-S7020-31-D(E)	Industrial SFP 1000Base-LX, S/M, 20km, wave length 1310nm, 15dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-T7T00-00-(E)	Industrial SFP 1000Base-T UTP 100meter, -10~70°C (-40~85°C)
ISFP-M5002-31-D(E)	Industrial SFP 155M 100Base-FX, MM, 2km, wave length 1310nm, 12dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-S5030-31-D(E)	Industrial SFP 155M 100Base-FX, SM, 30km, 1310nm, 19dB, LC, DDMI, -10~70°C (-40~85°C)

SFP Naming Rule

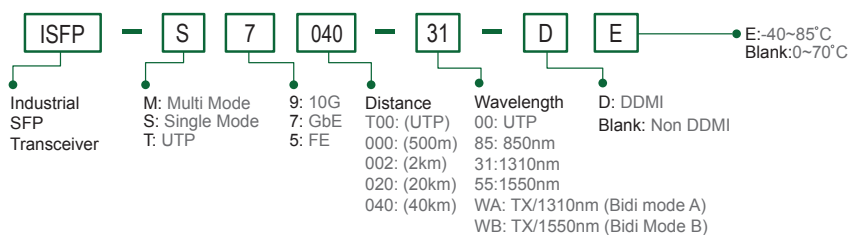



IGS-501S

5x 10/100/1000Base-T+ 1x 100/1000Base-X SFP Gigabit Ethernet Switch

IGS-500

5x 10/100/1000Base-T Gigabit Ethernet Switch

IGS-800

8x 10/100/1000Base-T Gigabit Ethernet Switch



These models are 5/8-port 10/100/1000Base-T Ethernet unmanaged Gigabit switches, with either 1 or 0 port 1000Base-X SFP port, that provide stable and reliable Ethernet transmission. Housed in rugged DIN rail or wall mountable enclosures, these switches are designed for harsh environments, such as industrial networking, intelligent transportation systems (ITS) and are also suitable for many military and utility market applications where environmental conditions exceed commercial product specifications (See Figure). Standard operating temperature range models (-10 to 60°C) and wide operating temperature range models (-40 to 75°C) fulfill the special needs of industrial automation applications.

Features

- 5x 10/100/1000Base-T RJ-45 + 1x 100/1000Base-X SFP (IGS-501S)
- 5x 10/100/1000Base-T RJ-45 (IGS-500)
- 8x 10/100/1000Base-T RJ-45 (IGS-800)
- Supports broadcast storm protection
- Supports power failure alarm message by relay
- Supports flow control
- Jumbo frame support
- Support IEEE802.3az Green Ethernet
- Supports auto-negotiation and auto-MDI/MDI-X
- Redundant dual DC input power 12/24/48VDC (9.6~60VDC)
- IP30 rugged metal housing, Fanless
- Supports DIN Rail or wall mounting installation
- Wide operating temperature -40~75°C (-E model)
- EN50121-4, CE, FCC Certification
- Heavy industrial grade EMS, EMI, EN61000-6-2, EN61000-6-4 certified

Specifications

IEEE Standard	IEEE 802.3 10Base-T Ethernet IEEE 802.3u 100Base-TX, 100Base-FX, Fast Ethernet IEEE 802.3ab 1000Base-T Gbit/s Ethernet over twisted pair IEEE802.3x Flow Control IEEE 802.3z 1000Base-X Gbit/s Ethernet over Fiber-Optic
Switch Architecture	Back-plane (Switching Fabric): 12Gbps (IGS-501S) 10Gbps (IGS-500) 16Gbps (IGS-800) Full wire-speed
Data Processing	Store and Forward
Flow Control	IEEE 802.3x flow control for Full duplex, back pressure for half duplex
Provides Broadcast Storm Protection	Supported
Jumbo Frame	9.6KBytes
MAC Address Table	8K
Packet Buffer Size	128KByte
Network Connector	5 x 10/100/1000Base-T RJ-45 (IGS-500, IGS-501S) 8 x 10/100/1000Base-T RJ-45 (IGS-800) 1x 100/1000Base-X SFP connector (only for IGS-501S) 10/100/1000Base-TX auto negotiation speed, Auto MDI/MDI-X function, Full/Half duplex
Network Cable	10Base-T: 2-pair UTP/STP Cat. 5 cable EIA/TIA-568 100-ohm (100m) 100Base-TX: 2-pair UTP/STP Cat. 5 cable EIA/TIA-568 100-ohm (100m) Fiber Cable (Multi-mode): 50/125um, 62.5/125um (only for IGS-501S) Fiber Cable (Single-mode): 9/125um (only for IGS-501S)
Protocols	CSMA/CD
LED	Per unit: Power 1 (Green), Power 2 (Green), Fault (Amber) Per RJ45 Link/Act 1000 (Yellow) Link/Act 10/100 (Green) Fiber LED Link/Act (Green)


DIP SW	DIP 1	ON : Disable OFF : Enable power failure alarm
	DIP 2	ON : Disables broadcast storm protection OFF : Enable broadcast storm protection
DIP SW	DIP 3	Green Ethernet ON : Disable Green Ethernet OFF : Enable 802.3az Green Ethernet
	DIP 4	SFP speed (only for IGS-501S) ON : 100M OFF : 1000M
Reverse Polarity Protection	Supported for Power Input	
Overload Current Protection	Supported	
Power Supply	Redundant Dual DC 12/24/48V (9.6~60VDC), or AC 24V (18~36VAC) Input power (Removable Terminal Block)	
Power Consumption	Input	IGS-500 IGS-501S IGS-800
	12VDC	3.3W 3.9W 7.0W
	24VDC	3.4W 3.9W 7.0W
	48VDC	4.8W 5.3W 8.7W
Alarm Relay Contact	Relay outputs with current carrying capacity of 1 A @24VDC, NC	
Removable Terminal Block	Provides 2 redundant power, alarm relay contact, 6 Pin	
Operating Temperature	-10°C~60°C (IGS-501S, IGS-500, IGS-800) -40°C~75°C (IGS-501S-E, IGS-500-E, IGS-800-E)	
Operating Humidity	5% to 95% (Non-condensing)	
Storage Temperature	-40 ~ 85°C	
Housing	Rugged Metal, IP30 Protection and fanless	
Dimensions	106 x 31.6 x 142 mm (D x W x H)	
Weight	0.415kg (IGS-501S) 0.41kg (IGS-500) 0.44kg (IGS-800)	
Installation Mounting	DIN Rail mounting, or wall mounting (Optional)	

MTBF	1,101,374 hrs (IGS-501S) 1,154,166hrs (IGS-500) 747,984hrs (IGS-800) (MIL-HDBK-217)
Warranty	5 years
Certification	
EMC/EMS	CE
EMI (Electromagnetic Interference)	FCC Part 15 Subpart B Class A, CE
Railway Traffic	EN50121-4
Immunity for Heavy Industrial Environment	EN61000-6-2

Emission for Heavy Industrial Environment	EN61000-6-4
EMS (Electromagnetic Susceptibility) Protection Level	EN61000-4-2 (ESD) Level 3, Criteria B EN61000-4-3 (RS) Level 3, Criteria A EN61000-4-4 (Burst) Level 3, Criteria A
EMS (Electromagnetic Susceptibility) Protection Level	EN61000-4-5 (Surge) Level 3, Criteria B EN61000-4-6 (CS) Level 3, Criteria A EN61000-4-8 (PFMF, Magnetic Field) Field Strength: 300A/m, Criteria A
Shock	IEC 60068-2-27
Freefall	IEC 60068-2-32
Vibration	IEC 60068-2-6


Application

Figure : IGS-800 Gigabit Ethernet Switch Transmission

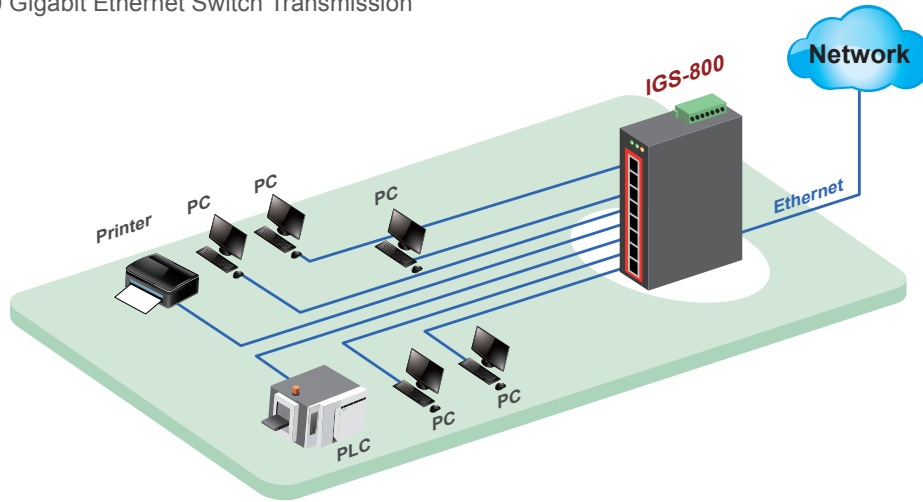


Dimensions


IGS-501S

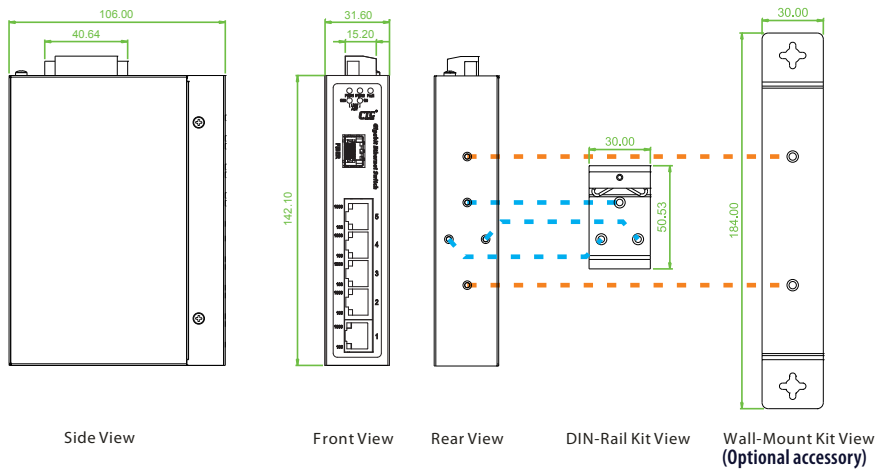

IGS-500

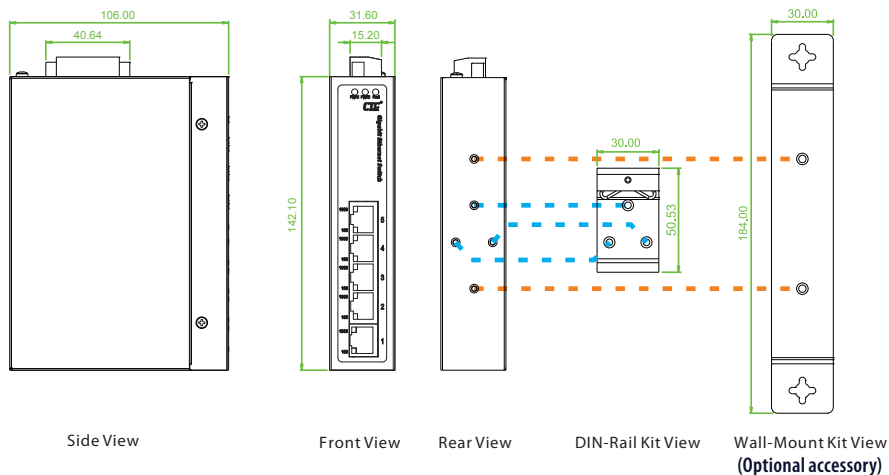


► IGS-800

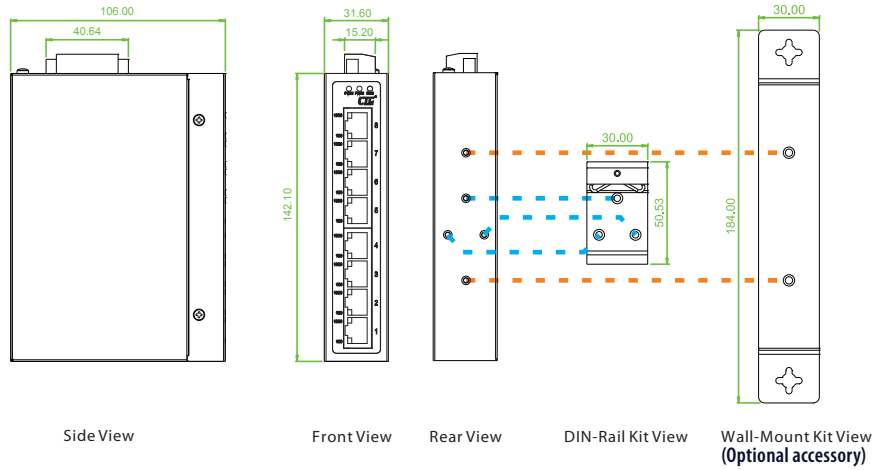

Ordering Information

Model Name	Total Port	RJ45 UTP port	Fiber Port	Power Input	Certification				Operating Temperature
		10/100/1000 Base-T	100/1000Base-X	Redundant	Railway EN50121-4	EN61000-6-2 EN61000-6-4	CE	FCC	
IGS-501S	6	5	1x SFP	12/24/48VDC	V	V	V	V	-10~60°C
IGS-501S-E	6	5	1x SFP	12/24/48VDC	V	V	V	V	-40~75°C
IGS-500	5	5		12/24/48VDC	V	V	V	V	-10~60°C
IGS-500-E	5	5		12/24/48VDC	V	V	V	V	-40~75°C
IGS-800	8	8		12/24/48VDC	V	V	V	V	-10~60°C
IGS-800-E	8	8		12/24/48VDC	V	V	V	V	-40~75°C

Model Naming Rule

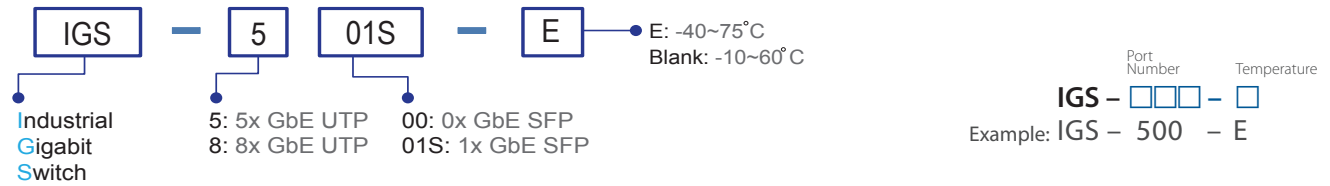

Package List

- One device of the series
- Protective caps for SFP ports (for IGS-501S)
- Quickly installation guide
- Din Rail with screws
- Terminal block

Optional Accessories

Wall mount kit accessories


IND-WMK01	Wall Mount kit for Industrial product (184 x 30mm)
-----------	--

Industrial SFP Transceiver

The ISFP series of industrial grade SFP modules have been fully tested with the IGS-501S product for guaranteed compatibility and performance. The best performance can be guaranteed even in mission-critical applications. (Please see CTC Union's Industrial SFP datasheet for more details and more items.)

ISFP-M7000-85-(E)	Industrial SFP GbE 1000Base-SX, M/M, 500 meter, wave length 850nm, 7.5dB, LC, -10~70°C (-40~85°C)
ISFP-S7020-31-(E)	Industrial SFP 1000Base-LX, S/M, 20km, wave length 1310nm, 15dB, LC, -10~70°C (-40~85°C)
ISFP-T7T00-00-(E)	Industrial SFP 1000Base-T UTP 100meter, -10~70°C (-40~85°C)
ISFP-M5002-31-(E)	Industrial SFP 155M 100Base-FX, MM, 2km, wave length 1310nm, 12dB, LC, -10~70°C (-40~85°C)
ISFP-S5030-31-(E)	Industrial SFP 155M 100Base-FX, SM, 30km, 1310nm, 19dB, LC, -10~70°C (-40~85°C)

SFP Naming Rule

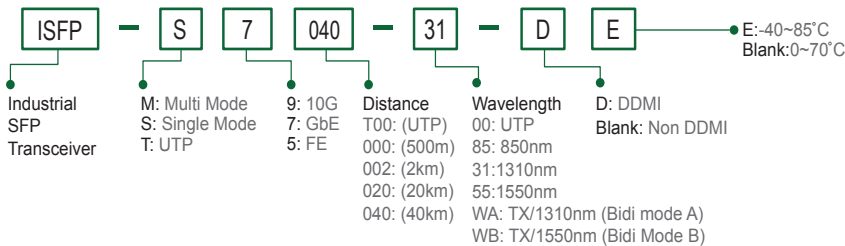



IGS-402F

4x 100/1000Base-T + 2x 1000Base-SX/LX
Gigabit Ethernet Switch

IGS-402S

4x 100/1000Base-T + 2x 100/1000Base-X SFP
Gigabit Ethernet Switch



These models are unmanaged industrial grade Gigabit switches with 4 10/100/1000Base-T ports and 2 fiber ports, that provide stable and reliable Ethernet transmission. Housed in rugged DIN rail or wall mountable enclosures, these switches are designed for harsh environments, such as industrial networking, intelligent transportation systems (ITS) and are also suitable for many military and utility market applications where environmental conditions exceed commercial product specifications (See Figure). Standard operating temperature range models (-10 to 60°C) and wide operating temperature range models (-40 to 75°C) fulfill the special needs of industrial automation applications.

Features

- 4x 10/100/1000Base-T RJ45 + 2x 1000Base-SX/LX Fiber (IGS-402F)
- 4x 10/100/1000Base-T RJ45 + 2x 100/1000Base-X SFP (IGS-402S)
- 12/24/48VDC redundant dual input power design
- Wide operating temperature -40 ~ 75°C ("E" model)
- Provides broadcast storm protection
- Supports DIP SW for alarm setting and broadcast storm protection
- Supports power failure alarm message by relay
- Supports flow control
- Jumbo frame support
- IP30 rugged metal housing and fanless
- Supports DIN Rail or wall mounting installation
- UL60950-1, CE, FCC, EN50121-4 certification
- Heavy industrial grade EMS, EMI, EN61000-6-2, EN61000-6-4 certified
- IP30 rugged metal housing and fanless

Specifications

IEEE Standard	IEEE 802.3 10Base-T Ethernet IEEE 802.3u 100Base-TX, 100Base-FX, Fast Ethernet IEEE 802.3ab 1000Base-T Gbit/s Ethernet over twisted pair IEEE 802.3z 1000Base-X Gbit/s Ethernet over Fiber-Optic IEEE 802.3x Flow Control and Back Pressure
Switch Architecture	Back-plane (Switching Fabric): 12Gbps (IGS-402S, IGS-402F) Full wire-speed
Data Processing	Store and Forward
Flow Control	IEEE 802.3x flow control, back pressure flow control
Provides Broadcast Storm Protection	Present, Enable / Disable set by DIP SW
Jumbo Frame	10K Bytes
MAC Address Table	8K
Packet Buffer Size	1Mbits
Network Connector	4 x RJ-45 10/100/1000Base-TX auto negotiation speed, Auto MDI/MDI-X function, Full/Half duplex 2 1000Base-X Fiber SC connector (IGS-402F) 2 100/1000Base-X SFP connector (IGS-402S)
Network Cable	UTP/STP above Cat. 5e cable EIA/TIA-568 100-ohm (100m) Fiber Cable (Multi-mode): 50/125um, 62.5/125um Fiber Cable (Single-mode): 9/125um
Protocols	CSMA/CD
LED	Per unit: Power 1 (Green), Power 2 (Green), Fault (Amber) Per RJ-45 port : Link/Active (Green), Speed 10 (OFF), 100 (Green), 1000 (Yellow) Fiber Per port: Link/Active (Green)
DIP SW	DIP 1 ON : Disable power failure alarm OFF : Enable power failure alarm DIP 2 ON : Disables broadcast storm protection OFF : Enable broadcast storm protection


DIP SW	DIP 4 ON : Fiber 2 for 100Base-FX SFP OFF : Fiber 2 for Gigabit SFP (IGS-402S) DIP 4 ON : Fiber 1 for 100Base-FX SFP OFF : Fiber 1 for Gigabit SFP (IGS-402S)
Reverse Polarity Protection	Supported for Power Input
Overload current protection	Supported
Power Supply	Redundant Dual DC 12/24/48V (9.6~60VDC) Input power (Removable Terminal Block)
Power Consumption	7.9W (IGS-402F) 7.9W (IGS-402S)
Alarm Relay Contact	Relay outputs with current carrying capacity of 1 A @24VDC
Removable Terminal Block	Provides 2 Redundant power, Alarm relay contact, 6 Pin
Operating Temperature	-10 ~ 60°C (IGS-402S, IGS-402F) -40 ~ 75°C (IGS-402S-E, IGS-402F-E)
Operating Humidity	5% to 95% (Non-condensing)
Storage Temperature	-40 ~ 85°C
Housing	Rugged Metal, IP30 Protection, Fanless
Dimensions	106 x 62.5 x 134.8 mm (D X W X H)
Weight	0.84kg (IGS-402S) 0.68kg (IGS-402F)
Installation Mounting	DIN Rail mounting, or wall mounting (Optional)
MTBF	1,000,643 Hours (IGS-402S) 821,412 Hours (IGS-402F) (MIL-HDBK-217)
Warranty	5 years
Certification	
EMC/EMS	CE
EMI (Electromagnetic Interference)	FCC Part 15 Subpart B Class A, CE
Railway Traffic	EN50121-4

Immunity for Heavy Industrial Environment	EN61000-6-2
Emission for Heavy Industrial Environment	EN61000-6-4
EMS (Electromagnetic Susceptibility) Protection Level	EN61000-4-2 (ESD) Level 3, Criteria B EN61000-4-3 (RS) Level 3, Criteria A EN61000-4-4 (Burst) Level 3, Criteria A

EMS	EN61000-4-5 (Surge) Level 3, Criteria B EN61000-4-6 (CS) Level 3, Criteria A EN61000-4-8 (PFMF, Magnetic Field) Field Strength: 300A/m, Criteria A
Safety	UL60950-1
Shock	IEC 60068-2-27
Freefall	IEC 60068-2-32
Vibration	IEC 60068-2-6


Application

Figure : IGS-402S & IGS-402F Gigabit Ethernet Switch Transmission

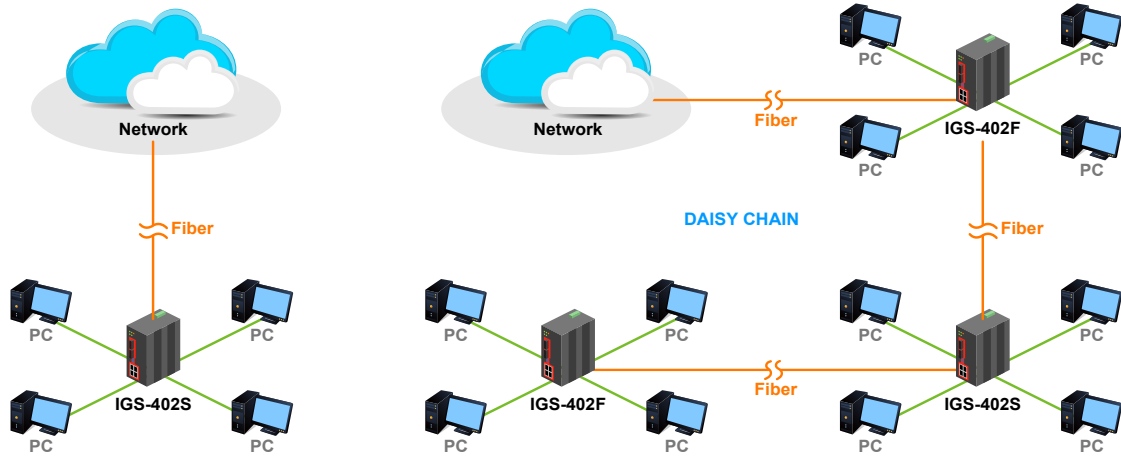


Dimensions

► IGS-402F

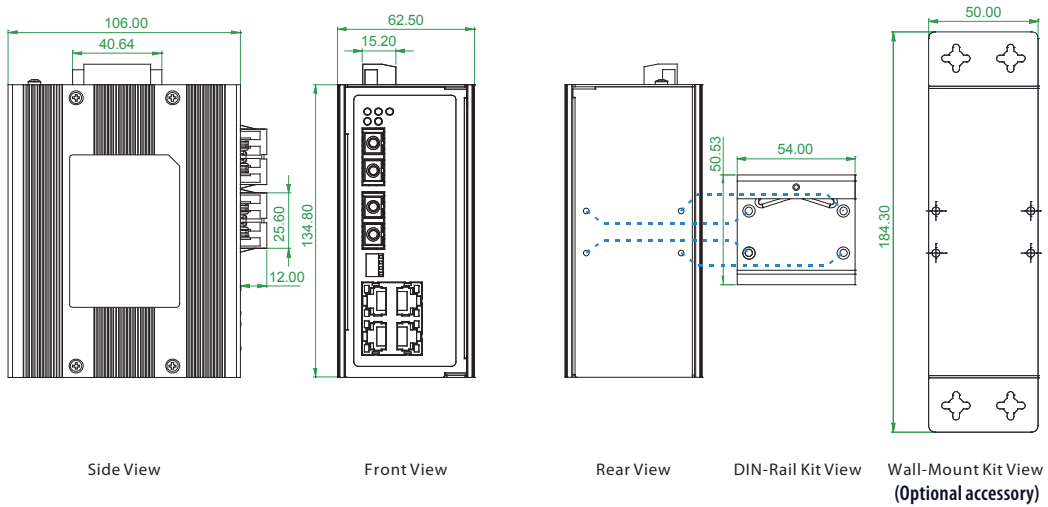


► IGS-402S

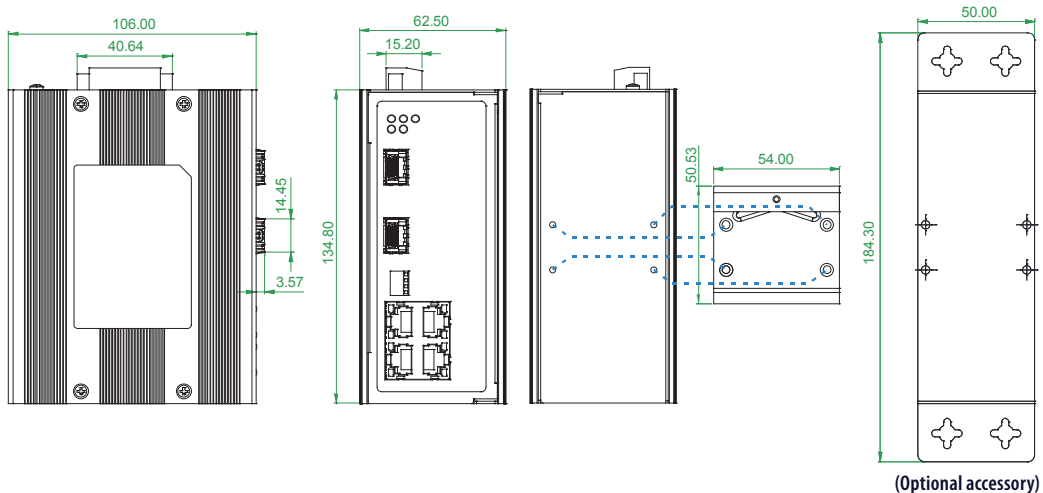


Ordering Information

Model Name	Total Port	RJ45 UTP port	Fiber Port		Power Input	Certification					Operating Temperature
		10/100/1000 Base-T	1000Base-X	100/1000Base-X	Redundant	Safety UL60950-1	Railway EN50121-4	EN61000-6-2 EN61000-6-4	CE	FCC	
IGS-402F	6	4	2 SC		12/24/48VDC	V	V	V	V	V	-10~60°C
IGS-402F-E	6	4	2 SC		12/24/48VDC	V	V	V	V	V	-40~75°C
IGS-402S	6	4	2 SFP		12/24/48VDC	V	V	V	V	V	-10~60°C
IGS-402S-E	6	4	2 SFP		12/24/48VDC	V	V	V	V	V	-40~75°C

Model Naming Rule

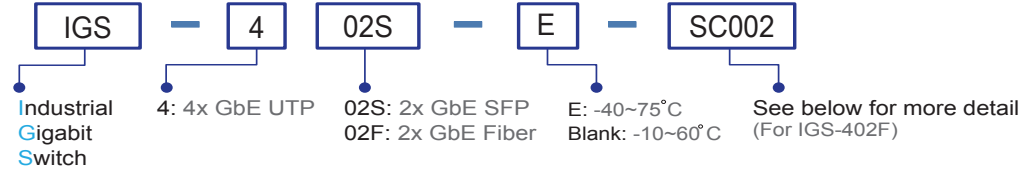

Fiber Connector	Connectivity Distance
SC (IGS-402F only)	SC001: 500m (SC, M/M) 002: 2km (M/M) SC020: 20km (SC, S/M) SC040: 40km (SC, S/M) SC020A: WDM 20km A type (TX:1310nm) SC020B: WDM 20km B type (TX:1550nm)



Package List

- One device of the series
- Protective caps for SFP ports (for IGS-402S)
- Quickly installation guide
- Din Rail with screws
- Terminal block

Optional Accessories

Wall mount kit accessories


IND-WMK02	Wall Mount kit for Industrial product, 184 x 50mm
-----------	---

Industrial SFP Transceiver

The ISFP series of industrial grade SFP modules have been fully tested with the series product for guaranteed compatibility and performance. The best performance can be guaranteed even in mission-critical applications. (Please see CTC Union's Industrial SFP datasheet for more details and more items.)

ISFP-M7000-85-(E)	Industrial SFP GbE 1000Base-SX, M/M, 500 meter, wave length 850nm, 7.5dB, LC, -10~70°C (-40~85°C)
ISFP-S7020-31-(E)	Industrial SFP 1000Base-LX, S/M, 20km, wave length 1310nm, 15dB, LC, -10~70°C (-40~85°C)
ISFP-T7T00-00-(E)	Industrial SFP 1000Base-T UTP 100meter, -10~70°C (-40~85°C)
ISFP-M5002-31-(E)	Industrial SFP 155M 100Base-FX, MM, 2km, wave length 1310nm, 12dB, LC, -10~70°C (-40~85°C)
ISFP-S5030-31-(E)	Industrial SFP 155M 100Base-FX, SM, 30km, 1310nm, 19dB, LC, -10~70°C (-40~85°C)

SFP Naming Rule

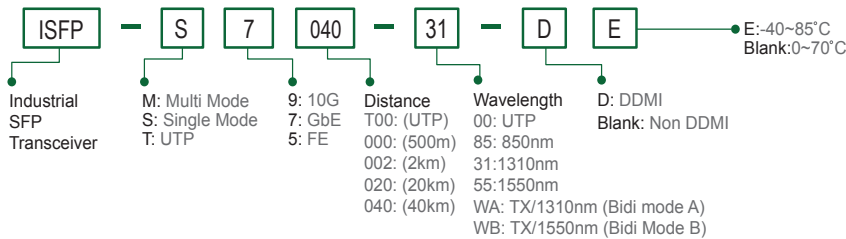

New



IFS-401F
4x 10/100Base-TX+
1x 100Base-FX FE Switch

IFS-402F
4x 10/100Base-TX+
2x 100Base-FX FE Switch

IFS-800
8x 10/100Base-TX Fast
Ethernet Switch

IFS-802GS
8x 10/100Base-TX +
2x 1000Base-X SFP FE Switch

IFS-1602GS
16x 10/100Base-TX +
2x 1000Base-X SFP Switch



These models are unmanaged industrial grade switches with 4~16 10/100Base-TX ports and 0~2 fiber ports, that provide stable and reliable Ethernet transmission. Housed in rugged DIN rail or wall mountable enclosures, these switches are designed for harsh environments, such as industrial networking, intelligent transportation systems (ITS) and are also suitable for many military and utility market applications where environmental conditions exceed commercial product specifications. Specifications (See Figure 1, 2). Standard operating temperature range models (-10 to 60°C) and wide operating temperature range models (-40 to 75°C) fulfill the special needs of industrial automation applications.

Features

- 4x 10/100Base-TX RJ45 + 1x 100Base-FX Fiber (IFS-401F)
- 4x 10/100Base-TX RJ45 + 2x 100Base-FX Fiber (IFS-402F)
- 8x 10/100Base-TX RJ45 (IFS-800)
- 8x 10/100Base-TX RJ45 + 2x 1000Base-X SFP (IFS-802GS)
- 16x 10/100Base-TX RJ45 + 2x 1000Base-X SFP (IFS-1602GS)
- Redundant dual DC input power 12/24/48VDC (9.6~60VDC)
- IP30 rugged metal housing and Fanless
- Wide operating temperature -40 ~ 75°C (-E model)
- Provides broadcast storm protection (IFS-401F, IFS-402F, IFS-800, IFS-1602GS)
- Supports DIP SW for alarm setting and broadcast storm protection
- Supports power failure alarm message by relay
- Supports flow control
- CE, FCC, and EN50121-4 certification
- Heavy industrial grade EMS, EMI, EN61000-6-2, EN61000-6-4 certified
- 4KV surge protection for UTP ports (IFS-1602GS)
- 2.25K VDC Hi-pot isolation protection for Ethernet ports and power (IFS-1602GS)

Specifications

IEEE Standard	IEEE 802.3 10Base-T Ethernet IEEE 802.3u 100Base-TX and 100Base-FX Fast Ethernet IEEE 802.3x Flow Control and Back Pressure IEEE 802.3z 1000Base-X Gbit/s Ethernet over Fiber-Optic	Protocol	CSMA/CD
Switch Architecture	Back-plane (Switching Fabric) : 1.0Gbps (IFS-401F) 1.2Gbps (IFS-402F) 1.6Gbps (IFS-800) 5.6Gbps (IFS-802GS) 7.2 Gbps (IFS-1602GS) Full wire-speed	LED	Per unit: Power 1 (Green), Power 2 (Green), Fault (Amber) RJ-45 Per port: Link/Active (Green), Speed 100 (Yellow) Fiber Per port: Link/Active (Green) (IFS-401F, IFS-402F) SFP Port : Link/Active (Green) (IFS-802GS, IFS-1602GS)
Data Processing	Store and Forward	DIP SW	DIP 1 OFF : Enable power failure alarm ON : Disable DIP 2 Broadcast storm protection (IFS-401F, IFS-402F, IFS-800, IFS-1602GS) OFF : Enable ON : Disables
Transfer Rate	14,880pps for Ethernet port 148,800pps for Fast Ethernet port 1,488,000pps for Giga Ethernet port	Reverse Polarity Protection	Supported for Power Input
Flow Control	IEEE 802.3x flow control, back pressure flow control	Overload Current Protection	Supported
Provides Broadcast Storm Protection	Present, Enable /Disable set by DIP SW (IFS-401F, IFS-402F, IFS-800, IFS-1602GS)	Power Supply	Redundant Dual DC 12/24/48V (9.6~60VDC) Input power (Removable Terminal Block)
MAC Address Table	2K (IFS-401F, IFS-402F, IFS-800) 8K (IFS-802GS) 16K (IFS-1602GS)	Power Consumption	4.4W (IFS-401F) 5.8W (IFS-402F) 4.4W (IFS-802GS) 3.9W (IFS-800) 8.7W (IFS-1602GS)
Packet Buffer Size	448Kbit (IFS-401F, IFS-402F, IFS-800) 1024Kbit (IFS-802GS) 4M bit (IFS-1602GS)	Alarm Relay Contact	Relay outputs with current carrying capacity of 1 A @24VDC, NC
Network Connector	4x RJ-45, 1x Fiber (IFS-401F), 4x RJ-45, 2 Fiber (IFS-402F) 8x RJ-45 (IFS-800) 8x RJ-45, 2 SFP (IFS-802GS) 16x RJ-45, 2x SFP (IFS-1602GS) RJ-45 Port: Auto MDI/MDI-X function, 10/100Base-TX auto negotiation speed, Full/Half duplex 1 or 2x 100Base-FX SC/ST fiber port, Multi/Single Mode (IFS-401F, IFS-402F) 2x 1000Base-X SFP port (IFS-802GS, IFS-1602GS)	Removable Terminal Block	Provides 2 Redundant power, Alarm relay contact, 6 Pin
Network Cable	10Base-T: 2-pair UTP/STP Cat. 5e cable EIA/TIA-568 100-ohm (100m) 100Base-TX: 2-pair UTP/STP Cat. 5e cable EIA/TIA-568 100-ohm (100m) Fiber Cable (Multi-mode): 50/125um~62.5/125um	Operating Temperature	-10 ~ 60°C (IFS-401F, IFS-402F, IFS-800, IFS-802GS, IFS-1602GS) -40 ~ 75°C (IFS-401F-E, IFS-402F-E, IFS-800-E, IFS-802GS-E, IFS-1602GS-E)
Network Cable	Fiber Cable (Single-mode): 8/125um~10/125um Wavelength: 1310nm (Multi-mode/Single-mode) Available distance: 2KM (Multi-Mode) 30KM (Single-Mode) 50KM (Single Mode) SFP: Distance depend on SFP Fiber Transceiver	Operating Humidity	5% to 95% (Non-condensing)
		Storage Temperature	-40 ~ 85°C
		Housing	Rugged Metal, IP30 Protection and Fanless
		Dimensions	106 x 31.6 x 142mm (D x W x H) (IFS-401F, IFS-402F, IFS-800) 106 x 72 x 152 mm (D x W x H) (IFS-802GS, IFS-1602GS)
		Weight	0.37kg (IFS-401F), 0.42kg (IFS-402F), 0.67kg (IFS-802GS) 0.43kg (IFS-800), 0.82kg (IFS-1602GS)
		Installation Mounting	DIN Rail mounting, or wall mounting (Optional)
		MTBF	908,971 Hours (IFS-401F) 907,622 Hours (IFS-402F) 1,064,064 Hours (IFS-800) 837,414 Hours (IFS-802GS) 461,653 Hours (IFS-1602GS) (MIL-HDBK-217)

Warranty	5 years
Certification	
EMC/EMS	CE
EMI (Electromagnetic Interference)	FCC Part 15 Subpart B Class A, CE
Railway Traffic	EN50121-4
Immunity for Heavy Industrial Environment	EN61000-6-2
Emission for Heavy Industrial Environment	EN61000-6-4

EMS (Electromagnetic Susceptibility) Protection Level	EN61000-4-2 (ESD) Level 3, Criteria B
	EN61000-4-3 (RS) Level 3, Criteria A
	EN61000-4-4 (Burst) Level 3, Criteria A
	EN61000-4-5 (Surge) Level 3, Criteria B
	EN61000-4-6 (CS) Level 3, Criteria A
Safety	EN61000-4-8 (PFMF, Magnetic Field) Field Strength: 300A/m, Criteria A
	UL60950-1 (Pending)
Hi-pot isolation protection	DC 2.25KV for power to chassis ground, and UTP port to chassis ground (IFS-1602GS)
4KV surge protection	Supported for UTP Port (IFS-1602GS)
Shock	IEC 60068-2-27
Freefall	IEC 60068-2-32
Vibration	IEC 60068-2-6

Application

Figure 1 : IFS-402F Fast Ethernet Switch Transmission with Daisy Chain



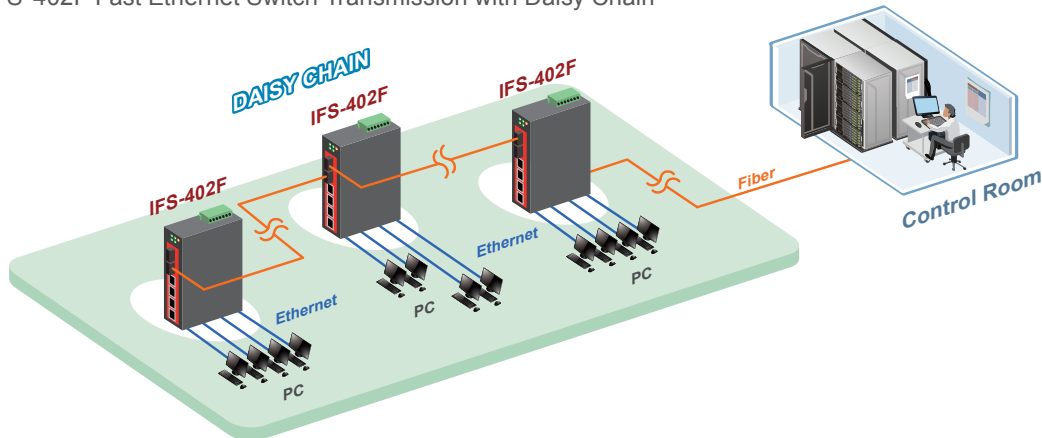


Figure 2 : IFS-800 Fast Ethernet Switch Transmission

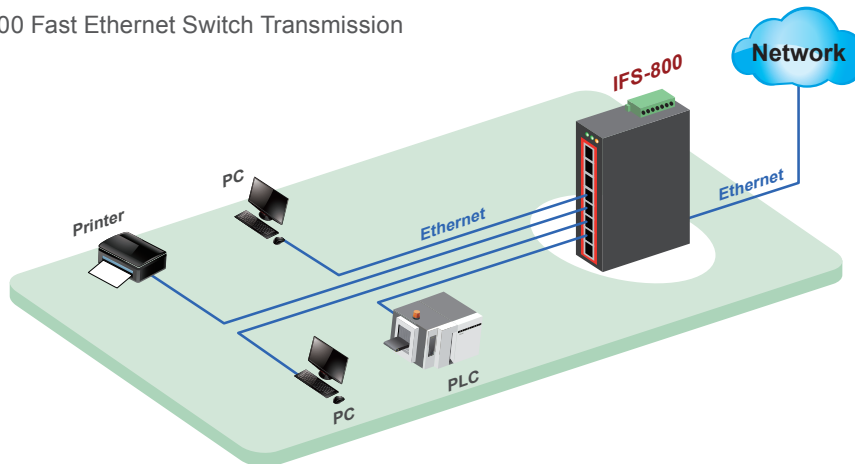


Dimensions


► IFS-401F

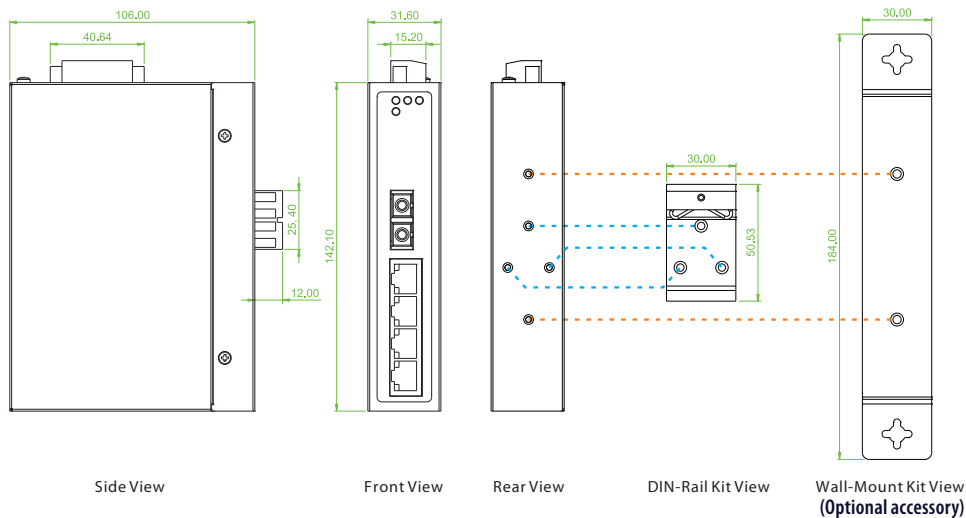


► IFS-402F

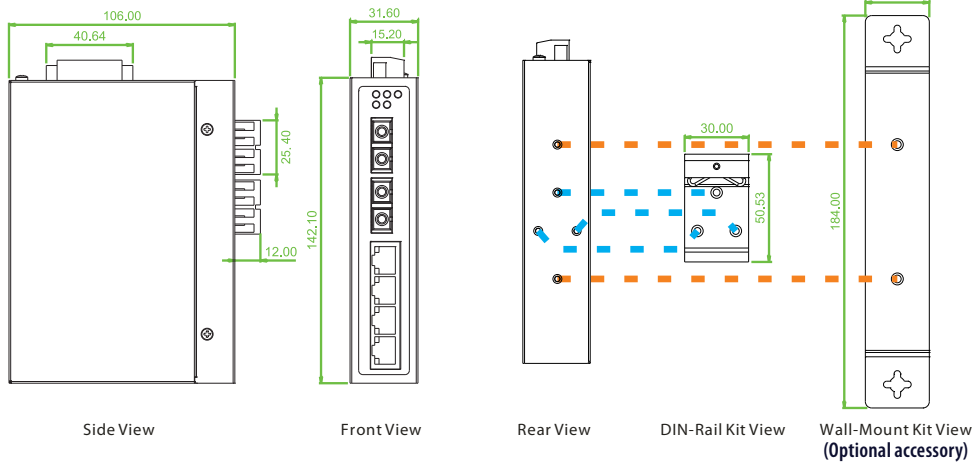


► IFS-800

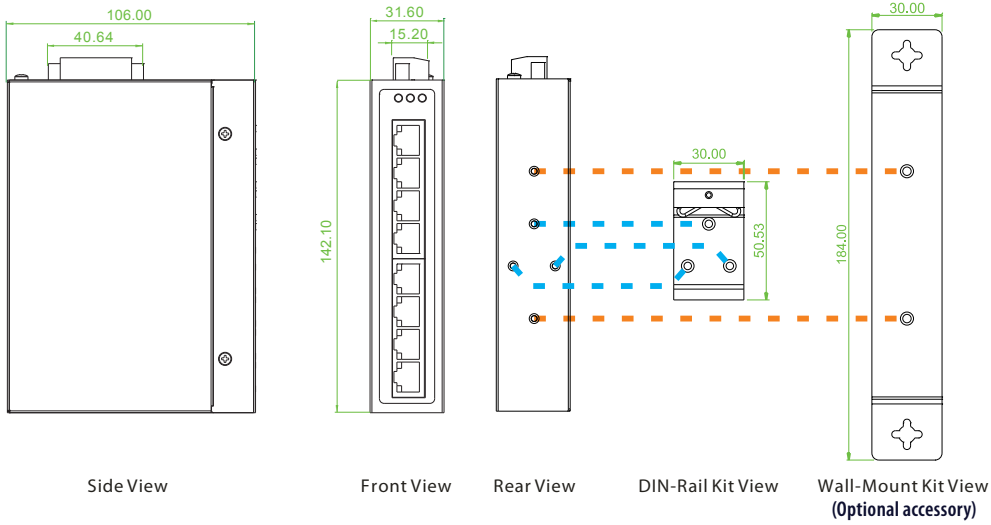

► IFS-802GS

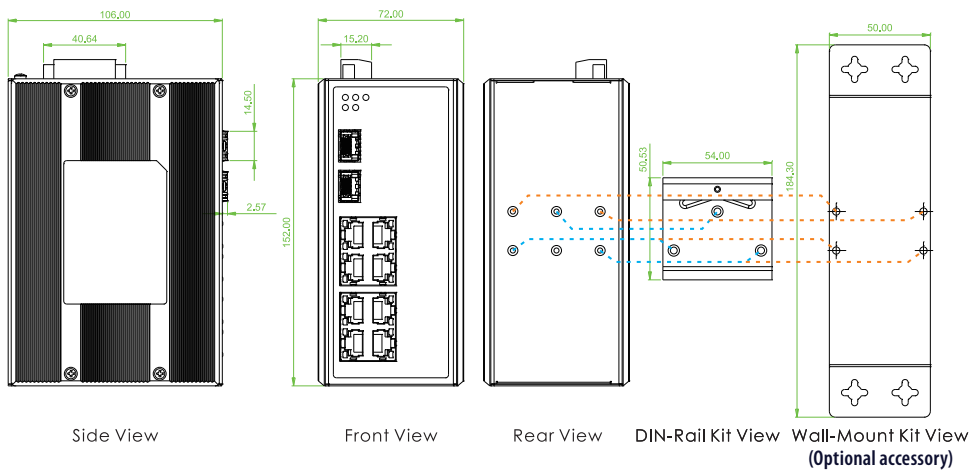


► IFS-1602GS

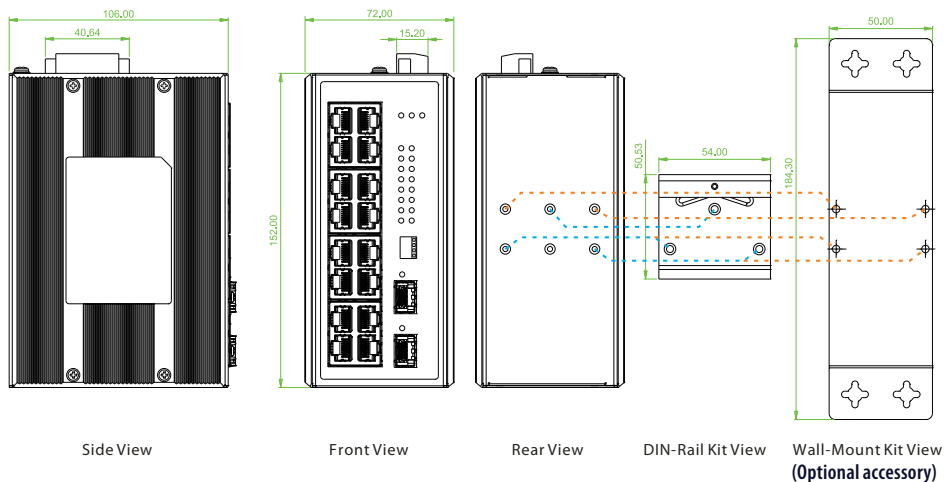


Ordering Information

Model Name	Total Port	RJ45 UTP Port	Fiber Port		Certification				Operating Temperature
		10/100Base-TX	100Base-FX	1000Base-X	Railway EN50121-4	EN61000-6-2 EN61000-6-4	CE	FCC	
IFS-401F	5	4	1 SC/ST		V	V	V	V	-10~60°C
IFS-401F-E	5	4	1 SC/ST		V	V	V	V	-40~75°C
IFS-402F	6	4	2 SC/ST		V	V	V	V	-10~60°C
IFS-402F-E	6	4	2 SC/ST		V	V	V	V	-40~75°C
IFS-800	8	8			V	V	V	V	-10~60°C
IFS-800-E	8	8			V	V	V	V	-40~75°C
IFS-802GS	10	8		2 SFP	V	V	V	V	-10~60°C
IFS-802GS-E	10	8		2 SFP	V	V	V	V	-40~75°C
IFS-1602GS	18	16		2 SFP	V	V	V	V	-10~60°C
IFS-1602GS-E	18	16		2 SFP	V	V	V	V	-40~75°C

Model Naming Rule

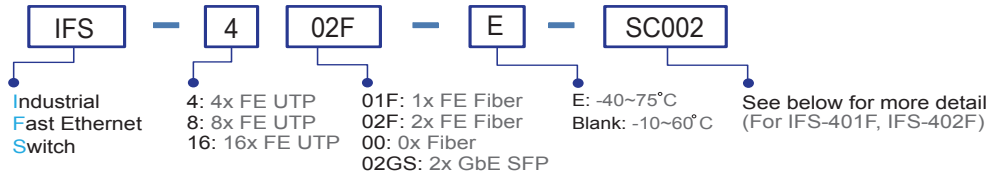

Fiber Option Type	Connectivity Distance
SC, ST (for IFS-401F, IFS-402F)	002: 2km 030: 30km 050: 50km 020A: WDM Bidi 20km A type (TX:1310nm) 020B: WDM Bidi 20km B type (TX: 1550nm)



Package List

- One device of the series
- Quickly installation guide
- Din Rail with screws
- Terminal block
- Protective caps for SFP ports (for IFS-802GS, IFS-1602GS)

Optional Accessories

Wall mount kit Accessories


IND-WMK01	Wall Mount kit for Industrial product, 184 x 30mm (Narrow) (For IFS-401F, IFS-402F, IFS-800)
IND-WMK02	Wall Mount kit for Industrial product, 184 x 50mm (Wide) (For IFS-802GS, IFS-1602GS)

Industrial SFP Transceiver

The ISFP series of industrial grade SFP modules have been fully tested with the IFS-802GS & IFS-1602GS product for guaranteed compatibility and performance. The best performance can be guaranteed even in mission-critical applications. (Please see CTC Union's Industrial SFP datasheet for more details and more items.)

ISFP-M7000-85-(E)	Industrial SFP GbE 1000Base-SX, M/M, 500 meter, wave length 850nm, 7.5dB, LC, -10~70°C (-40~85°C)
ISFP-S7020-31-(E)	Industrial SFP 1000Base-LX, S/M, 20km, wave length 1310nm, 15dB, LC, -10~70°C (-40~85°C)
ISFP-T7100-00-(E)	Industrial SFP 1000Base-T UTP 100meter, -10~70°C (-40~85°C)

SFP Naming Rule

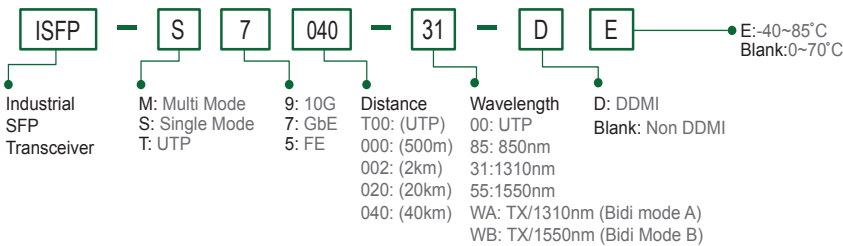



IFS-500C

5x 10/100Base-TX Fast Ethernet Switch
(Compact)



This model is a compact sized, unmanaged industrial grade Fast Ethernet switch with 5 10/100Base-TX ports that provide stable and reliable Ethernet transmission. Housed in rugged DIN rail or wall mountable enclosures, these switches are designed for harsh environments, such as industrial networking, intelligent transportation systems (ITS) and are also suitable for many military and utility market applications where environmental conditions exceed commercial product specifications (See Figure). Standard operating temperature range models (-10 to 60°C) and wide operating temperature range models (-40 to 75°C) fulfill the special needs of industrial automation applications.

Features

- Wide range input power 12/24/48VDC (9.6~60VDC), or AC24V (18~36VAC)
- IP30 rugged metal housing and Fanless
- Compact size for easy installation
- Wide operating temperature -40 ~ 75°C (-E model)
- Very low power consumption
- Supports flow control
- CE, FCC, and EN50121-4 for railway traffic certification
- Heavy industrial grade EMS, EMI, EN61000-6-2, EN61000-6-4 certified


Specifications

IEEE Standard	IEEE 802.3 10Base-T Ethernet IEEE 802.3u 100Base-TX and 100Base-FX Fast Ethernet IEEE 802.3x Flow Control and Back Pressure	
Switch Architecture	Back-plane (Switching Fabric) : 1.0 Gbps Full wire-speed	
Data Processing	Store and Forward	
Transfer Rate	14,880pps for Ethernet port 148,800pps for Fast Ethernet port	
Flow Control	IEEE 802.3x flow control, back pressure flow control	
MAC Address Table	1K	
Packet Buffer Size	448Kbits	
Network Connector	5x RJ-45 RJ-45 Port: Auto MDI/MDI-X function, 10/100Base-TX auto negotiation speed, Full/Half duplex	
Network Cable	10Base-T: 2-pair UTP/STP Cat. 5 cable EIA/TIA-568 100-ohm (100m) 100Base-TX: 2-pair UTP/STP Cat. 5 cable EIA/TIA-568 100-ohm (100m)	
Protocol	CSMA/CD	
LED	Per unit: Power (Green) RJ-45 Per port: Link/Active (Green), Speed 100 (Yellow)	
Reverse Polarity Protection	For DC input power protection	
Overload Current Protection	Supported	
Power Supply	DC 12/24/48V (9.6~60VDC) or AC 24V (18~36VAC) input power (Removable Terminal Block)	
Power Consumption	Input Voltage	Power Consumption(Watt)
	DC 12V	0.9W
	DC 24V	1.2W
	DC 48V	2W
Removable Terminal Block	Provides for input power (2 Pin)	
Operating Temperature	-10 ~ 60°C (IFS-500C) -40 ~ 75°C (IFS-500C-E)	
Operating Humidity	5% to 95% (Non-condensing)	


Storage Temperature	-40 ~ 85°C
Housing	Rugged Metal, IP30 Protection and Fanless
Dimensions	70 x 30 x 103 mm (D x W x H)
Weight	220g
Installation Mounting	DIN Rail mounting, or wall mounting (optional)
MTBF	1,738,327 Hours (MIL-HDBK-217)
Warranty	5 years
Certification	
EMC/EMS	CE
EMI (Electromagnetic Interference)	FCC Part 15 Subpart B Class A, CE
Railway Traffic	EN50121-4
Immunity for Heavy Industrial Environment	EN61000-6-2
Emission for Heavy Industrial Environment	EN61000-6-4
EMS (Electromagnetic Susceptibility) Protection Level	EN61000-4-2 (ESD) Level 3, Criteria B EN61000-4-3 (RS) Level 3, Criteria A EN61000-4-4 (Burst) Level 3, Criteria A EN61000-4-5 (Surge) Level 3, Criteria B EN61000-4-6 (CS) Level 3, Criteria A EN61000-4-8 (PFMF, Magnetic Field) Field Strength: 300A/m, Criteria A
Shock	IEC 60068-2-27
Freefall	IEC 60068-2-32
Vibration	IEC 60068-2-6

Application

Figure : IFS-500C Fast Ethernet Switch Transmission

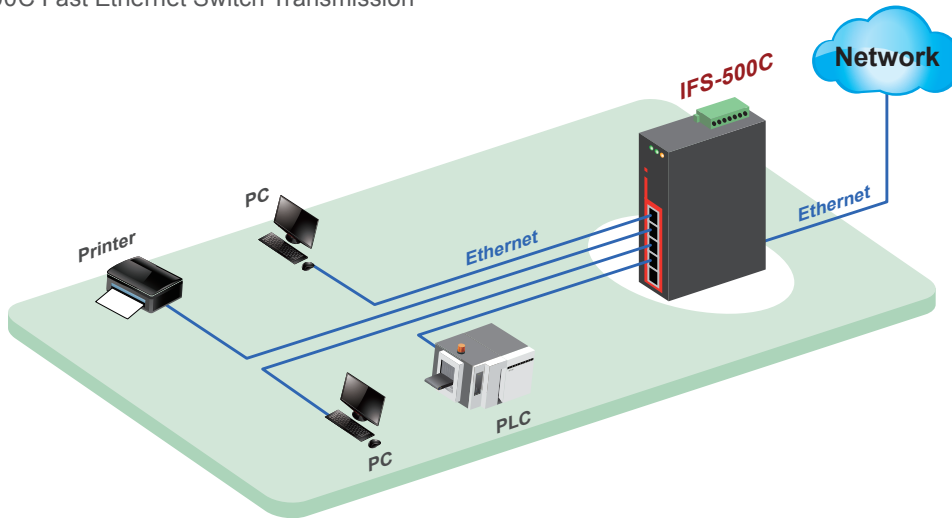


Dimensions

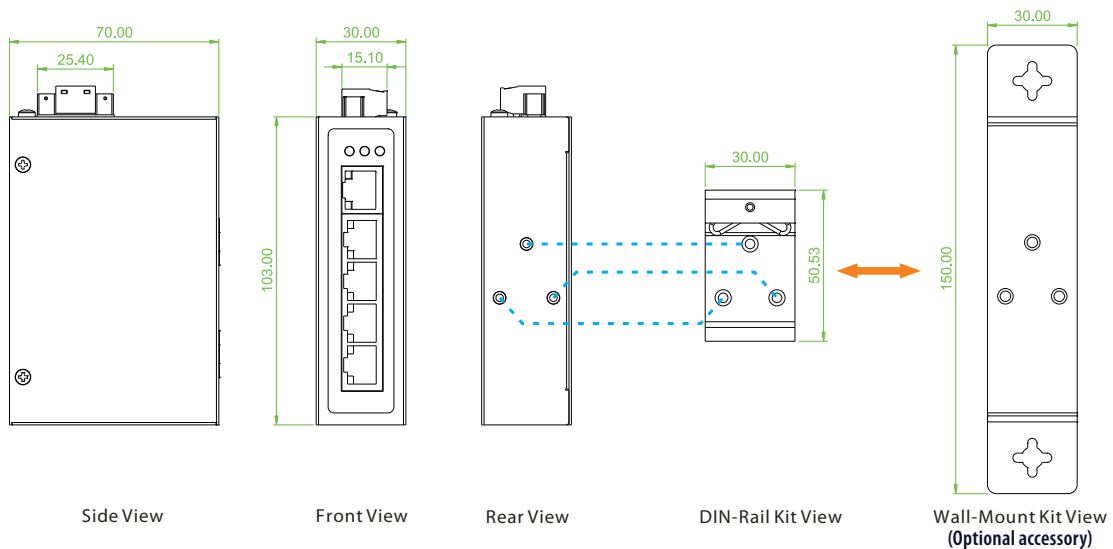

Ordering Information

Model Name	Total Port	RJ45 UTP port	Power input	Certification				Operating Temperature
		10/100Base-TX	Single power	Railway EN50121-4	EN61000-6-2 EN61000-6-4	CE	FCC	
IFS-500C	5	5	12/24/48VDC, 24VAC	V	V	V	V	-10~60°C
IFS-500C-E	5	5	12/24/48VDC, 24VAC	V	V	V	V	-40~75°C

Model Naming Rule

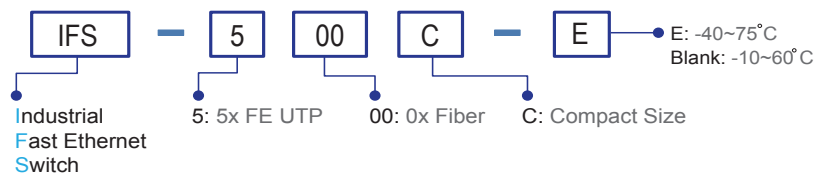

Package List

- IFS-500C device
- Quickly installation guide
- Din Rail with screws
- Terminal block

Optional Accessories

Wall mount kit Accessories

IND-WMK03	Wall Mount kit for Industrial product (Compact, 150 x 30mm)
-----------	---



IMC-1000MS

100/1000Base-T to 100/1000Base-X SFP
Managed Fiber Converter



IMC-1000MS is a 10/100/1000Base-T to 100/1000Base-X manageable Gigabit Ethernet media converter which offers dual speed fiber transmission. Housed in rugged DIN rail or wall mountable enclosures, these converters are designed for harsh environments, such as industrial networking and intelligent transportation systems (ITS) and are also suitable for many military and utility market applications where environmental conditions exceed commercial product specifications. The converters are manageable by Web, SNMP or In-Band management for Operation, Administration, Maintenance & Provisioning, which includes bandwidth control, speed, VLAN, Diagnostic, storm filter and converter configurations. In addition, network administrators can manage IMC-1000MS via standard SNMP manager such as SmartView™. It also provide loop-back test and dying gasp, and can be monitored from a centrally located OAM-enabled FRM220-1000MS converter via remote in-band management.

Features

- Conversion between 10/100/1000Base-T and 100/1000Base-X Fiber cable interface
- Supports Dual Rate (100/1000) SFP for selectable Fast or Gigabit speed on fiber
- Redundant dual DC input power 12/24/48VDC (9.6 ~ 60VDC)
- IP30 rugged metal housing and fanless
- Wide operating temperature -20~75°C (IMC-1000MS-E)
- UL60950-1, CE, FCC, RailWay traffic EN50121-4 certification
- Heavy industrial grade EMS, EMI EN61000-6-2, EN61000-6-4 certification
- MIB counters
- Supports LFPT (Link Fault Pass Through)
- Auto Laser Shutdown (ALS)
- Supports Digital Diagnostic Monitor Interface (DDMI) for SFP
- Supports SmartView for centralized management (Please see Catalog chapter 1- Software Management for more details)
- Supporting Central EMS for management of upto 50 SmartView Server ,and 25,000 device (maximum) (Please see Catalog chapter 1- Software Management for more details)
- Web management (Figure 3)
- SNMP management (Figure 1)
- Supports 16 IEEE 802.1Q Tag VLAN Group
- SNMP alarm trap for power loss and port link down
- Supports in-band management from FRM220 Chassis With FRM220-1000MS (Figure 2)
- Remote loop back test
- Dying gasp (remote power failure detection)

Specifications

Standard	IEEE802.3 10Base-T 10Mbit/s Ethernet IEEE802.3u 100Base-TX, 100Base-FX, Fast Ethernet IEEE802.3ab 1000Base-TX Gbit/s Ethernet over twisted pair IEEE802.3z 1000Base-X Gbit/s Ethernet over Fiber-optic IEEE802.3x Flow Control and Back pressure IEEE802.3ah OAM management	LED	Per Unit : Power 1 (Green), Power 2 (Green), Fault (Amber) Fiber LNK/ACT (Green): ON: Connected to network OFF: Not connected to network BLK: Receive /Transmit Data Fiber speed : Yellow : 1000Base-X Green : 100Base-X RJ-45 port: Speed: 10 (OFF), 100 (Green), 1000 (Yellow)
Fiber Ports	100Base-X or 1000Base-X set by Web Supports Auto Laser Shutdown (ALS) Supported DDMI for SFP diagnostic	LED	LNK/ACT for RJ45(Green): ON : Connected to network/ OFF: Not connected to network/ BLK: Networking is active
RJ45 Ports	10/100/1000Base-T Auto MDI/MDI-X and Auto-Negotiation Function Supports UTP CAT.5e Twisted Pair cable	Reverse Polarity Protection	Supported for power Input
CPU watch dog	Supported	Overload Current Protection	Supported
Push Button	Reset, Load default setting	Power Supply	12/24/48VDC (9.6~60VDC) , Redundant power with polarity Reverse protect function and removable terminal block
Jumbo Frame	9K bytes	Alarm Relay Contact	Relay outputs with current carrying capacity of 1 A @24VDC Relay alarm output for power fail or port link down
Fiber Parameters	Fiber Cable (Multi-mode): 50/125um,62.5/125um Fiber Cable (Single-mode): 9/125um Wavelength: 1310nm (Multi-mode/Single-mode) SFP, Distance depend on plug-in Fiber Transceiver	Remote Terminal Block	Provides 2 redundant power, alarm relay contact, 7 Pin
Link Fault Pass Through (LFPT)	TX-Fiber: If TX port link down, the media converter will force Fiber port to link down Fiber-TX: If Fiber port link down, the media converter will force TX port to link down	Power Consumption	4.8 W

Operating Humidity	5% ~ 95% (Non-condensing)
Operating Temperatur	-20 ~ 75°C (IMC-1000MS-E)
Storage Temperature	-40 ~ 85°C
Housing	Rugged Metal, IP30 Protection and fanless
Dimensions	106 x 38.6 x 142.1mm (D x W x H)
Weight	0.62kg
Installation	DIN Rail mounting, or wall mounting (Optional)
MTBF	1,153,428 Hours MIL-HDBK-217
Warranty	5 years
Certification	
EMI	CE
EMI (Electromagnetic Interference)	FCC Part 15 Subpart B Class A, CE
Railway Traffic	EN50121-4

Immunity for Heavy Industrial Environment	EN61000-6-2
Emission for Heavy Industrial Environment	EN61000-6-4
EMS (Electromagnetic Susceptibility) Protection Level	EN61000-4-2 (ESD) Level 3, Criteria B EN61000-4-3 (RS) Level 3, Criteria A EN61000-4-4 (Burst) Level 3, Criteria A EN61000-4-5 (Surge) Level 3, Criteria B EN61000-4-6 (CS) Level 3, Criteria A EN61000-4-8 (PFMF, Magnetic Field) Field Strength: 300A/m, Criteria A
Safety	UL60950-1
Shock	IEC 60068-2-27
Freefall	IEC 60068-2-32
Vibration	IEC 60068-2-6

Software Specifications

SNMP or Web Mode (figure 1, 3)	
Management	Ingress/Egress bandwidth control with 64K granularity Web management, Firmware upgrade via Web Supports SNMP, MIB for management Supports DHCP client for automatic IP configuration Supports 802.1Q tag VLAN, 16 Tag VLAN group, MIB counters display
Configuration	IP configuration, password setting, converter configuration port configuration, MIB counter, SNMP configuration VLAN group configuration, alarm configuration PoE Configuration
Diagnostic & Monitor	Supports Link Fault Pass-Through (LFPT) Function Broadcast/Multicast/Unicast storm filter SNMP alarm trap for power loss and port link Up/Down

In-Band Remote mode (Figure 2)	
Management	Supports in-band management from FRM220 Chassis With FRM220-1000MS card Ingress/Egress bandwidth control with 64K granularity
Configuration	IP configuration, converter configuration, port configuration, MIB counter VLAN group configuration, alarm configuration, PoE Configuration
Diagnostic & Monitor	Remote loop back test Supports Link Fault Pass-Through (LFPT) Function Broadcast/Multicast/Unicast storm filter

Application

Figure 1 : IMC-1000MS Management by SNMP, SmartView

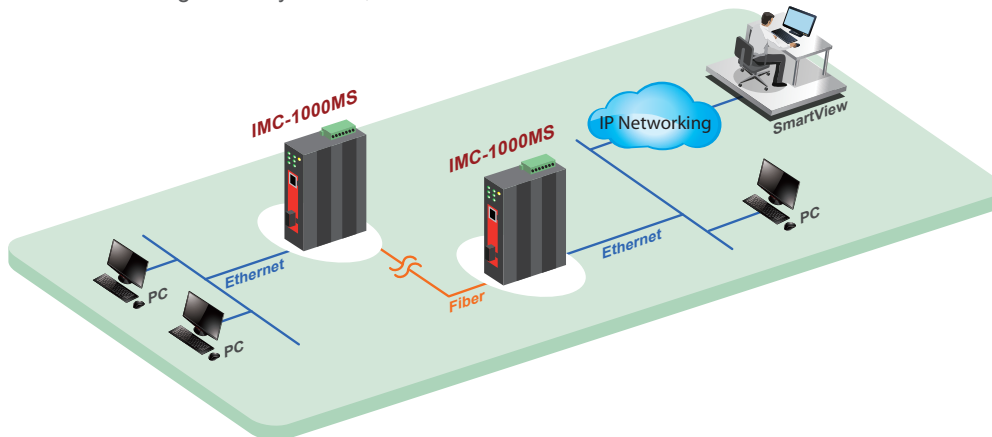


Figure 2 : IMC-1000MS Application in Remote, in-band Management



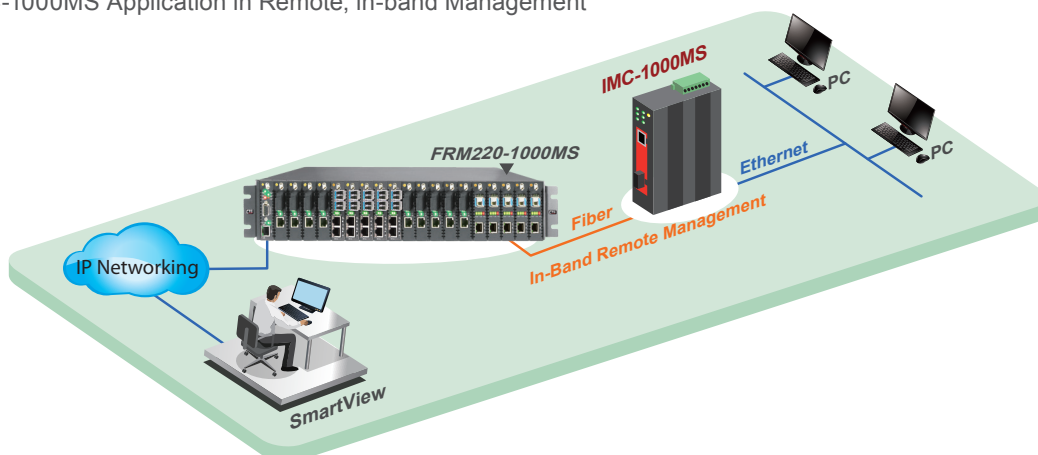


Figure 3 : IMC-1000MS Application in Web Management

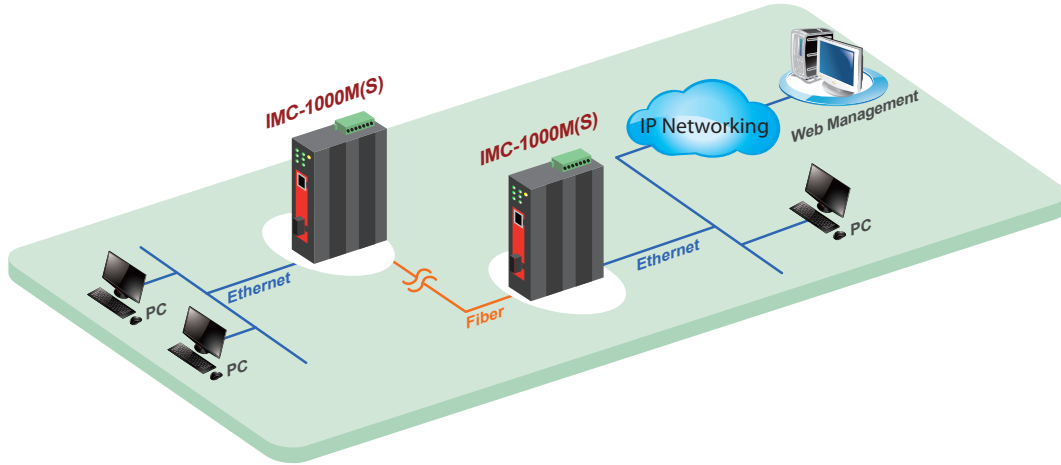


Dimensions

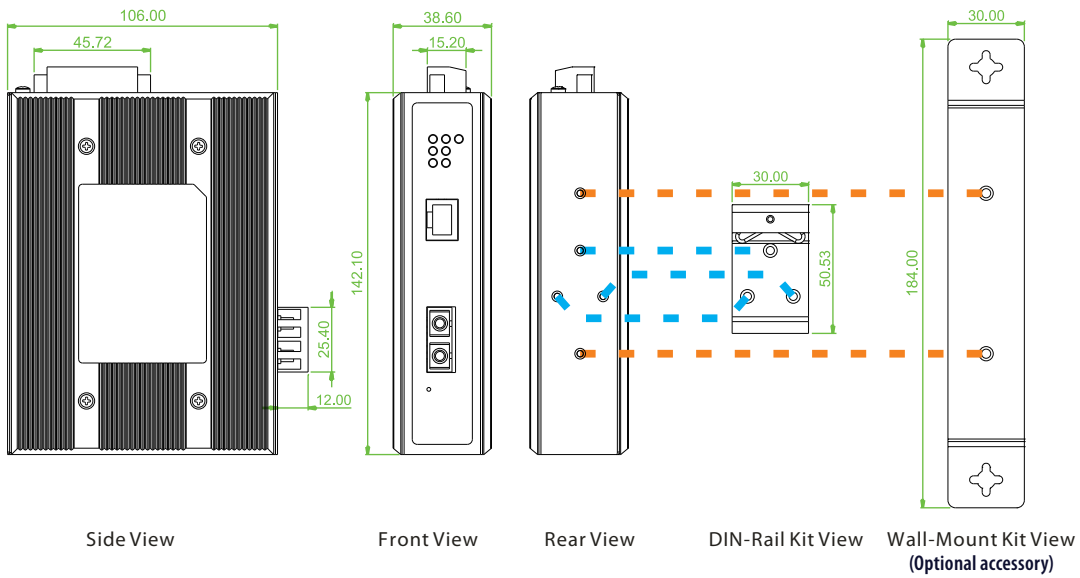

Ordering Information

Model Name	Managed	RJ45 UTP Port	Fiber	Power Input	Certification					Operating Temperature
		10/100/1000 Base-T	Dual Speed 100/1000Base-X	Redundant	Safety UL60950-1	Railway EN50121-4	EN61000-6-2 EN61000-6-4	CE	FCC	
IMC-1000MS-E	V	1	1 SFP	12/24/48VDC	V	V	V	V	V	-20~75°C

Model Naming Rule

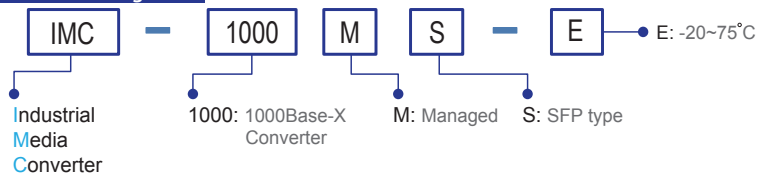

■ Package List

- CD (MIB file, Manual)
- Quickly installation guide
- Din Rail with screws
- Terminal block
- Protective caps for SFP ports

Optional Accessories

■ Wall mount kit Accessories


IND-WMK01	Wall Mount kit for Industrial product, 184 x 30mm
-----------	---

■ Industrial SFP Transceiver

The ISFP series of industrial grade SFP modules have been fully tested with the IMC-1000MS for guaranteed compatibility and performance. The best performance can be guaranteed even in mission-critical applications. (Please see CTC Union's Industrial SFP datasheet for more details and more items.)

ISFP-M7000-85-D(E)	Industrial SFP GbE 1000Base-SX, M/M, 500 meter, wave length 850nm, 7.5dB, DDMI, LC, -10~70°C (-40~85°C)
ISFP-S7020-31-D(E)	Industrial SFP 1000Base-LX, S/M, 20km, wave length 1310nm, 15dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-T7T00-00-(E)	Industrial SFP 1000Base-T UTP 100meter, -10~70°C (-40~85°C)
ISFP-M5002-31-D(E)	Industrial SFP 155M 100Base-FX, MM, 2km, wave length 1310nm, 12dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-S5030-31-D(E)	Industrial SFP 155M 100Base-FX, SM, 30km, 1310nm, 19dB, LC, DDMI, -10~70°C (-40~85°C)

SFP Naming Rule

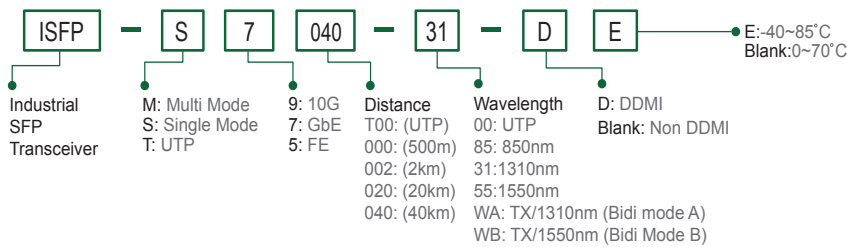



IMC-1000C

100/1000Base-T to 1000Base-SX/LX
Fiber Converter (Compact)

IMC-1000CS

100/1000Base-T to 100/1000Base-X SFP Slot
Fiber Converter (Compact)



These models are unmanaged industrial grade Gigabit Ethernet media converters that support conversion between electrical 10/100/1000Base-T and optical 1000Base-FX Ethernet. Simple DIP switch settings allow configuring the UTP port for auto-negotiation or for forced 10/100/1000 speed and half/ full duplex as well as for enabling LFPT (Link Fault Pass Through), Ethernet flow control (802.3x) and selecting Switch Mode (store & forward) or Converter Mode (Jumbo frame Pass-through). Housed in rugged DIN rail or wall mountable enclosures, these converters are designed for harsh environments, such as industrial networking and intelligent transportation systems (ITS) and are also suitable for many military and utility market applications where environmental conditions exceed commercial product specifications (See Figure).

Features

- DC input power 12/24/48VDC (9.6 ~ 60VDC) or 24VAC (18~36VAC)
- IP30 rugged metal housing and fanless
- Wide operating temperature -20 ~ 75°C
- CE, FCC, Railway traffic EN50121-4 certification
- Heavy industrial grade EMS, EMI, EN61000-6-2, EN61000-6-4 certified
- Store-and-Forward mode and Pass through mode (set by DIP SW)
- Conversion between 10/100/1000Base-T and 1000Base-X Fiber cable interface
- Provides a DIP-Switch to set functions
- Supports LFPT (Link Fault Pass Through)

Specifications

Standard	IEEE802.3 10Base-T 10Mbit/s Ethernet IEEE802.3u 100Base-TX, 100Base-FX, Fast Ethernet IEEE802.3ab 1000Base-T Gbit/s Ethernet over twisted pair IEEE802.3z 1000Base-X Gbit/s Ethernet over Fiber-Optic IEEE802.3x Flow Control
RJ45 Ports	10/100/1000Base-T Auto MDI/MDI-X and Auto-Negotiation Function Supports UTP CAT.5e Twisted Pair cable
Fiber Ports	1000Base-SX/LX SC (IMC-1000C) 100/1000Base-X SFP Slot (IMC-1000CS)
Data Process Architecture	Store and Forward mode or Pass through mode set by DIP SW
Jumbo Frame	9K bytes
Fiber Parameters	Fiber Cable (Multi-mode): 50/125um, 62.5/125um Fiber Cable (Single-mode): 9/125um Wavelength: 1310nm (Multi-mode/Single-mode) Available distance: (IMC-1000C) 500M (Multi-mode SX) 20KM (Single-mode) 40KM (Single-mode) Distance depend on SFP Fiber Transceiver (IMC-1000CS)
Link Fault Pass Through (LFPT)	TX-Fiber: If TX port link down, the media converter will force Fiber port to link down Fiber-TX: If Fiber port link down, the media converter will force TX port to link down
DIP Switch	Data process architecture OFF: Switch Mode ON: Converter Mode LFPT OFF: LFPT Disable ON: LFPT Enable Fiber Duplex OFF: Auto ON: Force Fiber Speed OFF: 1000Base-X ON: 100Base-FX (IMC-1000CS)
Connector	Fiber: SC (Multi-mode, 500M), SC (Single-mode, 20KM, 40KM) (IMC-1000C) SFP Slot (IMC-1000CS) RJ-45 Socket: CAT 5e Twisted Pair cable Auto MDI/MDI-X and Auto-Negotiation Function Supports
LED	Per Unit: Power (Green) SFP/Fiber port Link/Act (Yellow) RJ-45 port: Speed & Link/Act 10/100 (Green), 1000 (Yellow)


Reverse Polarity Protection	Supported for power input												
Overload Current Protection	Supported												
Power Supply	12/24/48VDC (9.6~60VDC) or 24VAC (18~36VAC) with polarity reverse protect function and removable terminal block												
Power Consumption	<table border="1"> <thead> <tr> <th>Input Voltage</th> <th>IMC-1000C</th> <th>IMC-1000CS</th> </tr> </thead> <tbody> <tr> <td>12VDC</td> <td>2.1W</td> <td>1.8W</td> </tr> <tr> <td>24VDC</td> <td>2.2W</td> <td>2W</td> </tr> <tr> <td>48VDC</td> <td>3.4W</td> <td>2.9W</td> </tr> </tbody> </table>	Input Voltage	IMC-1000C	IMC-1000CS	12VDC	2.1W	1.8W	24VDC	2.2W	2W	48VDC	3.4W	2.9W
Input Voltage	IMC-1000C	IMC-1000CS											
12VDC	2.1W	1.8W											
24VDC	2.2W	2W											
48VDC	3.4W	2.9W											
Removable Terminal Block	Provides for input power (2 Pin)												
Operating Humidity	5% ~ 95% (Non-condensing)												
Operating Temperature	-20 ~ 75°C (IMC-1000C-E, IMC-1000CS-E)												
Storage Temperature	-40 ~ 85°C												
Housing	Rugged Metal, IP30 Protection and fanless												
Dimensions	70x 30x 103 mm (D x W x H)												
Weight	220g (IMC-1000C) 215g (IMC-1000CS)												
Installation	DIN Rail, or wall mounting (Optional)												
MTBF	1,511,224 (IMC-1000C) 1,789,658 (IMC-1000CS) (MIL-HDBK-217)												
Warranty	5 years												
Certification													
EMC	CE												
EMI (Electromagnetic Interference)	FCC Part 15 Subpart B Class A, CE												
Railway Traffic	EN50121-4												
Immunity for Heavy Industrial Environment	EN61000-6-2												
Emission for Heavy Industrial Environment	EN61000-6-4												

EMS (Electromagnetic Susceptibility) Protection Level	EN61000-4-2 (ESD) Level 3, Criteria B
	EN61000-4-3 (RS) Level 3, Criteria A
	EN61000-4-4 (Burst) Level 3, Criteria A
	EN61000-4-5 (Surge) Level 3, Criteria B
	EN61000-4-6 (CS) Level 3, Criteria A
	EN61000-4-8 (PFMF, Magnetic Field) Field Strength: 300A/m, Criteria A

Shock	IEC 60068-2-27
Freefall	IEC 60068-2-32
Vibration	IEC 60068-2-6


Application

Figure : IMC-1000CS Media Converter Transmission

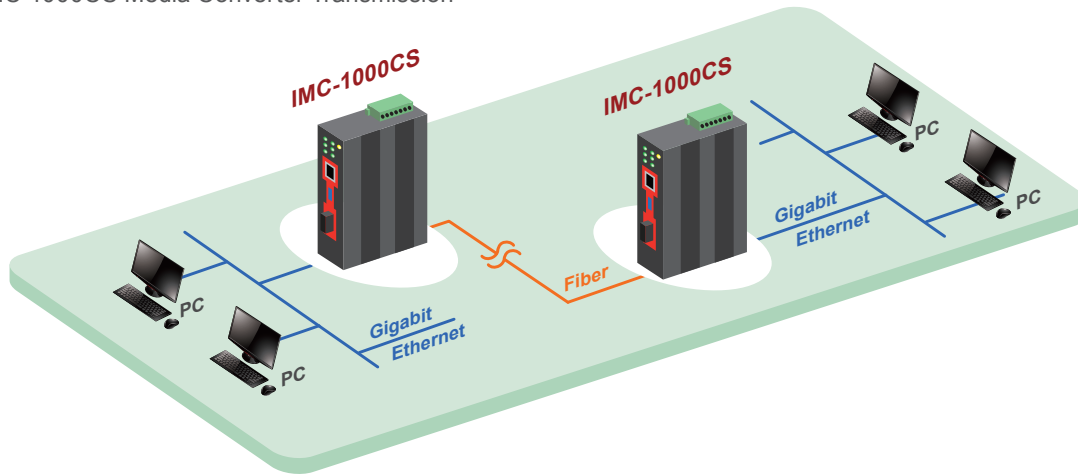


Dimensions

► IMC-1000C

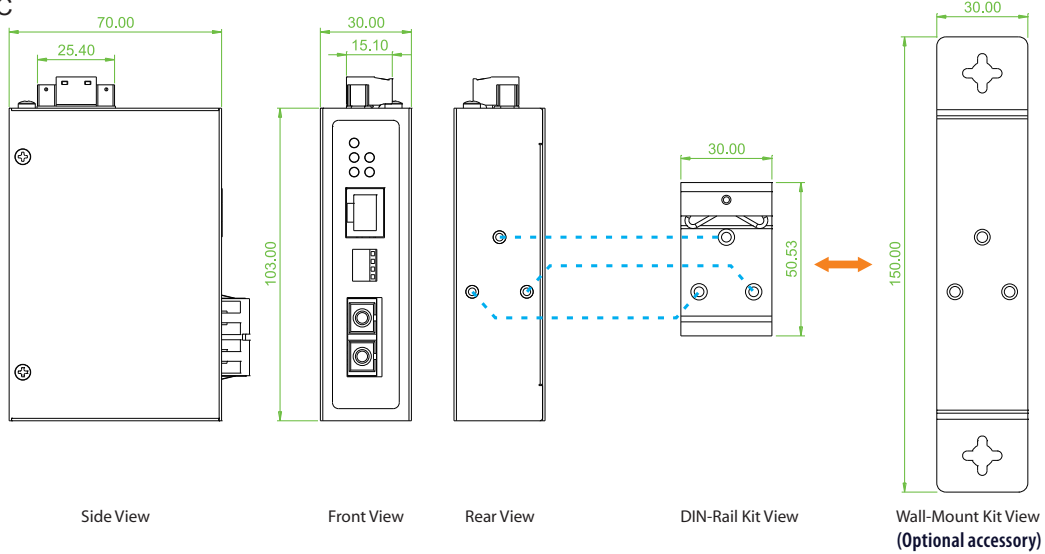


► IMC-1000CS

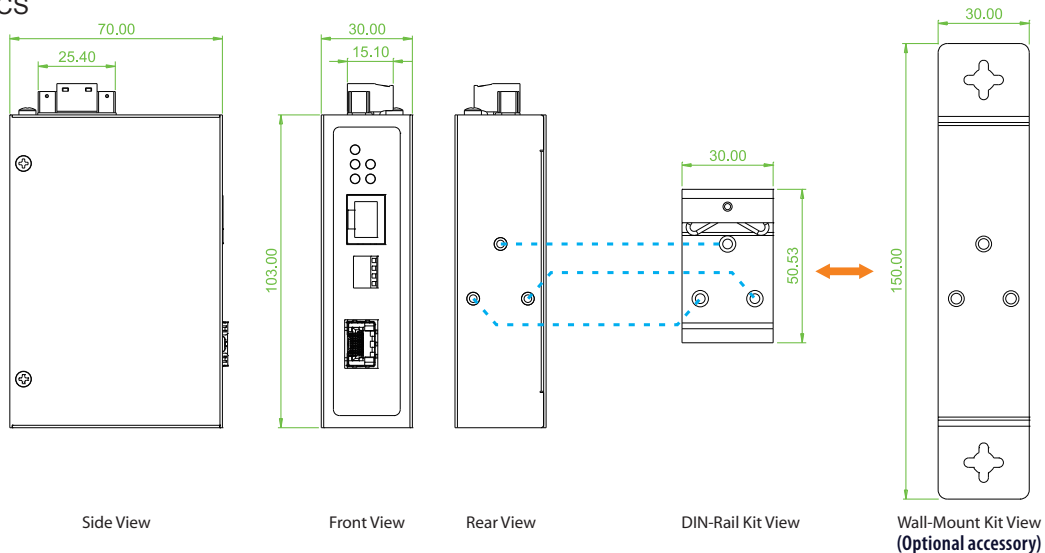


Ordering Information

Model Name	RJ45 UTP Port	Fiber		Power Input	Certification				Operating Temperature
	10/100/1000Base-T	1000Base-X	Dual Speed 100/1000Base-X	Single power	Railway EN50121-4	EN61000-6-2 EN61000-6-4	CE	FCC	
IMC-1000C-E	1	SC		12/24/48VDC, 24VAC	V	V	V	V	-20~75°C
IMC-1000CS-E	1		1 SFP	12/24/48VDC, 24VAC	V	V	V	V	-20~75°C

Model Naming Rule

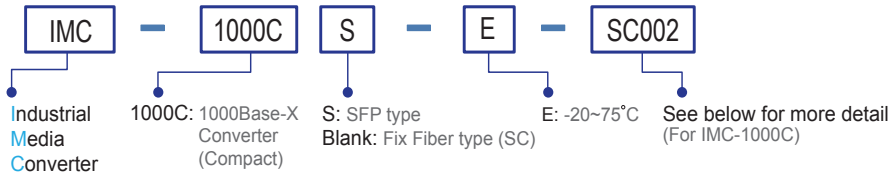

Connector Type	Connectivity Distance
SC (IMC-1000C-E only)	001:500M (M/M) 002: 2km (M/M) 020:20km (S/M) 040:40km (S/M) 020A: WDM 20km A type (TX:1310nm) 020B: WDM 20km B type (TX: 1550nm)type



Package List

- IMC-1000C(S) device
- Quickly installation guide
- Din Rail with screws
- Terminal block
- Protective caps for SFP ports

Optional Accessories

Wall mount kit Accessories


IND-WMK03	Wall Mount kit for Industrial product (Compact, 150 x 30mm)
-----------	---

Industrial SFP Transceiver

The ISFP series of industrial grade SFP modules have been fully tested with the IMC-1000CS product for guaranteed compatibility and performance. The best performance can be guaranteed even in mission-critical applications. (Please see CTC Union's Industrial SFP datasheet for more details and more items.)

ISFP-M7000-85-(E)	Industrial SFP GbE 1000Base-SX, M/M, 500 meter, wave length 850nm, 7.5dB, LC, -10~70°C (-40~85°C)
ISFP-S7020-31-(E)	Industrial SFP 1000Base-LX, S/M, 20km, wave length 1310nm, 15dB, LC, -10~70°C (-40~85°C)
ISFP-T7T00-00-(E)	Industrial SFP 1000Base-T UTP 100meter, -10~70°C (-40~85°C)
ISFP-M5002-31-(E)	Industrial SFP 155M 100Base-FX, MM, 2km, wave length 1310nm, 12dB, LC, -10~70°C (-40~85°C)
ISFP-S5030-31-(E)	Industrial SFP 155M 100Base-FX, SM, 30km, 1310nm, 19dB, LC, -10~70°C (-40~85°C)

SFP Naming Rule

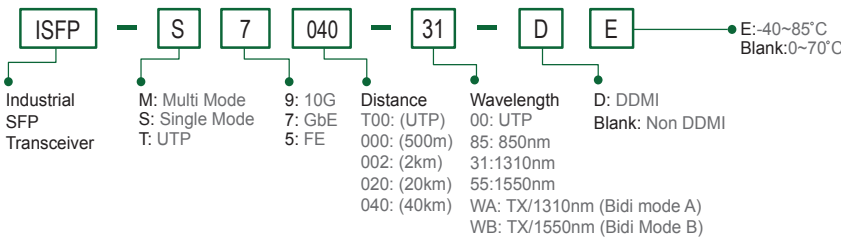



IMC-1000S

100/1000Base-T to 100/1000Base-X SFP
Fiber Converter



IMC-1000S is an unmanaged industrial grade Gigabit Ethernet media converter that supports conversion between electrical 10/100/1000Base-T and optical 100/1000Base-X Ethernet. Simple DIP switch settings allow configuring the UTP port for auto-negotiation or for forced 10/100/1000 speed and half/ full duplex as well as for enabling LFPT (Link Fault Pass Through), Ethernet flow control (802.3x) and selecting Switch Mode (store & forward) or Converter Mode (Jumbo frame Pass-through). Housed in rugged DIN rail or wall mountable enclosures, these converters are designed for harsh environments, such as industrial networking and intelligent transportation systems (ITS) and are also suitable for many military and utility market applications where environmental conditions exceed commercial product specifications (See Figure).

Features

- Redundant dual DC input power 12/24/48VDC (9.6 ~ 60VDC)
- IP30 rugged metal housing and fanless
- Wide operating temperature -20 ~ 75°C
- UL60950-1, CE, FCC, Railway traffic EN50121-4 certification
- Heavy industrial grade EMS, EMI, EN61000-6-2, EN61000-6-4 certified
- Store-and-Forward mode and Pass through mode (set by DIP SW)
- Conversion between 10/100/1000Base-T and 100/1000Base-X Fiber cable interface
- Provides a DIP-Switch to set functions
- Supports LFPT (Link Fault Pass Through)

Specifications


Standard	IEEE802.3 10Base-T 10Mbit/s Ethernet IEEE802.3u 100Base-TX, 100Base-FX, Fast Ethernet IEEE802.3ab 1000Base-T Gbit/s Ethernet over twisted pair IEEE802.3z 1000Base-X Gbit/s Ethernet over Fiber-Optic IEEE802.3x Flow Control	Overload Current Protection	Supported
RJ45 Ports	10/100/1000Base-T Auto MDI/MDI-X and Auto-Negotiation Function Supports UTP CAT.5e Twisted Pair cable	Power Supply	12/24/48VDC (9.6~60VDC) , Redundant power with polarity reverse protect function and removable terminal block
Fiber Ports	100Base-X or 1000Base-X SFP slot 100Base-X or 1000Base-X set by DIP SW	Power Consumption	4.2W
Data Process Architecture	Store and Forward mode or Pass through mode set by DIP SW	Alarm Relay Contact	Relay outputs with current carrying capacity of 1 A @24VDC
Jumbo Frame	9K bytes	Removable Terminal Block	Provides 2 Redundant power, Alarm relay contact
Fiber Parameters	Fiber Cable (Multi-mode): 50/125um, 62.5/125um Fiber Cable (Single-mode): 9/125um Wavelength: 1310nm (Multi-mode/Single-mode) SFP, Distance depend on Fiber Transceiver	Operating Humidity	5% ~ 95% (Non-condensing)
Link Fault Pass Through (LFPT)	TX-Fiber: If TX port link down, the media converter will force Fiber port to link down Fiber-TX: If Fiber port link down, the media converter will force TX port to link down	Operating Temperature	-20 ~ 75°C (IMC-1000S-E)
DIP Switch	Off: Alarm For Power Enable On: Alarm For Power Disable Off: Alarm For Port Enable On: Alarm For Port Disable Off: LFPT Disable On: LFPT Enable Off: Switch Mode On: Converter Mode Off: 1000Base-X On: 100Base-FX	Storage Temperature	-40 ~ 85°C
LED	Per Unit: Power 1 (Green), Power 2 (Green), Fault (Amber) LNK/ACT for Fiber(Green): ON : Connected to network/ OFF : Not connected to network/ BLK : Receive /Transmit Data SFP Fiber speed: Yellow : 1000Base-X Green : 100Base-FX RJ-45 port: Speed: 10 (OFF), 100 (Green), 1000 (Yellow) LNK/ACT for RJ45(Green): ON: Connected to network/ OFF: Not connected to network/ BLK: Networking is active	Housing	Rugged Metal, IP30 Protection and fanless
Reverse Polarity Protection	Supported for power input	Dimensions	106 x 38 x 142 mm (D x W x H)
		Weight	620g
		Installation	DIN Rail mounting, or wall mounting (Optional)
		MTBF	1,198,203 Hours MIL-HDBK-217
		Warranty	5 years
		Certification	
		EMC	CE
		EMI (Electromagnetic Interference)	FCC Part 15 Subpart B Class A, CE
		Railway Traffic	EN50121-4
		Immunity for Heavy Industrial Environment	EN61000-6-2
		Emission for Heavy Industrial Environment	EN61000-6-4

EMS (Electromagnetic Susceptibility) Protection Level	EN61000-4-2 (ESD) Level 3, Criteria B
	EN61000-4-3 (RS) Level 3, Criteria A
	EN61000-4-4 (Burst) Level 3, Criteria A
	EN61000-4-5 (Surge) Level 3, Criteria B
	EN61000-4-6 (CS) Level 3, Criteria A
	EN61000-4-8 (PFMF, Magnetic Field) Field Strength: 300A/m, Criteria A


Safety	UL60950-1
Shock	IEC 60068-2-27
Freefall	IEC 60068-2-32
Vibration	IEC 60068-2-6

Application

Figure : IMC-1000S Media Converter Transmission

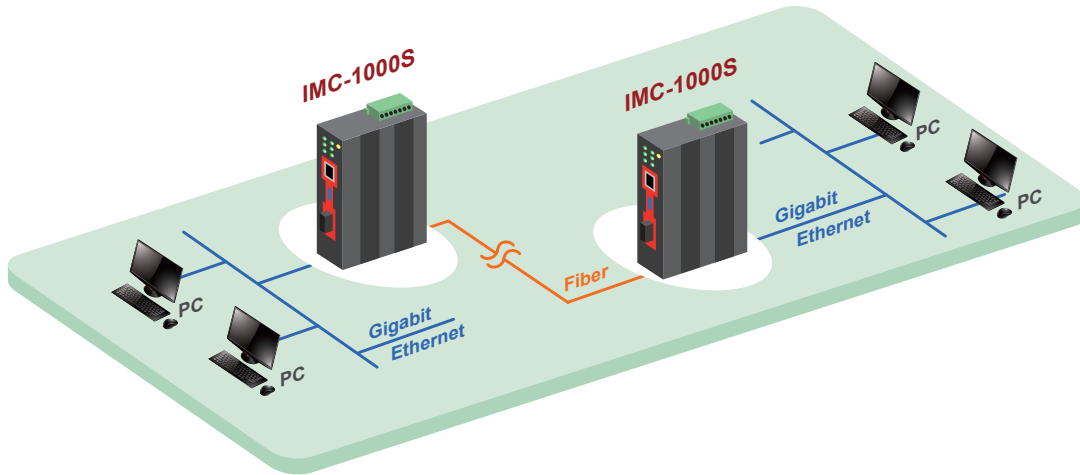


Dimensions

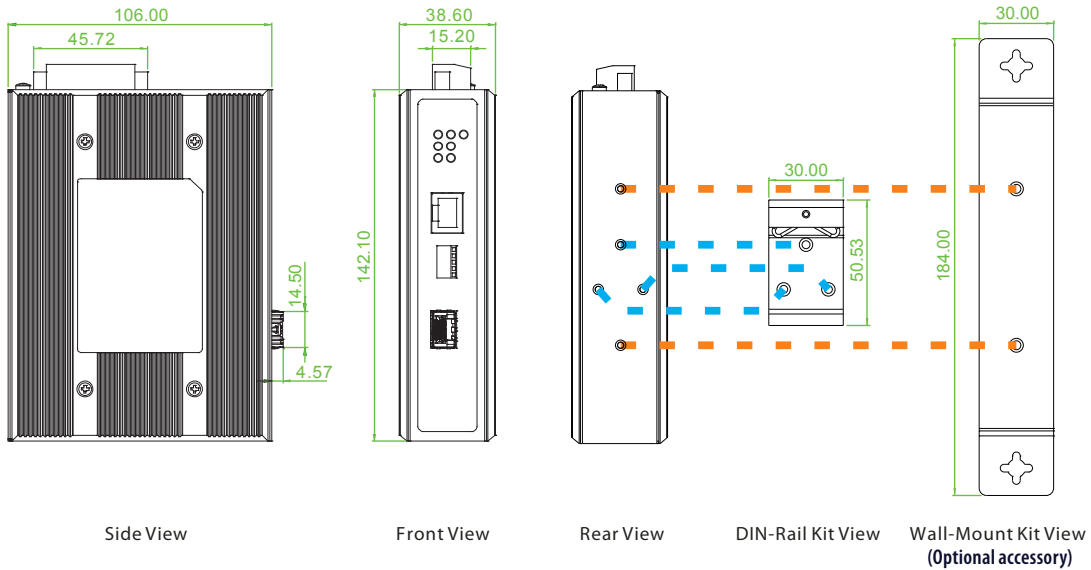

Ordering Information

Model Name	RJ45 UTP Port	Fiber	Power Input	Certification					Operating Temperature
	10/100/1000 Base-T	Dual Speed 100/1000Base-X	Redundant	Safety UL60950-1	Railway EN50121-4	EN61000-6-2 EN61000-6-4	CE	FCC	
IMC-1000S-E	1	1 SFP	12/24/48VDC	V	V	V	V	V	-20~75°C

Model Naming Rule

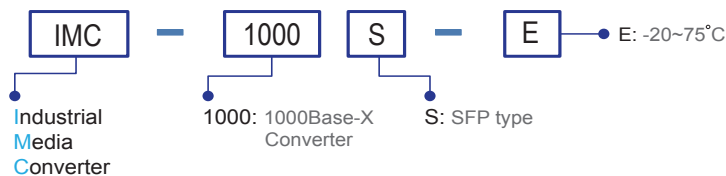

■ Package List

- IMC-1000S device
- Quickly installation guide
- Din Rail with screws
- Terminal block
- Protective caps for SFP ports

Optional Accessories

■ Wall mount kit Accessories

IND-WMK01 Wall Mount kit for Industrial product, 184 x 30mm

■ Industrial SFP Transceiver

The ISFP series of industrial grade SFP modules have been fully tested with the IMC-1000S product for guaranteed compatibility and performance. The best performance can be guaranteed even in mission-critical applications. (Please see CTC Union's Industrial SFP datasheet for more details and more items.)

ISFP-M7000-85-(E) Industrial SFP GbE 1000Base-SX, M/M, 500 meter, wave length 850nm, 7.5dB, LC, -10~70°C (-40~85°C)


ISFP-S7020-31-(E) Industrial SFP 1000Base-LX, S/M, 20km, wave length 1310nm, 15dB, LC, -10~70°C (-40~85°C)

ISFP-T7T00-00-(E) Industrial SFP 1000Base-T UTP 100meter, -10~70°C (-40~85°C)

ISFP-M5002-31-(E) Industrial SFP 155M 100Base-FX, MM, 2km, wave length 1310nm, 12dB, LC, -10~70°C (-40~85°C)

ISFP-S5030-31-(E) Industrial SFP 155M 100Base-FX, SM, 30km, 1310nm, 19dB, LC, -10~70°C (-40~85°C)

SFP Naming Rule

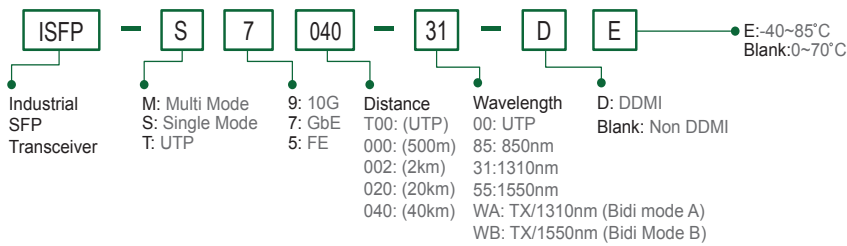



IMC-100C

10/100Base-TX to 100Base-FX Fiber Converter
(Compact)



IMC-100C is a compact sized, unmanaged industrial grade Fast Ethernet media converter that supports conversion between electrical 10/100Base-TX and optical 100Base-FX Ethernet. Simple DIP switch settings allow configuring UTP port for auto-negotiation or for forced 10/100 speed and half/ full duplex as well as for enabling LFPT (Link Fault Pass Through), and selecting Switch Mode (store & forward) or Converter Mode (Jumbo frame Pass-through). Housed in rugged DIN rail or wall mountable enclosures, these converters are designed for harsh environments, such as industrial networking and intelligent transportation systems (ITS) and are also suitable for many military and utility market applications where environmental conditions exceed commercial product specifications (See Figure).

Features

- DC input power 12/24/48VDC (9.6 ~ 60VDC) or 24VAC (18~36VAC)
- IP30 rugged metal housing, compact size and fanless
- Wide operating temperature -40 ~ 75°C (IMC-100C-E)
- CE, FCC, railway traffic EN50121-4 certification
- Heavy industrial grad EMS, EMI, EN61000-6-2, EN61000-6-4 certified
- Store-and-Forward mode and Pass Through mode (set by DIP SW)
- Support LFPT (Link Fault Pass Through)
- Conversion between 10/100Base-TX and 100Base-FX cable interface
- Provides a 4 pin DIP-Switch to set functions

Specifications

Standard	IEEE 802.3 10Base-T 10Mbit/s Ethernet IEEE 802.3u 100Base-TX, 100Base-FX, Fast Ethernet IEEE 802.3x Flow Control
RJ45 Ports	10/100Base-TX Auto MDI/MDI-X and Auto-Negotiation Function Supports UTP CAT.5e Twisted Pair cable
Fiber Ports	100Base-FX (SC/ST connectors)
Switch Architecture	Store and Forward in Switch mode Supports 1024 MAC addresses in Switch mode
Ethernet Packet length	2046Byte (Max) in Switch mode
Jumbo Frame	9K bytes in Pass through (Converter mode)
Fiber Parameters	Fiber Cable (Multi-mode): 50/125um,62.5/125um Fiber Cable (Single-mode): 9/125um Wavelength: 1310nm (Multi-mode/Single-mode) Available distance: 2KM (Multi-mode) 30KM (Single-mode) 50KM (Single-mode)
Link Fault Pass Through (LFPT)	TX- Fiber: If TX port link down, the media converter will force Fiber port to link down Fiber-TX: If Fiber port link down, the media converter will force TX port to link down
DIP Switch	Force Fiber port Duplex OFF: Full Duplex ON: Half Duplex LFPT: ON: Enables LFPT (Link Fault Pass through) OFF: Disables LFPT Architecture: OFF: Switching mode ON: Pass through Converter mode
Connector	Fiber: SC (Multi-mode, 2km), SC (Single-mode, 30km, 50KM) ST (Multi-mode, 2km), ST (Single-mode, 30km, 50KM) RJ-45 Socket: CAT.5e (10/100Mbps) Twisted Pair cable Auto MDI/MDI-X and Auto-Negotiation Function Support
LED	PWR (Green): ON: Power active / OFF: Power is inactive Fiber (Green): LNK/Act (Green) : Link & Active Dup (Green) : Fiber port Full or Half duplex LAN:100 (Green): 100M Link & Active 10 (Green): 10M Link & Active


Reverse Polarity Protection	Supported for power input									
Overload Current Protection	Supported									
Power Supply	12/24/48VDC (9.6~60VDC) or 24VAC (18~36VAC), polarity reverse protect function and removable terminal block									
Power Consumption	<table border="1"> <thead> <tr> <th>Input Voltage</th> <th>Watt(W)</th> </tr> </thead> <tbody> <tr> <td>12VDC</td> <td>1.8W</td> </tr> <tr> <td>24VDC</td> <td>1.8W</td> </tr> <tr> <td>48VDC</td> <td>2.1W</td> </tr> </tbody> </table>	Input Voltage	Watt(W)	12VDC	1.8W	24VDC	1.8W	48VDC	2.1W	
Input Voltage	Watt(W)									
12VDC	1.8W									
24VDC	1.8W									
48VDC	2.1W									
Removable Terminal Block	Provide for 1x DC input power (2 Pin)									
Operating Humidity	5% ~ 95% (Non-condensing)									
Operating Temperature	-40 ~ 75°C (IMC-100C-E)									
Storage Temperature	-40 ~ 85°C									
Housing	IP30 rugged metal housing ,compact size and fanless									
Dimensions	70 x 30 x 103 mm (D x W x H)									
Weight	215g									
Installation	DIN Rail mounting, Wall Mounting (Optional)									
MTBF	1,558,180 Hours (MIL-HDBK-217)									
Warranty	5 years									
Certifications										
EMC	CE									
EMI	FCC Part 15 Subpart B Class A, CE									
Railway Traffic	EN50121-4									
Immunity for Heavy Industrial environment	EN 61000-6-2									
Emission for Heavy Industrial Environment	EN 61000-6-4									

EMS	EN61000-4-2 (ESD) Level 3, Criteria B
(Electromagnetic Susceptibility) Protection Level	EN61000-4-3 (RS) Level 3, Criteria A
	EN61000-4-4 (EFT) Level 3, Criteria A
	EN61000-4-5 (Surge) Level 3, Criteria B
	EN61000-4-6 (CS) Level 3, Criteria A
	EN61000-4-8 (PFMF) Field strength 300A/m Criteria A


Shock	IEC 60068-2-27
Freefall	IEC 60068-2-32
Vibration	IEC 60068-2-6

Application

Figure 1 : IMC-100C Media Converter Transmission

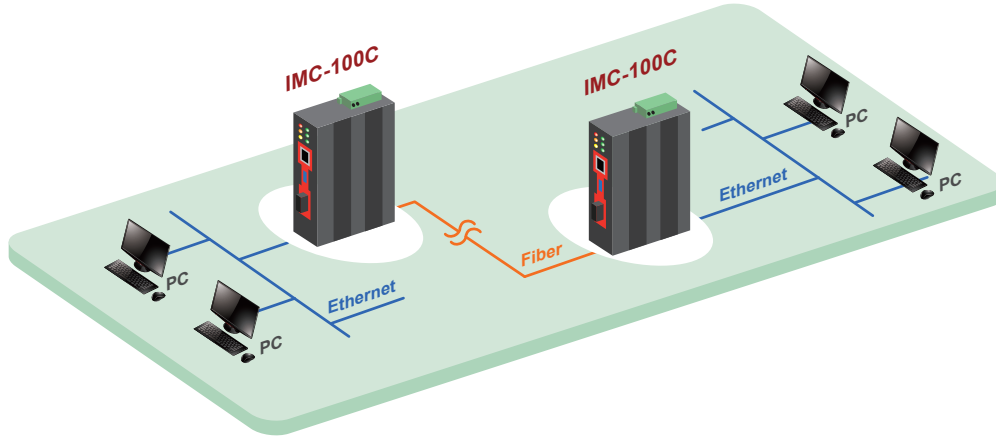



Dimensions

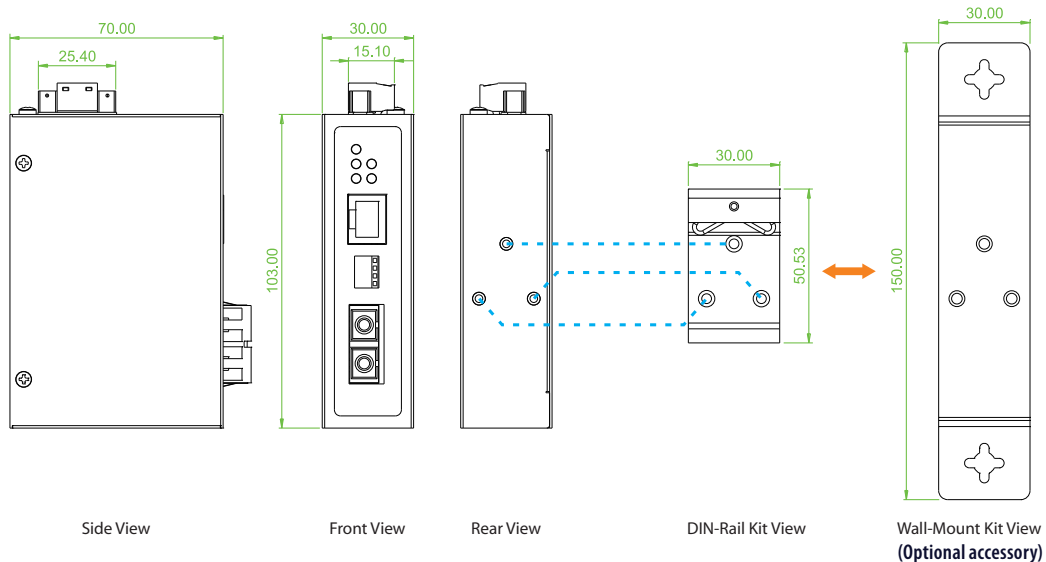

Ordering Information

Model Name	RJ45 UTP Port	Fiber	Power Input	Certification				Operating Temperature
	10/100Base-TX	100Base-FX	Single power	Railway EN50121-4	EN61000-6-2 EN61000-6-4	CE	FCC	
IMC-100C-E	1	1 SC	12/24/48VDC	V	V	V	V	-40~75°C

Model Naming Rule

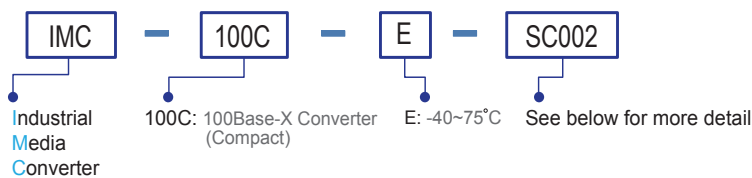

Connector Type	Connectivity Distance
SC, ST	002:2km (M/M) 030:30km (S/M) 050:50km (S/M) 020A: WDM 20km A type (TX:1310nm) 020B: WDM 20km B type (TX: 1550nm)

Package List

- IMC-100C device
- Din Rail with screws
- Quickly installation guide
- Terminal block

Optional Accessories

Wall mount kit Accessories

IND-WMK03	Wall Mount kit for Industrial product (Compact, 150 x 30mm)
-----------	---



IMC-100

10/100Base-TX to 100Base-FX Fiber Converter



IMC-100 is an unmanaged industrial grade Fast Ethernet media converter that supports conversion between electrical 10/100Base-TX and optical 100Base-FX Ethernet. Simple DIP switch settings allow configuring the UTP port for auto-negotiation or for forced 10/100 speed and half/ full duplex as well as for enabling LFPT (Link Fault Pass Through), Ethernet flow control (802.3x) and selecting Switch Mode (store & forward) or Converter Mode (Jumbo frame Pass-through). Housed in rugged DIN rail or wall mountable enclosures, these converters are designed for harsh environments, such as industrial networking and intelligent transportation systems (ITS) and are also suitable for many military and utility market applications where environmental conditions exceed commercial product specifications (See Figure).

Features

- Redundant dual DC input power 12/24/48VDC (9.6 ~ 58VDC)
- IP30 rugged metal housing and fanless
- Wide operating temperature -40 ~ 75°C (IMC-100-E)
- UL60950-1, CE, FCC, Rail traffic EN50121-4 certification
- Heavy industrial grade EMS, EMI, EN61000-6-2, EN61000-6-4 certified
- Store-and-Forward mode and Pass Through mode (set by DIP SW)
- Conversion between 10/100Base-TX and 100Base-FX cable interface
- Provides a DIP-Switch to set functions
- Supports LFPT (Link Fault Pass Through)

Specifications


Standard	IEEE 802.3 10Base-T 10Mbit/s Ethernet IEEE 802.3u 100Base-TX, 100Base-FX, Fast Ethernet IEEE 802.3x Flow Control	LED	100 (Amber): ON: 100Mbps/ OFF: 10Mbps LAN (Green): ON : Connected to network OFF: Not connected to network/ BLK: Networking is active
RJ45 Ports	10/100Base-TX Auto MDI/MDI-X and Auto-Negotiation Function Supports UTP CAT.5e Twisted Pair cable	Reverse Polarity Protection	Supported for power input
Fiber Ports	100Base-FX (SC/ST connectors)	Overload Current Protection	Supported
Switch Architecture	Store and Forward in Switch mode Supports 1024 MAC addresses in Switch mode	Power Supply	12/24/48VDC(9.6~58VDC), Redundant power with polarity reverse protect function and removable terminal block
Ethernet Packet length	2046Byte (Max) in Switch mode	Alarm Relay Contact	Relay outputs with current carrying capacity of 1 A @24VDC
Jumbo Frame	9K bytes in Pass through (Converter mode)	Removable Terminal Block	Provides 2 redundant power, alarm relay contact
Fiber Parameters	Fiber Cable (Multi-mode): 50/125um,62.5/125um Fiber Cable (Single-mode): 9/125um Wavelength: 1310nm (Multi-mode/Single-mode) Available distance: 2KM (Multi-mode) 30KM (Single-mode) 50KM (Single-mode)	Power Consumption	2.9 W
Link Fault Pass Through (LFPT)	TX- Fiber: If TX port link down, the media converter will force Fiber port to link down Fiber-TX: If Fiber port link down, the media converter will force TX port to link down	Operating Humidity	5% ~ 95% (Non-condensing)
DIP Switch	TP Auto Negotiation OFF: Auto Mode, ON: Force Mode Force TP Speed OFF: 100 Mbps, ON: 10 Mbps Force TP Duplex OFF: Full Duplex, ON: Half Duplex DIP Switch: ON: Enables LFPT (Link Fault Pass through) OFF: Disables LFPT (Link Fault Pass through) DIP Switch: ON: Flow Control Enable OFF: Flow Control Disable DIP Switch: OFF: Switching mode ON: Pass through Converter mode	Operating Temperature	-40 ~ 75°C (IMC-100-E)
Connector	Fiber: SC (Multi-mode, 2km), SC (Single-mode, 30km, 50KM) ST (Multi-mode, 2km), ST (Single-mode, 30km, 50KM) RJ-45 Socket: CAT.5e (10/100Mbps) Twisted Pair cable Auto MDI/MDI-X and Auto-Negotiation Function Support	Storage Temperature	-40 ~ 85°C
LED	PWR 1 (Green): ON: Power1 active/ OFF: Power1 is inactive PWR 2 (Green): ON: Power2 active/ OFF: Power2 is inactive Fault (Red): ON: Fiber or TP has failed OFF: TP are functional Fiber (Green): ON : Connected to network OFF: Not connected to network/ BLK: Receive/Transmit Data	Housing	Rugged Metal, IP30 Protection and fanless
		Dimensions	106 x 38.6 x 142.1mm (D X W X H)
		Weight	0.62kg
		Installation	DIN Rail mounting, or wall mounting (Optional)
		MTBF	1,199,572 Hours MIL-HDBK-217
		Warranty	5 years
		Certification	
		EMI	CE
		EMI (Electromagnetic Interference)	FCC Part 15 Subpart B Class A, CE
		Railway Traffic	EN50121-4
		Immunity for Heavy Industrial Environment	EN61000-6-2

Emission for Heavy Industrial Environment	EN61000-6-4
EMS (Electromagnetic Susceptibility) Protection Level	EN61000-4-2 (ESD) Level 3, Criteria B EN61000-4-3 (RS) Level 3, Criteria A EN61000-4-4 (Burst) Level 3, Criteria A


EMS (Electromagnetic Susceptibility) Protection Level	EN61000-4-5 (Surge) Level 3, Criteria B EN61000-4-6 (CS) Level 3, Criteria A EN61000-4-8 (PFMF, Magnetic Field) Field Strength: 300A/m, Criteria A
Safety	UL60950-1
Shock	IEC 60068-2-27
Freefall	IEC 60068-2-32
Vibration	IEC 60068-2-6

Application

Figure : IMC-100 Media Converter Transmission

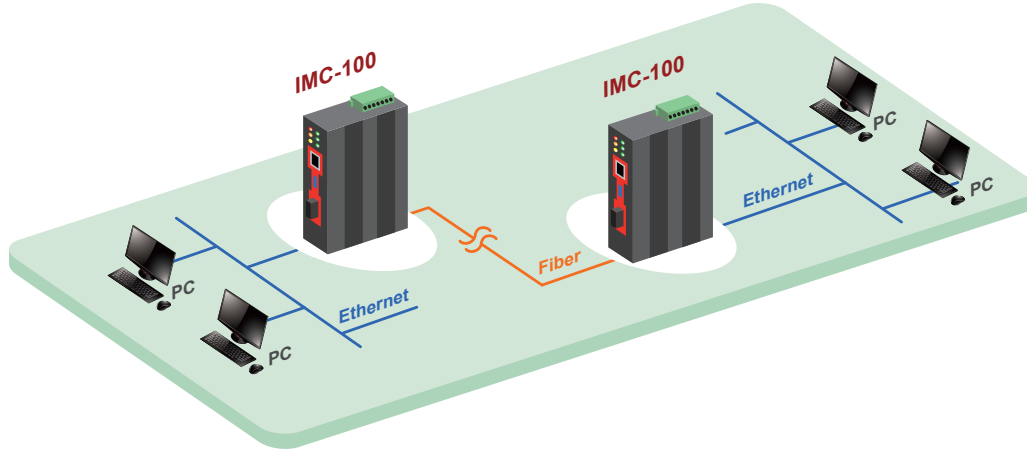


Dimensions

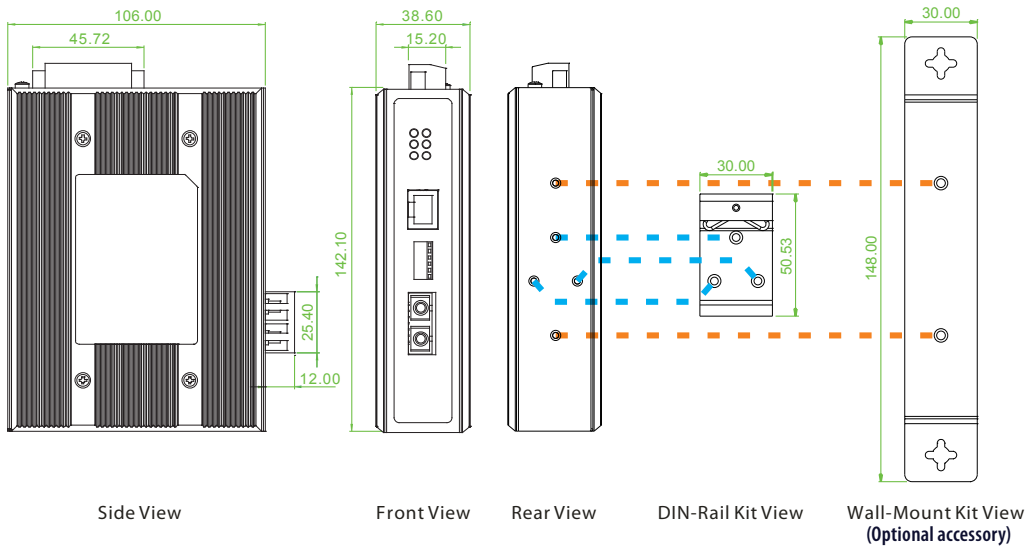

Ordering Information

Model Name	RJ45 UTP Port	Fiber	Power Input	Certification					Operating Temperature
	10/100Base-TX	100Base-FX	Redundant	Safety UL60950-1	Railway EN50121-4	EN61000-6-2 EN61000-6-4	CE	FCC	
IMC-100-E	1	1 SC	12/24/48VDC	V	V	V	V	V	-40~75°C

Model Naming Rule

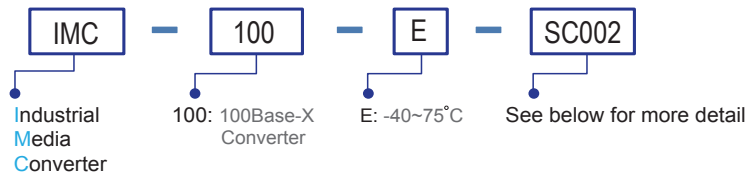

Temperature Connector Type Connectivity Distance
IMC-100 - [] - [] [] [] [] []
 Example: IMC-100 - E - SC002

Connector Type	Connectivity Distance
SC,ST	002:2km (M/M) 030:30km (S/M) 050:50km (S/M) 020A:WDM 20km A type (TX:1310nm) 020B:WDM 20km B type (TX:1550nm)

Package List

- IMC-100 device
- Quickly installation guide
- Din Rail with screws
- Terminal block

Optional Accessories

Wall mount kit Accessories

IND-WMK01	Wall Mount kit for Industrial product, 184 x 30mm
-----------	---

Preliminary



IBP-202

Optical Bypass Switch



The IBP-202 Optical Bypass Switch is an industrial grade external bypass switch for optical-node failure in fiber optical network infrastructures. The IBP-202 Optical Bypass Switch prevents and saves communication from network failures during power loss. When power failure occurs, the Bypass switch will swiftly set to bypass mode and isolate the main-network from the local networking device (See Figure 1). Bypass switches are commonly used in some major optical networks, such as in railway communication systems, factory automation, and power substation, where fiber link failures are not tolerated.

Features

- Supports 100M/1G/10G optical bypass in SC/ST/LC connectors
- Optical bypass switching time <10ms with Low insertions loss
- Provides rotary switch to set delay boot time (0~180 seconds)
- Redundant dual DC input power 12/24/48VDC (9.6 ~ 60VDC)
- IP30 rugged metal housing and fanless
- Wide operating temperature -20 ~ 75°C
- Heavy industrial grade EMS, EMI, EN61000-6-2, EN61000-6-4, CE, FCC certified

Specifications

Fiber Connector	SC, ST, LC
Operating wavelength	1260 ~ 1360nm / 1510~1610nm
Optic Fiber cable	Single mode 8/125um, 9/125um
Insertion loss	<1.5dB
Optical Switching time	< 5ms
LED indicator	Power 1, Power 2, Operation mode (Normal /Bypass)
Boot up delay adjuster	Provides a rotary switch to configure boot up delay time (0~180 seconds)
Removable Terminal Block	Provide for redundant power
Power supply	12/24/48VDC (9.6~60VDC), Redundant power with polarity reverse protect function and removable terminal block
Reverse Polarity Protection	Supported for Power Input
Overload Current Protection	Supported
Power consumption	<2W
Housing	Rugged metal, IP30 protection and fanless
Weight	TBD
Installation	DIN Rail mounting, or wall mounting (Optional)
Operating Temperature	-20~75°C
Storage temperature	-40 ~ 85°C
Operating Humidity	5% ~ 95% (Non-condensing)
MTBF	TBD
Warranty	5 Years
Certification	
EMC	CE
EMI (Electromagnetic Interference)	FCC Part 15 Subpart B Class A, CE
Immunity for Heavy Industrial Environment	EN61000-6-2

Emission for Heavy Industrial Environment	EN61000-6-4
EMS (Electromagnetic Susceptibility) Protection Level	EN61000-4-2 (ESD) Level 3, Criteria B EN61000-4-3 (RS) Level 3, Criteria A EN61000-4-4 (EFT) Level 3, Criteria A EN61000-4-5 (Surge) Level 3, Criteria B EN61000-4-6 (CS) Level 3, Criteria A EN61000-4-8 (PFMF) Field strength 300A/m Criteria A
Shock	IEC 60068-2-27
Freefall	IEC 60068-2-32
Vibration	IEC 60068-2-6

Application

The IBP-202 supports the function of optical path Normal mode and Bypass mode for fiber optical networks. It offers a simple mechanism to switch both of upload and down load fiber path when a power system failure occurred, and a path restores when power back. It offers a simple way to reduce the risk of optical network Node-Down which is caused by the power system.

Figure 1 :IBP-202 Data flow in Normal or Bypass mode

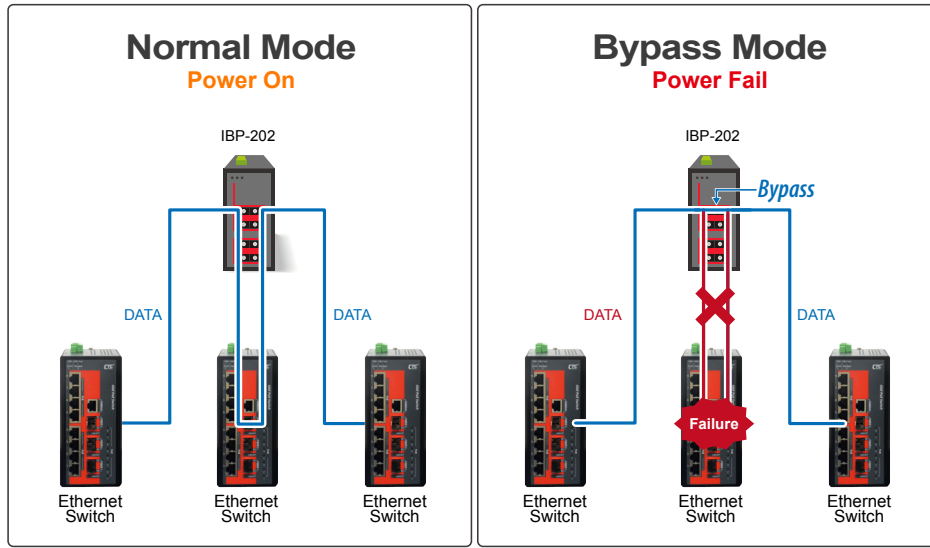


Figure 2 : Application example in line connection


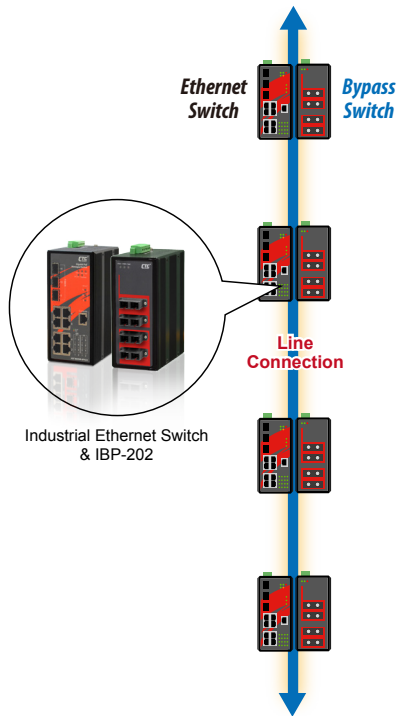


Figure 3 : Application example in ring connection

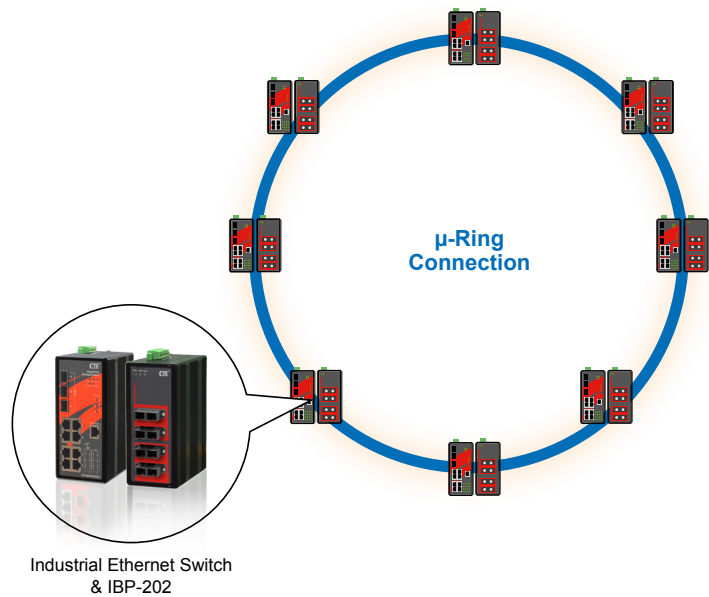

Ordering Information

Model Name	Fiber connector			Power Input	Certification			Operating Temperature
	Connectortype	Connector Q'ty	Data rate	Redundant	EN61000-6-2 EN61000-6-4	CE	FCC	
IBP-202-SSC	SM SC	4	100M/Giga/10G	12/24/48VDC	V	V	V	-20~75°C
IBP-202-SST	SM ST	4	100M/Giga/10G	12/24/48VDC	V	V	V	-20~75°C
IBP-202-SLC	SM LC	4	100M/Giga/10G	12/24/48VDC	V	V	V	-20~75°C

Package List

- IBP-202 device
- Din Rail with screws
- Quickly installation guide
- Terminal block

Optional Accessories

Wall Mount Kit Accessories

IND-WMK02	Wall Mount kit for Industrial product, 184 x 50mm
-----------	---

Preliminary



IFC-FDC-PRO

PROFIBUS to Daisy Chain Fiber Converter

IFC-Serial-PRO

PROFIBUS to Fiber Converter



These products are PROFIBUS to fiber optic converters which secure PROFIBUS data transmission via fiber optical cabling for extending distance and isolating EMC/noise to reduce mutual interference between PROFIBUS devices.

These products are protocol transparent, can be applied to the PROFIBUS, and also can be applied to other networks using RS485 interfaces (See Figure 1).

These converters are capable of selecting interface modes for connection to RS-485 2-wire half duplex or 4-wire full duplex. Additionally, the terminal block offers an alarm relay contact and two redundant DC power inputs. IFC Series converters are also available in two operating temperature ranges, a standard -10° to 60°C commercial temperature range and an extended -40° to 75°C range. With all these specifically designed features, the series is reliable and an ideal solution for keeping your industrial automation applications running smoothly and continuously even in harsh environments.

Features

- Supports 2 fiber link (IFC-FDC-PRO)
- Supports 1 fiber link (IFC-Serial-PRO)
- Extend serial transmission distance up to 2km, 30km, 60km
- Supports several topology , cable redundancy (Figure 3), ring redundancy (Figure 4), daisy chain (Figure 5), point to point (IFC-FDC-PRO)
- Supports point to point (Figure 6) (IFC-Serial-PRO)
- Redundant dual power inputs (12/24/48VDC)
- Protocol transparent. These products can be applied to the PROFIBUS, but also can be applied to other network using RS485 interface
- Baudrate up to 12Mbps
- Auto baudrate, no need to set baudrate
- 2.5KVrms isolation for serial port
- CE, FCC, heavy industrial grade EMS, EMI, EN61000-6-2, EN61000-6-4 certified
- Supports relay output for power or link failure warning
- Hardened housing with IP30 protection
- Fanless and DIN-Rail design for harsh industrial environment
- Adjustable pull high/low resistor and terminator for RS-422/485 transmission

Specifications

FieldBus Protocol	Protocol transparent	PROFIBUS and all operations available on RS485
Problem isolation	Isolate EMC/noise to reduce mutual interference between PROFIBUS device. Isolate the PROFIBUS side of the failure, to avoid the impact of the other side (See Figure 2)	
Fiber Port Interface	Connector	SC, ST
	Fiber Port	2 fiber ports (IFC-FDC-PRO) 1 fiber port (IFC-Serial-PRO)
	Fiber Type	MM 2km, SM 30km, 60km Bidi 20KM
	Wavelength	MM 1310nm, SM 1310 Bidi: Mode A : TX1310nm/RX1550nm Mode B : TX1550nm/RX1310nm
	Point to Point Transmission	Full duplex
	Ring Transmission	Full duplex, self-healing operation Zero recovery time
Fiber port Topology	Cable redundancy(Figure 3) with zero recovery time Ring redundancy(Figure 4) with zero recovery time Daisy chain(Figure 5) Point to point (IFC-FDC-PRO) Point to point(Figure 6) (IFC-Serial-PRO)	
Serial port Interface	Serial Port Connector	DB9 Female RS-485 : 4, 2 wires
	RS-485 direction	Automatically detection
	Serial port Baudrate	50 to 12Mbps Auto baudrate, no need to set baudrate
	Serial port isolation	2.5KVrms isolation for serial signals EMC/noise isolation, to reduce mutual interference between serial port device


Serial port Interface	Pull high resistor	Selected by 10 position rotary switch
	Pull low resistor	Selected by 10 position rotary switch
	120 ohm terminator	Built-in 120 ohm terminator (Selected by Dip Switch)
Environmental	Operating Temperature	-10 ~ 60°C (IFC-FDC-PRO, IFC-Serial-PRO) -40 ~ 75°C (IFC-FDC-PRO-E, IFC-Serial-PRO-E)
	Storage Temperature	-40 ~ 85°C
	Humidity	5 ~ 95% RH
LED Indications	PWR1, PWR2, Alarm, Master, TD, RD, Fiber Link, Fiber2 Link (IFC-FDC-PRO only), Ring	
Alarm Relay	Alarm exists for power, fiber link or ring protection Relay output with carry capacity 1A @ 24VDC	
Power	Power Input	Redundant Dual Power 12, 24, 48 VDC (9.6 ~ 60VDC)
	Power Consumption	<6W
	Power Reversal Protection	Yes
	Over Current Protection: Signal Short Together Protected	
	Terminal Block for Power and Alarm : Terminal Block : V1+, V1-, V2+, V2-, Alarm NC, Alarm COM, Alarm NO	
Mechanical	Water & Dust Proof	IP30 Protection, Fanless
	Dimensions	106 x 38.6 x 142.1mm (D x W x H)
	Mounting	DIN-Rail, or wall mounting (Optional)
	Weight	TBD

Certification	
EMC	CE
EMI	FCC Part 15 Subpart B Class A, CE
Immunity for Heavy Industrial Environment	EN61000-6-2
Emission for Heavy Industrial Environment	EN61000-6-4

EMS (Electromagnetic Susceptibility) Protection Level	EN61000-4-2 ESD Level 3 EN61000-4-3 RS Level 3 EN61000-4-4 EFT Level 3 EN61000-4-5 Surge Level 3 EN61000-4-6 CS Level 3
Free Fall	IEC 60068-2-32
Vibration	IEC 60068-2-6
Shock	IEC 60068-2-27
Green	RoHS
MTBF	TBD

Application & Topology (IFC-FDC-PRO)

Figure 1 : Application for PROFIBUS Network

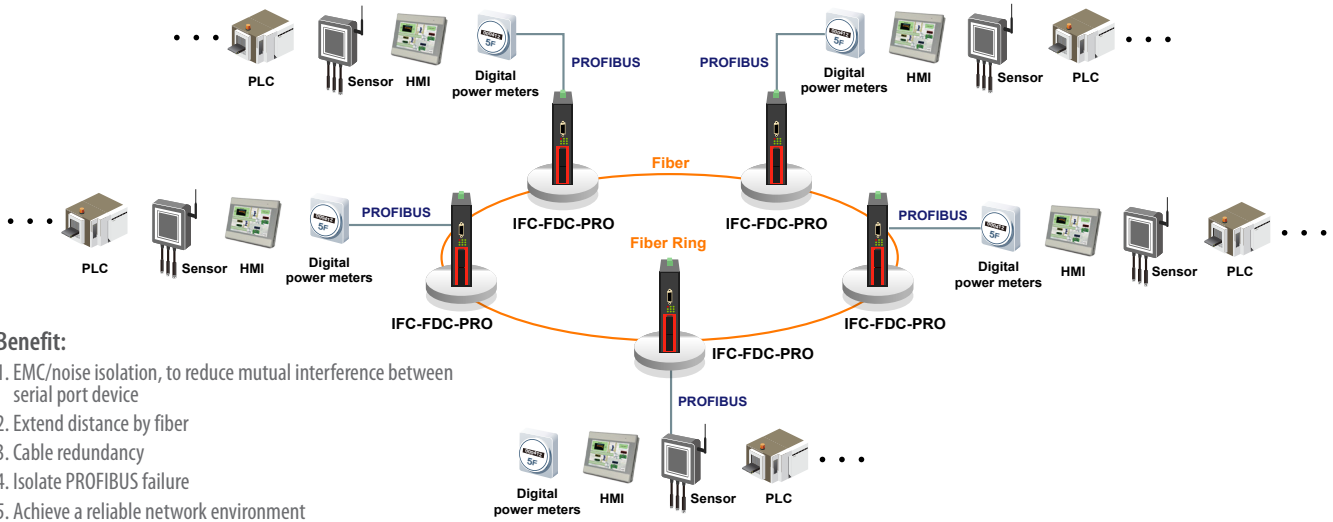

Benefit:

1. EMC/noise isolation, to reduce mutual interference between serial port device
2. Extend distance by fiber
3. Cable redundancy
4. Isolate PROFIBUS failure
5. Achieve a reliable network environment

Figure 2 : Isolate PROFIBUS Failure

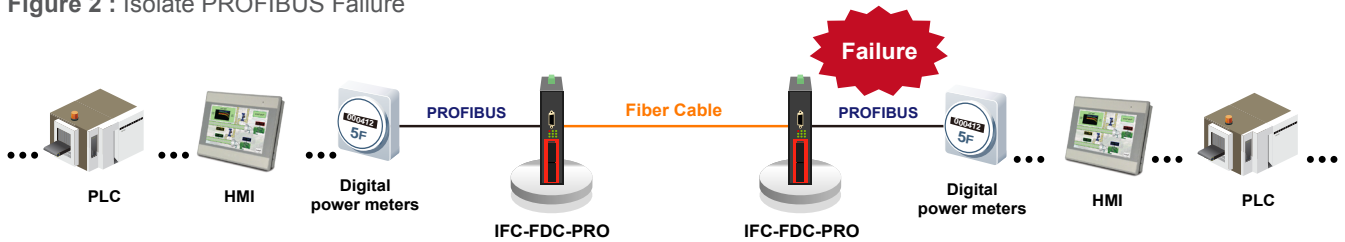


Figure 3 : Fiber Cable Redundancy topology & application

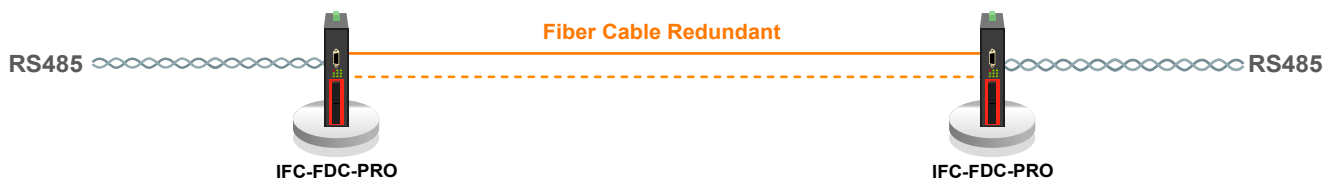


Figure 4 : Fiber Ring Redundancy topology & application


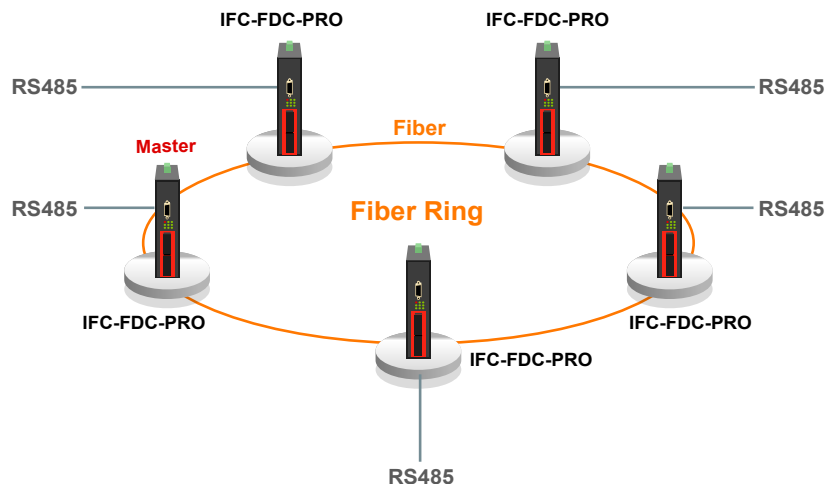


Figure 5 : Fiber Daisy Chain topology & application

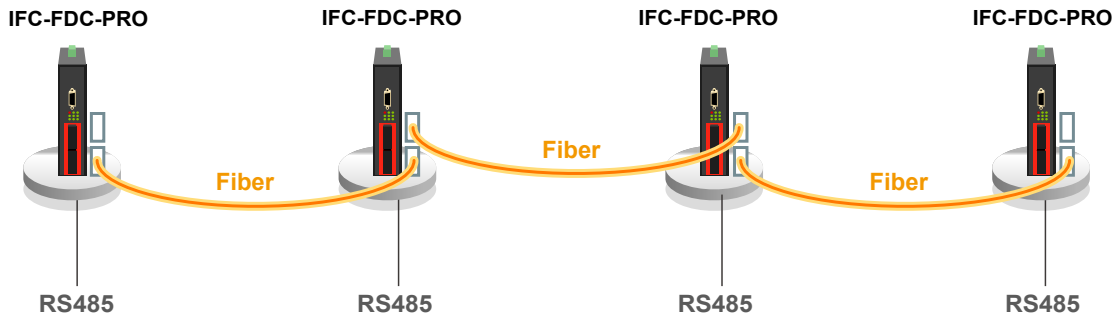

Application & Topology (IFC-Serial-PRO)

Figure 6 : IFC-Serial-PRO Application for PROFIBUS

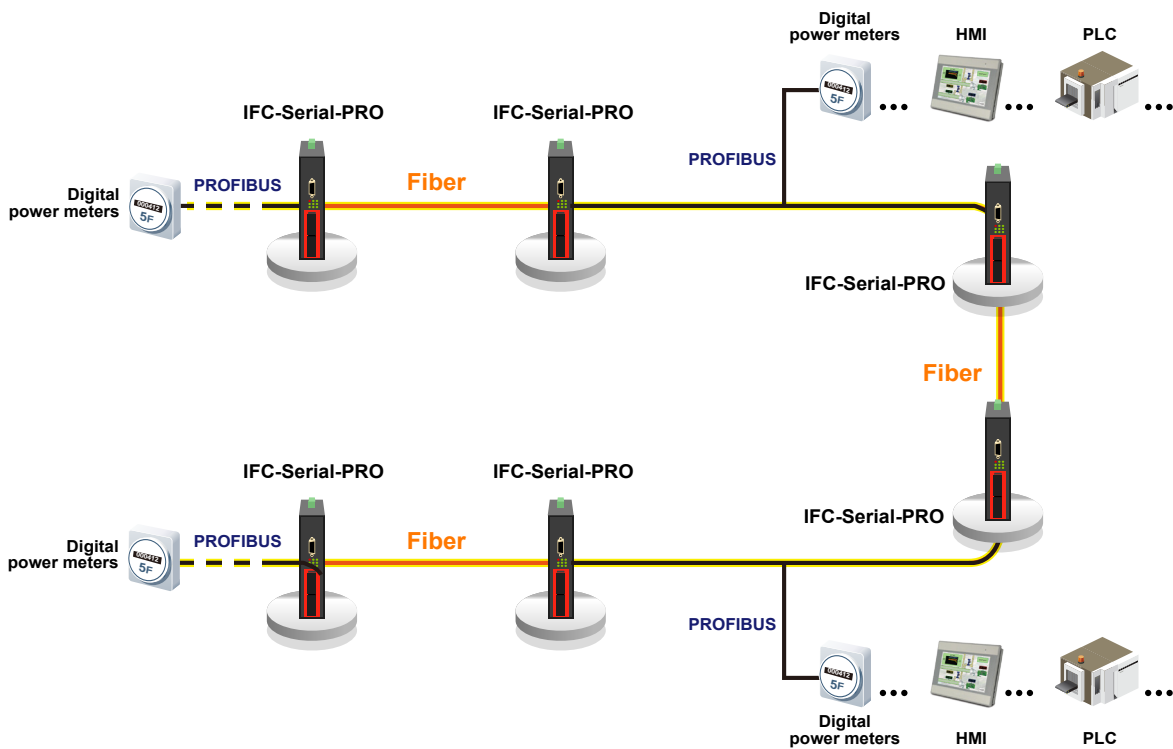


Figure 7 : Fiber Point to Point topology & application



Benefit:

1. Reduce mutual interference between serial port device
2. Extend distance by fiber
3. Achieve a reliable network environment


Ordering Information

Model Name	Serial (Profibus)		Fiber	Power Input	Certification			Operating Temperature
	RS422/485	Isolation 2.5KV	SC/ST	Redundant	EN61000-6-2 EN61000-6-4	CE	FCC	
IFC-FDC-PRO	1	V	2	12/24/48VDC	V	V	V	-10~60°C
IFC-FDC-PRO-E	1	V	2	12/24/48VDC	V	V	V	-40~75°C
IFC-Serial-PRO	1	V	1	12/24/48VDC	V	V	V	-10~60°C
IFC-Serial-PRO-E	1	V	1	12/24/48VDC	V	V	V	-40~75°C

Model Naming Rule



Connector Type	Connectivity Distance
SC,ST	002: M/M 2km 030: S/M 30km 060: S/M 60km 020AB: 20KM Bidi (20KM 1x mode A + 1x Mode B) (for IFC-FDC-PRO) 020A: 20KM Bidi mode A (for IFC-Serial-PRO) 020B: 20KM Bidi mode B (for IFC-Serial-PRO) Mode A: TX 1310nm/RX1550nm Mode B: TX 1550nm/RX1310nm



Package List

- One device of the series
- Quickly installation guide
- Din Rail with screws
- Terminal block

Optional Accessories

Wall Mount kit Accessories

IND-WMK01	Wall Mount kit for Industrial product, 184 x 30mm
-----------	---

Preliminary



IFC-Serial-CAN

CAN BUS to Fiber Converter



These products are CAN BUS to fiber optic converters which secure CAN BUS data transmission via fiber optic to extend distance and isolate from EMC/noise thus reducing interference between CAN BUS devices. (See Figure 1)
The converters are available in two operating temperature ranges, a standard -10° to 60°C commercial temperature range and an extended -40° to 75°C range. With all these specifically designed features, the series is reliable and an ideal solution for keeping your industrial automation applications running smoothly and continuously even in harsh environments.

Features

- Subports protocol CAN 2.0A , CAN 2.0B, ISO 11898-2 standard
- Extend serial transmission distance up to 2km, 30km
- Redundant dual power inputs (12/24/48VDC)
- Baudrate up to 1Mbps
- Auto baudrate, no need to set baudrate
- 2.5KVrms isolation for CAN BUS port
- CE, FCC, heavy industrial grade EMS, EMI, EN61000-6-2, EN61000-6-4 certified
- Supports relay output for power or link failure warning
- Hardened housing with IP30 protection
- Fanless and DIN-Rail design for harsh industrial environment
- 120 ohm terminator selectable by DIP SW


Specifications

FieldBus Protocol	CAN 2.0A, CAN 2.0B, ISO 11898-2 standard	
Problem isolation	Isolate EMC/noise to reduce mutual interference between CAN BUS device. Isolate the CAN BUS side of the failure, to avoid the impact of the other side (See Figure 2)	
System Propagation delay	125ns	
Fiber Port Interface	Connector	SC, ST
	Fiber Port	1 fiber port
	Fiber Type	MM 2km, SM 30km Bidi 20KM
	Wavelength	MM 1310nm, SM 1310nm Bidi: Mode A : TX1310nm/RX1550nm Mode B : TX1550nm/RX1310nm
	Baud rate	Upto 1Mbps Auto baud rate, depend on CAN BUS copper port
Fiber port Topology	Point to point (Figure 3)	
CAN BUS port interface	3 pin terminal block CAN_L, CAN_H, CAN_GND	
	Baudrate	50 to 1Mbps Auto baudrate, no need to set baudrate
	CAN BUS port isolation	2.5KVrms isolation for CAN BUS signals EMC/noise isolation, to reduce mutual interference between serial port device
	120 ohm terminator	Built-in 120 ohm terminator (Selected by Dip Switch)
	Environmental	Operating Temperature
	Storage Temperature	-40 ~ 85°C
	Humidity	5 ~ 95% RH
LED Indications	PWR1, PWR2, Alarm, Fiber TX, Fiber RX	
Alarm Relay	Alarm exists for power, fiber link Relay output with carry capacity 1A @ 24VDC	

Power	Power Input	Redundant Dual Power 12, 24, 48 VDC (9.6 ~ 60VDC)
	Power Consumption	<3W
	Power Reversal Protection	Supported for power input
	Over Current Protection	Signal Short Together Protected
	Terminal Block for Power and Alarm	Terminal Block : V1+, V1-, V2+, V2-, Alarm NC, Alarm COM, Alarm NO
Mechanical	Water & Dust Proof	IP30 Protection, Fanless
	Dimensions	106 x 38.6 x 142.1mm (D x W x H)
	Mounting	DIN-Rail, or wall mounting (Optional)
	Weight	TBD
Certification		
EMC	CE	
EMI	FCC Part 15 Subpart B Class A, CE	
Immunity for Heavy Industrial Environment	EN61000-6-2	
Emission for Heavy Industrial Environment	EN61000-6-4	
EMS (Electromagnetic Susceptibility) Protection Level	EN61000-4-2 ESD Level 3	
	EN61000-4-3 RS Level 3	
	EN61000-4-4 EFT Level 3	
	EN61000-4-5 Surge Level 3	
	EN61000-4-6 CS Level 3	
Free Fall	IEC 60068-2-32	
Vibration	IEC 60068-2-6	
Shock	IEC 60068-2-27	
Green	RoHS	
MTBF	TBD	

Application & Topology

Figure 1 : IFC-Serial-CAN Application for CAN BUS

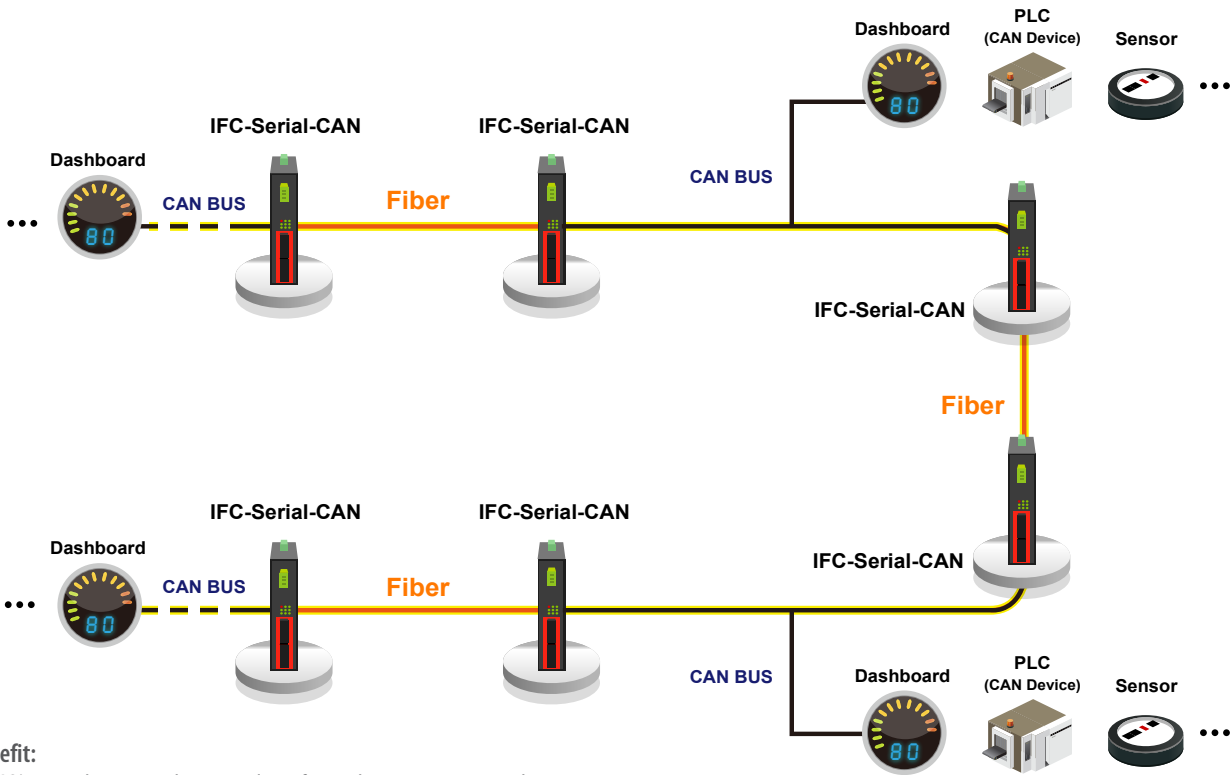

Benefit:

1. EMC/noise isolation, to reduce mutual interference between copper port device
2. Extend distance by fiber
3. Isolate CAN BUS failure
4. Achieve a reliable network environment

Figure 2 : Isolate CANBUS Failure


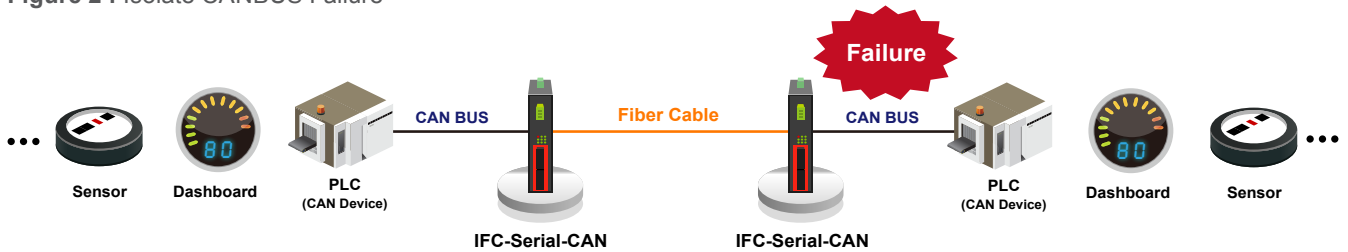


Figure 3 : Fiber Point to Point topology

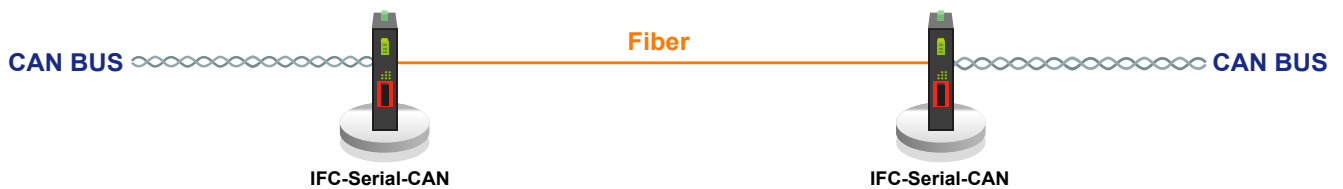


Benefit:

1. Reduce mutual interference between serial port device
2. Extend distance by fiber
3. Achieve a reliable network environment


Ordering Information

Model Name	Serial		Fiber	Power Input	Certification			Operating Temperature
	CANBUS	Isolation 2.5KV	SC/ST	Redundant	EN61000-6-2 EN61000-6-4	CE	FCC	
IFC-Serial-CAN	1	V	1	12/24/48VDC	V	V	V	-10~60°C
IFC-Serial-CAN-E	1	V	1	12/24/48VDC	V	V	V	-40~75°C

Model Naming Rule

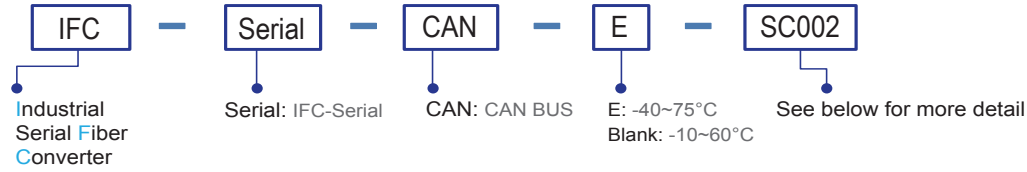

Connector Type	Connectivity Distance
SC,ST	002: M/M 2km 030: S/M 30km 020A: 20KM Bidi mode A 020B: 20KM Bidi mode B Mode A: TX 1310nm/RX1550nm Mode B: TX 1550nm/RX1310nm



Package List

- IFC-Serial-CAN device
- Din Rail with screws
- Quickly installation guide
- Terminal block

Optional Accessories

Wall Mount kit Accessories

IND-WMK01	Wall Mount kit for Industrial product, 184 x 30mm
-----------	---



IFC-FDC

RS-232/422/485 Daisy Chain Fiber Converter

IFC-Serial

RS-232/422/485 Fiber Converter



These converters are capable of selecting interface modes for connection to RS-232 (3 wire), RS-485 (2 wire, half duplex) or RS-422/485 (4 wire, full duplex) and feature a three-way communication plus a second independent RS-232 communication channel. Additionally, the terminal block offers an alarm relay contact and two redundant DC power inputs. IFC Series converters are also available in two operating temperature ranges, a standard -10° to 60°C commercial temperature range and an extended -40° to 75°C range. With all these specifically designed features, IFC Series are reliable and ideal solutions for keeping your industrial automation applications running smoothly and continuously even in harsh environments. The product is protocol transparent that can be applied to RS485/422/232 networks, such as MODBUS to achieve reliable network (See Figure 2).

Features

- Supports 2 fiber link (IFC-FDC)
- Supports 1 fiber link (IFC-Serial)
- Supports dual channel communication, including Triple-Way communication, and Two-Way communication
- Extend serial transmission distance up to 2km, 30km, 60km
- Supports several topology, cable redundancy (Figure 3), ring redundancy (Figure 4), daisy chain (Figure 5), point to point (IFC-FDC)
- Supports point to point (Figure 7) (IFC-Serial)
- Redundant dual power inputs (12/24/48VDC)
- Protocol transparent, suitable for all serial (RS485/422/232) transmission protocol, such as Modbus...
- Baudrate up to 1024kpbs for serial port
- Auto baudrate, no need to set baudrate
- 2.5KV isolation for serial port (RS485/422/232)
- UL60950-1, CE, FCC, heavy industrial grade EMS, EMI, EN61000-6-2, EN61000-6-4 certified
- Supports relay output for power or link failure warning
- Hardened housing with IP30 protection
- Fanless and DIN-Rail design for harsh industrial environment
- Adjustable pull high/low resistor and terminator for RS-422/485 transmission

Specifications

FieldBus Protocol	Protocol transparent	Protocol applicable to all operations available on RS485/422/232, such as Modbus,...	Environmental	Operating Temperature	-10 ~ 60°C (IFC-FDC, IFC-Serial) -40 ~ 75°C (IFC-FDC-E, IFC-Serial-E)	
Data Flow	Dual Channel Communication	Both of Triple-Way and Two-Way Communication Way (Figure 1 or 6)		Storage Temperature	-40 ~ 85°C	
Optical Interface	Connector	SC, ST		Humidity	5 ~ 95% RH	
	Fiber Port	2 fiber ports (IFC-FDC) 1 fiber port (IFC-Serial)	LED Indications	PWR1, PWR2, Alarm, Master, TD, RD, Fiber Link, Fiber2 Link (IFC-FDC only), Ring		
	Fiber Type	MM 2km, SM 30km, 60km Bidi 20KM	Alarm Relay	Alarm exists for power, fiber link or ring protection Relay output with carry capacity 1A @ 24VDC		
	Wavelength	MM 1310nm, SM 1310 Bidi: Mode A : TX1310nm/RX1550nm Mode B : TX1550nm/RX1310nm	Power	Power Input	Redundant Dual Power 12, 24, 48 VDC (9.6 ~ 58VDC)	
	Point to Point Transmission	Full duplex	Power Consumption	6W (IFC-FDC) 5W (IFC-Serial)	Power Reversal Protection	Yes
	Ring Transmission	Full duplex, self-healing operation	Over Current Protection	: Signal Short Together Protected		
Fiber port Topology	Cable redundancy(Figure 3), ring redundancy(Figure 4), daisy chain(Figure 5), point to point (IFC-FDC) Point to point(Figure 7) (IFC-Serial)		Mechanical	Water & Dust Proof	IP30 Protection, Fanless	
Electrical Interface	Serial Port Connector	RS-232(DB9), RS-422/RS-485(5 pin terminal block) RS-485 : 4, 2 wires, RS-422 : 4 wires	Dimensions	106 x 38.6 x 142.1mm (D x W x H)		
	RS-485 direction	Automatically detection	Mounting	DIN-Rail, or wall mounting (Optional)		
	Serial port Baudrate	50 to 1024kpbs Auto baudrate, no need to set baudrate	Weight	0.64kg (IFC-FDC) 0.63kg (IFC-Serial)		
	Serial port isolation	2.5KV isolation for serial signals EMC/noise isolation, to reduce mutual interference between serial port device	Certification	Safety	UL60950-1	
	Pull high resistor	Selected by 10 position rotary switch	EMC	CE		
	Pull low resistor	Selected by 10 position rotary switch	EMI	FCC Part 15 Subpart B Class A, CE		
	120 ohm terminator	Built-in 120 ohm terminator (Selected by Dip Switch)	Immunity for Heavy Industrial Environment	EN61000-6-2		
		Emission for Heavy Industrial Environment	EN61000-6-4			

Certification	EMS	EN61000-4-2 ESD Level 3
	(Electromagnetic Susceptibility)	EN61000-4-3 RS Level 3
	Protection Level	EN61000-4-4 EFT Level 3
		EN61000-4-5 Surge Level 3
		EN61000-4-6 CS Level 3

Certification	Free Fall	IEC 60068-2-32	
	Vibration	IEC 60068-2-6	
	Shock	IEC 60068-2-27	
	Green	RoHS	
	MTBF		739,886 Hours (IFC-FDC)
			847,029 Hours (IFC-Serial) (MIL-HDBK-217)

Application & Topology (IFC-FDC)

Figure 1 : Dual Channel Data Flow

Channel 1 : Triple Way
Channel 2 : Two Way


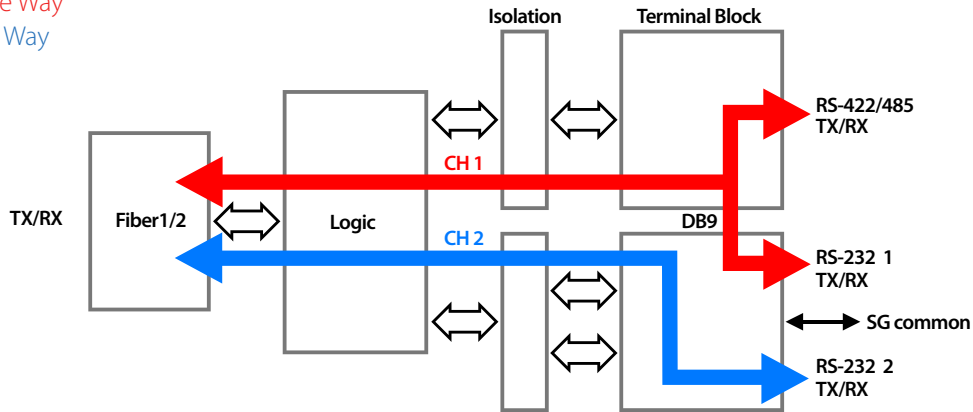


Figure 2 : Application for Modbus Network

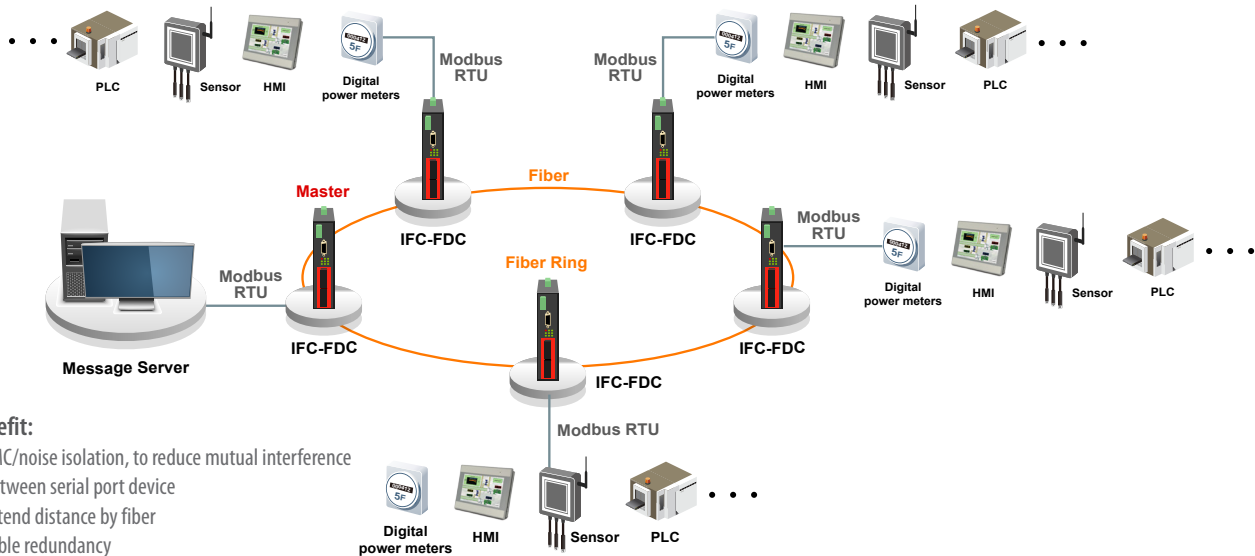

Benefit:

1. EMC/noise isolation, to reduce mutual interference between serial port device
2. Extend distance by fiber
3. Cable redundancy
4. Achieve a reliable network environment

Figure 3 : Fiber Cable Redundancy topology & application

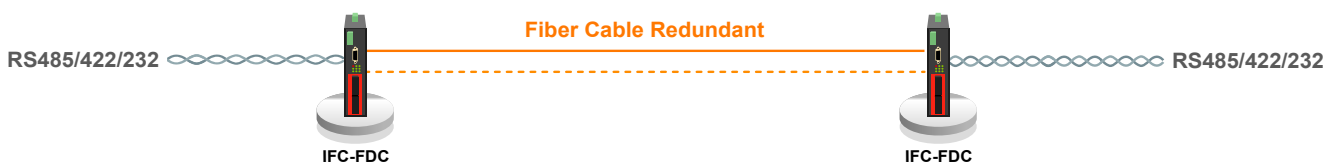


Figure 4 : Fiber Ring Redundancy topology & application


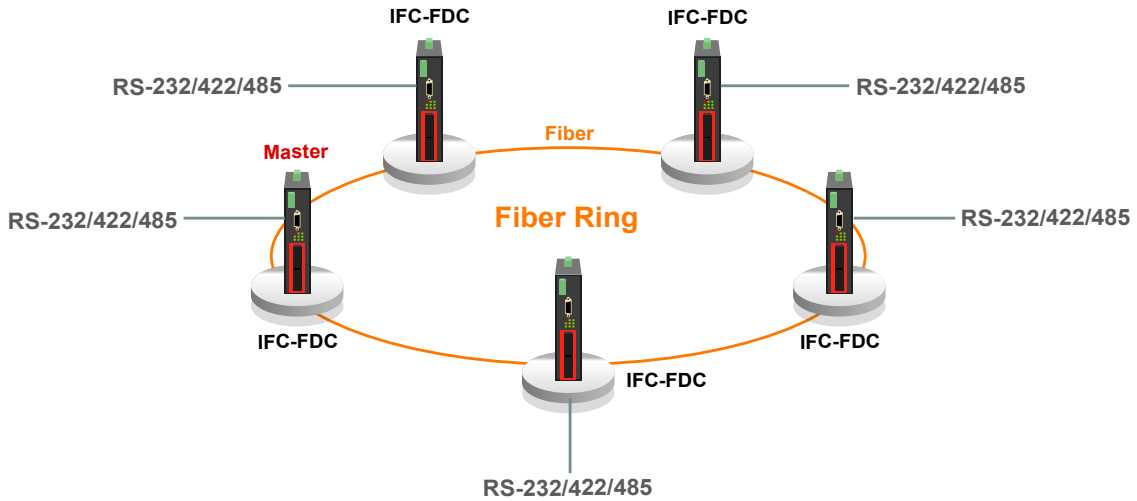


Figure 5 : Fiber Daisy Chain topology & application

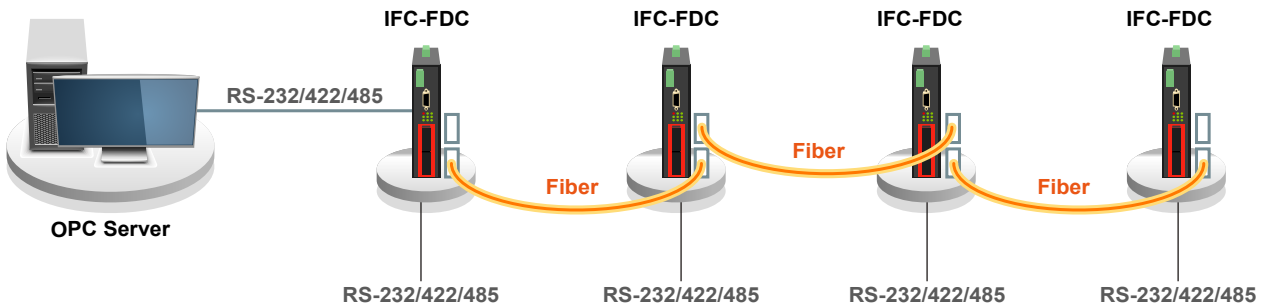

Application & Topology (IFC-Serial)

Figure 6 : Dual Channel Data Flow

Channel 1 : Triple Way
Channel 2 : Two Way


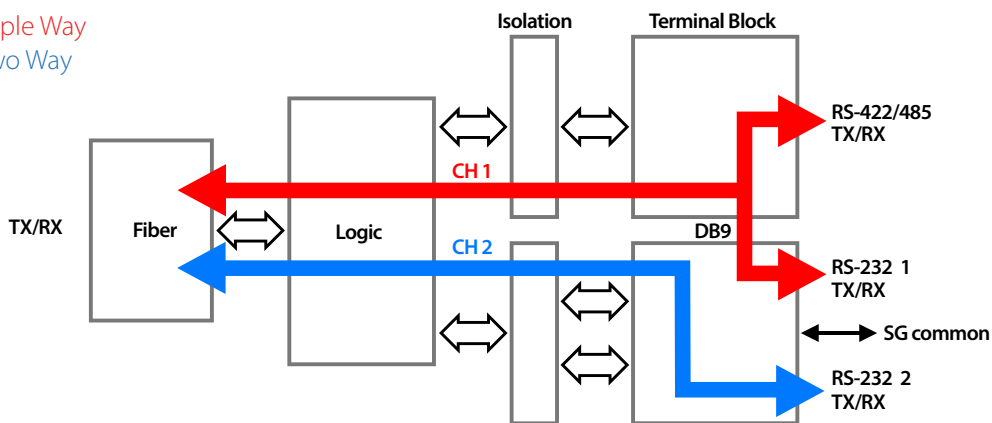


Figure 7 : Fiber Point to Point topology & application

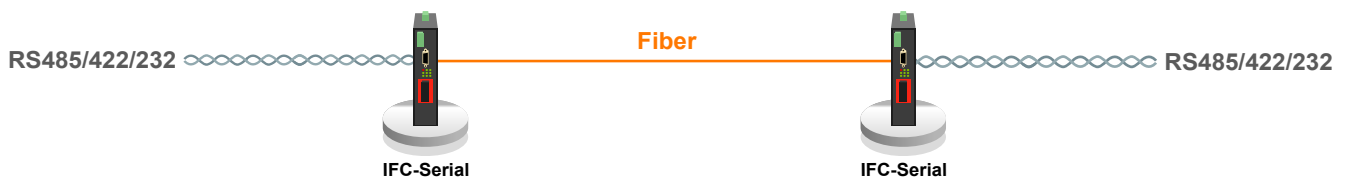


Benefit:


1. Reduce mutual interference between serial port device
2. Extend distance by fiber
3. Achieve a reliable network environment

Dimensions

► IFC-FDC

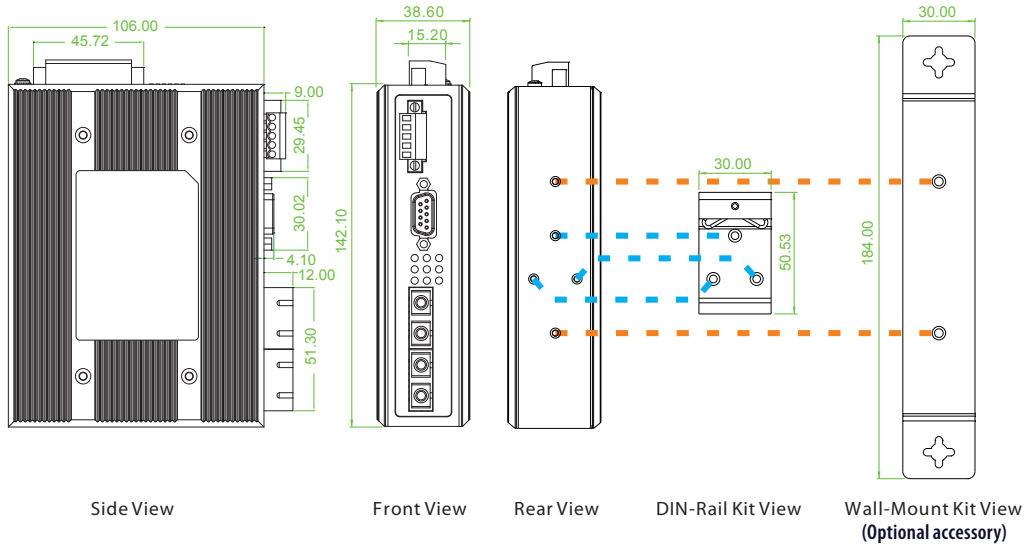


► IFC-Serial

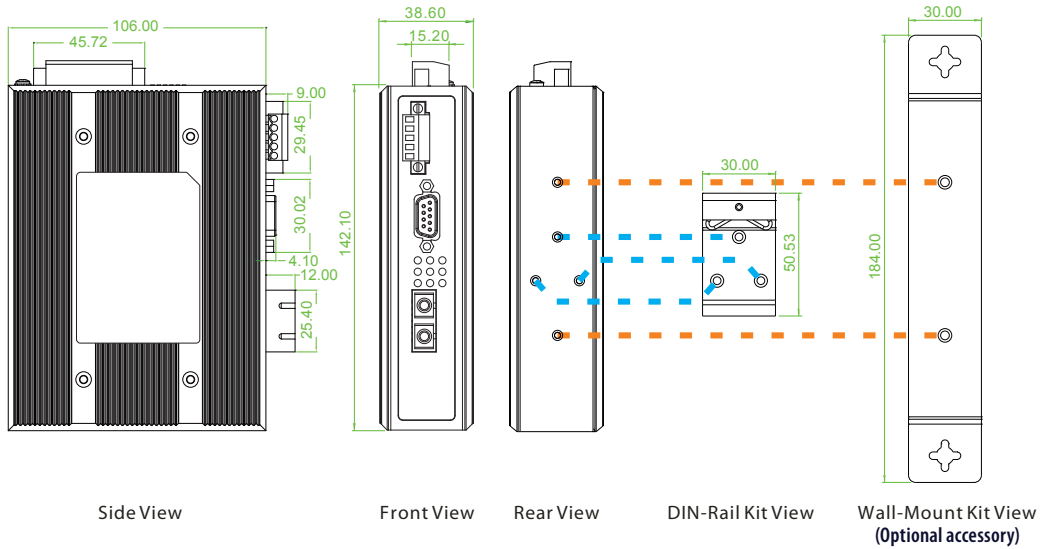

Ordering Information

Model Name	Dual Channel	Serial (ModBus or others)			Fiber		Power Input	Certification			Operating Temperature	
		RS232	RS422/485	Isolation 2.5KV	SC/ST	Daisy Chain		Redundant	Safety UL60950-1	EN61000-6-2 EN61000-6-4		CE
IFC-FDC	V	2	1	V	2	V	12/24/48VDC	V	V	V	V	-10~60°C
IFC-FDC-E	V	2	1	V	2	V	12/24/48VDC	V	V	V	V	-40~75°C
IFC-Serial	V	2	1	V	1		12/24/48VDC	V	V	V	V	-10~60°C
IFC-Serial-E	V	2	1	V	1		12/24/48VDC	V	V	V	V	-40~75°C

Model Naming Rule

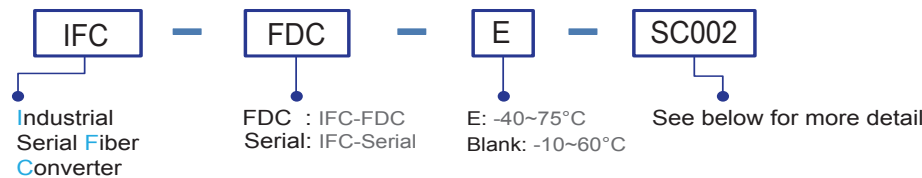

Connector Type	Connectivity Distance
SC,ST	002: M/M 2km 030: S/M 30km 050: S/M 50km 020AB: 20KM Bidi (20KM 1x mode A + 1x Mode B) (for IFC-FDC) 020A: 20KM Bidi mode A (for IFC-Serial) 020B: 20KM Bidi mode B (for IFC-Serial) Mode A: TX 1310nm/RX1550nm Mode B: TX 1550nm/RX1310nm

Temperature Connector Connectivity
Type Type Distance
IFC – FDC – □ – □ □ □ □ □
Example: IFC – FDC – E – SC002

■ Package List

- One device of the series
- Quickly installation guide
- Din Rail with screws
- Terminal block

Optional Accessories

■ Wall Mount kit Accessories

IND-WMK01 Wall Mount kit for Industrial product, 184x30mm



STE100A-232

RS232 Serial Server

STE100A-Serial

RS485/232 Serial Server

The IP Device Server provides the serial device server for hosts to control RS-232, 2 or 4 wire asynchronous RS-422/485 serial devices located virtually anywhere through a TCP/IP or UDP/IP connection. The Device Server has the DB9 port connection on one side, and a 10/100 Mbps Ethernet connection on the other side. It connects serial devices such as PLC, alarm sensors and PTZ camera control to IP networks. Applications include industrial/factory automation, public safety and surveillance systems. The IP Device Server Windows driver is designed to control the IP Serial Server devices. The driver installs a virtual COM on Windows which maps the virtual COM port to the IP address of the IP Serial Server device across the network, enabling the Windows applications to access remote serial devices over Ethernet. IP Device Server can function as a UDP or a server or client for TCP connection. The application scenarios are direct IP mode, virtual COM mode, and paired mode.


Features

- 10/100Mbps Ethernet port
- 230.4kbps serial interface
- TCP Server, TCP client, Virtual com mode, UDP
- Supports for DHCP, HTTP, ICMP, ARP, IP, UDP, TCP
- Support Virtual COM
- Easy to use with Windows utility
- 2 Wire(half duplex) or 4 Wire(full duplex)RS-422/485(STE100A-Serial)
- Configurable IEEE 802.3 DA/SA assignment
- Flexible RS-232/422/485 Interface (STE100A-Serial)
- Configuration by web browser
- Low power consumption with 12VDC input
- Wall mount , or Din Rail optional

Specifications

General	LED	Ready, TP Link/Act, Data TX/RX	Protocols	TCP, UDP, IP, ARP, ICMP, HTTP, DHCP
	OS supported	Windows XP / 2000 / 2003 / 2008 / VISTA / WIN7 / WIN8		Management
Serial Interface	STE100A-Serial I : RS-232/422/485		Security	Password Access
	STE100A-232 : RS-232		Power	12VDC external switching power adapter
Serial Connector	DB9 Male		Operating Temperature	0 ~ 60°C
Baudrate	110 to 230.4Kbps		Storage Temperature	-10 ~ 70°C
Data bits	5, 6, 7, 8		Humidity	0 – 90% non-condensing
Stop bits	1, 1.5 for Data bits 5 mode; 1, 2 for data bits 6, 7, 8 mode		DIN rail mount	DIN-Rail Mounting Kit (Optional)
Parity	None, Even, Odd		Panel mount	Yes
Flow Control	None or RTS / CTS for RS-232		Dimensions	85.8 x 84.2 x 22mm (D x W x H) with DIN-Rail Mounting Kit
	Full Duplex(4-Wire) or Half Duplex(2-Wire) for RS-422/485		Certifications	CE, FCC
Data Packing Delimiter	1, 2		MTBF	2,501,030 Hours (STE100A-232) 2,385,346 Hours (STE100A-Serial) (MIL-HDBK-217)
LAN Interface	RJ-45 connector, IEEE802.3 10/100Base-TX			
Communication Modes	TCP Server, TCP Client, Virtual COM mode, UDP			

Application

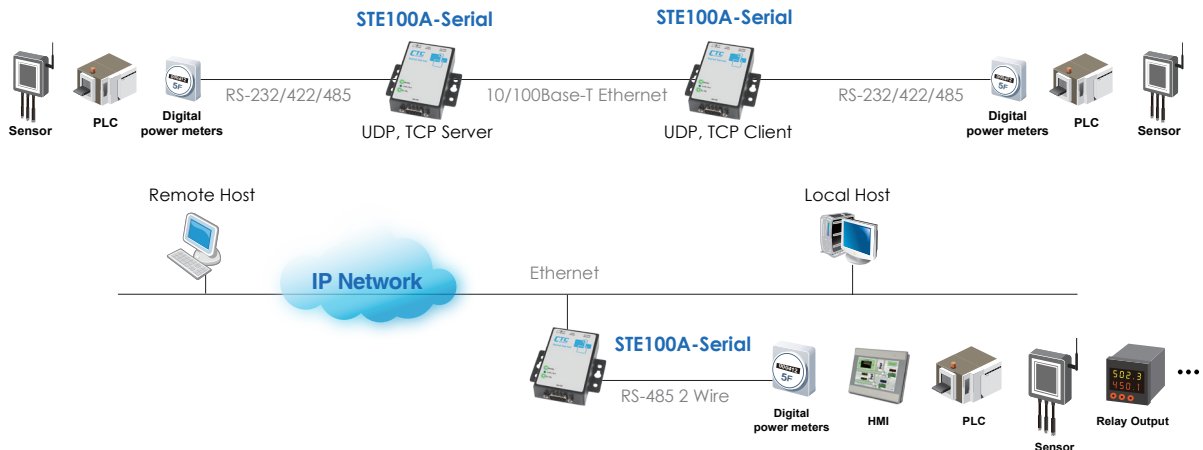

Appearance





Dimensions

STE100A-232

STE100A-Serial

Unit: mm (inch)

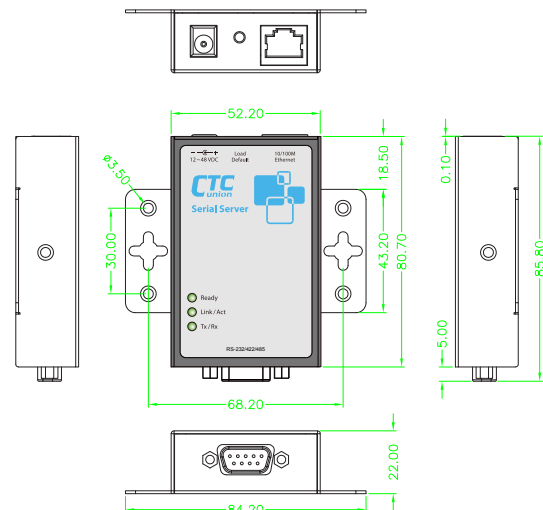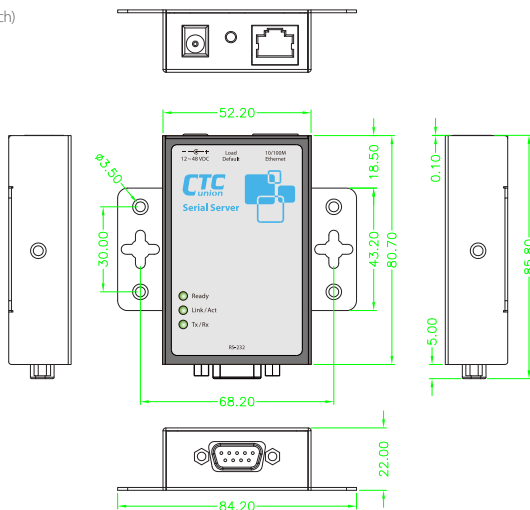

Ordering Information

Model Name	Description
STE100A-232	1-port RS232 device server with AC power adapter
STE100A-Serial	1-port RS232/422/485 device server with AC power adapter

Package List

- One device of the series
- 12V DC Switching power adapter
- CD (VCOM, Manual)
- Rubber Foot

Optional Accessories

Terminal & Wall Mount Kit

STE100A-Serial-WT	STE100A-Serial DB9 wiring terminal
STE100A/DRK01	STE100A/RS232,STE100A/Serial DIN-Rail Mounting Kit

Industrial Power Supply

DC-APT/12V	-48VDC to 12VDC Adapter - 0.83 Amp, 10 Watts ,Output 12VDC, Input -48VDC
------------	--





IEXT224-4PH

Long Reach PoE Extenders
(Phone line and Coaxial cable)



IEXT224-4PH is intended to extend the reach of Ethernet Data and IEEE 802.3at Power over Ethernet beyond its natural limitations of 100 meters. The solution works in pairs for point-to-point connectivity. The unit at the local site can transmit data and remote power feeding power over a single pair of telephone grade UTP wire or Coaxial cable up to 1,200 meters. The unit at the remote side provides four 10/100Base-TX IEEE 802.3at PoE ports for total power budget of 30W and can receive its power from the local unit when power is unavailable at the remote side.

These products are particularly designed for harsh environments, such as industrial networking, traffic surveillance, security automation applications, IP surveillance, city security, intelligent transportation systems (ITS) and are also suitable for many military and utility market applications where environmental conditions exceed commercial product specifications.

Features

- Long transmission data and power feeding distance up to 1200 meter
- Complies with IEEE 802.3at PoE
- Simultaneous transmission of Ethernet data and PoE Power over Phone line wire or coaxial cable
- Centralized management of power supply
- Eliminated the need for power supply at remote sites
- Easy cabling for quick installation
- Quick deployment and easy maintenance.
- Flexible and efficient power management
- Dip Switch to option the remote unit that can be powered by remote-side power or local power.
- Display data rate by LED
- Display real power loading by LED

Specifications

Hardware Standard Interfaces	IEEE802.3 10Base-T IEEE802.3u 100Base-TX IEEE802.3af PoE IEEE802.3af PoE+ ITU-T G.993.2 VDSL2
Power over Copper PoE Extender with 4x 10/100Base-TX IEEE 802.3at PoE Ports	
Network Connector	Terminal Block for Copper Port BNC Female for Coaxial Port 4 x RJ-45 10/100Base-TX IEEE 802.3at PoE Port
Dip Switch	SW 1: Selectable Asy (30a) or Sym(17a) (VDSL2 Profile) SW 2: Selectable target SNR margin 6dB or 9dB SW 3: Selectable Remote Power: OFF: Enable Feeding power by remote unit (Figure 1) ON: Disable Feeding power by remote unit (Figure 2)
LED	Active: System Status Local PWR: Local Power mode (See Figure 2) Remote PWR: Remote Power (See Figure 1) PoE: PoE Port Status for per PoE Port PoE Output: 5/15/30 Watts (Display total PoE loading) (Remote power mode) Line Speed: Link/20/40/60/80/100 Mbps
Standards Support	VDSL2 ITU-T G.993.2 VDSL2 Profiles: 17a and 30a
Protocol Support	Transparent bridging to higher layer protocols
Operating Temperature	-40°C to 75°C
Storage Temperature	-40°C to 85°C
Humidity	10% - 95% (non-condensing)
Power Supply	Redundant dual 48VDC (44~57VDC) Input power (Removable Terminal Block)
Power Consumption	65 Watts maximum
Housing	Rugged Metal, IP30 Protection and fanless
Dimensions	106.5 x 62 x 135 mm (D x W x H)

Weight	IEXT-224-4PH-L : 705g (local) IEXT-224-4PH-R : 715g (remote)
Installation Mounting	DIN Rail mounting, and Wall Mounting
MTBF	IEXT224-4PH : IEXT224-4PH-L - 253,543 Hours IEXT224-4PH-R - 233,606 Hours (MIL-HDBK-217)

Certification	
EMS	CE, FCC
Safety	EN60950-1
Shock	IEC60068-2-27
Freefall	IEC60068-2-32
Vibration	IEC60068-2-6

Transmitting rate and PoE Power budget

UTP – 24AWG Copper Wire


Profile	6dB		6dB		PoE Output Budget
	Asymmetrical	Symmetrical	Asymmetrical	Symmetrical	
Distance	Upstream Rate (Mbps)	Downstream Rate (Mbps)	Upstream Rate (Mbps)	Downstream Rate (Mbps)	
300 m	65	100	100	100	30W
400 m	45	95	70	70	20W
600 m	30	65	45	45	15W
800 m	10	45	27	27	7W
1,000 m	6	35	18	18	5W
1,200 m	1	20	8	16	4W

Coaxial Cable


Profile	6dB		6dB		PoE Output Budget
	Asymmetrical	Symmetrical	Asymmetrical	Symmetrical	
Distance	Upstream Rate (Mbps)	Downstream Rate (Mbps)	Upstream Rate (Mbps)	Downstream Rate (Mbps)	
400 m	100	100	100	100	30W
600 m	50	100	50	80	20W
800 m	50	100	50	80	15W
1,000 m	45	90	50	60	10W
1,200 m	40	70	50	50	8W

Application


► **Figure 1 : Remote Power feeding Enable**

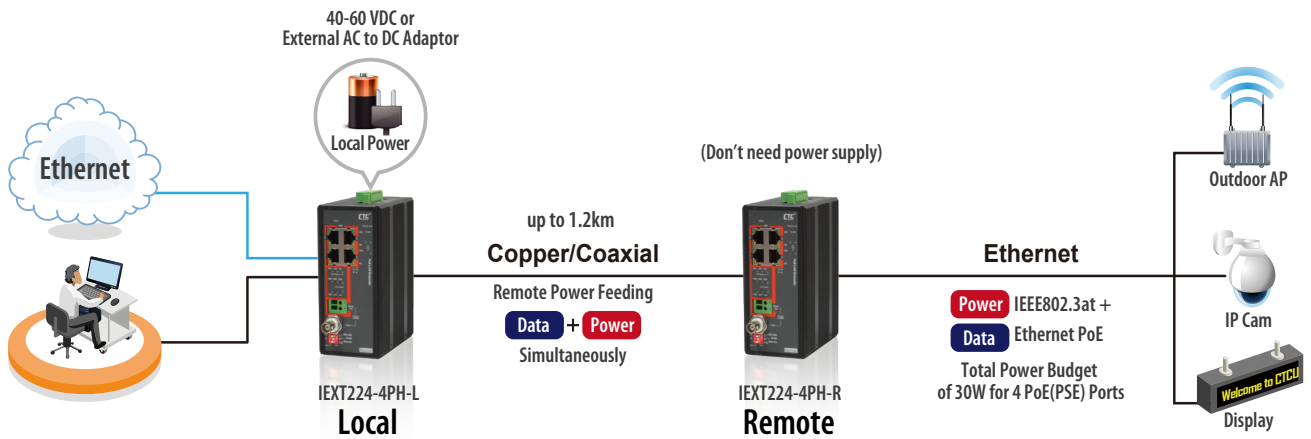

► **Figure 2 : Remote Power feeding Disable**

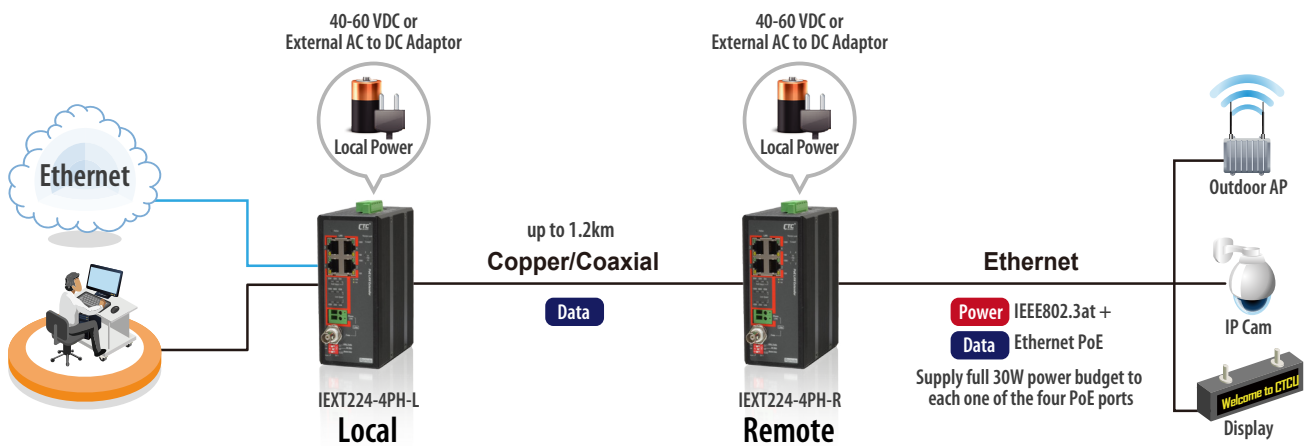

Dimensions

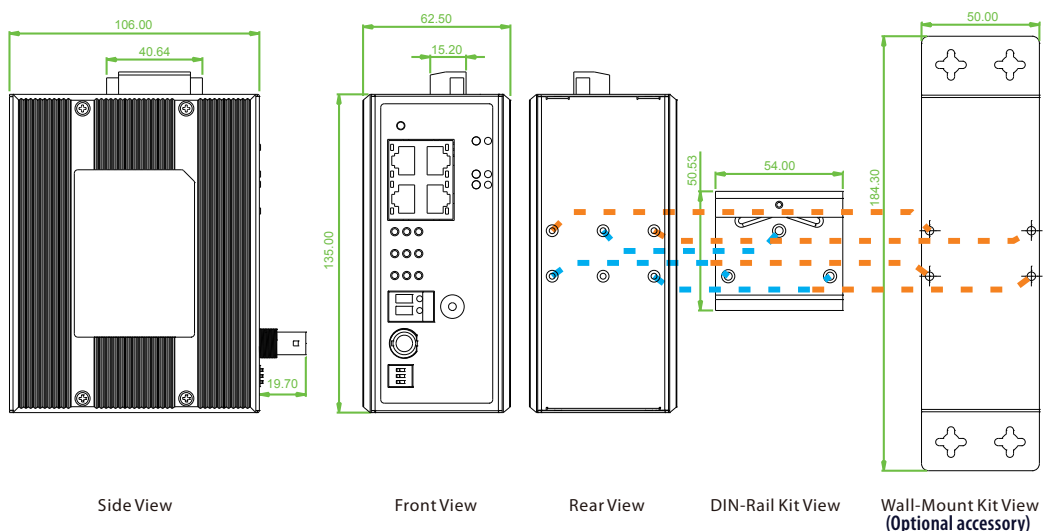

Ordering Information

Model Name	UTP	Long Distance		PoE Port IEEE802.3at	Certification		
	10/100	RJ11	Coaxial		Safety EN60950-1	CE	FCC
IEXT224-4PH	4	1	1	4	V	V	V

■ Package List

- One device of the series (one local and one remote unit)
- Quickly installation guide
- Din Rail with screws
- Wall mount bracket with screws
- Terminal block

Optional Accessories

■ Industrial Power Supply

NDR-120-48 Industrial Power, Input 90 ~ 264VAC / 127 ~ 370VDC, Output 48 VDC, 120W, -20 ~ +70°C

Preliminary



IEXT211

10/100Base-TX Ethernet Extenders



This product is intended to extend the reach of 10/100Base-TX Ethernet data beyond its limitations of 100 meters. It is particularly designed for harsh environments, such as industrial networking, traffic surveillance, security automation applications, IP surveillance, city security, intelligent transportation systems (ITS) and is also suitable for many military and utility market applications where environmental conditions exceed commercial product specifications. (See Figure 1 & 2)

Features

- Ethernet over phone wire, extend distance upto 2KM through the phone wire
- Selectable CO or CPE mode
- Selectable Band plan (Symmetric or Asymmetric)
- Comply with ITU-T G.993.2 VDSL2
- Compatible with CTC model VDSL2-1524 & VDSL2-1008 DSLAM
- Display data rate by LED
- 12/24/48VDC (9.6~60VDC) redundant dual input power
- Wide operating temperature -40~75°C
- Rugged metal, IP30 protection & Fanless design
- CE, FCC, Rail Traffic EN50121-4, heavy industrial grade EMS, EMI, EN61000-6-2, EN61000-6-4 certify

Specifications

Hardware Standard Interfaces	IEEE802.3	10Base-T
	IEEE802.3u	100Base-TX
	IEEE802.3x	Flow Control
	ITU-T G.993.2	VDSL2
Port function & Standard	Ethernet port :	
	1x RJ-45 10/100Base-TX	
	Support Auto negotiation speed, Auto MDI/MDI-X function	
	UTP/STP above Cat. 5e cable	
	EIA/TIA-568 100-ohm (100m)	
	Extension port :	
VDSL2 ITU-T G.993.2		
Terminal Block and RJ11 for telephone wire		
Above 24AWG cable		
Maximum distance 2KM @24AWG phone line wire		
DIP SW	CO or CPE side	
	Symmetric or Asymmetric communication mode (Asymmetric mode is recommended, distance >1KM)	
LED	Power 1 & 2 : power status	
	Ethernet LK/Act : Ethernet port Link /Active	
	Extension LK/Act : Extension port Link /Active	
	CO /CPE	
	Sym / Asy	
	Line Speed : 100/80/60/40/20/below 20Mbps	
Operating Temperature	-40°C to 75°C	
Storage Temperature	-40°C to 85°C	
Humidity	10% - 95% (non-condensing)	
Power Supply	Redundant dual 12/24/48VDC (9.6~60VDC) Input power (Removable Terminal Block)	
Power Consumption	<5W	
Housing	Rugged Metal, IP30 Protection and fanless	
Dimensions	106 x 31.6 x 142mm (D x W x H)	
Weight	TBD	
Installation Mounting	DIN Rail mounting, or Wall Mounting (Optional)	
MTBF	TBD	
Certification		
EMS	CE	
EMI (Electromagnetic Interference)	FCC Part 15 Subpart B Class A, CE	


Railway Traffic	EN50121-4
Immunity for Heavy Industrial Environment	EN61000-6-2
Emission for Heavy Industrial Environment	EN61000-6-4
EMS (Electromagnetic Susceptibility) Protection Level	EN61000-4-2 (ESD) Level 3, Criteria B
	EN61000-4-3 (RS) Level 3, Criteria A
	EN61000-4-4 (Burst) Level 3, Criteria A
	EN61000-4-5 (Surge) Level 3, Criteria B
	EN61000-4-6 (CS) Level 3, Criteria A
	EN61000-4-8 (PFMF, Magnetic Field) Field Strength: 300A/m, Criteria A
Safety	UL60950-1 (Pending)
Shock	IEC60068-2-27
Freefall	IEC60068-2-32
Vibration	IEC60068-2-6

Application

Figure 1 : Distance extend for Ethernet Application



Figure 2 : IEXT211 & VDSL2 DSLAM Application

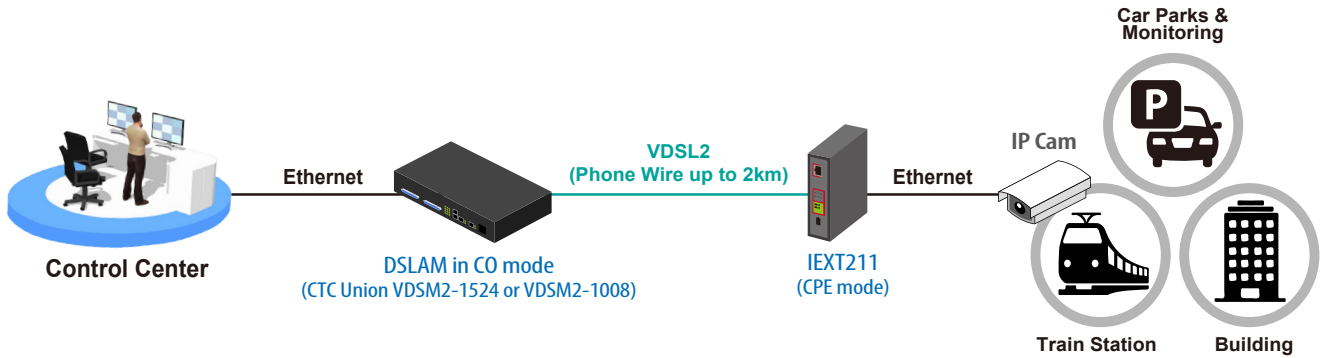

Ordering Information

Model Name	RJ45 UTP Ethernet	Extension port		Power Input	Certification			Operating Temperature
	10/100Base-TX	Terminal	RH11	Redundant	Railway EN50121-4	EN61000-6-2 EN61000-6-4	CE FCC	
IEXT211	1	1	1	12/24/48VDC	V	V	V	-40~75°C

Package List

- One device of the series (one local and one remote unit)
- Quickly installation guide
- Din Rail with screws
- Terminal block

Optional Accessories

Wall Mount kit Accessories

IND-WMK01	Wall Mount kit for Industrial product, 184 x 30mm
-----------	---



INJ-IG60-24

Gigabit Ethernet PoE+ Injector IEEE802.3at/af,
15.4/30/36/60/72W (24V Booster)



INJ-IG60-24 is an industrial grade, single port, gigabit Ethernet PoE (Power over Ethernet) injector with power boost technology. PoE describes a system to pass electrical power safely, along with data, on Ethernet cabling. The original IEEE 802.3af-2003 PoE standard provides up to 15.4 W of DC power to each device. The updated IEEE 802.3at-2009 PoE standard also known as PoE+ or PoE plus, provides up to 30 W of power. Additionally, INJ-IG60-24 can provide up to 36/60/72W through the non-standard use of all 4 pairs of category 5 cable. Housed in a rugged DIN rail or wall mountable enclosure, this product is designed for harsh environments, such as industrial networking, security, intelligent transportation systems (ITS) and is also suitable for many military and utility market applications where environmental conditions exceed commercial product specifications (See Figure 1). Standard operating temperature range models (-10 to 60°C) and wide operating temperature range models (-40 to 75°C) fulfill the special needs of industrial automation applications.

Features

- Provides 1 port IEEE802.3at/af PoE Injector
- Power output 15.4W, 30W, 36W, 60W, 72W select by DIP SW
- 24/48VDC (20~57VDC) redundant dual input power with built-in very high efficiency booster (94~96%) to rise up 55 VDC for PoE output
- Regulate PoE output voltage (55VDC) to stabilize PoE device, and guarantee delivery PoE power distance to 100meter (Figure 2)
- PoE Mode A/B Select by DIP SW
- 4 Pairs (60W/72W) PD handshake mode select by DIP SW (Such as AXIS® IP cam)
- Wide operating temperature -40 ~ 75°C (INJ-IG60-E24)
- CE, FCC, Railway traffic EN50121-4 certified
- Heavy industrial grade EMS, EMI, EN61000-6-2, EN61000-6-4 certified
- IP30 rugged metal housing and fanless

Specifications

IEEE Standard	IEEE 802.3 10Base-T Ethernet IEEE 802.3u 100Base-TX Fast Ethernet IEEE 802.3ab 1000Base-T Gigabit Ethernet IEEE802.3at Power over Ethernet+, PoE+ IEEE802.3af Power over Ethernet, PoE
PoE Standard	IEEE802.3at, IEEE802.3af
PoE Standard & RJ-45 Pin Assignment	RJ-45 support IEEE 802.3at/af Middle-Span Alternative B mode or End-Span Alternative A mode, set by DIP SW End-Span, Alternative A mode Positive (V+): RJ-45 pin 1, 2. Negative (V-): RJ-45 pin 3, 6. Data (1, 2, 3, 6, 4, 5, 7, 8) Middle-Span, Alternative B mode Positive (V+): RJ-45 pin 4,5 Negative (V-): RJ-45 pin 7,8 Data (1, 2, 3, 6, 4, 5, 7, 8)
Network Connector	1 RJ-45 for 10/100/1000Base-T Data, and 1 RJ-45 for 10/100/1000Base-T Data with PoE Output power
Network Cable	UTP/STP above Cat. 5e cable EIA/TIA-568 100-ohm (100m)
LED	Per unit: Power 1 (Green), Power 2 (Green), Fault (Amber) 4/2 Pairs (Green) ON: 4 Pairs PoE Power output for 60W PoE OFF: 2 Pairs PoE Power output
DIP SW	SW1 Reserved SW2 ON: Hi Power 36W 36W PoE output OFF: Standard PoE 802.3af (15.4W), 802.3at (30W) SW3 ON: 4 Pair PoE Pin Ultra-High Power 60W/72W PoE Output OFF: 2 Pair PoE Pin depend on DIP SW 1,2 SW4 ON: Alternative B mode PoE Power Pin 4, 5, 7, 8 (When DIP SW 3 Off) OFF: Alternative A mode PoE Power Pin 1, 2, 3, 6 (When DIP SW 3 Off)
Reverse Polarity Protection	Supported for power input

Overload Current Protection	Supported																														
Power Supply	Redundant Dual DC 24/48V (20~57VDC) Input power (Removable Terminal Block) Built-in very high efficiency booster(97~99%) to rise up 55 VDC for PoE output Regulated PoE output voltage (55VDC) to stabilize PoE device, and guarantee delivery PoE power distance to 100meter (Figure 2)																														
PoE Power Budget	Maximum Ultra High Power 60W, IEEE802.3at 30W, IEEE802.3at High power 36W, IEEE802.3af 15.4W																														
Power Consumption	INJ-IG60-24 in 30W mode (2 Pair) <table border="1"> <thead> <tr> <th>Input Voltage</th> <th>Input Power Consumption</th> <th>Device Power Consumption</th> <th>PoE Power Budget</th> <th>Boost Efficiency</th> </tr> </thead> <tbody> <tr> <td>24VDC</td> <td>33W</td> <td>1.4W</td> <td>30W</td> <td>94.90%</td> </tr> <tr> <td>48VDC</td> <td>33.2</td> <td>1.9W</td> <td>30W</td> <td>95.80%</td> </tr> </tbody> </table> INJ-IG60-24 in 60W mode (4 Pair) <table border="1"> <thead> <tr> <th>Input Voltage</th> <th>Input Power Consumption</th> <th>Device Power Consumption</th> <th>PoE Power Budget</th> <th>Boost Efficiency</th> </tr> </thead> <tbody> <tr> <td>24VDC</td> <td>65.2W</td> <td>1.4W</td> <td>60W</td> <td>94.10%</td> </tr> <tr> <td>48VDC</td> <td>64.7W</td> <td>1.9W</td> <td>60W</td> <td>95.50%</td> </tr> </tbody> </table>	Input Voltage	Input Power Consumption	Device Power Consumption	PoE Power Budget	Boost Efficiency	24VDC	33W	1.4W	30W	94.90%	48VDC	33.2	1.9W	30W	95.80%	Input Voltage	Input Power Consumption	Device Power Consumption	PoE Power Budget	Boost Efficiency	24VDC	65.2W	1.4W	60W	94.10%	48VDC	64.7W	1.9W	60W	95.50%
Input Voltage	Input Power Consumption	Device Power Consumption	PoE Power Budget	Boost Efficiency																											
24VDC	33W	1.4W	30W	94.90%																											
48VDC	33.2	1.9W	30W	95.80%																											
Input Voltage	Input Power Consumption	Device Power Consumption	PoE Power Budget	Boost Efficiency																											
24VDC	65.2W	1.4W	60W	94.10%																											
48VDC	64.7W	1.9W	60W	95.50%																											
Alarm Relay Contact	Relay outputs with current carrying capacity of 1 A @24VDC																														
Removable Terminal Block	Provides 2 redundant power, alarm relay contact, 6 Pin																														
Operating Temperature	-10 ~ 60°C (INJ-IG60-24) -40 ~ 75°C (INJ-IG60-E24)																														
Operating Humidity	5% to 95% (Non-condensing)																														
Storage Temperature	-40 ~ 85°C																														
Housing	Rugged Metal, IP30 Protection and fanless																														
Dimensions	106 x 31.6 x 142 mm (D x W x H)																														
Weight	0.425kg																														
Installation Mounting	DIN Rail mounting, or Wall Mounting (Optional)																														

MTBF	1,403,339 Hours (MIL-HDBK-217)
Warranty	5 years
Certification	
EMC	CE
EMI	FCC Part 15 Subpart B Class A, CE
Railway Traffic	EN50121-4
Immunity for Heavy Industrial environment	EN 61000-6-2
Emission for Heavy industrial environment	EN 61000-6-4

EMS (Electromagnetic Susceptibility) Protection Level	EN61000-4-2 (ESD) Level 3, Criteria B
	EN61000-4-3 (RS) Level 3, Criteria A
	EN61000-4-4 (EFT) Level 3, Criteria A
	EN 61000-4-5 (Surge) Level 3, Criteria B
	EN 61000-4-6 (CS) Level 3, Criteria A
Safety	EN61000-4-8 (PFMF) Field strength 300A/m Criteria A
	UL60950-1 (pending)
Shock	IEC 60068-2-27
Freefall	IEC 60068-2-32
Vibration	IEC 60068-2-6

Application

Figure 1 : INJ-IG60-24 Gigabit Ethernet PoE Injector



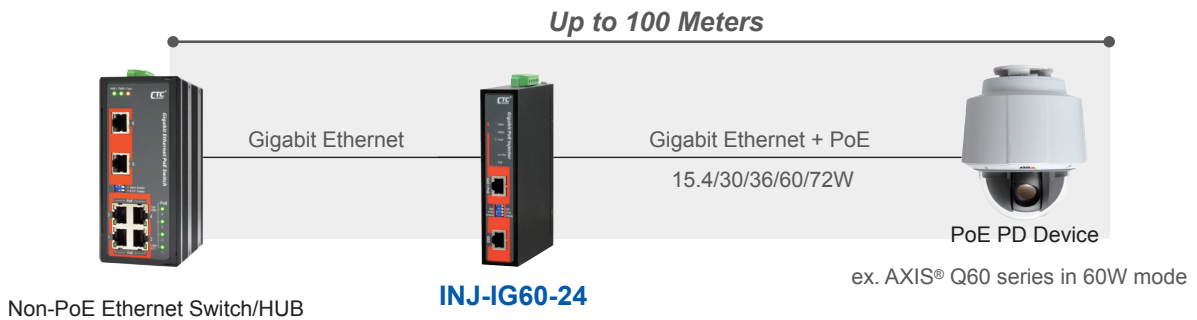


Figure 2 : Very high efficiency boost technology for PoE

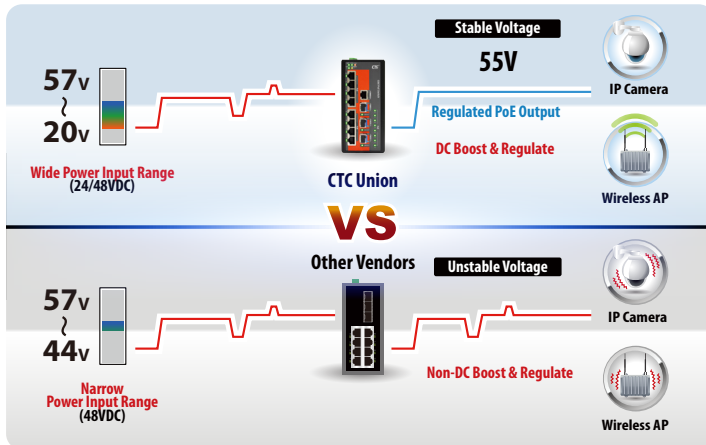

- Regulated PoE output voltage (55VDC) to stabilize PoE device
- Guarantee delivery PoE power distance to 100 meter
- Wide range input power 24/48VDC (20~57VDC)
- Built-in very high efficiency (94~97%) to boost PoE output voltage


Dimensions

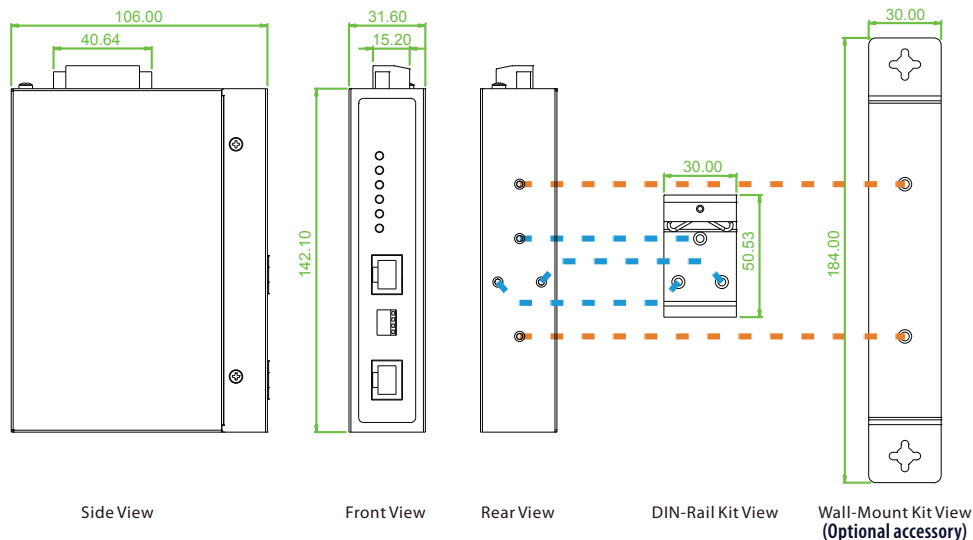

Ordering Information

Model Name	Ethernet	PoE Port		Power input	Certification			Operating Temperature
	10/100/1000 Base-T	IEEE802.3at (PSE)	Power Budget	Redundant	Railway EN50121-4	EN61000-6-2 EN61000-6-4	CE FCC	
INJ-IG60-24	1	1	15/30/36/60/72W	24/48VDC	V	V	V	-10~60°C
INJ-IG60-E24	1	1	15/30/36/60/72W	24/48VDC	V	V	V	-40~75°C

Model Naming Rule

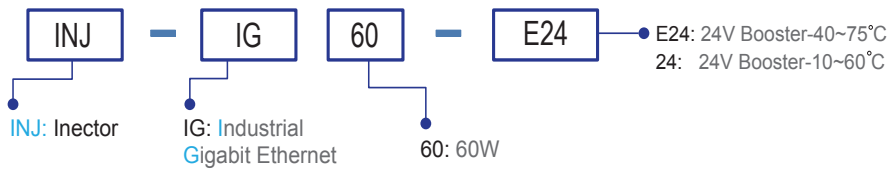

Package List

- INJ-IG60-24 device
- Din Rail with screws
- Quickly installation guide
- Terminal block

Optional Accessories

Wall mount kit Accessories

IND-WMK01	Wall Mount kit for Industrial product, 184 x 30mm
-----------	---



INJ-IG01-PH

Gigabit Ethernet PoE+ Injector IEEE802.3at/af,
15.4/30/36/60W (Compact)



INJ-IG01-PH is an industrial grade, single port, gigabit Ethernet PoE (Power over Ethernet) injector with power boost technology. PoE describes a system to pass electrical power safely, along with data, on Ethernet cabling. The original IEEE 802.3af-2003 PoE standard provides up to 15.4 W of DC power to each device. The updated IEEE 802.3at-2009 PoE standard also known as PoE+ or PoE plus, provides up to 30 W of power. Additionally, INJ-IG01-PH can provide up to 36/60W through the non-standard use of all 4 pairs of category 5 cable. Housed in a rugged DIN rail or wall mountable enclosure, this product is designed for harsh environments, such as industrial networking, security, intelligent transportation systems (ITS) and is also suitable for many military and utility market applications where environmental conditions exceed commercial product specifications (See Figure 1). Standard operating temperature range models (-10 to 60°C) and wide operating temperature range models (-40 to 75°C) fulfill the special needs of industrial automation applications.

Features

- Provides 1 port IEEE802.3at/af PoE Injector
- Power output 15.4W, 30W, 36W, 60W select by DIP SW
- PoE Mode A/B Select by DIP SW
- 4 Pairs PD handshake mode select by DIP SW (Such as AXIS® IP cam)
- CE, FCC, Railway traffic EN50121-4 certified
- Heavy industrial grade EMS, EMI, EN61000-6-2, EN61000-6-4 certified
- Wide operating temperature -40 ~ 75°C (INJ-IG01-PHE)
- IP30 rugged metal housing and fanless

Specifications

IEEE Standard	IEEE 802.3 10Base-T Ethernet IEEE 802.3u 100Base-TX Fast Ethernet IEEE 802.3ab 1000Base-T Gigabit Ethernet IEEE 802.3at, IEEE802.3af
PoE Standard	IEEE802.3at, IEEE802.3af
PoE Standard & RJ-45 Pin Assignment	RJ-45 support IEEE 802.3at/af Middle-Span Alternative B mode or End-Span Alternative A mode, set by DIP SW End-Span, Alternative A mode Positive (V+): RJ-45 pin 1, 2. Negative (V-): RJ-45 pin 3, 6. Data (1, 2, 3, 6, 4, 5, 7, 8) Middle-Span, Alternative B mode Positive (V+): RJ-45 pin 4,5 Negative (V-): RJ-45 pin 7,8 Data (1, 2, 3, 6, 4, 5, 7, 8)
Network Connector	1 RJ-45 for 10/100/1000Base-T Data, and 1 RJ-45 for 10/100/1000Base-T Data with PoE Output power
Network Cable	UTP/STP above Cat. 5e cable EIA/TIA-568 100-ohm (100m)
LED	Per unit: Power (Green) Alt A/PoE, Alt B/PoE (Green) ON when a PD device is connected to the GbE+PoE RJ-45 connector and the injector is feeding power in Alt A or B mode. Blinking One of the Injector faults (overload, short circuit or over-temperature) occurs.
DIP SW	SW1 ON: Alternative B mode PoE Power Pin 4, 5, 7, 8 (When DIP SW 3 Off) OFF: Alternative A mode PoE Power Pin 1, 2, 3, 6 (When DIP SW 3 Off) SW2 ON: Hi Power 36W 36W PoE output OFF: Standard PoE 802.3af (15.4W), 802.3at (30W) SW3 ON: 4 Pair PoE Pin Ultra-High Power 60W PoE Output OFF: 2 Pair PoE Pin depend on DIP SW 1,2 SW4 60W PD handshake mode OFF: General PD at ether 2 or 4 pairs mode ON: Compatible with some particular PD devices at high power mode (4 Pair mode), such as AXIS® Q60
Reverse Polarity Protection	Supported for power input


Overload Current Protection	Supported									
Power Supply	(44~57VDC) Input power (Removable Terminal Block)									
PoE Power Output	Maximum Ultra High Power 60W, IEEE802.3at 30W, IEEE802.3at High power 36W, IEEE802.3af 15.4W									
Power Consumption	<table border="1"> <thead> <tr> <th></th> <th>In 30W mode (2 Pairs)</th> <th>In 60W mode (4 Pairs)</th> </tr> </thead> <tbody> <tr> <td>Input Power Consumption (Input 48VDC)</td> <td>31.1W</td> <td>62.8W</td> </tr> <tr> <td>PoE Output Power</td> <td>30W</td> <td>60W</td> </tr> </tbody> </table>		In 30W mode (2 Pairs)	In 60W mode (4 Pairs)	Input Power Consumption (Input 48VDC)	31.1W	62.8W	PoE Output Power	30W	60W
	In 30W mode (2 Pairs)	In 60W mode (4 Pairs)								
Input Power Consumption (Input 48VDC)	31.1W	62.8W								
PoE Output Power	30W	60W								
Removable Terminal Block	Provides 2 Pin for power input connectorn									
Operating Temperature	-10 ~ 60°C (INJ-IG01-PH) -40 ~ 75°C (INJ-IG01-PHE)									
Operating Humidity	5% to 95% (Non-condensing)									
Storage Temperature	-40 ~ 85°C									
Housing	Rugged Metal, IP30 Protection and fanless									
Dimensions	70 x 30 x 103 mm (D x W x H)									
Weight	215g									
Installation Mounting	DIN Rail mounting, and Wall Mounting (Optional)									
MTBF	2,108,634 Hours (MIL-HDBK-217)									
Warranty	5 years									
Certification										
EMC	CE									
EMI	FCC Part 15 Subpart B Class A, CE									
Railway Traffic	EN50121-4									
Immunity for Heavy Industrial environment	EN 61000-6-2									
Emission for Heavy industrial environment	EN 61000-6-4									

EMS (Electromagnetic Susceptibility) Protection Level	EN61000-4-2 (ESD) Level 3, Criteria B
	EN61000-4-3 (RS) Level 3, Criteria A
	EN61000-4-4 (EFT) Level 3, Criteria A
	EN 61000-4-5 (Surge) Level 3, Criteria B
	EN 61000-4-6 (CS) Level 3, Criteria A
	EN61000-4-8 (PFMF) Field strength 300A/m Criteria A


Shock	IEC 60068-2-27
Freefall	IEC 60068-2-32
Vibration	IEC 60068-2-6

Application

Figure : INJ-IG01-PH Gigabit Ethernet PoE Injector

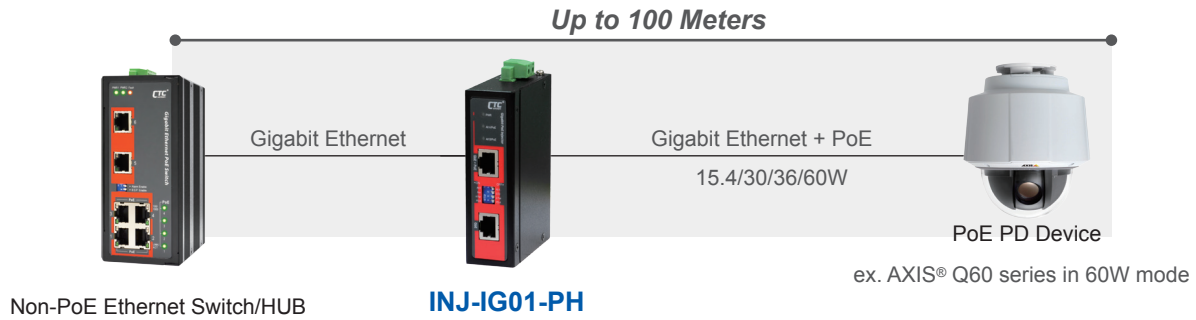


Dimensions

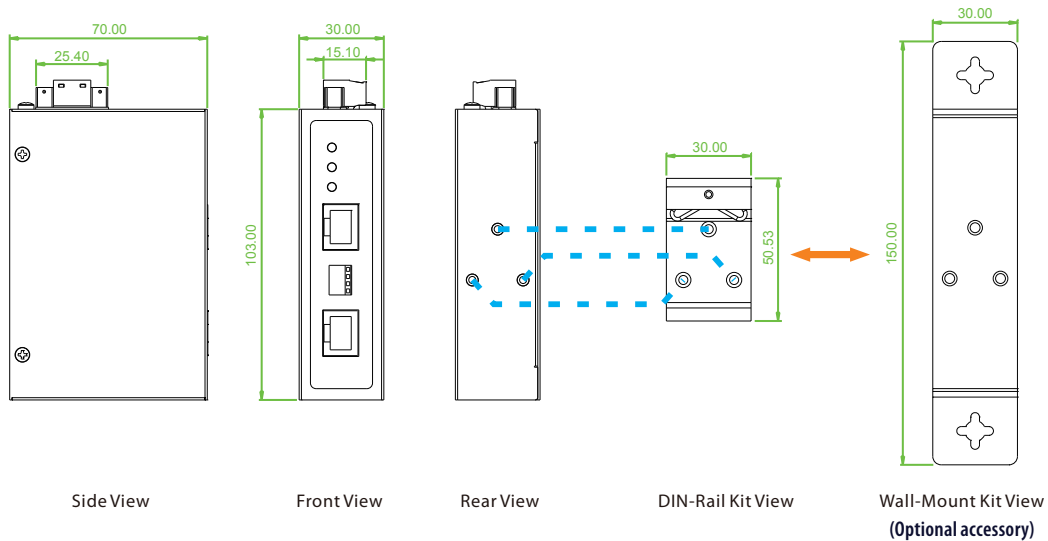

Ordering Information

Model Name	Ethernet		PoE Port		Powerinput		Certification			Operating Temperature
	10/100/1000 Base-T	IEEE802.3at (PSE)	Power Budget	Single power	Railway EN50121-4	EN61000-6-2 EN61000-6-4	CE	FCC		
INJ-IG01-PH	1	1	15/30/36/60	48VDC	V	V	V	V	-10~60°C	
INJ-IG01-PHE	1	1	15/30/36/60	48VDC	V	V	V	V	-40~75°C	

Model Naming Rule

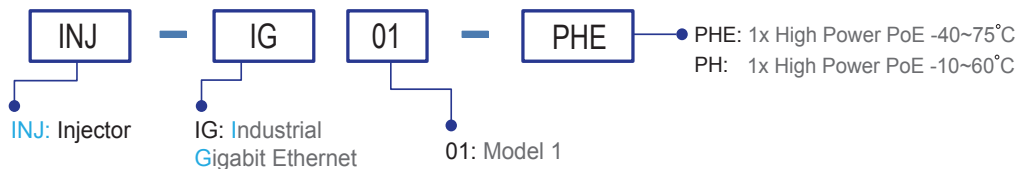

Package List

- INJ-IG01-PH device
- Din Rail with screws
- Quickly installation guide
- Terminal block

Optional Accessories

Wall mount kit Accessories

IND-WMK03	Wall Mount kit for Industrial product (Compact, 150 x 30mm)
-----------	---



INJ-G30

Gigabit Ethernet IEEE802.3af/at
High Power Injector



This device consists of 1 PoE Injector ports. That can solve the limitation of the power outlet location and offer the system designer a flexible solution to locate the network device everywhere. The compact size and wall mounting was specifically designed for easy installation. It can be installed where space is limited; moreover, it provides smooth network migration and easy upgrade to network capacity.

Features


- 1 Port PoE Injector, 55VDC /30W output
- Compliant IEEE802.3af/at
- Providing 1 10/100/1000Mbps pass through data rate
- Wall Mountable
- Compliant with IEEE 802.3 10Base-T, IEEE 802.3u 100Base-TX and IEEE802.3ab 1000Base-T
- Safety & EMI Certificates: CE & FCC Class B Smart plug & play
- Compact Size

Specifications

Ethernet Standard	IEEE 802.3 10Base-T 10Mbit/s Ethernet
	IEEE 802.3u 100Base-TX, 100Base-FX, Fast Ethernet
	IEEE 802.3ab 1000Base-T Gbit/s Ethernet over twisted pair
Network Cable	IEEE 802.3af Power over Ethernet (PoE) IEEE 802.3at Power over Ethernet (PoE+)
Indications	1x RJ-45 for 10/100/1000Base-T data 1x RJ-45 for 10/100/1000Base-T data and PoE Power output
Power Input	10Base-T Cat. 3, 4, 5e UTP/STP; 100/1000Base-T Cat. 5 UTP/STP
Filtering/ Forwarding Rate	10/100/1000Mbps pass through data rate
PoE Power output pin	RJ45 Pin 1,2(V+), Pin 3,6(V-)
LED	System Power

External Power Adapter	Input 100/110/120/220/240 VAC (Wide Range) Output 36W ,56VDC
PoE output voltage	55VDC
PoE Power Budget	30W (Maximum)
Operating Temperature	0 ~ 45°C
Storage Temperature	-20 ~ 85°C
Humidity	10 ~90% RH (Non-condensing)
Dimension	80 x 68 x 24mm (D x W x H)
Weight	138g
Installation mounting	Wall mount
Certificates	CE & FCC Class B

Application

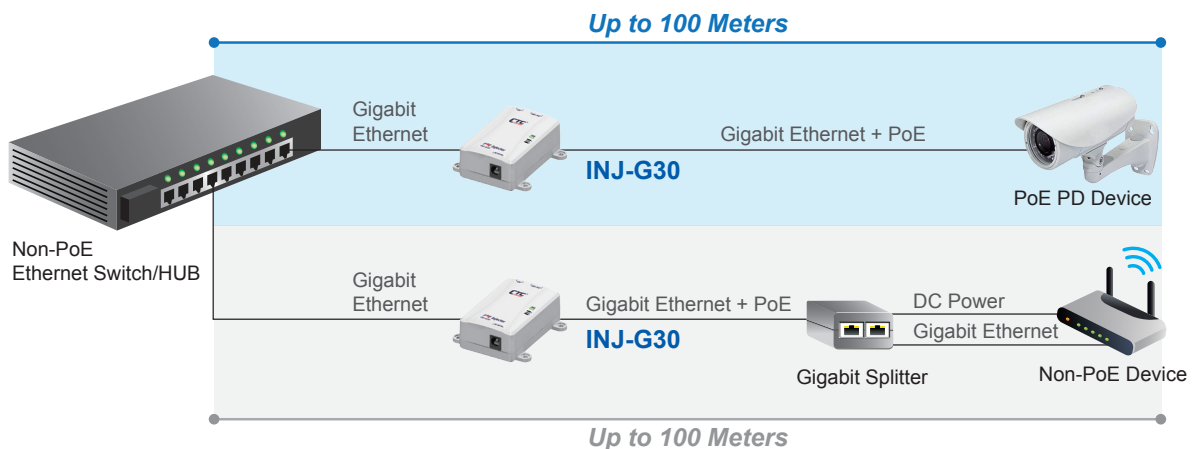

Ordering Information

Model Name	Description
INJ-G30	1 Port Gigabit Ethernet, IEEE802.3af/at high power PoE+ Injector

IEC 61850-3

Industrial Ethernet Switch

- IEC 61850-3, IEEE1613
- IEEE1588 PTP v2
- Zero Packet loss
- GOOSE Message
- Wide operating temperature : -40~85°C




In power substation environments, where electromagnetic interference is very high, the IPS series of Ethernet switches, complying with IEC61850-3 and IEEE 1613 standards, are especially designed for power substation. In smart grid applications, zero packet loss must be maintained with wide temperature tolerances to ensure reliable packet transmissions.

IP30 rugged metal housings and special heat dissipation design enable IPS series Ethernet switches to operate normally under extreme weather conditions without suffering failures.

■ **GOOSE** Message

For mission-critical applications, GOOSE messages can be placed into the highest QoS priority so as to avoid packet loss and delay.

- IPS series Ethernet switches can communicate with GOOSE multicasts.
- Critical communications are prioritized with the highest QoS priority.
- Achieve zero packet loss to ensure reliable transmissions.





IPS-G803SM

8x 100/1000Base-T + 3x 100/1000Base-X SFP
Managed Switch



IPS-G803SM is a managed industrial grade Gigabit Ethernet switch that is designed to meet the demands of power substation systems and is fully compliant with the requirement of IEC 61850-3 and IEEE 1613. The switch provides a variety of redundant functions to increase the reliability of your communications system, including redundant and isolated power supplies (24/48VDC) and 110/220VDC/VAC. The managed Ethernet functions include STP/RSTP/MSTP/ITU-T G.8032 ERPS and multiple μ-Ring for redundant cabling, layer 2 Ethernet IGMP, VLAN, QoS, ACL, Security, IPv6, bandwidth control, port mirroring, cable diagnostic and Green Ethernet. Housed in rugged DIN rail or wall mountable enclosures, these switches are designed for harsh environments, such as power substation networking (See Figure). The series product can be managed centrally and conveniently by CTC Union's SmartView™ Element Management System or other third party SNMP managers.

Features

- 8x 10/100/1000Base-T RJ-45 and 3x 100/1000Base-X SFP Fiber
- UL60950-1, CE, FCC, and EN50121-4, certification
- IEC 61850-3, IEEE1613 certified for power substation
- Heavy industrial grade EMS, EMI, EN61000-6-2, EN61000-6-4 certified
- Redundancy isolated low voltage 24/48VDC, or/and isolated High voltage AC/DC (110/220 VAC/VDC) power inputs
- Supports negative power input with isolated RS-232 console port (for example in telecom system)
- Wide Operating Temperature -40~85°C
- DIN Rail mounting or wall mounting
- IP30 rugged metal housing, Fanless
- Cable diagnostic, Measuring cable normal or broken point distance
- Support GOOSE Message that complies with IEC61850 standard to achieve zero packet loss
- Supports IEEE1588 PTP V2 for precise time synchronization to operate in Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master, Slave mode by each port
- Supports Green Ethernet IEEE802.3az EEE (Energy Efficient Ethernet) Management to optimize the power consumption
- STP, RSTP, MSTP, ITU-T G.8032 Ethernet Ring Protection Switching (ERPS), and μ-Ring for cabling redundant
- Provides 5 instances that each can support μ-Ring, μ-Chain or Sub-Ring type for flexible uses. Supports up to 5 rings in one device (Please see CTC Union μ-Ring white paper for more details and more topology application)
- μ-Ring for Redundant Ethernet Ring, recovery time<10ms in 250 units
- QoS, Traffic classification QoS, CoS, bandwidth control for Ingress and Egress, Storm Control, DiffServ
- IEEE802.1Q VLAN, MAC based VLAN, IP subnet based VLAN, Protocol based VLAN, VLAN translation, GVRP, MVR
- Dynamic IEEE 802.3ad LACP Link Aggregation, Static Link Aggregation
- IGMP snooping V1/V2/V3, IGMP Filtering/ Throttling, IGMP query, IGMP proxy reporting, MLD snooping V1/V2
- Security : Port based and Mac based IEEE802.1X, RADIUS, ACL, TACACS+, HTTP/HTTPS, SSL/SSH v2
- Software upgrade via TFTP and HTTP, redundant firmware to avoid in case of upgrade failure
- Supports DHCP Server / Client /Relay/Snooping/Snooping option 82/Relay option 82
- Supports RMON, MIB II, Private MIB, Port mirroring, Event syslog, DNS, NTP/SNTP, IEEE802.1ab LLDP
- Supports IPv6 Telnet server /ICMP v6
- CLI, Web based management, SNMP v1/v2c/v3, Telnet server for management
- Provides SmartConfig for quick and easy mass configuration tool (Please see Catalog chapter 1- Software Management for more details)
- Supports SmartView for Centralized Management (Please see Catalog chapter 1- Software Management for more details)
- Supporting Central EMS for management of upto 50 SmartView Server, and maximum upto 25,000 device (Please see Catalog chapter 1- Software Management for more details)

Specifications

Standard	IEEE 802.3 10Base-T 10Mbit/s Ethernet IEEE 802.3u 100Base-TX, 100Base-FX, Fast Ethernet IEEE 802.3ab 1000Base-T Gbit/s Ethernet over twisted pair IEEE 802.3z 1000Base-X Gbit/s Ethernet over Fiber-Optic IEEE 802.1d STP (Spanning Tree Protocol) IEEE 802.1w RSTP (Rapid Spanning Tree Protocol) IEEE 802.1s MSTP (Multiple Spanning Tree Protocol) IEEE 802.1Q for VLAN Tagging IEEE 802.1X Port based and MAC based Network Access Control, Authentication IEEE802.3ac Max frame size extended to 1522Bytes IEEE 802.3ad Link aggregation for parallel links with LACP(Link Aggregation Control Protocol)	Standard	IEEE802.3x Flow Control and Back Pressure ITU-T G.8032/ Y.1344 ERPS (Ethernet Ring Protection Switching) IEEE 802.1ad Stacked VLANs, Q-in-Q IEEE 802.1p LAN Layer 2 QoS/CoS Protocol for Traffic Prioritization IEEE 802.1ab Link Layer Discovery Protocol (LLDP) IEEE 802.3az EEE (Energy Efficient Ethernet)
		Switch Architecture	Back-plane (Switching Fabric): 22 Gbps Full wire-speed
		Data Processing	Store and Forward
		Flow Control:	IEEE 802.3x flow control, back pressure flow control

Jumbo Frame	9.6KB										
IEEE802.3ac	Max frame size extended to 1522Bytes (allow Q-tag in packet)										
MAC Address Table	8K										
Memory Buffer	512K Bytes for packet buffer										
Network Connector	8x 10/100/1000Base-T RJ-45 auto negotiation speed Auto MDI/MDI-X function, Full/Half duplex 3x 100/1000Base-X dual speed mode SFP slot, with DDMI										
Console	RS-232 (RJ-45) Isolated RS-232 port grounding for negative power system, or telecom application										
Network Cable	UTP/STP above Cat. 5e cable EIA/TIA-568 100-ohm (100m)										
Protocols	CSMA/CD										
LED	Per unit : Power 1 (Green), Power 2 (Green), Fault (Amber) (-LL model) Per unit : Power 1 (Green), Power 2 (Green), Power 3(Green), Fault (Amber) (-HL model) Per RJ-45 port :10/100Link/Act: Green, 1000Link/Act: Amber SFP Fiber Per port : Link/Active (Green)										
Reverse Polarity Protection	Supported for Power Input										
Overload Current Protection	Supported										
CPU Watch Dog	Supported										
Power Input	Redundant 2x Isolated Low Voltage DC Input power (-LL model) Redundant 2x isolated Low Voltage DC and 1 High Voltage AC/DC input power (-HL model) Isolated Low Voltage DC : Isolated 24/48V (18~72VDC), Removable Terminal Block High voltage AC/DC : isolated 110/220VAC (88VAC~264VAC) or 110/220VDC (85~300VDC), Removable Terminal Block Supports negative voltage input power for Telecom										
Power consumption	<table border="1"> <thead> <tr> <th>Input Voltage</th> <th>IPS-G803SM</th> </tr> </thead> <tbody> <tr> <td>110VAC</td> <td>9.3 W</td> </tr> <tr> <td>220VAC</td> <td>9.2 W</td> </tr> <tr> <td>24VDC</td> <td>9.6 W</td> </tr> <tr> <td>48VDC</td> <td>11.1 W</td> </tr> </tbody> </table>	Input Voltage	IPS-G803SM	110VAC	9.3 W	220VAC	9.2 W	24VDC	9.6 W	48VDC	11.1 W
Input Voltage	IPS-G803SM										
110VAC	9.3 W										
220VAC	9.2 W										
24VDC	9.6 W										
48VDC	11.1 W										
Alarm Relay Contact	Relay outputs with current carrying capacity of 1 A @24VDC										

Software Specifications

Topology	
VLAN	IEEE 802.1q VLAN, up to 4094 ID IEEE 802.1q VLAN, up to 4094 Groups IEEE 802.1ad Q-in-Q MAC-based VLAN, up to 256 entries IP Subnet-based VLAN, up to 128 entries Protocol-based VLAN (Ethernet, SNAP, LLC), up to 128 entries VLAN Translation, up to 256 entries MVR (Multiple VLAN Registration) GVRP (GARP VLAN Registration Protocol)
Link Aggregation (Port Trunk)	Static (Hash with SA, DA, IP, TCP/UDP port), up to 5 trunk group Dynamic (IEEE 802.3ad LACP), up to 5 trunk group
Spanning Tree	IEEE802.1d STP, IEEE802.1w RSTP, IEEE802.1s MSTP
Multiple u-Ring	up to 5 instances that each supports u-Ring, u-Chain or Sub-Ring type for flexible uses, and maximum up to 5 Rings Recovery time <10ms Maximum 250 devices in a Ring (Please see CTC Union μ-Ring white paper for more details and more topology application)
Loop Protection	Supported
ITU-T G.8032 / Y.1344 ERPS (Ethernet Ring Protection)	Convergence time <50ms Single Ring, Sub-Ring, Multiple ring topology network
QoS Feature	
Class of Service	IEEE802.1p 8 active priorities queues for per port
GOOSE Message	Complies with IEC61850 standard to achieve zero packet loss
Traffic Classification QoS	IEEE802.1p based CoS IP Precedence based CoS IP DSCP based CoS

Removable Terminal Block	Provide 2 redundant low volt power, alarm relay contact (6 Pin) (-LL model) Provide 2 redundant low volt power, alarm relay contact (6 Pin) , and High volt Power (2 Pin) (-HL model)
Operating Temperature	-40°C ~ 85°C
Operating Humidity	5% to 95% (Non-condensing)
Storage Temperature	-40°C ~ 85°C
Housing	Rugged Metal, IP30 Protection, Fanless
Dimension	106 x 82 x 152mm (D x W x H)
Weight	0.885kg (IPS-G803SM-LL) 1.085kg (IPS-G803SM-HL)
Installation mounting	DIN Rail mounting, or wall mounting (Optional)
MTBF	535,335 Hours (IPS-G803SM-LL) 143,943 Hours (IPS-G803SM-HL) (MIL-HDBK-217)
Warranty	5 years
Certification	
EMC/EMS	CE, FCC
EMI	FCC Part 15 Subpart B Class A EN 55022 Class A
EMS (Electromagnetic Susceptibility) Protection Level	EN61000-4-2 (ESD) Level 4, Criteria B EN61000-4-3 (RS) Level 4, Criteria A EN61000-4-4 (EFT) Level 4, Criteria A EN61000-4-5 (Surge) Level 4, Criteria B EN61000-4-6 (CS) Level 4, Criteria A EN61000-4-8 (Magnetic Field) Level 5, Criteria A
Safety	UL60950-1
Power Substation	IEC 61850-3, IEEE 1613
Immunity for Heavy Industrial Environment	EN61000-6-2
Emission for Heavy Industrial Environment	EN61000-6-4
Railway Traffic	EN50121-4
Freefall	IEC 60068-2-32
Vibration	IEC 60068-2-6


Traffic Classification QoS	QCL(QoS Control List): Frame Type, Source/Destination MAC, VLAN ID, PCP, DEI QCE(QoS Control Entry): Protocol, Source IP, IP Fragment, DSCP, TCP/UDP port number
Bandwidth Control for Ingress	Rate in steps : 1 kbps / Mbps / fps / kfps Range : 100 kbps to 1Gbps / 1fps to 3300kfps Rate Unit : bit or frame
Bandwidth Control for Egress	Rate in steps : 1 kbps / Mbps Range : 100 kbps to 1Gbps Rate Unit : bit Per queue / Per port shaper
DiffServ (RF 2474) Remarkings	
Storm Control	for Unicast, Broadcast, Multicast
IP Multicasting Feature	
IGMP / MLD Snooping	IGMP Snooping v1, v2, v3 / MLD Snooping v1, v2 support 1022 IGMP groups Port Filtering Profile
IGMP / MLD Snooping	Throttling Fast Leave Maximum Multicast Group : up to 1022 entries Query / Static Router Port
Security Features	
IEEE 802.1X	Port-Based MAC-Based
ACL	Number of rules : up to 256 entries for L2 / L3 / L4 L2 : Mac address SA/DA/VLAN L3: IP address SA/DA, Subnet L4: TCP/UDP
RADIUS authentication & accounting	
TACACS+ authentication & accounting, TACACS+ 3.0	
HTTPS, HTTP	Supported

SSL / SSH v2	Supported
User Name	Local Authentication
Password	Remote Authentication (via RADIUS/ TACACS+)
Authentication	
Management Interface Access	Web, Telnet / SSH , CLI RS-232 console
Filtering	
Management Features	
CLI	Cisco® like CLI
Web Based Management	
Telnet	Server
SNMP	V1, V2c, V3
SW & Configuration Upgrade	TFTP, HTTP
	Redundant firmware in case of upgrade failure
RMON	RMON I (1, 2, 3, 9 group), RMON II
MIB	MIB II RFC1213, Private MIB
UPnP	Supported
DHCP	Server
	Client
	Relay
	Snooping
	Snooping option 82
	Relay option 82
IP Source Guard	Supported
Port Mirroring	Supported
Event Syslog	Syslog server (RFC3164) (Support 1 server)
Warning Message	System Syslog, SMTP/ e-mail event message, alarm relay
DNS	Client, Proxy


IEEE1588 PTP V2	Support 5 operating mode in each port : Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master, Slave
NTP /SNTP	Client
LLDP (IEEE 802.1ab)	Link Layer Discovery Protocol LLDP-MED
IPv6 Features	
IPv6 Management	Telnet Server/ICMP v6
SNMP over IPv6	Supported
HTTP over IPv6	Supported
SSH over IPv6	Supported
IPv6 Telnet	Supported
IPv6 NTP / SNTP	Client
IPv6 TFTP	Supported
IPv6 QoS	Supported
IPv6 ACL	Number of rules: up to 256 entries for L2 / L3 / L4 L2 : Mac address SA/DA/VLAN L3: IP address SA/DA, Subnet L4: TCP/UDP
Others Features	
Green Ethernet	Supports IEEE802.3az EEE (Energy Efficient Ethernet) Management to optimize the power consumption Determine the cable length and lowering the power for ports with short cables
Green Ethernet	Lower the power for a port when there is no link LED Power Management: Adjustment LEDs intensity
Cable Diagnostic	Measuring UTP cable is normal or broken point distance

Application

Figure : IPS-Series in Power Substation Application

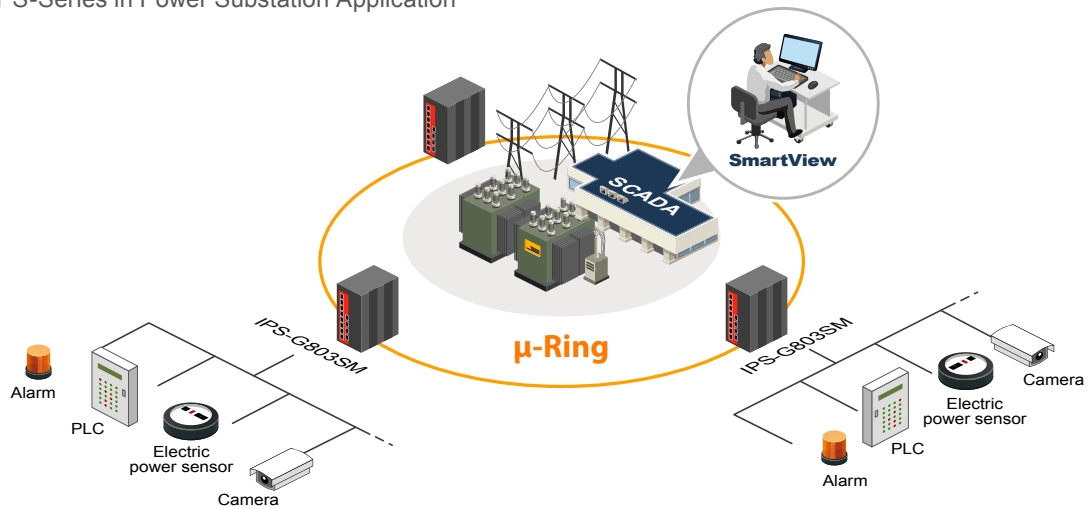


Dimensions

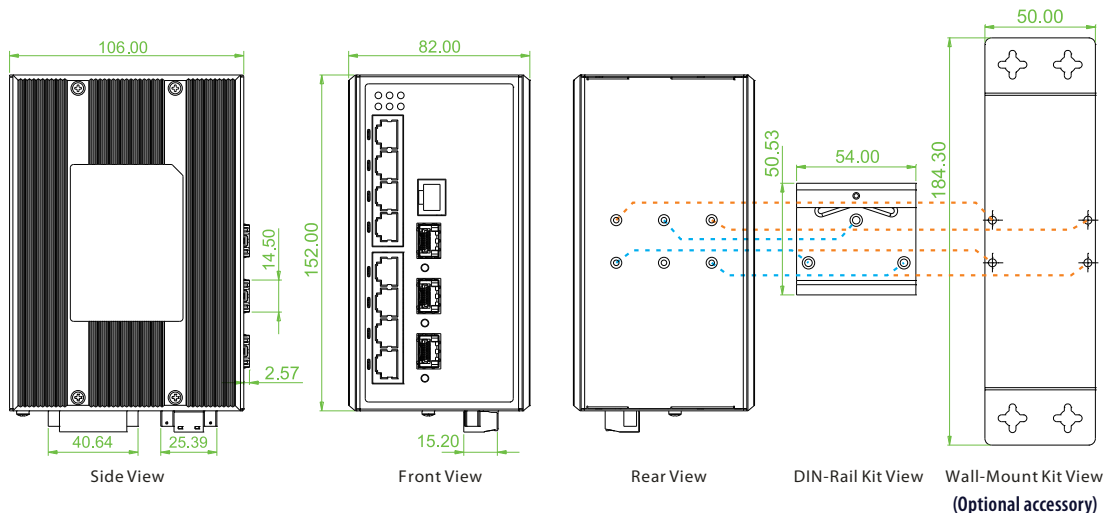

Ordering Information

Model Name	Managed	Total Port	RJ45 UTP port	Fiber	Redundant Input Power		Certification				
			10/100/1000 Base-T	100/1000 Base-X	Low Voltage 24/48,-48VDC	High Voltage 110/220V DC/AC	IEC61850-3 IEEE1613	Railway EN50121-4	Safety UL60950-1	EN61000-6-2 EN61000-6-4	CE, FCC
IPS-G803SM-LL	V	11	8	3 SFP	2		V	V	V	V	V
IPS-G803SM-HL	V	11	8	3 SFP	2	1	V	V	V	V	V

Model Naming Rule

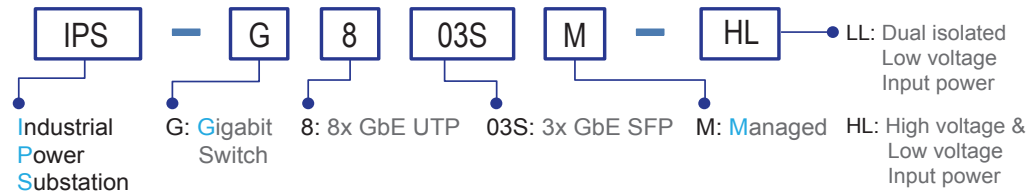

Package List

- IPS-G803SM device
- Console cable (RJ45 to DB9)
- CD (SmartConfig, MIB file, Manual)
- Quickly installation guide
- Din Rail with Screws
- Terminal blocks
- Protective caps for SFP ports

Optional Accessories

Wall mount kit

IND-WMK02 Wall Mount kit for Industrial product (Wide) (184 x 50mm)

Industrial SFP Transceiver

The ISFP series of industrial grade SFP modules have been fully tested with the IPS-G803SM for guaranteed compatibility and performance. The best performance can be guaranteed even in mission-critical applications. (Please see CTC Union's Industrial SFP datasheet for more detail and more items.)

ISFP-M7000-85-D(E) Industrial SFP GbE 1000Base-SX, M/M, 500 meter, wave length 850nm, 7.5dB, LC, DDMI, -10~70°C (-40~85°C)


ISFP-S7020-31-D(E) Industrial SFP 1000Base-LX, S/M, 20km, wave length 1310nm, 15dB, LC, DDMI, -10~70°C (-40~85°C)

ISFP-T7T00-00-(E) Industrial SFP 1000Base-T UTP 100meter, -10~70°C (-40~85°C)

ISFP-M5002-31-D(E) Industrial SFP 155M 100Base-FX, MM, 2km, wave length 1310nm, 12dB, LC, DDMI, -10~70°C (-40~85°C)

ISFP-S5030-31-D(E) Industrial SFP 155M 100Base-FX, SM, 30km, 1310nm, 19dB, LC, DDMI, -10~70°C (-40~85°C)


SFP Naming Rule

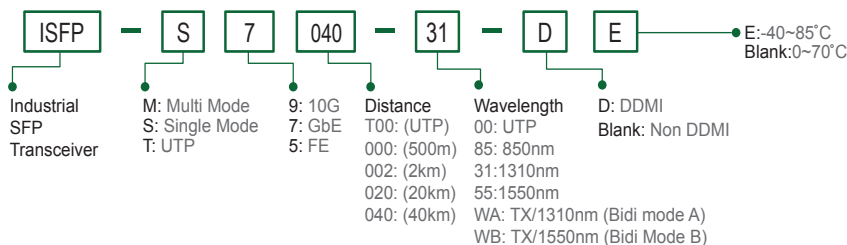



IPS-803GSM

8x 10/100Base-TX + 3x 100/1000Base-X SFP
Managed Switch



IPS-803GSM is a managed industrial grade Ethernet switch that is designed to meet the demands of power substation systems and is fully compliant with the requirement of IEC 61850-3 and IEEE 1613. The switch provide a variety of redundant functions to increase the reliability of your communications system, including redundant and isolated power supplies (24/48 VDC) and 110/220 VDC/VAC). The managed Ethernet functions include STP/RSTP/MSTP/ITU-T G.8032 ERPS and multiple μ-Ring for redundant cabling, layer 2 Ethernet IGMP, VLAN, QoS, ACL, Security, IPv6, bandwidth control, port mirroring, cable diagnostic and Green Ethernet. Housed in rugged DIN rail or wall mountable enclosures, these switches are designed for harsh environments, such as power substation networking (See Figure). The series product can be managed centrally and conveniently by CTC Union's SmartView™ Element Management System or other third party SNMP managers.

Features

- 8x 10/100Base-TX RJ-45 and 3x 100/1000Base-X SFP Fiber
- UL60950-1, CE, FCC, and EN50121-4, certification
- IEC 61850-3, IEEE1613 certified for power substation
- Heavy industrial grade EMS, EMI, EN61000-6-2, EN61000-6-4 certified
- Redundancy isolated low voltage 24/48VDC, or/and isolated High voltage AC/DC (110/220 VAC/VDC) power inputs
- Supports negative power input with isolated RS-232 console port (for example in telecom system)
- Wide Operating Temperature -40~85°C
- DIN Rail mounting or wall mounting
- IP30 rugged metal housing, Fanless
- Cable diagnostic, Measuring cable normal or broken point distance
- Support GOOSE Message that complies with IEC61850 standard to achieve zero packet loss
- Supports IEEE1588 PTP V2 for precise time synchronization to operate in Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master, Slave mode by each port
- Supports Green Ethernet IEEE802.3az EEE (Energy Efficient Ethernet) Management to optimize the power consumption
- STP, RSTP, MSTP, ITU-T G.8032 Ethernet Ring Protection Switching (ERPS), and μ-Ring for cabling redundant
- Provides 5 instances that each can support μ-Ring, μ-Chain or Sub-Ring type for flexible uses. Supports up to 5 rings in one device (Please see CTC Union μ-Ring white paper for more details and more topology application)
- μ-Ring for Redundant Ethernet Ring, recovery time<10ms in 250 units
- QoS, Traffic classification QoS, CoS, bandwidth control for Ingress and Egress, Storm Control, DiffServ
- IEEE802.1Q VLAN, MAC based VLAN, IP subnet based VLAN, Protocol based VLAN, VLAN translation, GVRP, MVR
- Dynamic IEEE 802.3ad LACP Link Aggregation, Static Link Aggregation
- IGMP snooping V1/V2/V3, IGMP Filtering/ Throttling, IGMP query, IGMP proxy reporting, MLD snooping V1/V2
- Security : Port based and Mac based IEEE802.1X, RADIUS, ACL, TACACS+, HTTP/HTTPS, SSL/SSH v2
- Software upgrade via TFTP and HTTP, redundant firmware to avoid in case of upgrade failure
- Supports DHCP Server / Client /Relay/Snooping/Snooping option 82/Relay option 82
- Supports RMON, MIB II, Private MIB, Port mirroring, Event syslog, DNS, NTP/SNTP, IEEE802.1ab LLDP
- Supports IPv6 Telnet server /ICMP v6
- CLI, Web based management, SNMP v1/v2c/v3, Telnet server for management
- Provides SmartConfig for quick and easy mass configuration tool (Please see Catalog chapter 1- Software Management for more details)
- Supports SmartView for Centralized Management (Please see Catalog chapter 1- Software Management for more details)
- Supporting Central EMS for management of upto 50 SmartView Server, and maximum upto 25,000 device (Please see Catalog chapter 1- Software Management for more details)

Specifications

Standard	IEEE 802.3 10Base-T 10Mbit/s Ethernet IEEE 802.3u 100Base-TX, 100Base-FX, Fast Ethernet IEEE 802.3z 1000Base-X Gbit/s Ethernet over Fiber-Optic IEEE 802.1d STP (Spanning Tree Protocol) IEEE 802.1w RSTP (Rapid Spanning Tree Protocol) IEEE 802.1s MSTP (Multiple Spanning Tree Protocol) IEEE 802.1Q for VLAN Tagging IEEE 802.1X Port based and MAC based Network Access Control, Authentication IEEE802.3ac Max frame size extended to 1522Bytes IEEE 802.3ad Link aggregation for parallel links with LACP(Link Aggregation Control Protocol)	Standard	IEEE802.3x Flow Control and Back Pressure ITU-T G.8032/ Y.1344 ERPS (Ethernet Ring Protection Switching) IEEE 802.1ad Stacked VLANs, Q-in-Q IEEE 802.1p LAN Layer 2 QoS/CoS Protocol for Traffic Prioritization IEEE 802.1ab Link Layer Discovery Protocol (LLDP) IEEE 802.3az EEE (Energy Efficient Ethernet)
Switch Architecture		Switch Architecture	Back-plane (Switching Fabric): 7.6 Gbps Full wire-speed
Data Processing		Data Processing	Store and Forward
Flow Control:		Flow Control:	IEEE 802.3x flow control, back pressure flow control

Jumbo Frame	9.6KB										
IEEE802.3ac	Max frame size extended to 1522Bytes (allow Q-tag in packet)										
MAC Address Table	8K										
Memory Buffer	512K Bytes for packet buffer										
Network Connector	8x 10/100Base-TX RJ-45 auto negotiation speed Auto MDI/MDI-X function, Full/Half duplex 3x 100/1000Base-X dual speed mode SFP slot, with DDMI										
Console	RS-232 (RJ-45) Isolated RS-232 port grounding for negative power system, or telecom application										
Network Cable	UTP/STP above Cat. 5e cable EIA/TIA-568 100-ohm (100m)										
Protocols	CSMA/CD										
LED	Per unit : Power 1 (Green), Power 2 (Green), Fault (Amber) (-LL model) Per unit : Power 1 (Green), Power 2 (Green), Power 3 (Green), Fault (Amber) (-HL model) Per RJ-45 port : 10/100Link/Act: Green SFP Fiber Per port : Link/Active (Green)										
Reverse Polarity Protection	Supported for Power Input										
Overload Current Protection	Supported										
CPU Watch Dog	Supported										
Power Input	Redundant 2x Isolated Low Voltage DC Input power (-LL model) Redundant 2x isolated Low Voltage DC and 1 High Voltage AC/DC input power (-HL model) Isolated Low Voltage DC : Isolated 24/48V (18~72VDC), Removable Terminal Block High voltage AC/DC : isolated 110/220VAC (88VAC~264VAC) or 110/220VDC (85~300VDC), Removable Terminal Block Supports negative voltage input power for Telecom										
Power consumption	<table border="1"> <thead> <tr> <th>Input Voltage</th> <th>IPS-803GSM</th> </tr> </thead> <tbody> <tr> <td>110VAC</td> <td>7.3 W</td> </tr> <tr> <td>220VAC</td> <td>7 W</td> </tr> <tr> <td>24VDC</td> <td>8W</td> </tr> <tr> <td>48VDC</td> <td>9.2 W</td> </tr> </tbody> </table>	Input Voltage	IPS-803GSM	110VAC	7.3 W	220VAC	7 W	24VDC	8W	48VDC	9.2 W
Input Voltage	IPS-803GSM										
110VAC	7.3 W										
220VAC	7 W										
24VDC	8W										
48VDC	9.2 W										
Alarm Relay Contact	Relay outputs with current carrying capacity of 1 A @24VDC										

Removable Terminal Block	Provide 2 redundant low volt power, alarm relay contact (6 Pin) (-LL model) Provide 2 redundant low volt power, alarm relay contact (6 Pin) , and High volt Power (2 Pin) (-HL model)
Operating Temperature	-40°C ~ 85°C
Operating Humidity	5% to 95% (Non-condensing)
Storage Temperature	-40°C ~ 85°C
Housing	Rugged Metal, IP30 Protection, Fanless
Dimension	106 x 82 x 152mm (D x W x H)
Weight	0.885kg (IPS-803GSM-LL) 1.085kg (IPS-803GSM-HL)
Installation mounting	DIN Rail mounting, or wall mounting (Optional)
MTBF	535,335 Hours (IPS-803GSM-LL) 143,943 Hours (IPS-803GSM-HL) (MIL-HDBK-217)
Warranty	5 years
Certification	
EMC/EMS	CE, FCC
EMI	FCC Part 15 Subpart B Class A EN 55022 Class A
EMS (Electromagnetic Susceptibility) Protection Level	EN61000-4-2 (ESD) Level 4, Criteria B EN61000-4-3 (RS) Level 4, Criteria A EN61000-4-4 (EFT) Level 4, Criteria A EN61000-4-5 (Surge) Level 4, Criteria B EN61000-4-6 (CS) Level 4, Criteria A EN61000-4-8 (Magnetic Field) Level 5, Criteria A
Safety	UL60950-1
Power Substation	IEC 61850-3, IEEE 1613
Immunity for Heavy Industrial Environment	EN61000-6-2
Emission for Heavy Industrial Environment	EN61000-6-4
Railway Traffic	EN50121-4
Freefall	IEC 60068-2-32
Vibration	IEC 60068-2-6

Software Specifications

Topology	
VLAN	IEEE 802.1q VLAN, up to 4094 ID IEEE 802.1q VLAN, up to 4094 Groups IEEE 802.1ad Q-in-Q MAC-based VLAN, up to 256 entries IP Subnet-based VLAN, up to 128 entries Protocol-based VLAN (Ethernet, SNAP, LLC), up to 128 entries VLAN Translation, up to 256 entries MVR (Multiple VLAN Registration) GVRP (GARP VLAN Registration Protocol)
Link Aggregation (Port Trunk)	Static (Hash with SA, DA, IP, TCP/UDP port), up to 5 trunk group Dynamic (IEEE 802.3ad LACP), up to 5 trunk group
Spanning Tree	IEEE802.1d STP, IEEE802.1w RSTP, IEEE802.1s MSTP
Multiple u-Ring	up to 5 instances that each supports u-Ring, u-Chain or Sub-Ring type for flexible uses, and maximum up to 5 Rings Recovery time <10ms Maximum 250 devices in a Ring (Please see CTC Union u-Ring white paper for more details and more topology application)
Loop Protection	Supported
ITU-T G.8032 / Y.1344 ERPS (Ethernet Ring Protection)	Convergence time <50ms Single Ring, Sub-Ring, Multiple ring topology network
QoS Feature	
Class of Service	IEEE802.1p 8 active priorities queues for per port
GOOSE Message	Complies with IEC61850 standard to achieve zero packet loss
Traffic Classification QoS	IEEE802.1p based CoS IP Precedence based CoS IP DSCP based CoS


Traffic Classification QoS	QCL(QoS Control List): Frame Type, Source/Destination MAC, VLAN ID, PCP, DEI QCE(QoS Control Entry): Protocol, Source IP, IP Fragment, DSCP, TCP/UDP port number
Bandwidth Control for Ingress	Rate in steps : 1 kbps / Mbps / fps / kfps Range : 100 kbps to 1Gbps / 1fps to 3300kfps Rate Unit : bit or frame
Bandwidth Control for Egress	Rate in steps : 1 kbps / Mbps Range : 100 kbps to 1Gbps Rate Unit : bit Per queue / Per port shaper
DiffServ (RF 2474) Remarking	
Storm Control	for Unicast, Broadcast, Multicast
IP Multicasting Feature	
IGMP / MLD Snooping	IGMP Snooping v1, v2, v3 / MLD Snooping v1, v2 support 1022 IGMP groups Port Filtering Profile
IGMP / MLD Snooping	Throttling Fast Leave Maximum Multicast Group : up to 1022 entries Query / Static Router Port
Security Features	
IEEE 802.1X	Port-Based MAC-Based
ACL	Number of rules : up to 256 entries for L2 / L3 / L4 L2 : Mac address SA/DA/VLAN L3 : IP address SA/DA, Subnet L4 : TCP/UDP
RADIUS authentication & accounting	
TACACS+ authentication & accounting, TACACS+ 3.0	
HTTPS, HTTP	Supported

SSL / SSH v2	Supported
User Name	Local Authentication
Password	Remote Authentication (via RADIUS/ TACACS+)
Authentication	
Management Interface Access	Web, Telnet / SSH , CLI RS-232 console
Filtering	
Management Features	
CLI	Cisco® like CLI
Web Based Management	
Telnet	Server
SNMP	V1, V2c, V3
SW & Configuration Upgrade	TFTP, HTTP
	Redundant firmware in case of upgrade failure
RMON	RMON I (1, 2, 3, 9 group), RMON II
MIB	MIB II RFC1213, Private MIB
UPnP	Supported
DHCP	Server
	Client
	Relay
	Snooping
	Snooping option 82
	Relay option 82
IP Source Guard	Supported
Port Mirroring	Supported
Event Syslog	Syslog server (RFC3164) (Support 1 server)
Warning Message	System Syslog, SMTP/ e-mail event message, alarm relay
DNS	Client, Proxy


IEEE1588 PTP V2	Support 5 operating mode in each port : Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master, Slave
NTP /SNTP	Client
LLDP (IEEE 802.1ab)	Link Layer Discovery Protocol LLDP-MED
IPv6 Features	
IPv6 Management	Telnet Server/ICMP v6
SNMP over IPv6	Supported
HTTP over IPv6	Supported
SSH over IPv6	Supported
IPv6 Telnet	Supported
IPv6 NTP / SNTP	Client
IPv6 TFTP	Supported
IPv6 QoS	Supported
IPv6 ACL	Number of rules: up to 256 entries for L2 / L3 / L4 L2 : Mac address SA/DA/VLAN L3: IP address SA/DA, Subnet L4: TCP/UDP
Others Features	
Green Ethernet	Supports IEEE802.3az EEE (Energy Efficient Ethernet) Management to optimize the power consumption Determine the cable length and lowering the power for ports with short cables
Green Ethernet	Lower the power for a port when there is no link LED Power Management: Adjustment LEDs intensity
Cable Diagnostic	Measuring UTP cable is normal or broken point distance

Application

Figure : IPS-Series in Power Substation Application

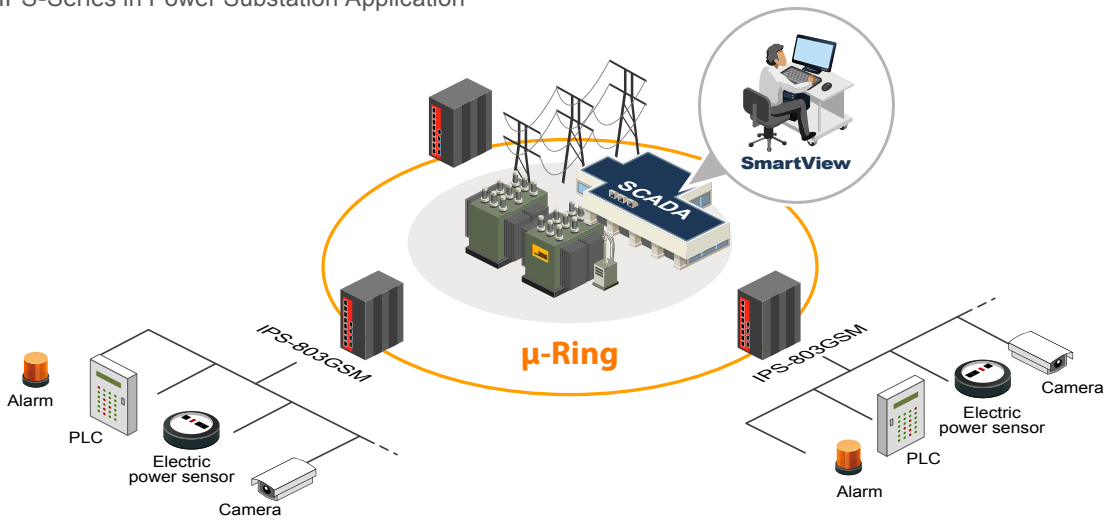


Dimensions

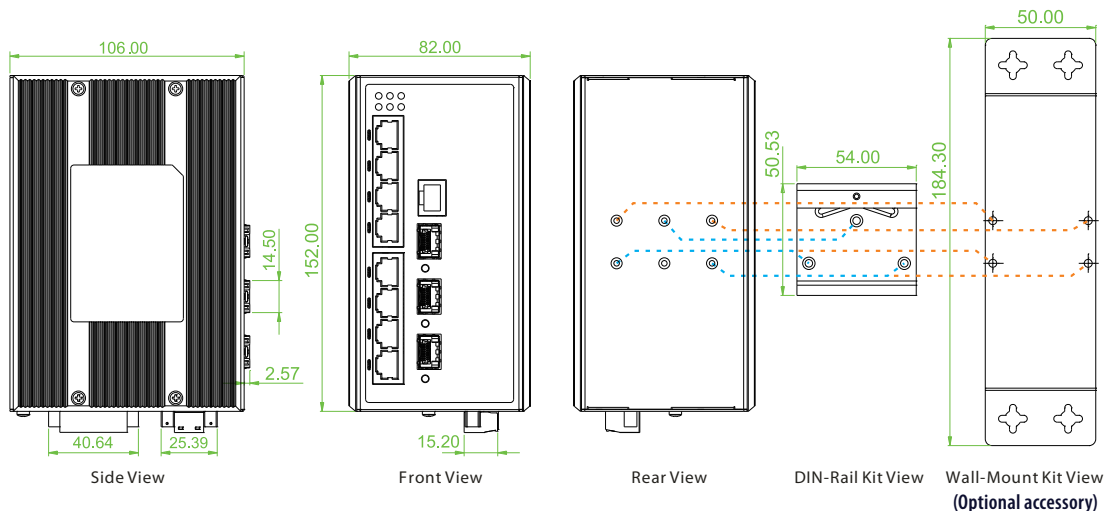

Ordering Information

Model Name	Managed	Total Port	RJ45 UTP port	Fiber	Redundant Input Power		Certification					
			10/100Base-TX	100/1000 Base-X	Low Voltage 24/48, -48VDC	High Voltage 110/220V DC/AC	IEC61850-3 IEEE1613	Railway EN50121-4	Safety UL60950-1	Safety UL60950-1	CE, FCC	
IPS-803GSM-LL	V	11	8	3 SFP	2			V	V	V	V	V
IPS-803GSM-HL	V	11	8	3 SFP	2	1		V	V	V	V	V

Model Naming Rule

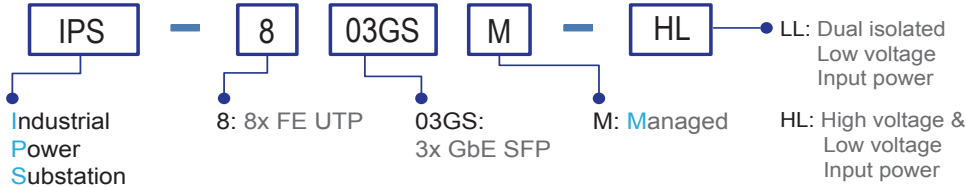

Package List

- IPS-803GSM device
- Console cable (RJ45 to DB9)
- CD (SmartConfig, MIB file, Manual)
- Quickly installation guide
- Din Rail with Screws
- Terminal blocks
- Protective caps for SFP ports

Optional Accessories

Wall mount kit


IND-WMK02	Wall Mount kit for Industrial product (Wide) (184 x 50mm)
-----------	---

Industrial SFP Transceiver

The ISFP series of industrial grade SFP modules have been fully tested with the IPS-803GSM for guaranteed compatibility and performance. The best performance can be guaranteed even in mission-critical applications. (Please see CTC Union's Industrial SFP datasheet for more detail and more items.)

ISFP-M7000-85-D(E)	Industrial SFP GbE 1000Base-SX, M/M, 500 meter, wave length 850nm, 7.5dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-S7020-31-D(E)	Industrial SFP 1000Base-LX, S/M, 20km, wave length 1310nm, 15dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-T7T00-00-(E)	Industrial SFP 1000Base-T UTP 100meter, -10~70°C (-40~85°C)
ISFP-M5002-31-D(E)	Industrial SFP 155M 100Base-FX, MM, 2km, wave length 1310nm, 12dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-S5030-31-D(E)	Industrial SFP 155M 100Base-FX, SM, 30km, 1310nm, 19dB, LC, DDMI, -10~70°C (-40~85°C)

SFP Naming Rule

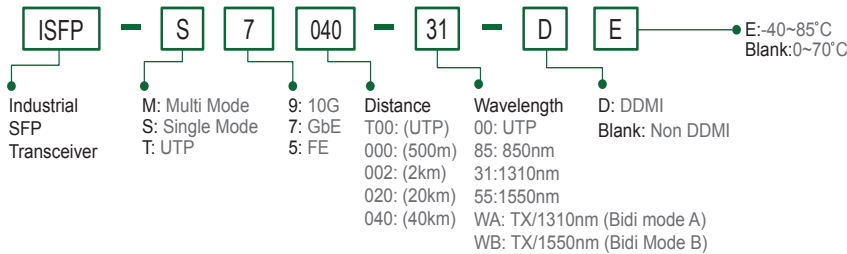



Industrial SFP Transceiver

- 10G 10GBase-X for Optic
- 1.25G 1000Base-X for Optic
- 155Mbps 100Base-FX for Optic
- 1.25G 100/1000Base-T for UTP




CTC Union's industrial SFP Transceivers are highly reliable, for serial optical data communications applications specified for single mode fiber operation at 1.25G/155M bps. They operate with +3.3V power supplies and are intended for single mode or multi-mode fiber, operating at a nominal wavelength of 1310nm/1550nm/850nm. Each SFP Transceiver consists of a transmitter optical subassembly (TOSA), a receiver optical subassembly (ROSA) and an electrical subassembly. CTC Union's industrial SFP transceivers ensure your networks operate with maximum reliability, performance, and flexibility.


Features

- The ISFP series of industrial grade SFP modules have been fully tested with CTC industrial grade product for guaranteed compatibility and performance. The best performance can be guaranteed even in mission-critical applications
- Single 3.3V power supply
- Duplex or Simplex LC receptacle connector
- Hot Pluggable
- Lower power dissipation
- All 10G SFP+ compliant to IEEE802.3ae 10GBase-X Ethernet over fiber
- All Gigabit SFP compliant to IEEE802.3z 1000Base-X and IEEE802.3ab 100/1000Base-T
- All Fast Ethernet SFP Compliant to IEEE802.3u 100Base-FX
- Industrial standard small form pluggable (SFP) package
- Compliant with Multi-Source Agreement (MSA) Small Form Factor Pluggable (SFP)
- Eye safety compliant with Class 1 laser product standard IEC825-1
- CE, FCC class B certification
- RoHS compliant
- 5 years warranty

10Gbps 10GBase-X Fiber SFP+

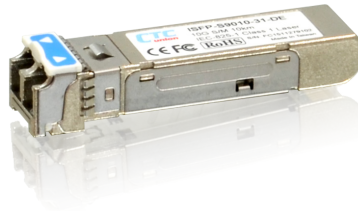


Dimension

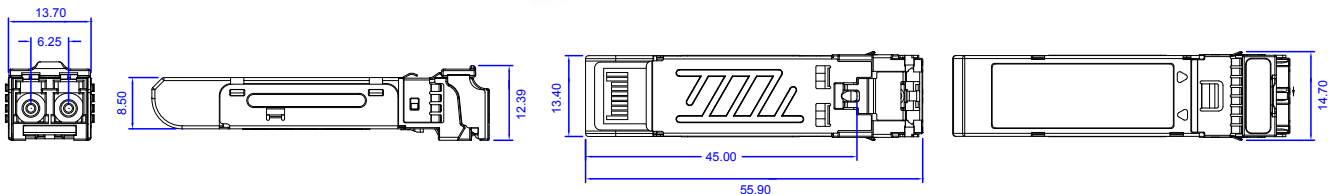


Order Information (10G 10GBase-X)

Model Name	Cable Type	Typical Distance	Wavelength (nm)	TX (dBm) (Min~Max)	RX Sensitivity (dBm)	Power Budget (dB)	Saturation (dBm)	Power Consumption	DDMI	Operating Temperature
ISFP-M9000-85-D	MM	300m (OM3)	850	-6.5~-1	-9.9	3.4	-1	1W	V	-10~70°C
ISFP-M9000-85-DE	MM	300m (OM3)	850	-6.5~-1	-9.9	3.4	-1	1W	V	-40~85°C
ISFP-S9010-31-D	SM	10km	1310	-8~-0.5	-14.4	6.4	0.5	1W	V	-10~70°C
ISFP-S9010-31-DE	SM	10km	1310	-8~-0.5	-14.4	6.4	0.5	1W	V	-40~85°C
ISFP-S9040-31-D	SM	40km	1310	0.5~5	-15.5	16	0.5	1W	V	-10~70°C
ISFP-S9040-31-DE	SM	40km	1310	0.5~5	-15.5	16	0.5	1W	V	-40~85°C

1.25Gbps 1000Base-X Fiber SFP

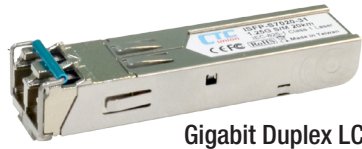


Dimension

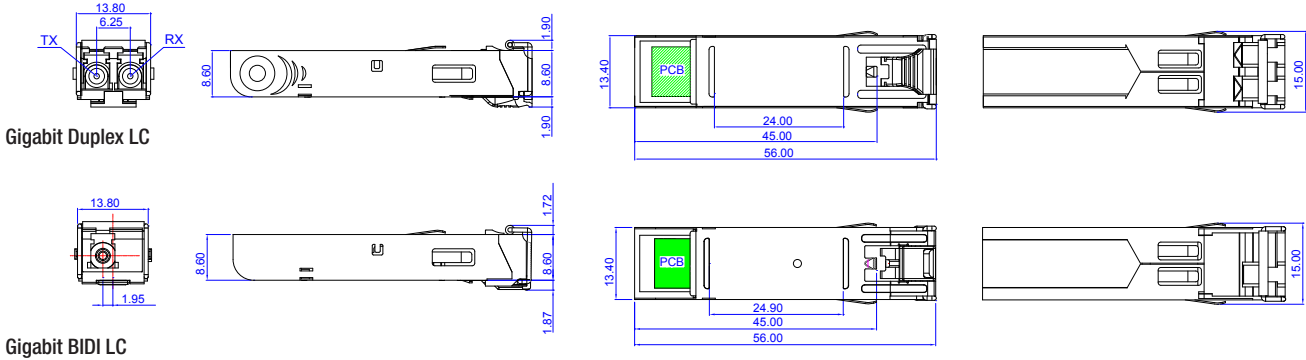


Order Information (1.25Gbps 1000Base-X)

Model Name	Cable Type	Typical Distance	Wavelength (nm)	TX (dBm) (Min~Max)	RX Sensitivity (dBm)	Power Budget (dB)	Saturation (dBm)	Power Consumption	DDMI	Operating Temperature
ISFP-M7000-85	MM	550m	850	-9.5~-4	-17	7.5	-3	1W		-10~70°C
ISFP-M7000-85-D	MM	550m	850	-9.5~-4	-17	7.5	-3	1W	V	-10~70°C
ISFP-M7000-85-E	MM	550m	850	-9.5~-4	-17	7.5	-3	1W		-40~85°C
ISFP-M7000-85-DE	MM	550m	850	-9.5~-4	-17	7.5	-3	1W	V	-40~85°C
ISFP-M7002-31	MM	2km	1310	-9~-1	-19	10	-1	1W		-10~70°C
ISFP-M7002-31-D	MM	2km	1310	-9~-1	-19	10	-1	1W	V	-10~70°C
ISFP-M7002-31-E	MM	2km	1310	-9~-1	-19	10	-1	1W		-40~85°C
ISFP-M7002-31-DE	MM	2km	1310	-9~-1	-19	10	-1	1W	V	-40~85°C
ISFP-S7020-31	SM	20km	1310	-8~-2	-23	15	-1	1W		-10~70°C
ISFP-S7020-31-D	SM	20km	1310	-8~-2	-23	15	-1	1W	V	-10~70°C
ISFP-S7020-31-E	SM	20km	1310	-8~-2	-23	15	-1	1W		-40~85°C
ISFP-S7020-31-DE	SM	20km	1310	-8~-2	-23	15	-1	1W	V	-40~85°C
ISFP-S7040-31-D	SM	40km	1310	-2~3	-23	21	-3	1W	V	-10~70°C
ISFP-S7040-31-DE	SM	40km	1310	-2~3	-23	21	-3	1W	V	-40~85°C
ISFP-S7020-WA-D	SM	20km	T1310/R1550	-8~-2	-23	15	-2	1W	V	-10~70°C
ISFP-S7020-WB-D	SM	20km	T1550/R1310	-8~-2	-23	15	-2	1W	V	-10~70°C
ISFP-S7020-WA-DE	SM	20km	T1310/R1550	-8~-2	-23	15	-2	1W	V	-40~85°C
ISFP-S7020-WB-DE	SM	20km	T1550/R1310	-8~-2	-23	15	-2	1W	V	-40~85°C

1.25Gbps 100/1000Base-T UTP SFP

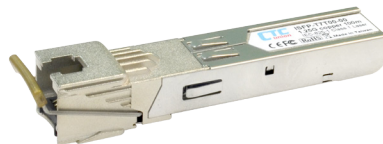

Dimension

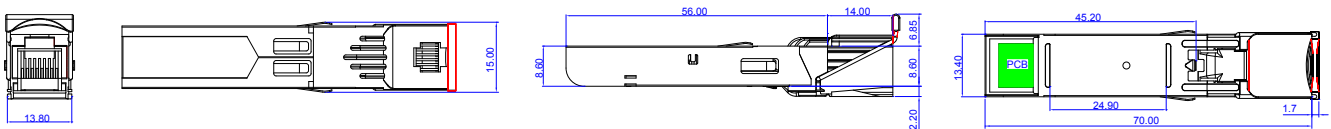


Order Information (1.25Gbps 100/1000Base-T UTP)

Model Name	Cable Type	Typical Distance	Power Consumption	Operating Temperature
ISFP-T7T00-00	UTP Cat 5e	100m	1.1W	-10~70°C
ISFP-T7T00-00-E	UTP Cat 5e	100m	1.1W	-40~85°C

155Mbps 100Base-FX Fiber SFP




Duplex LC






BIDI LC



Dimension

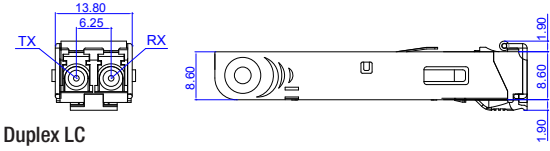

Duplex LC

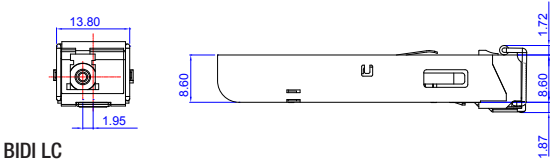


BIDI LC



Order Information (1.55M 100Base-FX)

Model Name	Cable Type	Typical Distance	Wavelength (nm)	TX (dBm) (Min~Max)	RX Sensitivity (dBm)	Power Budget (dB)	Saturation (dBm)	Power Consumption	DDMI	Operating Temperature
ISFP-M5002-31	MM	2km	1310	-20~-14	-32	12	-8	1W		-10~70°C
ISFP-M5002-31-D	MM	2km	1310	-20~-14	-32	12	-8	1W	V	-10~70°C
ISFP-M5002-31-E	MM	2km	1310	-20~-14	-32	12	-8	1W		-40~85°C
ISFP-M5002-31-DE	MM	2km	1310	-20~-14	-32	12	-8	1W	V	-40~85°C
ISFP-S5030-31	SM	30km	1310	-15~-8	-34	19	-5	1W		-10~70°C
ISFP-S5030-31-D	SM	30km	1310	-15~-8	-34	19	-5	1W	V	-10~70°C
ISFP-S5030-31-E	SM	30km	1310	-15~-8	-34	19	-5	1W		-40~85°C
ISFP-S5030-31-DE	SM	30km	1310	-15~-8	-34	19	-5	1W	V	-40~85°C
ISFP-S5050-31-D	SM	50km	1310	-5~0	-35	30	-5	1W	V	-10~70°C
ISFP-S5050-31-DE	SM	50km	1310	-5~0	-35	30	-5	1W	V	-40~85°C
ISFP-S5020-WA-D	SM	20km	T1310/R1550	-14~-8	-32	18	-3	1W	V	-10~70°C
ISFP-S5020-WB-D	SM	20km	T1550/R1310	-14~-8	-32	18	-3	1W	V	-10~70°C
ISFP-S5020-WA-DE	SM	20km	T1310/R1550	-14~-8	-32	18	-3	1W	V	-40~85°C
ISFP-S5020-WB-DE	SM	20km	T1550/R1310	-14~-8	-32	18	-3	1W	V	-40~85°C

Ordering Information

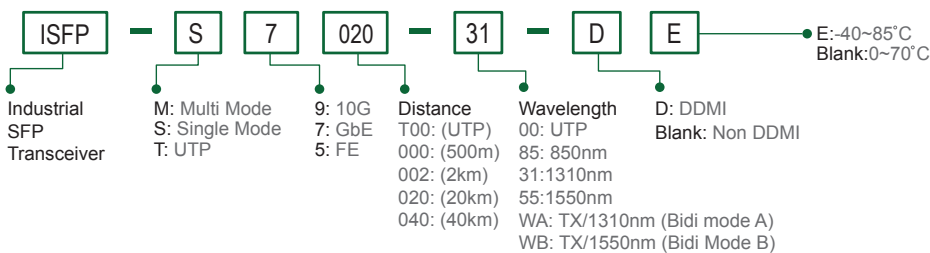



NDR-240-48
Output 48VDC, 240W

DR-4524
Output 24VDC, 45W

NDR-120-48
Output 48VDC, 120W

MDR-40-24
Output 24VDC, 40W

NDR-120-24
Output 24VDC, 120W

MDR-20-24
Output 24VDC, 20W



Having reliable and stable power for your industrial grade switches or converters is the best way to improve reliability and keep any down time to a minimum. CTC Union's safety certified AC to DC power supplies that are 100% compatible with all of our industrial grade switches and converters.

Features

- The series of industrial grade power supply have been fully tested with our industrial product for guaranteed compatibility and performance
- Universal AC input voltage range
- Protections: Short circuit / Overload / Over voltage/Over temperature
- Cooling by free air convection
- UL508, TUV, CB, CE safety approved
- Heavy industry grade EMS EN61000-6-2 approved
- 3 years warranty

Specifications

Model Name		NDR-240-48	NDR-120-48	NDR-120-24
Output	Dc Voltage	48V	48V	24V
	Rated Current	5A	2.5A	5A
	Current Range	0~5A	0~2.5A	0 ~ 5A
	Rated Power	240W	120W	120W
	Output Voltage Adj. Range	48~55VDC	48~55VDC	24 ~ 28VDC
Input	Voltage Range	90 ~ 264VAC / 127 ~ 370VDC	90~264VAC / 127~370VDC	90~264VAC / 127~370VDC
	Frequency Range	47 ~ 63Hz	47 ~ 63Hz	47 ~ 63Hz
	Efficiency (Typ.)	90%	89%	88%
Protection	Overload	105 ~ 130% rated output power Protection type : Constant current limiting, recovers automatically after fault condition is removed	105 ~ 130% rated output power Protection type : Constant current limiting, recovers automatically after fault condition is removed	105 ~ 130% rated output power Protection type : Constant current limiting, recovers automatically after fault condition is removed
	Over Voltage	56 ~ 65V Protection type : Shut down o/p voltage, re-power on to recover	56~65V Protection type : Shut down o/p voltage, re-power on to recover	29 ~ 33V Protection type : Shut down o/p voltage, re-power on to recover
	Over Temperature	Shut down o/p voltage, recovers automatically after temperature goes down	Shut down o/p voltage, re-power on to recover	Shut down o/p voltage, re-power on to recover
Indicator	LED	DC OK	DC OK	DC OK
Housing	Dimension	113.5 x 63 x 125.2 mm (D x W x H)	113.5 x 40 x 125.2mm (D x W x H)	113.5 x 40 x 125.2mm (D x W x H)
	Installation Mounting	DIN Rail	DIN Rail	DIN Rail
Environment	Working Temp	-20 ~ 70°C	-20 ~ 70°C	-20 ~ 70°C
	Working Humidity	20 ~ 95% RH non-condensing	20 ~ 95% RH non-condensing	20 ~ 90% RH non-condensing
	Storage Temp., Humidity	-40 ~ 85°C , 10 ~ 95% RH	-40 ~ 85°C , 10 ~ 95% RH	-20 ~ 85°C , 10 ~ 95% RH
	Vibration	Compliance to IEC60068-2-6	Compliance to IEC60068-2-6	Compliance to IEC60068-2-6
	Safety Standards	UL508, TUV EN60950-1 approved	UL508, TUV EN60950-1 approved	UL508, TUV EN60950-1 approved
Safety & EMC	Withstand Voltage	I/P-O/P:3KVAC, I/P-FG:2KVAC, O/P-FG: 0.5KVAC	I/P-O/P:3KVAC, I/P-FG:2KVAC, O/P-FG: 0.5KVAC	I/P-O/P:3KVAC, I/P-FG:2KVAC, O/P-FG: 0.5KVAC
	Isolation Resistance	I/P-O/P, I/P-FG, O/P-FG >100M Ohm /500VD@25°C/ 70% RH	I/P-O/P, I/P-FG, O/P-FG >100M Ohm /500VD@25°C/ 70% RH	I/P-O/P, I/P-FG, O/P-FG >100M Ohm /500VD@25°C/ 70% RH
	EMC Emission	Compliance to EN55022 (CISPR22), EN61204-3 Class B, EN61000-3-2, -3	Compliance to EN55022 (CISPR22) Class B, EN61000-3-2,-3	Compliance to EN55022 (CISPR22) Class B, EN61000-3-2,-3
	EMC Immunity	Compliance to EN61000-4-2, 3, 4, 5, 6, 8, 11, EN55024, EN61000-6-2, EN61204-3, heavy industry level, criteria A	Compliance to EN61000-4-2, 3, 4, 5, 6, 8, 11, EN55024, EN61000-6-2, (EN50082-2), heavy industry level, criteria A	Compliance to EN61000-4-2, 3, 4, 5, 6, 8, 11, EN55024, EN61000-6-2 (EN50082-2) heavy industry level, criteria A
Others	PFC	Built in Active PFC		
	MTBF	230.2K Hours MIL-HDBK-217F (25°C)	453.3K Hours MIL-HDBK-217F (25°C)	453.3K Hours MIL-HDBK-217F (25°C)
	Waranty	3 Years	3 Years	3 Years

Model Name		DR-4524	MDR-40-24	MDR-20-24
Output	Dc Voltage	24V	24V	24V
	Rated Current	2A	1.7A	1A
	Current Range	0 ~ 2A	0~1.7A	0~1A
	Rated Power	48W	40.8W	24W
	Output Voltage Adj. Range	21.6 ~ 26.4VDC	24~30VDC	21.6~26.4VDC
Input	Voltage Range	85 ~ 264VAC / 120 ~ 370VDC	85 ~ 264VAC / 120 ~ 370VDC	85 ~ 264VAC / 120 ~ 370VDC
	Frequency Range	47 ~ 63Hz	47 ~ 63Hz	47 ~ 63Hz
	Efficiency (Typ.)	80%	88%	84%
Protection	Overload	105 ~ 150% rated output power Protection type : Constant current limiting, recovers automatically after fault condition is removed	105 ~ 150% rated output power Protection type : Constant current limiting, recovers automatically after fault condition is removed	105 ~ 160% rated output power Protection type : Constant current limiting, recovers automatically after fault condition is removed
	Over Voltage	27.6 ~ 32.4V Protection type : Shut off o/p voltage, clamping by zener diode	31.2~36V Protection type : Shut down o/p voltage, re-power on to recover	27.6~32.4V Protection type : Shut down o/p voltage, re-power on to recover
Alarm Relay	DC OK Relay		DC OK Relay will Close In Normal Relay contact rating(max.) : 30V/1A resistive	DC OK Relay will Close In Normal Relay contact rating(max.) : 30V/1A resistive
Indicator	LED	Power On	DC OK	DC OK
Housing	Dimension	67 x 78 x 93 mm (D x W x H)	100 x 40 x 90mm (D x W x H)	100 x 22.5 x 90mm (D x W x H)
	Installation Mounting	DIN Rail	DIN Rail	DIN Rail
Environment	Working Temp	-10 ~ 50°C	-20 ~ 70°C	-20 ~ 70°C
	Working Humidity	20 ~ 90% RH non-condensing	20 ~ 90% RH non-condensing	20 ~ 90% RH non-condensing
	Storage Temp., Humidity	-20 ~ 85°C , 10 ~ 95% RH	-40 ~ 85°C , 10 ~ 95% RH	-40 ~ 85°C , 10 ~ 95% RH
	Vibration	Compliance to IEC60068-2-6	Compliance to IEC60068-2-6	Compliance to IEC60068-2-6
Safety & EMC	Safety Standards	UL508 approved	UL508, UL60950-1, TUV EN60950-1 approved	UL508, TUV EN60950-1 approved
	Withstand Voltage	I/P-O/P:3KVAC, I/P-FG:2KVAC, O/P-FG:0.5KVAC	I/P-O/P:3KVAC, I/P-FG:2KVAC, O/P-FG:0.5KVAC	I/P-O/P:3KVAC, I/P-FG:2KVAC, O/P-FG:0.5KVAC
	Isolation Resistance	I/P-O/P, I/P-FG, O/P-FG >100M Ohm /500VD@25°C/ 70% RH	I/P-O/P, I/P-FG, O/P-FG >100M Ohm /500VD@25°C/ 70% RH	I/P-O/P, I/P-FG, O/P-FG >100M Ohm /500VD@25°C/ 70% RH
	EMC Emission	Compliance to EN55022 (CISPR22), EN61204-3 Class B, EN61000-3-2, -3	Compliance to EN55011, EN55022 (CISPR22), EN61204-3 Class B, EN61000-3-2,-3	Compliance to EN55011, EN55022 (CISPR22), EN61204-3 Class B, EN61000-3-2,-3
	EMC Immunity	Compliance to EN61000-4-2, 3, 4, 5, 6, 8, 11, EN55024, EN61000-6-2 (EN50082-2), heavy industry level, criteria A	Compliance to EN61000-4-2, 3, 4, 5, 6, 8, 11, EN55024, EN61000-6-2, EN61204-3, heavy industry level, criteria A	Compliance to EN61000-4-2, 3, 4, 5, 6, 8, 11, EN55024, EN61000-6-2, EN61204-3, heavy industry level, criteria A
Others	PFC			
	MTBF	364.6K hrs MIL-HDBK-217F (25°C)	301.7K Hours MIL-HDBK-217F (25°C)	236.9K Hours MIL-HDBK-217F (25°C)
	Waranty	3 Years	3 Years	3 Years

Ordering Information

Model Name	Input Voltage Range	Output Voltage	Output Voltage Adj. Range	Output Power	Operating Temperature
NDR-240-48	90 ~ 264VAC / 127 ~ 370VDC	48VDC	48~55VDC	240W	-20~ 70°C
NDR-120-48	90 ~ 264VAC / 127 ~ 370VDC	48VDC	48~55VDC	120W	-20~ 70°C
NDR-120-24	90 ~ 264VAC / 127 ~ 370VDC	24VDC	24~28VDC	120W	-20~ 70°C
DR-4524	85 ~ 264VAC / 120 ~ 370VDC	24VDC	21.6~26.4VDC	48W	-10~ 50°C
MDR-40-24	85 ~ 264VAC / 120 ~ 370VDC	24VDC	24~30VDC	40W	-20~ 70°C
MDR-20-24	85 ~ 264VAC / 120 ~ 370VDC	24VDC	21.6~26.4VDC	24W	-20~ 70°C

Appendix - Product Selection Table



Core Switch

Model	Total Port	GbE Port			10 GbE	PoE port	Redundant Input Power	Certification			
		100/1000 Base-X SFP	10/100/1000 Base-T RJ45	100/1000Base-X SFP & RJ45				IEEE802.3ae SFP+	IEEE802.3at (budget)	Railway EN50121-4	Safety UL60950-1 EN60950-1
ICS-G24S4X	28	20		4 Combo	4		110/220V AC/DC or 24/48, -48V DC	✓	UL60950-1	✓	✓
ICS-G24S2X	26	20		4 Combo	2		110/220V AC/DC or 24/48, -48V DC	✓	UL60950-1	✓	✓
ICS-M2404X	28		3 slots module		4		110/220V AC/DC or 24/48, -48V DC	✓	✓	✓	✓
ICS-G24044X	32		24	4 SFP	4		110/220V AC/DC or 24/48, -48V DC	✓	✓	✓	✓
ICS-G24044X-24PH	32		24	4 SFP	4	24(240W)	48VDC, -48VDC	✓	✓	✓	✓




4G LTE Router

Model	Managed	WAN			Local Port			Certification		
		SIM	Cellular Mobile	10/100Base-TX	10/100Base-TX	RS232	RS485 (ModBus RTU)	Railway EN50121-4	EN61000-6-2 EN61000-6-4	CE, FCC
ICR-4103	✓	2 SIM for Redundant	2G/3G/4G LTE band	1	3	2	1	✓	✓	✓



SyncE Switch

Model	Managed	Total Port	RJ45 Port	Fiber Port	Sync Ethernet	Redundant Input Power	Certification			
			10/100/1000 Base-T	100/1000 Base-X			Railway EN50121-4	Safety UL60950-1 EN60950-1	EN61000-6-2 EN61000-6-4	CE, FCC
IGS-804SM-SE	✓	12	8	4 SFP	✓	12/24/48, -48V DC	✓	EN60950-1	✓	✓
IGS-1608SM-SE	✓	24	16	8 SFP	✓	12/24/48, -48V DC	✓	✓	✓	✓

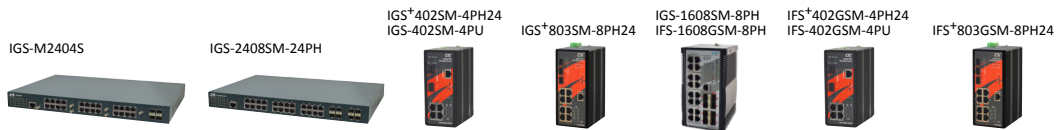

Managed PoE Switch

Model	Managed	Total Port	RJ45 Port		FiberPort	PoE Port		Redundant Input Power	Certification				
			10/100 Base-TX	10/100/1000 Base-T	100/1000 Base-X	IEEE802.3at (budget)	IEEE802.3bt (budget)		Railway EN50121-4	Safety EN60950-1	Safety UL60950-1	EN61000-6-2 EN61000-6-4	CE, FCC
IGS-M2404S	✓ (Rackmount)	28		3 slot Module + 4x GbE SFP				48V DC, -48V DC	✓	✓	✓	✓	✓
IGS-2408SM-24PH	✓ (Rackmount)	32	24	8 SFP	24 (400W)			48V DC, -48V DC	✓	✓	✓	✓	✓
IGS+402SM-4PH24	✓	6	4	2 SFP	4 (120W)			24/48/-48V DC	✓	✓	✓	✓	✓
IGS-402SM-4PU	✓	6	4	2 SFP		4 (240W)		48/-48V DC	✓	✓	✓	✓	✓
IGS+803SM-8PH24	✓	11	8	3 SFP	8 (180W)			24/48/-48V DC	✓	✓	✓	✓	✓
IGS-1608SM-8PH	✓	24	16	8 SFP	8 (240W)			48, -48V DC	✓	✓	✓	✓	✓
IFS+402GSM-4PH24	✓	6	4	2 SFP	4 (120W)			24/48/-48V DC	✓	✓	✓	✓	✓
IFS-402GSM-4PU	✓	6	4	2 SFP		4 (240W)		48/-48V DC	✓	✓	✓	✓	✓
IFS+803GSM-8PH24	✓	11	8	3 SFP	8 (180W)			24/48/-48V DC	✓	✓	✓	✓	✓
IFS-1608GSM-8PH	✓	24	16	8 SFP	8 (240W)			48, -48V DC	✓	✓	✓	✓	✓

Appendix - Product Selection Table




Unmanaged PoE Switch

Model	Total Port	RJ45 Port		Fiber Port		PoE Port		Redundant Input Power	Certification			
		10/100 Base-TX	10/100/1000 Base-T	1000 Base-X	100/1000 Base-X	IEEE802.3at (budget)	IEEE802.3bt (budget)		Railway EN50121-4	Safety UL60950-1	EN61000-6-2 EN61000-6-4	CE, FCC
IGS-402S-4PH24	6		4		2 SFP	4 (120W)		24/48V DC	✓	✓	✓	✓
IGS-402S-4PU	6		4		2 SFP		4 (240W)	48V DC	✓		✓	✓
IGS-402F-4PH24	6		4	2 SC		4 (120W)		24/48V DC	✓	✓	✓	✓
IGS-600-4PH24	6		6			4 (120W)		24/48V DC	✓	✓	✓	✓
IFS-802GS-8PH	10	8			2 SFP			48V DC	✓		✓	✓
IFS-1602GS-8PH	18	16			2 SFP			48V DC	✓		✓	✓



Managed Ethernet Switch

Model	Managed	Total Port	RJ45 Port		Fiber Port	Redundant Input Power	Certification					
			10/100 Base-TX	10/100/1000 Base-T	100/1000 Base-X		Railway EN50121-4	Safety EN60950-1	Safety UL60950-1	EN61000-6-2 EN61000-6-4	CE, FCC	
IGS-M2404S	✓ (Rackmount)	28	3 slot Module + 4x GbE SFP				110/220V AC/DC or 24/48, -48V DC	✓	✓	✓	✓	✓
IGS-S2804TM	✓ (Rackmount)	28		4	28 SFP		110/220V AC/DC or 24/48, -48V DC	✓		✓	✓	✓
IGS-2408SM	✓ (Rackmount)	32		24	8 SFP		110/220V AC/DC or 24/48, -48V DC	✓	✓	✓	✓	✓
IGS+404SM	✓	8		4	4 SFP		12/24/48, -48V DC	✓	✓	✓	✓	✓
IGS+803SM	✓	11		8	3 SFP		12/24/48, -48V DC	✓	✓	✓	✓	✓
IGS-812SM	✓	20		8	12 SFP		12/24/48VDC	✓		✓	✓	✓
IGS-1604SM	✓	20		16	4 SFP		12/24/48VDC	✓		✓	✓	✓
IFS+402GSM	✓	6	4		2 SFP		12/24/48, -48V DC	✓	✓	✓	✓	✓
IFS+803GSM	✓	11	8		3 SFP		12/24/48, -48V DC	✓	✓	✓	✓	✓
IFS-1604GSM	✓	20	16		4 SFP		12/24/48VDC	✓		✓	✓	✓

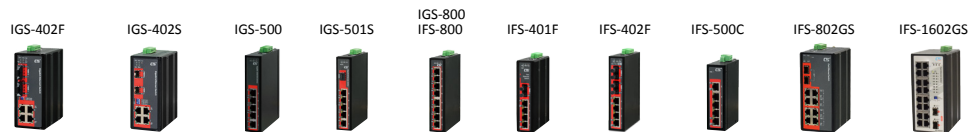

Unmanaged Ethernet Switch

Model	Total Port	RJ45 Port		Fiber Port			Power Input		Certification				
		10/100 Base-TX	10/100/1000 Base-T	100 Base-FX	1000 Base-X	100/1000 Base-X	Redundant	Single Power	Railway EN50121-4	Safety UL60950-1	EN61000-6-2 EN61000-6-4	CE, FCC	
IGS-402F	6		4		2 SC				12/24/48V DC	✓	✓	✓	✓
IGS-402S	6		4			2 SFP			12/24/48V DC	✓	✓	✓	✓
IGS-500	5		5						12/24/48V DC	✓		✓	✓
IGS-501S	6		5			1 SFP			12/24/48V DC	✓		✓	✓
IGS-800	8		8						12/24/48V DC	✓		✓	✓
IFS-401F	5	4		1 SC/ST					12/24/48V DC	✓		✓	✓
IFS-402F	6	4		2 SC/ST					12/24/48V DC	✓		✓	✓
IFS-500C	5	5							12/24/48V DC	✓		✓	✓
IFS-800	8	8							12/24/48V DC	✓		✓	✓
IFS-802GS	10	8			2 SFP				12/24/48V DC	✓		✓	✓
IFS-1602GS	18	16			2 SFP				12/24/48V DC	✓		✓	✓

Appendix - Product Selection Table

IMC-1000MS-PH12 IMC-1000S-PH12 IMC-100-PH12



PoE Converter

Model	Managed	RJ45 Port		Fiber Port		PoE Port	Redundant Input Power	Certification		
		10/100 Base-TX	10/100/1000 Base-T	100 Base-FX	100/1000 Base-X	IEEE802.3at (budget)		Railway EN50121-4	EN61000-6-2 EN61000-6-4	CE, FCC
IMC-1000MS-PH12	✓		1		1 SFP	1 (30W)	12/24/48V DC	✓	✓	✓
IMC-1000S-PH12			1		1 SFP	1 (30W)	12/24/48V DC	✓	✓	✓
IMC-100-PH12		1			1 SC/ST	1 (30W)	12/24/48V DC	✓	✓	✓

IMC-1000MS IMC-100 IMC-100C IMC-1000CS IMC-1000 IMC-1000S



Ethernet Converter

Model	Managed	RJ45 Port		Fiber Port		Power Input		Certification			
		10/100 Base-TX	10/100/1000 Base-T	100 Base-FX	100/1000 Base-X	Redundant	Single Power	Railway EN50121-4	Safety UL60950-1	EN61000-6-2 EN61000-6-4	CE, FCC
IMC-1000MS	✓		1		1 SFP		12/24/48V DC	✓	✓	✓	✓
IMC-100		1			1 SC/ST		12/24/48V DC	✓	✓	✓	✓
IMC-100C		1			1 SC/ST		12/24/48V DC	✓		✓	✓
IMC-1000CS			1		1 SFP		12/24/48V DC	✓		✓	✓
IMC-1000C			1		1 SC		12/24/48V DC	✓		✓	✓
IMC-1000S			1		1 SFP		12/24/48V DC	✓	✓	✓	✓

IBP-202



Optical Bypass Switch

Model	Fiber connector			Certification		
	Connectortype	Connector port	Data rate	Railway EN50121-4	EN61000-6-2 EN61000-6-4	CE, FCC
IBP-202	SM SC/ST/LC	4	100M/Giga/10G	✓	✓	✓

IFC-FDC IFC-Serial IFC-FDC-PRO IFC-Serial-PRO IFC-FDC-CAN



FieldBus Fiber Converter

Model	Dual Channel	Serial (Field Bus transparent)					Fiber		Redundant Input Power	Certification		
		RS232	RS422/485	FieldBus	Baud Rate Max	Isolation (2.5KV)	SC/ST	Daisy Chain		Safety UL60950-1	EN61000-6-2 EN61000-6-4	CE, FCC
IFC-FDC	✓	2	1	ModBus or Others	1Mbps	✓	2	✓	12/24/48V DC	✓	✓	✓
IFC-Serial	✓	2	1	ModBus or Others	1Mbps	✓	1		12/24/48V DC	✓	✓	✓
IFC-FDC-PRO			1	ProfiBus	12Mbps	✓	2	✓	12/24/48V DC		✓	✓
IFC-Serial-PRO			1	ProfiBus	12Mbps	✓	1		12/24/48V DC		✓	✓
IFC-Serial-CAN				Can Bus	1Mbps	✓	1		12/24/48V DC		✓	✓

IEXT224-4PH



PoE Ethernet Extender

Model	RJ45 UTP		Long distance extended		Redundant Input Power	Certification		
	10/100 Base-TX	IEEE802.3at PoE (Power budget)	RJ11 (2 wire)	Coaxial		Railway EN50121-4	EN61000-6-2 EN61000-6-4	CE, FCC
IEXT224-4PH	4	4(30W)	1	1	48V DC		✓	✓

Appendix - Product Selection Table

IEXT211



LAN Extender

Model	RJ45 UTP	Long distance extended		Redundant Input Power	Certification		
	10/100Base-TX	RJ11(2 wire)	Coaxial		Railway EN50121-4	EN61000-6-2 EN61000-6-4	CE, FCC
IEXT211	1	1	1	48V DC	✓	✓	✓

INJ-IG60-24



INJ-IG01-PH



INJ-G30



PoE Injector

Model	LAN RJ45 Port	PoE RJ45 Port		Power Input		Certification		
	10/100/1000 Base-T(X)	10/100/1000 Base-T(X)	PoE 15.4W/30W/36W/60W	Redundant	Single Power	EN61000-6-2 EN61000-6-4	EN50121-4	CE/FCC
INJ-IG60-24	✓	✓	✓	24/48V DC		✓	✓	✓
INJ-IG01-PH	✓	✓	✓		48V DC	✓	✓	✓
INJ-G30	✓	✓	15.4W/30W		110/220VAC			✓

ITP-2204GTM-16PH



ITP-1204GTM-12PH



ITP-G802SM-8PH24
ITP-802GSM-8PH24



ITP-G802TM-8PH24
ITP-802GTM-8PH24



ITP-800-8PH24



EN 50155 PoE Switch

Model	Managed	IP67	Total Port	M12 UTP Port		Fiber Port	PoE Port	Redundant Input Power	Certification				
				10/100 Base-TX	10/100/1000 Base-T(X or A-code)				100/1000 Base-X	IEEE802.3at (budget)	EN50155	Railway EN50121-4	Safety UL60950-1
ITP-2204GTM-16PH	✓	IP64	26	22	4		16(120W)	24/48/110VDC	✓	✓	EN60950-1	✓	✓
ITP-1204GTM-12PH	✓	IP64	16	12	4		12(120W)	24/48/110VDC	✓	✓	EN60950-1	✓	✓
ITP-G802SM-8PH24	✓	✓	10		8	2 SFP	8(180W)	24/48V DC	✓	✓	✓	✓	✓
ITP-G802TM-8PH24	✓	✓	10		10		8(180W)	24/48V DC	✓	✓	✓	✓	✓
ITP-802GSM-8PH24	✓	✓	10	8		2 SFP	8(180W)	24/48V DC	✓	✓	✓	✓	✓
ITP-802GTM-8PH24	✓	✓	10	8	2		8(180W)	24/48V DC	✓	✓	✓	✓	✓
ITP-800-8PH24		✓	8	8			8(180W)	24/48V DC	✓	✓		✓	✓

ITP-2204GTM



ITP-1204GTM



ITP-G802SM
ITP-802GSM



ITP-G802TM
ITP-802GTM



ITP-500
ITP-800



EN 50155 Switch

Model	Managed	IP67	Total Port	M12 UTP Port		Fiber Port	Redundant Input Power	Certification				
				10/100 Base-TX	10/100/1000 Base-T(X or A-code)			100/1000 Base-X	EN50155	Railway EN50121-4	Safety UL60950-1	EN61000-6-2 EN61000-6-4
ITP-2204GTM	✓	IP64	26	22	4		24/48/110VDC	✓	✓	EN60950-1	✓	✓
ITP-1204GTM	✓	IP64	16	12	4		24/48/110VDC	✓	✓	EN60950-1	✓	✓
ITP-G802SM	✓	✓	10		8	2 SFP	110/220V AC/DC or 24/48V DC	✓	✓	✓	✓	✓
ITP-G802TM	✓	✓	10		10		110/220V AC/DC or 24/48V DC	✓	✓	✓	✓	✓
ITP-802GSM	✓	✓	10	8		2 SFP	110/220V AC/DC or 24/48V DC	✓	✓	✓	✓	✓
ITP-802GTM	✓	✓	10	8	2		110/220V AC/DC or 24/48V DC	✓	✓	✓	✓	✓
ITP-500		✓	5	5			12/24/48V DC	✓	✓		✓	✓
ITP-800		✓	8	8			12/24/48V DC	✓	✓		✓	✓

Appendix - Product Selection Table

IPS-M2404S



IPS-G803SM



IPS-803GSM



IEC 61850-3 Switch

Model	Managed	Total Port	RJ45 Port		Fiber	Redundant Input Power	Certification					
			10/100 Base-TX	10/100/1000 Base-T	100/1000 Base-X		IEC61850-3 IEEET1613	Railway EN50121-4	Safety UL60950-1	EN61000-6-2 EN61000-6-4	CE, FCC	
IPS-M2404S	✓ (Rackmount)	28	3 slot Module + 4x GbE SFP				110/220V AC/DC or 24/48, -48V DC	✓	✓	✓	✓	✓
IPS-G803SM	✓	11		8	3 SFP	110/220V AC/DC or 24/48, -48V DC	✓	✓	✓	✓	✓	
IPS-803GSM	✓	11	8		3 SFP	110/220V AC/DC or 24/48, -48V DC	✓	✓	✓	✓	✓	

STE100A/RS232
STE100A-Serial



IP Device Server

Model	RJ45 Port	Serial Port		Single Power Input	Certification
	10/100Base-TX	RS232	RS232/422/485		CE,FCC
STE100A/RS232	1	1		110/220VAC Power Adapter	✓
STE100A-Serial	1		1	110/220VAC Power Adapter	✓

