

GSW-1005MS

5x GbE, RJ45 + 1x Dual Rate SFP
L2 Managed Ethernet Switch



GSW-1005MS is a managed Gigabit Ethernet CPE switch designed 5-Ports 10/100/1000Base-T RJ45 and 1 port 100/1000Base-X SFP based fiber optics. The traditional transmission distance of Gigabit Ethernet over RJ45 copper can be extended up to 100km over a fiber optics interface. GSW-1005MS has a optional cable tray that allows the installer to enclose the excess fiber within the unit, thus providing protection for the sensitive fiber at subscriber side. LEDs provide visual monitoring of Ethernet connected devices such as Ethernet home gateways, wireless access points or PC/laptop via 10/100/1000Base-T twisted pair RJ45 ports on GSW-1005MS. When GSW-1005MS is deployed as a stand-alone solution, it incorporates an easy to use Web user interface for operation, administration and maintenance both locally and remotely. All of the enabled Layer 2 features and functions of GSW-1005MS can be configured and monitored via web, CLI or SNMP management. GSW- 1005MS is particularly suitable for deploying and provisioning active Ethernet FTTH service of multi-service operators (MSO).

Features


- 5-Port 10/100/1000Base-T + 100/1000Base-X SFP uplink
- Supports 9.6K Bytes jumbo frame
- Supports IEEE 802.1Q tagged VLAN & Q-in-Q VLAN stacking
- Supports IEEE 802.1p priority queue
- Supports IGMP snooping v1/v2/v3
- Supports DHCP auto provisioning
- Supports dying gasp
- Fiber cable tray(optional)

Specifications

Interface	5x 10/100/1000Base-T RJ-45 with 1x 100/1000Base-X SFP
Switching fabric capacity	12Gbps
Packet forwarding capacity	8.928Mpps
Filter & Forward rate	14880pps at 10Mbps, 148800pps at 100Mbps, 1488000pps at 1Gbps
Transmission method	Store and Forward Switching
Standard	IEEE 802.3u, IEEE 802.3z, IEEE 802.3ae, IEEE 802.3x, IEEE 802.1p, IEEE 802.1Q, IEEE 802.1ad, IEEE 802.1x, IEEE 802.1ab, IEEE 802.3az
Packet buffer	4M bits
MAC table size	8K
Jumbo frame size	9600 Bytes
VLAN feature	IEEE 802.1Q tagged VLAN (Max. 4K VLAN groups) MAC based VLAN Protocol based VLAN Private VLAN for port isolation IP subnet based VLAN, Voice VLAN VLAN translation, IEEE 802.1ad Q-in-Q
QoS feature	IEEE 802.1p 8 priority queues per port, CoS based on switch port; VLAN ID; DSCP; TCP/UDP port IEEE 802.1p priority tag remarking, DSCP remarking, Port based ingress/egress rate limit
Security	Port based/single/multiple IEEE 802.1x access control MAC based access control authentication RADIUS authentication, limited MAC address learning IP/MAC binding, ACL rule based filtering TACACS+, DHCP snooping/relay option 82 ARP inspection, IP source guard
IP multicasting	IGMP throttling, IGMP filtering, IGMP fast leave, IGMP snooping v1/v2/v3, MVR, MLD snooping v1
Storm Control	Unknown Unicast/Broadcast/Multicast storm suppression
Management	Web/Telnet CLI interface Web/CLI authentication SSH v2 HTTPS port mirroring


Management	system syslog IPv6 management NTP text based configuration upload or download, IEEE 802.1ab LLDP DHCP auto provisioning
SNMP agent	SNMP v1/v2c/v3, RMON Group 1,2,3 and 9
Software upgrade	TFTP/HTTP
Power Input	100v~240VAC power adapter
Operating Temperature	0 ~ 50°C
Storage Temperature	-25 ~ 70°C
Humidity	5% ~ 90% (non-condensing)
Dimensions	170 x 120 x 35mm (D x W x H)
Certification	FCC, CE

Application

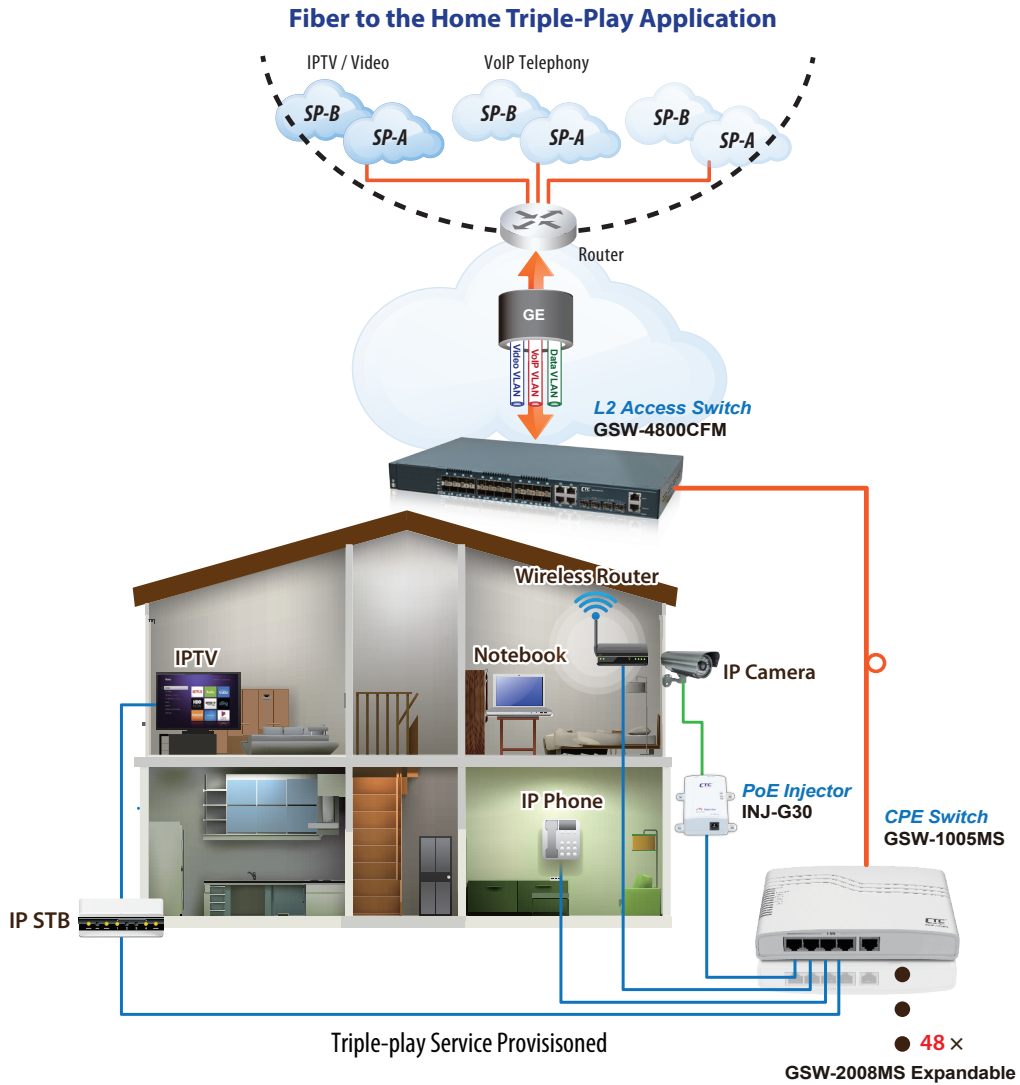

Cable Tray Assembly

CT001/CT002 is an optional fiber tray and mounting hardware for deploying GSW-1005/2008 for residential fiber to the home applications. CT001/CT002 tray options is wall mounted, allowing secure termination of fiber leads.

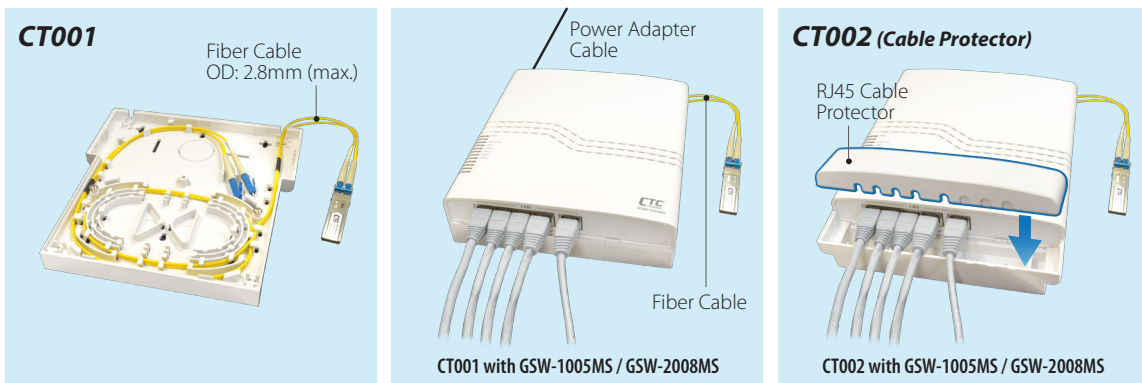

Ordering Information

Model Name	Description
GSW-1005MS	5-port 10/100/1000 Base-T to 100/1000 Base-X Managed GbE Ethernet Switch (cable tray optional)

Accessories

CT001	Cable Tray for GSW-1005MS/GSW-2008MS
CT002	Cable Tray & LAN cable protection cover for GSW-1005MS/2008MS

Dimensions (mm)

