

New



FRM220-MP7G1X

7x 1 GE to 10G Muxponder

The FRM220-MP7G1X is a 7x 1GE to 10G Muxponder. Based on TDM technology, the Muxponder transports seven separate Gigabit Ethernet data streams into a 10 Gbps SFP+ Based trunk port. This solution provides significant cost reduction and excellent fiber utilization when compared to CWDM optical multiplexing. The FRM220-MP7G1X incorporates 7x 1GE SFP based access interfaces that can accommodate various types of SFP. Such as Multi-mode, Single mode and 1Gbps copper SFPs. The trunk port is a SFP+ 10Gbps permitting flexible connectivity options between the Muxponders either in a WDM system or directly between two devices. Two types of housings are available for installation in a 19" FRM220 chassis. 20 slots are provided by using the FRM220-CH20 chassis 2U while the FRM220-CH08 1U supports up to 8 modules. Both housings can be monitored and configured through SNMP, Web GUI or Telnet using a NMC management module.

Features


- 7x 1 GE to 10G
- 10 Gbps trunk port rate
- Network management via NMC
- Remotely activated Local or Remote Loopback
- SFP+ Digital Diagnostics monitoring
- Hot swappable
- Supports FRM220-CH02M, CH02/SMT, CH04A, CH08, CH20

Specifications

Access Data Rate	1G Ethernet
Trunk Data Rate	10Gbps
Access Type	10Gbps
Optical parameters	1.25G SFP/ 10G SFP+
Operating Temperature	0 ~ 55°C
Storage Temperature	-10 ~ 80°C

Relative Humidity	10 ~ 90% (non-condensing)
Dimension	Card: 155 x 46 x 88mm (D x W x H)
Weight	300g
Connectors	7x SFP-LC & 1x SFP+ LC
Power Consumption	12W

Application

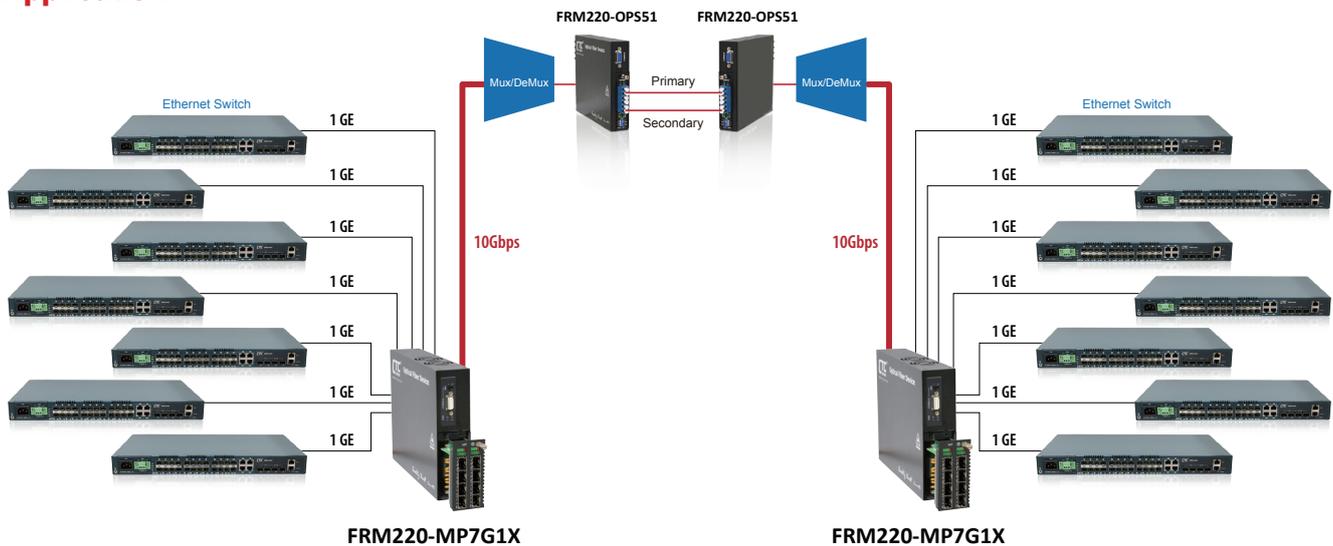

Ordering Information

Model Name	Description
FRM220-MP7G1X	7x 1GE (SFP) to 10G (SFP+) Muxponder

Note: This card MUST be placed in CH02M chassis with fan. For SNMP management, place this card in CH04A chassis.

3
10G Muxponder