



## IFS-802GS-8PH

8x 10/100Base-TX + 2x 1000Base-X SFP w/ 8x PoE+ (240W)

## IFS-1602GS-8PH

16x 10/100Base-TX+ 2x 1000Base-X SFP with 8x PoE+ (240W)



The IFS-802GS-8PH and IFS-1602GS-8PH are 10/18 Ports unmanaged industrial grade Ethernet PoE switches with 8x 10/100Base-TX PoE that provide stable and reliable Ethernet transmission. Housed in rugged DIN rail or wall mountable enclosures, these switches are designed for harsh environments, such as industrial networking, security automation applications, IP Surveillance, intelligent transportation systems (ITS) and are also suitable for many military and utility market applications where environmental conditions exceed commercial product specifications (See figure 1). Standard operating temperature range models (-10 to 60°C) and wide operating temperature range models (-40 to 75°C) fulfill the special needs of industrial automation applications.

### Features

- 8x 10/100Base-TX RJ45 + 2x1000Base-X SFP with 8x PoE (IFS-802GS-8PH)
- 16x 10/100Base-TX RJ45 + 2x 1000Base-X SFP with 8x PoE (IFS-1602GS-8PH)
- Provides 8-port IEEE 802.3at/af PoE output (30W/Per Port)
- Maximum PoE output power budget 240W
- 48VDC (44~57VDC) redundant dual input power
- Wide operating temperature -40 ~ 75°C ("E" model)
- Supports power failure alarm message by relay
- Supports flow control
- Provides broadcast storm protection (IFS-1602GS-8PH)
- IP30 rugged metal housing and fanless
- DIN Rail mounting or wall mounting
- CE, FCC, railway EN50121-4 certification
- Heavy industrial grade EMS, EMI, EN61000-6-2, EN61000-6-4 certification
- 4KV surge protection for UTP and PoE ports (IFS-1602GS-8PH)
- 2.25KVDC Hi-pot isolation protection for Ethernet ports and power (IFS-1602GS-8PH)

### Specifications

<b>IEEE Standard</b>	IEEE 802.3 10Base-T Ethernet IEEE 802.3u 100Base-TX Fast Ethernet IEEE 802.3z 1000Base-X Gigabit Ethernet IEEE 802.3x Flow Control and Back Pressure IEEE 802.3at PoE+ (Power over Ethernet enhancements) IEEE 802.3af PoE (Power over Ethernet)
<b>Switch Architecture</b>	Back-plane (Switching Fabric): 5.6Gbps (IFS-802GS-8PH) 7.2Gbps (IFS-1602GS-8PH)
<b>Data Processing</b>	Store and Forward
<b>Flow Control</b>	IEEE 802.3x flow control, back pressure flow control
<b>MAC Address Table</b>	8K (IFS-802GS-8PH) 16K (IFS-1602GS-8PH)
<b>Packet Buffer Size</b>	1Mbits (IFS-802GS-8PH) 4Mbits (IFS-1602GS-8PH)
<b>Max Frame Size</b>	1632 Bytes (IFS-802GS-8PH) 1664Byte (IFS-1602GS-8PH)
<b>Jumbo Frame</b>	16K Byte (IFS-1602GS-8PH)
<b>PoE standard</b>	IEEE 802.3at/af
<b>PoE RJ-45 pin Assignment</b>	RJ-45 port #1~# 8 support IEEE 802.3at/af (IFS-802GS-8PH) RJ-45 port #9~# 16 support IEEE 802.3at/af (IFS-1602GS-8PH) End-Span, Alternative A mode Positive (V+): RJ-45 pin 1, 2. Negative (V-): RJ-45 pin 3, 6. Data (1, 2, 3, 6)
<b>Network Connector</b>	8x RJ-45 for 10/100Base-TX (IFS-802GS-8PH) 16x RJ-45 for 10/100Base-TX (IFS-1602GS-8PH) auto negotiation speed, Auto MDI/MDI-X function, Full/Half duplex 2x 1000Base-X SFP
<b>Network Cable</b>	UTP/STP above Cat. 5e cable EIA/TIA-568 100-ohm (100m)


<b>Network Cable</b>	Fiber Cable (Multi-mode): 50/125um, 62.5/125um Fiber Cable (Single-mode): 9/125um																
<b>Protocols</b>	CSMA/CD																
<b>LED</b>	Per unit: Power 1 (Green), Power 2 (Green), Fault (Amber) Per RJ-45 port : Link/Active (Green) Speed 100 (Yellow)																
<b>LED</b>	Fiber Per port: Link/Active (Green) Per PoE Port LED : • Active : ON • Inactive : OFF																
<b>DIP SW</b>	DIP 1 Power failure alarm OFF : Enable ON : Disable DIP 2 Broadcast Protection (IFS-1602GS-8PH) OFF : Enable ON : Disable																
<b>Reverse Polarity Protection</b>	Supported for Power Input																
<b>Overload Current Protection</b>	Supported																
<b>Power Supply</b>	Redundant dual 48VDC (44~57VDC) input power (Removable terminal block) (50~57V input is recommended for IEEE802.3at in 30W applications)																
<b>Power Consumption</b>	IFS-802GS-8PH power consumption <table border="1"> <thead> <tr> <th>Input Voltage</th> <th>Total Power Consumption</th> <th>Device Power Consumption</th> <th>PoE Power Budget</th> </tr> </thead> <tbody> <tr> <td>50 VDC</td> <td>251W</td> <td>5.2W</td> <td>240W</td> </tr> </tbody> </table> IFS-1602GS-8PH power consumption <table border="1"> <thead> <tr> <th>Input Voltage</th> <th>Total Power Consumption</th> <th>Device Power Consumption</th> <th>PoE Power Budget</th> </tr> </thead> <tbody> <tr> <td>50 VDC</td> <td>253.2W</td> <td>8.9W</td> <td>240W</td> </tr> </tbody> </table>	Input Voltage	Total Power Consumption	Device Power Consumption	PoE Power Budget	50 VDC	251W	5.2W	240W	Input Voltage	Total Power Consumption	Device Power Consumption	PoE Power Budget	50 VDC	253.2W	8.9W	240W
Input Voltage	Total Power Consumption	Device Power Consumption	PoE Power Budget														
50 VDC	251W	5.2W	240W														
Input Voltage	Total Power Consumption	Device Power Consumption	PoE Power Budget														
50 VDC	253.2W	8.9W	240W														
<b>PoE Power Budget</b>	Maximum PoE Output power budget 240W (30W/Per Port)																
<b>Alarm Relay Contact</b>	Relay outputs with current carrying capacity of 1A @24VDC																

<b>Removable Terminal Block</b>	Provides 2 Redundant power, Alarm relay contact, 6 Pin
<b>Operating Temperature</b>	-10 ~ 60°C (IFS-802GS-8PH, IFS-1602GS-8PH) -40 ~ 75°C (IFS-802GS-8PHE, IFS-1602GS-8PHE)
<b>Operating Humidity</b>	5% to 95% (Non-condensing)
<b>Storage Temperature</b>	-40 ~ 85°C
<b>Housing</b>	Rugged metal, IP30 Protection and fanless
<b>Dimensions</b>	106 x 72 x 152 mm (D X W X H)
<b>Weight</b>	765g (IFS-802GS-8PH) 850g (IFS-1602GS-8PH)
<b>Installation Mounting</b>	DIN Rail mounting, or wall mounting (Optional)
<b>MTBF</b>	635,446Hours (IFS-802GS-8PH) 493,382 Hours (IFS-1602GS-8PH) (MIL-HDBK-217)
<b>Warranty</b>	5 years
<b>Certification</b>	
<b>EMC</b>	CE
<b>EMI (Electromagnetic Interference)</b>	FCC Part 15 Subpart B Class A, CE

<b>Railway Traffic</b>	EN50121-4
<b>Immunity for Heavy Industrial Environment</b>	EN61000-6-2
<b>Emission for Heavy Industrial Environment</b>	EN61000-6-4
<b>EMS (Electromagnetic Susceptibility) Protection Level</b>	EN61000-4-2 (ESD) Level 3, Criteria B EN61000-4-3 (RS) Level 3, Criteria A EN61000-4-4 (Burst) Level 3, Criteria A EN61000-4-5 (Surge) Level 3, Criteria B EN61000-4-6 (CS) Level 3, Criteria A EN61000-4-8 (PFMF, Magnetic Field) Field Strength: 300A/m, Criteria A
<b>Safety</b>	UL60950-1 (Pending)
<b>Hi-pot isolation protection</b>	DC 2.25KV for power to chassis ground, and UTP/PoE port to chassis ground (IFS-1602GS-8PH)
<b>4KV surge protection</b>	Supported for PoE, UTP and SFP port (IFS-1602GS-8PH)
<b>Shock</b>	IEC 60068-2-27
<b>Freefall</b>	IEC 60068-2-32
<b>Vibration</b>	IEC 60068-2-6


## Application

Figure 1 : IFS-802GS-8PH & IFS-1602GS-8PH PoE Ethernet Switch Transmission

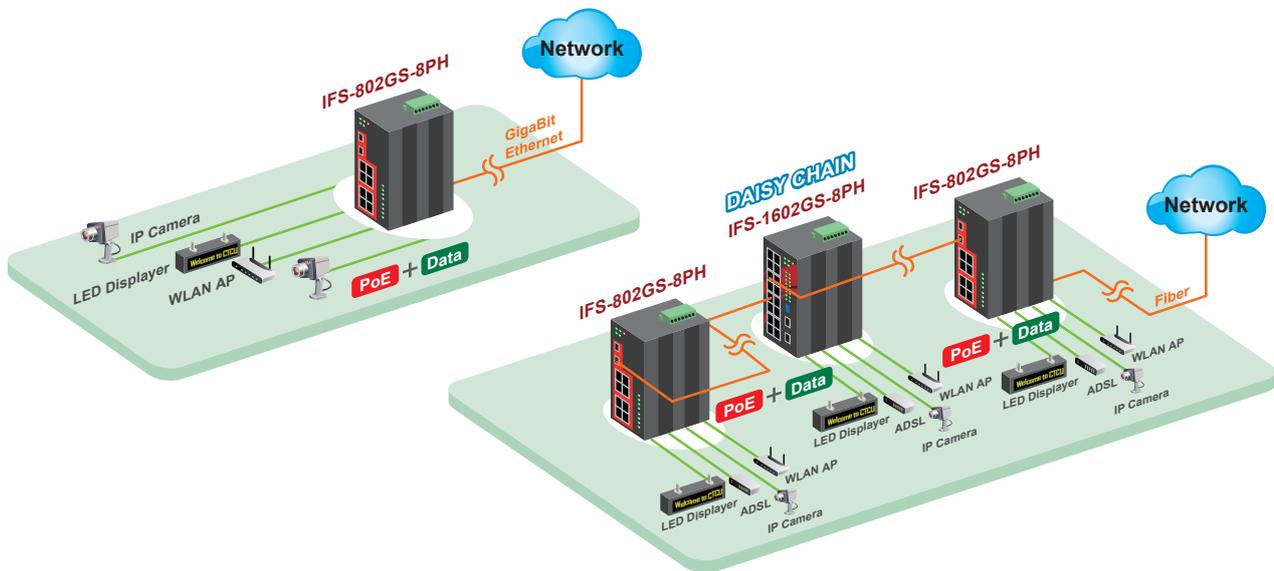


## Dimensions

### ► IFS-802GS-8PH

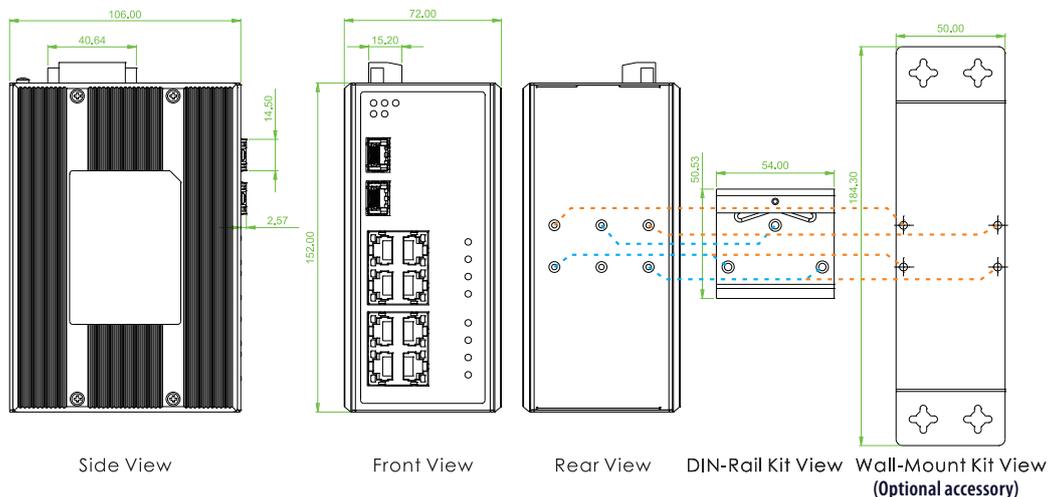

6 Unmanaged FE PoE Switch IFS-802GS-8PH & IFS-1602GS-8PH


► IFS-1602GS-8PH

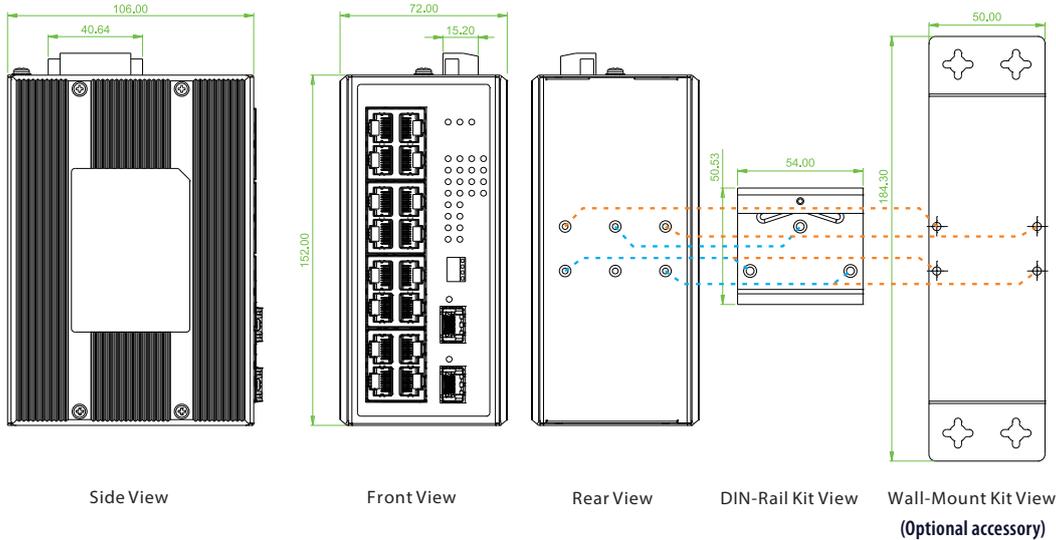

**Ordering Information**

Model Name	Total port	RJ45 UTP Port	FiberPort	PoE Port		Input Power	Certification			Operating Temperature
		10/100 Base-T(X)	1000Base-X	IEEE802.3at	Power Budget		Railway EN50121-4	EN61000-6-2	EN61000-6-4	
IFS-802GS-8PH	10	8	2 SFP	8	240W	48VDC	V	V	V	-10~60°C
IFS-802GS-8PHE	10	8	2 SFP	8	240W	48VDC	V	V	V	-40~75°C
IFS-1602GS-8PH	18	16	2 SFP	8	240W	48VDC	V	V	V	-10~60°C
IFS-1602GS-8PHE	18	16	2 SFP	8	240W	48VDC	V	V	V	-40~75°C

**Model Naming Rule**

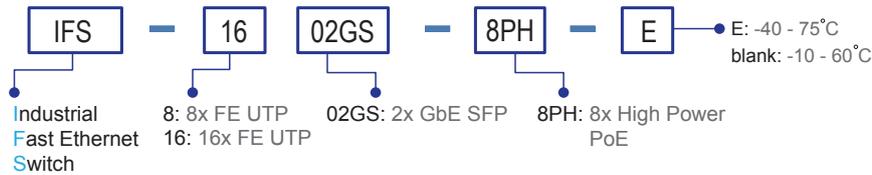

**Package List**

- IFS-802GS-8PH or IFS-1602GS-8PH Device
- Quick installation guide
- Din Rail with screws
- Terminal block
- Protective caps for SFP ports

**Optional Accessories**

**Wall mount kit accessories**

IND-WMK02 Wall Mount kit for Industrial product (Wide) (184 x 50mm)

**Industrial SFP Transceiver**

The ISFP series of industrial grade SFP modules have been fully tested with the series product for guaranteed compatibility and performance. The best performance can be guaranteed even in mission-critical applications. (Please see CTC Union's Industrial SFP datasheet for more details and more items.)

ISFP-M7000-85-(E) Industrial SFP GbE 1000Base-SX, M/M, 500 meter, wave length 850nm, 7.5dB, LC, -10~70°C (-40~85°C)

ISFP-S7020-31-(E) Industrial SFP 1000Base-LX, S/M, 20km, wave length 1310nm, 15dB, LC, -10~70°C (-40~85°C)

ISFP-T7T00-00-(E) Industrial SFP 10/100/1000Base-T UTP 100meter, -10~70°C (-40~85°C)

**SFP Naming Rule**

