



IMC-1000S-PH12

100/1000Base-T to 100/1000Base-X SFP with PoE+
(PSE) Fiber Converter (30W, 12V Booster)



IMC-1000S-PH12 is a family of unmanaged Gigabit Ethernet media converters that support conversion between electrical 10/100/1000Base-T and optical 1000Base-X Ethernet and as PSE (Power Source Equipment) provide PoE+ power over Ethernet. The IMC-1000S-PH12 provides an SFP cage for 100/1000Base-X compatible SFP modules. Housed in rugged DIN rail or wall mountable enclosures, these converters are designed for harsh environments, such as industrial networking, intelligent transportation systems (ITS) and are also suitable for many military and utility market applications where environmental conditions exceed commercial product specifications (See Figure 1).

Features

- Conversion between 10/100/1000Base-T and 100/1000Base-X Fiber cable interface
- Supports dual rate (100/1000) SFP for selectable Fast or Gigabit speed on fiber
- 12/24/48VDC (9.6~57VDC) redundant dual input power with built-in very high efficiency booster (97~99%) to rise up 55 VDC for PoE output
- Regulate PoE output voltage (55VDC) to stabilize PoE device, and guarantee delivery PoE power distance to 100meter (Figure 2)
- Provides IEEE 802.3at PoE output (30Watts)
- Supports Remote PD reset by fiber port link down (Figure 3)
- Supports LFPT (Link Fault Pass Through)
- IP30 rugged metal housing and fanless
- Wide operating temperature -20~75°C
- CE, FCC, Railway traffic EN50121-4 certification
- Heavy industrial grade EMS,EMI EN61000-6-2, EN61000-6-4 certification
- Supports Jumbo frame 9K bytes packet

Specifications

| | | | |
|---------------------------------------|---|-------------------------------------|--|
| Standard | IEEE 802.3 10Base-T 10Mbit/s Ethernet IEEE 802.3u 100Base-TX, 100Base-FX, Fast Ethernet IEEE 802.3ab 1000Base-T Gbit/s Ethernet over twisted pair IEEE 802.3z 1000Base-X Gbit/s Ethernet over Fiber-Optic IEEE 802.3x Flow Control and Back pressure IEEE 802.3at PoE+ (Power over Ethernet enhancement) IEEE 802.3af PoE (Power over Ethernet) IEEE 802.1q Tag VLAN | DIP Switch | PoE Output: OFF: Enable PoE output ON: Disable PoE output Remote PD reset (Figure 3) Off: Disable Remote PD reset On: Enable Remote PD reset by fiber port link down |
| RJ45 Ports | 10/100/1000Base-T Auto MDI/MDI-X and Auto-Negotiation Function Supports UTP CAT.5e Twisted Pair cable | Connector and Pin Assignment | SFP Slot RJ-45 Socket: CAT.5e (10/100/1000Mbps) Twisted Pair cable Auto MDI/MDI-X and Auto-Negotiation Function Support RJ-45 Port support IEEE 802.3at/af End-Span, Alternative A mode. |
| Fiber Ports | 100Base-X or 1000Base-X SFP slot 100Base-X or 1000Base-X set by DIP SW | Connector and Pin Assignment | PoE (V+): RJ-45 pin 1, 2. PoE (V-): RJ-45 pin 3, 6. Data (1,2,3,6,4,5,7,8) |
| Data Process Architecture | Store and Forward mode or Pass Through mode Set by DIP SW | LED | Per Unit :Power 1 (Green) ,Power 2 (Green) ,Fault (Amber)) Fiber LNK/ACT (Green): ON: Connected to network, OFF: Not connected to network , BLK: Receive /Transmit Data Fiber Speed: Yellow : 1000Base-X, Green : 100 Base- X RJ-45 Port: Speed: 10 (OFF), 100 (Green), 1000 (Yellow) LNK/ACT for RJ45(Green): ON: Connected to network, OFF: Not connected to network, BLK: Networking is active PoE Status (Green): Flash: PoE Fault (Over-load or short), ON: PoE normal working, OFF : PoE No Power output |
| Jumbo Frame | 9K bytes | Reverse Polarity Protection | Supported for Power Input |
| Fiber Parameters | Fiber Cable (Multi-mode): 50/125um, 62.5/125um Fiber Cable (Single-mode): 9/125um Wavelength: 1310nm (Multi-mode/Single-mode) Available distance: • SFP, Distance depend on plug-in Fiber Transceiver | Overload Current Protection | Supported |
| Link Fault Pass Through (LFPT) | TX- Fiber: If TX port link down, the media converter will force Fiber port to link down Fiber-TX: If Fiber port link down, the media converter will force TX port to link down | Power Supply | 12/24/48VDC (9.6~57VDC), Redundant power with polarity reverse protect function and removable terminal block Built-in very high efficiency booster(97~99%) to rise up 55 VDC for PoE output Regulated PoE output voltage (55VDC) to stabilize PoE device, and guarantee delivery PoE power distance to 100meter (Figure 2) |
| DIP Switch | ON: Disable Alarm For Power Loss OFF: Enable Alarm For Power Loss ON: Disable Alarm For Port Link-Failure OFF: Enable Alarm For Port Link-Failure ON: LFPT Enable, OFF: LFPT Disable Data process Architecture : ON : Pass through mode OFF : Store and Forward Switch mode Fiber Speed: OFF: 1000Base-X ON: 100Base-X | PoE Power budget | 30W |

| Power Consumption | Power consumption & Boost efficiency | | | | |
|-------------------|--------------------------------------|-------------------------|--------------------------|------------|------------------|
| | Input Voltage | Total Power Consumption | Device Power Consumption | PoE Budget | Boost Efficiency |
| | 12VDC | 34.2W | 3.9W | 30W | 99.0% |
| | 24VDC | 34.7W | 4.4W | 30W | 99.0% |
| 48VDC | 35.4W | 4.7W | 30W | 97.7% | |

| | |
|---------------------------------|--|
| Alarm Relay Contact | Relay outputs with current carrying capacity of 1 A @24VDC |
| Removable Terminal Block | Provides 2 redundant power, alarm relay contact, 6 Pin |
| Operating Humidity | 5%~95% (Non-condensing) |
| Operating Temperature | -20°C ~ 75°C |
| Storage Temperature | -40°C ~ 85°C |
| Housing | Rugged Metal, IP30 Protection and fanless |
| Dimensions | 106 x 62.5 x 135 mm (D x W x H) |
| Weight | 650g |
| Installation | DIN Rail mounting, or wall mounting (Optional) |
| MTBF | 881,372 Hours MIL-HDBK-217 |
| Warranty | 5 years |

| Certification | |
|---|--|
| EMC | CE |
| EMI | FCC Part 15 Subpart B Class A, CE |
| Railway Traffic | EN50121-4 |
| Immunity for Heavy Industrial environment | EN 61000-6-2 |
| Emission for Heavy industrial environment | EN 61000-6-4 |
| EMS (Electromagnetic Susceptibility) Protection Level | EN61000-4-2 (ESD) Level 3, Criteria B EN61000-4-3 (RS) Level 3, Criteria A EN61000-4-4 (EFT) Level 3, Criteria A EN 61000-4-5 (Surge) Level 3, Criteria B EN 61000-4-6 (CS) Level 3, Criteria A EN61000-4-8 (PFMF) Field strength 300A/m Criteria A |
| Safety | UL60950-1 (pending) |
| Shock | IEC 60068-2-27 |
| Freefall | IEC 60068-2-32 |
| Vibration | IEC 60068-2-6 |

Application

Figure 1 : IMC-1000S-PH12 Industrial PoE Transmission



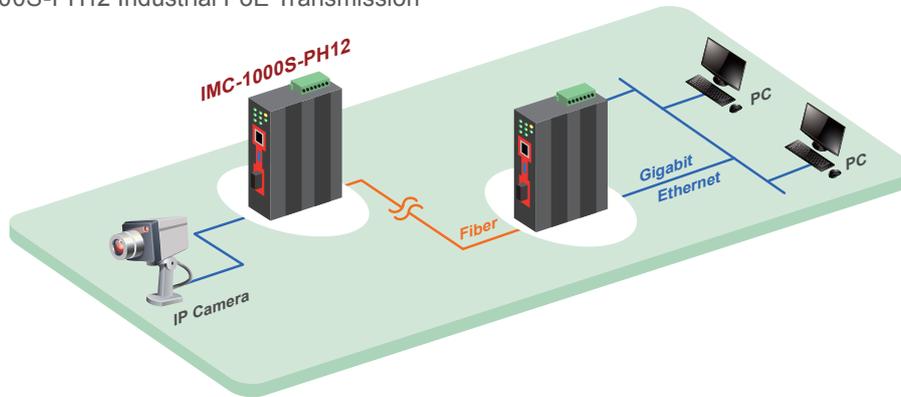


Figure 2 : High efficiency boost technology for PoE

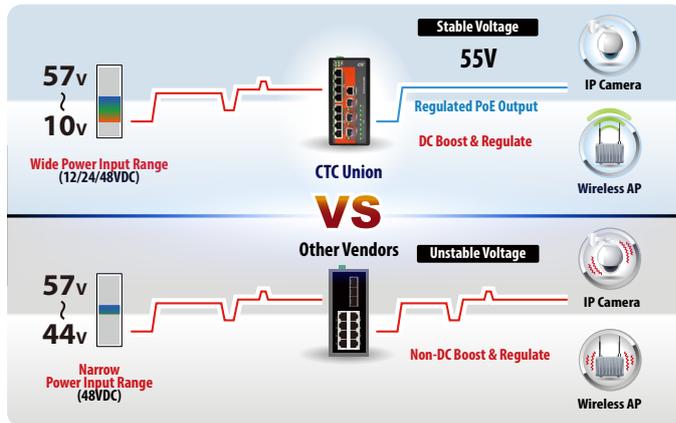


- Regulated PoE output voltage (55VDC) to stabilize PoE device
- Guarantee delivery PoE power distance to 100 meters
- Wide range input power 24/48VDC (20~57VDC)
- Built-in very high efficiency (94~97%) to boost PoE output voltage

Figure 3 : Remote PD Reset Application

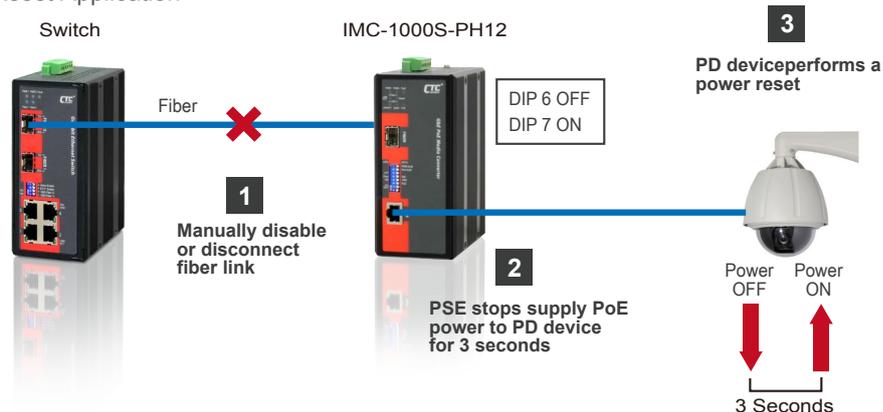


Dimensions

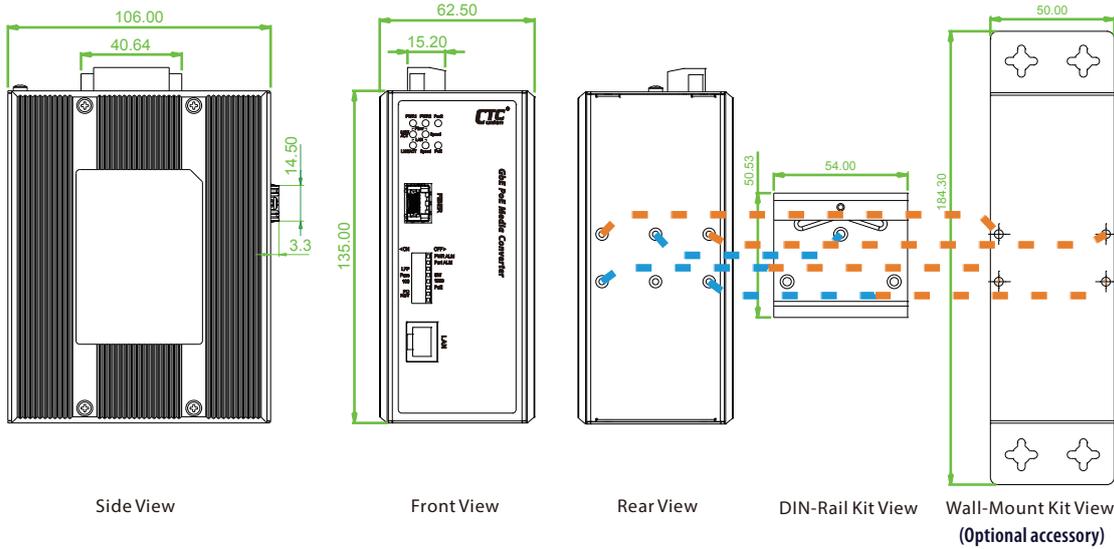

Ordering Information

| Model Name | RJ45 UTP | Fiber | PoE Port | | Power Input | Certification | | | | Operating Temperature |
|-----------------|--------------------|---------------------------|--------------------|--------------|-------------|-------------------|----------------------------|----|-----|-----------------------|
| | 10/100/1000 Base-T | Dual Speed 100/1000Base-X | IEEE 802.3at (PSE) | Power Budget | Redundant | Railway EN50121-4 | EN61000-6-2 EN61000-6-4 | CE | FCC | |
| IMC-1000S-PHE12 | 1 | 1 SFP | 1 | 30W | 12/24/48VDC | V | V | V | V | -20~75°C |

Model Naming Rule

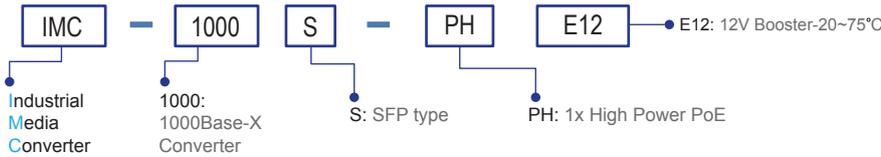

Package List

- IMC-1000S-PH12
- Quick installation guide
- Din Rail bracket with screws
- Terminal block
- Protective caps for SFP ports

Optional Accessories

Wall mount kit accessories

IND-WMK02 Wall Mount kit for Industrial product, 184 x 50mm

Industrial SFP Transceiver

The ISFP series of industrial grade SFP modules have been fully tested with the IMC-1000S-PH12 product for guaranteed compatibility and performance. The best performance can be guaranteed even in mission-critical applications. (Please see CTC Union's Industrial SFP datasheet for more details and more items.)

| | |
|--------------------|---|
| ISFP-M7000-85-D(E) | Industrial SFP GbE 1000Base-SX, M/M, 500 meter, wave length 850nm, 7.5dB, LC, DDMI, -10~70°C (-40~85°C) |
| ISFP-S7020-31-D(E) | Industrial SFP 1000Base-LX, S/M, 20km, wave length 1310nm, 15dB, LC, DDMI, -10~70°C (-40~85°C) |
| ISFP-T7T00-00-(E) | Industrial SFP 10/100/1000Base-T UTP 100meter, -10~70°C (-40~85°C) |
| ISFP-M5002-31-D(E) | Industrial SFP 155M 100Base-FX, MM, 2km, wave length 1310nm, 12dB, LC, DDMI, -10~70°C (-40~85°C) |
| ISFP-S5030-31-D(E) | Industrial SFP 155M 100Base-FX, SM, 30km, 1310nm, 19dB, LC, DDMI, -10~70°C (-40~85°C) |

SFP Naming Rule

