



MSW-4424CS

20x GbE, SFP + 4x GbE Combo + 4x 10GE(SFP+)
L2+ Managed Carrier Ethernet Switch w/ SyncE

The MSW-4424CS is positioned as a layer 2+ Gigabit access switch solution. It is equipped with 20 100Base-FX/1000Base-X dual speed SFP slots, 4 ports GbE combo (10/100/1000Base-T or 100/1000Base-X SFP) ports and 4 1000Base-X/10G Base-X dual speed SFP+ uplink slots. The MSW-4424CS offers the best flexibility and scalability for the operators or service providers to deploy their Metro Ethernet network. With the deployment of MSW-4424CS, the operators or service providers can flexibly provision the bandwidth for either 100Mbps or 1000Mbps as well as uplink connection of Gigabit or 10G speed upon their service applications. The MSW-4424CS has built-in dual power supplies to enable power redundancy function and enhance the high network availability.

Aimed at Metro Ethernet applications, the specifications of MSW-4424CS fully meet the attributes of Carrier Ethernet proposed by MEF (Metro Ethernet Forum). It complies with MEF 9 standard to support E-Line/E-Access service and MEF 14 standard to enable the bandwidth profile configuration delivering SLA (Service Level Agreement) for end-to-end performance characteristics as well as Ethernet OAM functionality to support carrier grade service OAM management rapidly detecting and recovering from the network incidents in real time. MSW-4424CS supports timing synchronization features (SyncE & IEEE 1588v2) to enhance and migrate a carrier grade network for mobile backhaul applications.

Features

Fully dual rate architecture of fiber link port

Completely dual speed ports of fiber link to offer the scalable physical connection of Metro Ethernet network for operators.

Fully Ethernet OAM enabled

Enabling Ethernet OAM features (IEEE 802.3ah/802.1ag/ITU-T Y.1731) to rapidly detect and recover network fault and save the OPEX for operators as well as increase customer satisfaction.

Timing synchronization

Advanced synchronization features such as SyncE or IEEE 1588v2 to allow operators delivering service with optimal stability and continuity in the end-to-end connectivity.

MEF standards compliant solution

CE2.0 compliant product to guarantee the compatibility with other MEF certified equipment and reduce the risk and cost for Metro Ethernet network deployment of operators.

Specifications


Interface	100/1000Mbps SFP slots x 20 + GbE combo port (10/100/1000Base-T or 100/1000Mbps SFP slot) x 4 + 1/10Gbps SFP+ slot x 4
Console Port	RJ-45 console port x 1
1PPS/ToD port	RJ45 x 2
Management Port	10/100/1000Base-T RJ45 x 1
Filter & Forward Rate	14880pps at 10Mbps, 148800pps at 100Mbps, 1488000pps at 1Gbps, 14880000pps at 10Gbps
Switching Fabric Capacity	128Gbps
Packet Forwarding Capacity	95Mpps
Transmission Method	Store and Forward Switching
Standards	IEEE 802.3u, IEEE 802.3z, IEEE 802.3ae, IEEE 802.1p, IEEE 802.1Q, IEEE 802.1ad, IEEE 802.1d, IEEE 802.1w, IEEE 802.1s, IEEE 802.1x, IEEE 802.3ad, IEEE 802.3ah, IEEE 802.1ag, IEEE 802.3az, ITU-T Y.1731, ITU-T G.8262, IEEE 1588 v2
Packet Buffer	32M bits
Mac Table Size	32K
Max. Packet Size	10K Bytes
VLAN Feature	IEEE 802.1Q tagged VLAN (Max. 4K VLAN groups), port based VLAN, MAC based VLAN, protocol based VLAN

VLAN Feature	private VLAN, IEEE 802.1ad Q-in-Q, VLAN translation, GVRP
QoS Feature	IEEE 802.1p 8 priority queues per port, CoS based on switch port; VLAN ID; DSCP; TCP/UDP port IEEE 802.1p priority tag remarking, DSCP remarking, Port based ingress/egress rate limit 3 colors marker-CIR/EIR/Burst bandwidth control
L2 switching Protection	STP, RSTP, MSTP, ITU-T G.8031/G.8032
Trunking	IEEE 802.3ad LACP (Max. 14 trunking group, Max. 8 ports per trunking group)
Security	IEEE 802.1x port based access control MAC based access control authentication RADIUS authentication, limited MAC address learning IP/MAC binding, ACL rule based filtering, TACACS+ IP source guard, DHCP snooping/relay option 82 ARP inspection
IP Multicasting	IGMP throttling, IGMP filtering, IGMP fast leave IGMP snooping v1/v2/v3, MVR, MLD snooping v1/v2
Storm Control	Unknown Unicast/Broadcast/Multicast storm suppression
Management	Web/Telnet CLI/SNMP/console interface, Web/CLI authentication, SSH v2, HTTPS, port mirroring syslog, IPv6 management, NTP, SNTP, IEEE 802.3az, Energy, Efficient, Ethernet (EEE) power management
SNMP agent	SNMP v1/v2c/v3, RMON Group 1,2,3 and 9
Software upgrade	TFTP/HTTP
Ethernet OAM	IEEE 802.3ah/IEEE 802.1ag/ITU-T Y.1731

Timing synchronization	ITU-T G.8262, SyncE, IEEE 1588 v2
LED display	Power, System, Console, Link/Act, Speed
Power input	100V ~ 240V AC, -36 ~ -60V DC
Build in power module combination	AC, DC, AD (AC+DC), AA (AC+AC) or DD (DC+DC)
Power Consumption	< 60W

Operating Temperature	-10 ~ 60°C
Storage Temperature	-25 ~ 70°C
Humidity	5% ~ 90% (non-condensing)
Dimensions	250x 440x 43.5mm (DxWxH)
Certification	FCC, CE

Application

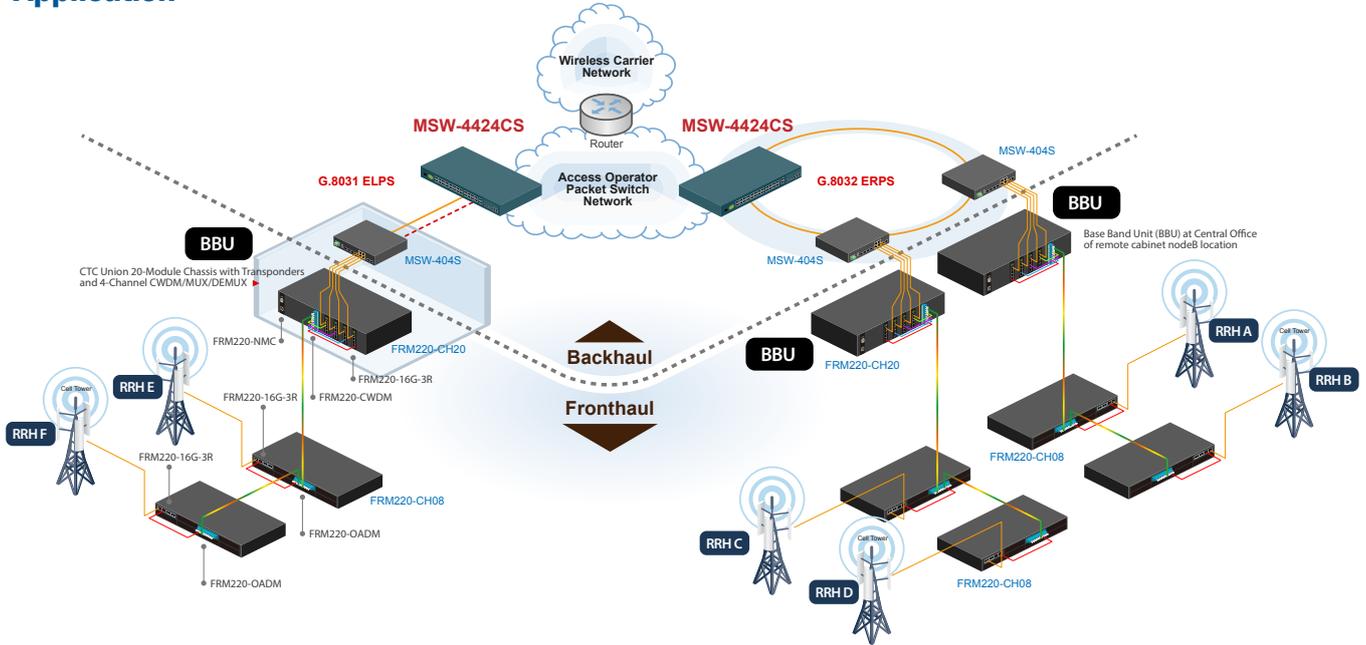

- Carrier Ethernet with multiple class of service
- Traffic Synchronization
- Precise delivery of time-sensitive services

Ordering Information

Model Name	Description
MSW-4424CS-AC	L2+ 10G Fiber Access Switch with SyncE and build-in single AC power module
MSW-4424CS-DC	L2+ 10G Fiber Access Switch with SyncE and build-in single DC power module
MSW-4424CS-AA	L2+ 10G Fiber Access Switch with SyncE and build-in dual AC power module
MSW-4424CS-DD	L2+ 10G Fiber Access Switch with SyncE and build-in dual DC power module
MSW-4424CS-AD	L2+ 10G Fiber Access Switch with SyncE and build-in AC + DC power module

Power Type
MSW - 4424CS -
 Example: MSW - 4424CS - AC

Accessories

10G SFP+ Transceiver Module

SFM-1000-SR85	10G SFP+ SR/SW MMF 300m, 850nm VCSEL, 10G Ethernet/FC/SDH/SONET
SFS-1010-LR31	10G SFP+ LR/LW SMF 10km, 1310nm DFB DML, 10G Ethernet/FC/SDH/SONET
SFS-1040-ER55	10G SFP+ ER/EW SMF 40km, 1550nm DFB EML, 10G Ethernet/FC/SDH/SONET
SFS-1080-ZR55	10G SFP+ ZR/EW SMF 80km, 1550nm DFB EML, 10G Ethernet/FC/SDH/SONET