



IGS-404SM

4x 10/100/1000Base-T+ 4x 100/1000Base-X SFP

IGS-803SM

8x 10/100/1000Base-T+ 3x 100/1000Base-X SFP

IGS-812SM

8x 10/100/1000Base-T+ 12x 100/1000Base-X SFP

IGS-1604SM

16x 10/100/1000Base-T+ 4x 100/1000Base-X SFP

The series models are managed industrial grade Gigabit switches with 4~16 ports 10/100/1000Base-T ports and 3~12 ports SFP Gigabit/Fast Ethernet ports that provide stable and reliable Ethernet transmission. The Ethernet switches support a variety of management functions, including STP/RSTP/MSTP/ ITU-T G.8032 Ring and multiple u-Ring for redundant cabling, layer 2 Ethernet IGMP, VLAN, QoS, Security, IPv6, bandwidth control, port mirroring, cable diagnostic and Green Ethernet. Housed in rugged DIN rail or wall mountable enclosures, these switches are designed for harsh environments, such as industrial networking, security automation applications, intelligent transportation systems (ITS) and are also suitable for many military and utility market applications where environmental conditions exceed commercial product specifications. Standard operating temperature range models (-10 to 60°C) and wide operating temperature range models (-40 to 75°C) fulfill the special needs of industrial automation applications.

Features

- 4x 10/100/1000Base-T RJ-45 and 4x 100/1000Base-X SFP Fiber (IGS-404SM)
- 8x 10/100/1000Base-T RJ-45 and 3x 100/1000Base-X SFP Fiber (IGS-803SM)
- 8x 10/100/1000Base-T RJ-45 and 12x 100/1000Base-X SFP Fiber (IGS-812SM)
- 16x 10/100/1000Base-T RJ-45 and 4x 100/1000Base-X SFP Fiber (IGS-1604SM)
- UL60950-1, CE, FCC, Rail Traffic EN50121-4 certified
- Industrial Grade EMS, EMI, EN61000-6-2, EN61000-6-4 certified
- Cable diagnostic, Measuring cable normal or broken point distance
- Supports Green Ethernet IEEE802.3az EEE (Energy Efficient Ethernet) management to optimize the power consumption
- STP, RSTP, MSTP, ITU-T G.8032 Ethernet Ring Protection Switching (ERPS) for redundant cabling
- Provides 5 instances that each can support u-Ring, u-Chain or Sub-Ring type for flexible uses (see Figure 3). Supports up to 5 rings in one device (see Figure 2).
- u-Ring for Redundant Cabling, recovery time < 10ms in 250 devices
- DHCP client/Relay/Snooping/Snooping option 82/Relay option 82
- QoS, Traffic classification QoS, CoS, bandwidth control for Ingress and Egress, Storm Control, DiffServ
- IEEE802.1q VLAN, MAC based VLAN, IP subnet based VLAN, Protocol based VLAN, VLAN translation, GVRP, MVR
- Dynamic IEEE 802.3ad LACP Link Aggregation, Static Link Aggregation
- IGMP snooping V1/V2/V3, IGMP Filtering/ Throttling, IGMP query, IGMP proxy reporting, MLD snooping V1/V2
- Security : Port based and MAC based IEEE802.1X, RADIUS, ACL, TACACS+, HTTP/HTTPS, SSL/SSH v2
- Software upgrade via TFTP and HTTP, redundant firmware to avoid in case of upgrade failure
- Support IEEE1588 PTP V2 for precise time synchronization to operate in Master, Boundary, Slave mode by each port
- RMON, MIB II, Port mirroring, Event syslog, DNS, NTP/SNTP, IEEE802.1ab LLDP
- Supports IPv6 Telnet server /ICMP v6
- CLI, Web based management, SNMP v1/v2c/v3, Telnet server for management
- Provides SmartConfig for quick and easy mass configuration
- Supports SmartView for Centralized Management

Specifications

Standard	IEEE 802.3 10Base-T 10Mbit/s Ethernet
	IEEE 802.3u 100Base-TX, 100Base-FX, Fast Ethernet
	IEEE 802.3ab 1000Base-T Gbit/s Ethernet over twisted pair
	IEEE 802.3z 1000Base-X Gbit/s Ethernet over Fiber-Optic
	IEEE 802.1d STP (Spanning Tree Protocol)
	IEEE 802.1w RSTP (Rapid Spanning Tree Protocol)
	IEEE 802.1s MSTP (Multiple Spanning Tree Protocol)
	ITU-T G.8032 / Y.1344 ERPS (Ethernet Ring Protection Switching)
	IEEE 802.1Q Virtual LANs (VLAN)
	IEEE 802.1X Port based and MAC based Network Access Control, Authentication
	IEEE 802.3ad Link aggregation for parallel links with LACP(Link Aggregation Control Protocol)
	IEEE 802.3x Flow control for Full Duplex
	IEEE 802.1ad Stacked VLANs, Q-in-Q
	IEEE 802.1p LAN Layer 2 QoS/CoS Protocol for Traffic Prioritization
	IEEE 802.1ab Link Layer Discovery Protocol (LLDP)
	IEEE 802.3az EEE (Energy Efficient Ethernet)
VLAN ID	4094 IEEE802.1Q VLAN VID
Switch Architecture	Back-plane (Switching Fabric): 16Gbps (IGS-404SM) 22Gbps (IGS-803SM) 40Gbps (IGS-812SM, IGS-1604SM)
Data Processing	Store and Forward
Flow Control	IEEE 802.3x for full duplex mode Back pressure for half duplex mode

Network Connector	4x 10/100/1000Base-T RJ-45 + 4x 100/1000Base-X SFP connector (IGS-404SM) 8x 10/100/1000Base-T RJ-45 + 3x 100/1000Base-X SFP connector (IGS-803SM) 8x 10/100/1000Base-T RJ-45+ 12x 100/1000Base-X SFP connector (IGS-812SM) 16x 10/100/1000Base-T RJ-45+ 4x 100/1000Base-X SFP connector (IGS-1604SM) RJ-45 UTP port support Auto negotiation speed, Auto MDI/MDI-X function, SFP port support dual speed with DDMI																				
Console	RS-232 (RJ-45)																				
Network Cable	UTP/STP above Cat. 5e cable EIA/TIA-568 100-ohm (100m)																				
Protocols	CSMA/CD																				
Reverse Polarity Protection	Present																				
Overload Current Protection	Present																				
CPU Watch Dog	Present																				
Power Supply	Redundant Dual DC 12/24/48V (9.6~60VDC) Input power (Removable Terminal Block)																				
Power Consumption	<table border="1"> <thead> <tr> <th>Input Voltage</th> <th>IGS-404SM</th> <th>IGS-803SM</th> <th>IGS-812SM</th> <th>IGS-1604SM</th> </tr> </thead> <tbody> <tr> <td>12VDC</td> <td>8.2W</td> <td>8.5W</td> <td>14.3W</td> <td>14.5W</td> </tr> <tr> <td>24VDC</td> <td>8.1W</td> <td>9.1W</td> <td>14.2W</td> <td>14.4W</td> </tr> <tr> <td>48VDC</td> <td>9.6W</td> <td>10.6W</td> <td>15.8W</td> <td>16.3W</td> </tr> </tbody> </table>	Input Voltage	IGS-404SM	IGS-803SM	IGS-812SM	IGS-1604SM	12VDC	8.2W	8.5W	14.3W	14.5W	24VDC	8.1W	9.1W	14.2W	14.4W	48VDC	9.6W	10.6W	15.8W	16.3W
Input Voltage	IGS-404SM	IGS-803SM	IGS-812SM	IGS-1604SM																	
12VDC	8.2W	8.5W	14.3W	14.5W																	
24VDC	8.1W	9.1W	14.2W	14.4W																	
48VDC	9.6W	10.6W	15.8W	16.3W																	
LED	Per unit: Power 1 (Green), Power 2 (Green), Fault (Amber), CPU Act (Green), Ring Master (Yellow) Per RJ-45 port: 10/100 Link/Active (Green) 1000 Link/Active (Amber) SFP Fiber Per port: Link/Active (Green)																				
Jumbo Frame	9.6KB																				

MAC Address Table	8K
Memory Buffer	256K Bytes for packet buffer
Warning Message	System Syslog, SMTP/ e-mail event message, alarm relay
Alarm Relay Contact	Relay outputs with current carrying capacity of 1 A @24VDC
Removable Terminal Block	Provide 2 redundant power, alarm relay contact, 6 Pin
Operating Temperature	-10 ~ 60°C (IGS-404SM, IGS-803SM, IGS-812SM, IGS-1604SM) -40 ~ 75°C (IGS-404SM-E, IGS-803SM-E, IGS-812SM-E, IGS-1604SM-E)
Operating Humidity	5% to 95% (Non-condensing)
Storage Temperature	-40 ~ 85°C
Housing	Rugged Metal, IP30 Protection, Fanless
Dimensions	106 x 62.5 x 135 mm (D x W x H) (IGS-404SM) 106 x 72 x 152 mm (D x W x H) (IGS-803SM, IGS-812SM, IGS-1604SM)
Weight	0.725kg (IGS-404SM) 0.78kg (IGS-803SM) 0.795kg (IGS-812SM) 0.82kg (IGS-1604SM)
Installation Mounting	DIN Rail mounting or wall mounting
MTBF	302,826hrs (IGS-404SM) 404,589hrs (IGS-803SM) 204,078hrs (IGS-812SM) 145,967hrs (IGS-1604SM) (MIL-HDBK-217)
Warranty	5 years

Software Specifications

Topology	
VLAN	IEEE 802.1q VLAN, up to 4094 802.1Q VLAN VID IEEE 802.1q VLAN, up to 4094 Groups IEEE 802.1ad Q-in-Q MAC-based VLAN, up to 256 entries IP Subnet-based VLAN, up to 128 entries Protocol-based VLAN (Ethernet, SNAP, LLC), up to 128 entries VLAN Translation, up to 256 entries GVRP (GARP VLAN Registration Protocol) MVR (Multicast VLAN Registration)
Link Aggregation (Port Trunk)	Static (Hash with SA, DA, IP, TCP/UDP port), up to 5 trunk group Dynamic (IEEE 802.3ad LACP), up to 5 trunk group
Spanning Tree	IEEE802.1d STP IEEE802.1w RSTP IEEE802.1s MSTP
Multiple u-Ring	up to 5 instances that each supports u-Ring, u-Chain or Sub-Ring type for flexible uses, and maximum up to 5 Rings. Recovery time <10ms The maximum number of devices allowed in a Ring supported ring is 250.
Loop Protection	Present
ITU-T G.8032 / Y.1344 ERPS (Ethernet Ring Protection)	Recovery time <50ms Single Ring, Sub-Ring, Multiple ring topology network
QoS Features	
Class of Service	IEEE802.1p 8 active priorities queues for per port
Traffic Classification QoS	IEEE802.1p based CoS IP Precedence based CoS IP DSCP based CoS QCL(QoS Control List): Frame Type, Source/Destination MAC, VLAN ID, PCP, DEI QCE(QoS Control Entry): Protocol, Source IP, IP Fragment, DSCP, TCP/UDP port number
Bandwidth Control for Ingress	Rate in steps :1 kbps / Mbps / fps / kfps Range : 100 kbps to 1Gbps / 1fps to 3300kfps Rate Unit : bit or frame
Bandwidth Control for Egress	Rate in steps : 1 kbps / Mbps Range : 100 kbps to 1Gbps Rate Unit : bit Per queue / Per port shaper
DiffServ (RF 2474) Remarking	
Storm Control	for Unicast, Broadcast, Multicast
IP Multicasting Features	
IGMP / MLD Snooping	IGMP Snooping v1, v2, v3 / MLD Snooping v1, v2 Port Filtering Profile Throttling, Fast Leave Maximum Multicast Group : up to 1022 entries Query / Static Router Port

Certification	
EMC	CE
EMI (Electromagnetic Interference)	FCC Part 15 Subpart B Class A, CE EN55022 Class A
Railway Traffic	EN50121-4
Immunity for Heavy Industrial Environment	EN61000-6-2
Emission for Heavy Industrial Environment	EN61000-6-4
EMS (Electromagnetic Susceptibility) Protection Level	EN61000-4-2 (ESD) Level 3, Criteria B EN61000-4-3 (RS) Level 3, Criteria A EN61000-4-4 (Burst) Level 3, Criteria A EN61000-4-5 (Surge) Level 3, Criteria B EN61000-4-6 (CS) Level 3, Criteria A EN61000-4-8 (PFMF, Magnetic Field) Field Strength: 300A/m, Criteria A
Safety	UL60950-1
Shock	IEC 60068-2-27
Freefall	IEC 60068-2-32
Vibration	IEC 60068-2-6

Security Features	
IEEE 802.1X	Port-Based MAC-Based
ACL	Number of rules : up to 256 entries for L2 / L3 / L4
RADIUS authentication & accounting	
TACACS+ authentication & accounting, TACACS+ 3.0	
HTTPS, HTTP	
SSL / SSH v2	
User Name Password Authentication	Local Authentication Remote Authentication (via RADIUS / TACACS+)
Management Interface Access Filtering	
Management Features	
CLI	Cisco® like CLI
Web Based Management	
Telnet	Server
SNMP	V1, V2c, V3
SW & Configuration Upgrade	TFTP, HTTP Redundant firmware in case of upgrade failure
RMON	RMON I (1, 2, 3, 9 group), RMON II
MIB	RFC1213 MIB II, Private MIB
DHCP	Client, Relay, Snooping Snooping option 82 Relay option 82
IP Source Guard	
Port Mirroring	
Event Syslog	Syslog server (RFC3164) (Support 1 server)
Warning Message	System syslog, e-mail, alarm relay
DNS	Client, Proxy
IEEE1588 PTP V2	Master, Boundary, Slave Operating mode Operating in each port of these switch
NTP / SNTP	
LLDP (IEEE 802.1ab)	Link Layer Discovery Protocol LLDP-MED
IPv6 Features	
IPv6 Management	Telnet Server/ICMP v6
SNMP over IPv6	
HTTP over IPv6	
SSH over IPv6	
IPv6 Telnet Support	
IPv6 NTP / SNTP Support	
IPv6 TFTP Support	
IPv6 QoS	
IPv6 ACL	Number of rules: up to 256 entries L2 / L3 / L4

Others Features

Green Ethernet Supports IEEE802.3az EEE (Energy Efficient Ethernet) Management to optimize the power consumption
Determine the cable length and lowering the power for ports with short cables

Green Ethernet Lower the power for a port when there is no link
LED Power Management :Adjustment LEDs intensity

Cable Diagnostic Measuring cable normal or broken point distance

Application

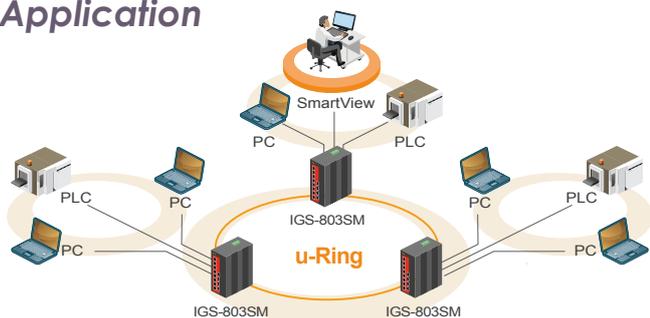


Figure 1 : Application Example

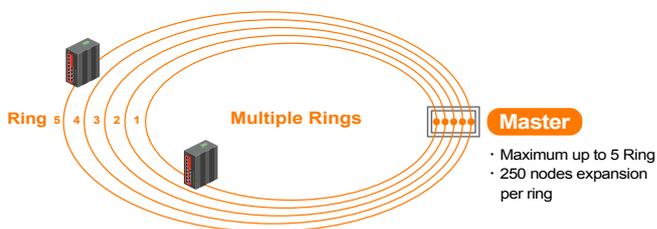


Figure 2 : Multiple Rings

u-Ring Configuration							
Delete	Instance	Type	Master	East		West	
				Port	Edge	Port	Edge
Delete	1	u-Ring	<input type="checkbox"/>	1		2	
Delete	2	u-Ring	<input type="checkbox"/>	4		3	
Delete	3	u-Ring	<input type="checkbox"/>	10 (Fiber2)		11 (Fiber3)	
Delete	4	Sub-Ring	<input type="checkbox"/>	6			
Delete	5	u-Chain	<input type="checkbox"/>	5	<input type="checkbox"/>	9 (Fiber1)	<input type="checkbox"/>


Auto-refresh Refresh

Add New Instance

Save Reset

Figure 3 : User-Friendly Configuration In Web Interface

Figure 4 : u-Ring Type

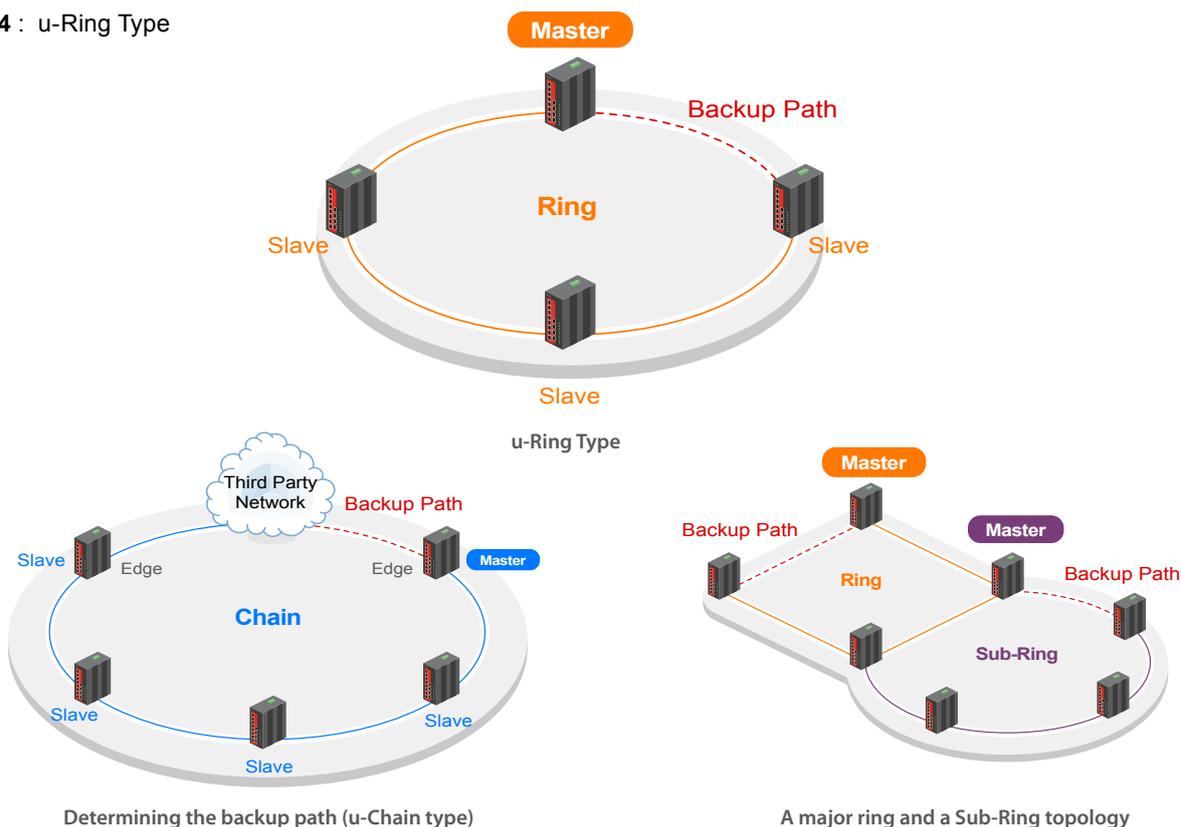


Determining the backup path (u-Chain type)

A major ring and a Sub-Ring topology


Figure 5 : Ring Configuration Example

Ring Configuration Type


- u-Ring
- Sub-Ring

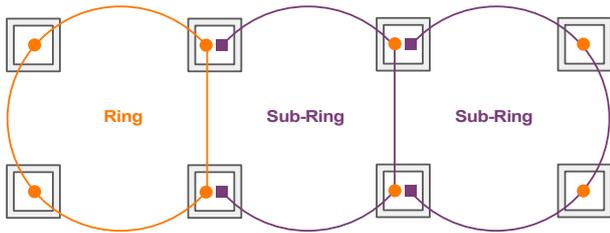


Ring Configuration Type

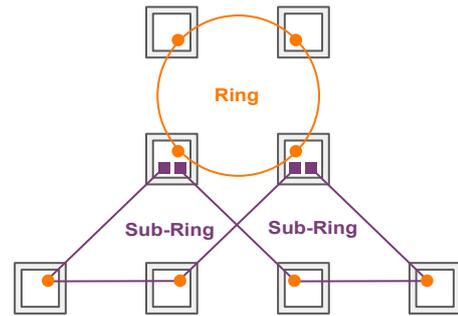

Combination of a ring and two Sub-Ring

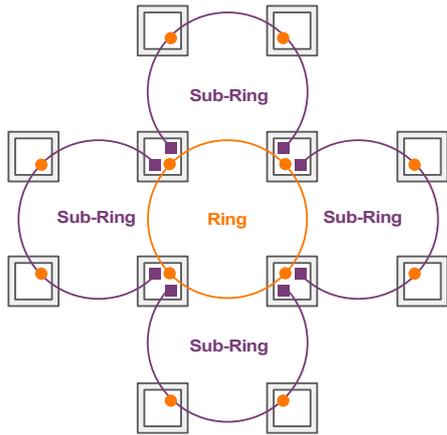


Combination of a ring and four Sub-Ring

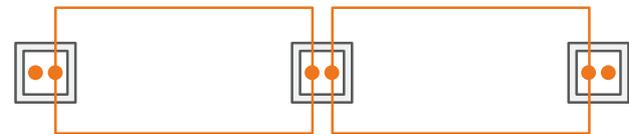

Cable Redundancy

Dimensions

IGS-404SM

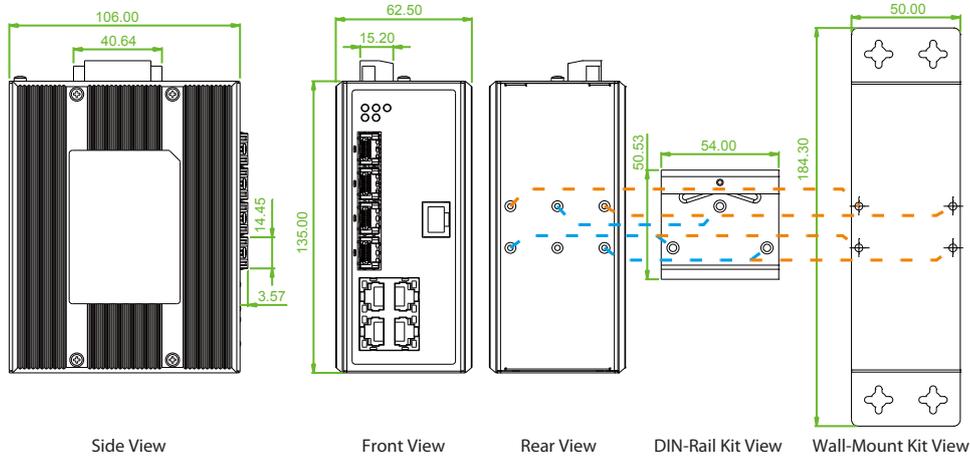

Side View


Front View

Rear View

DIN-Rail Kit View

Wall-Mount Kit View

IGS-803SM

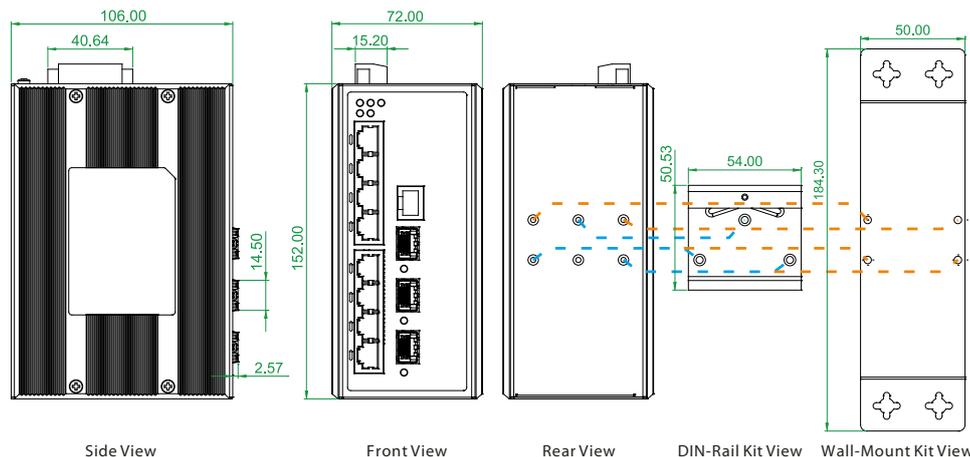

Side View


Front View

Rear View


DIN-Rail Kit View

Wall-Mount Kit View

IGS-812SM

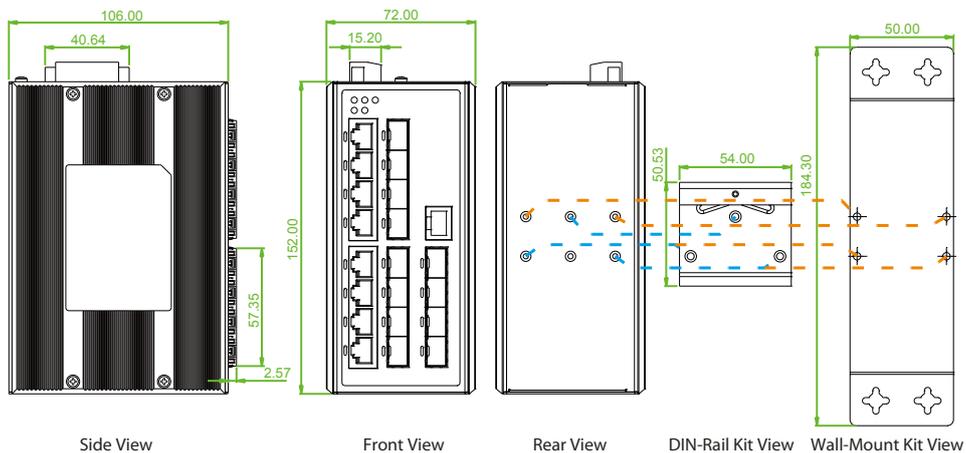


IGS-1604SM

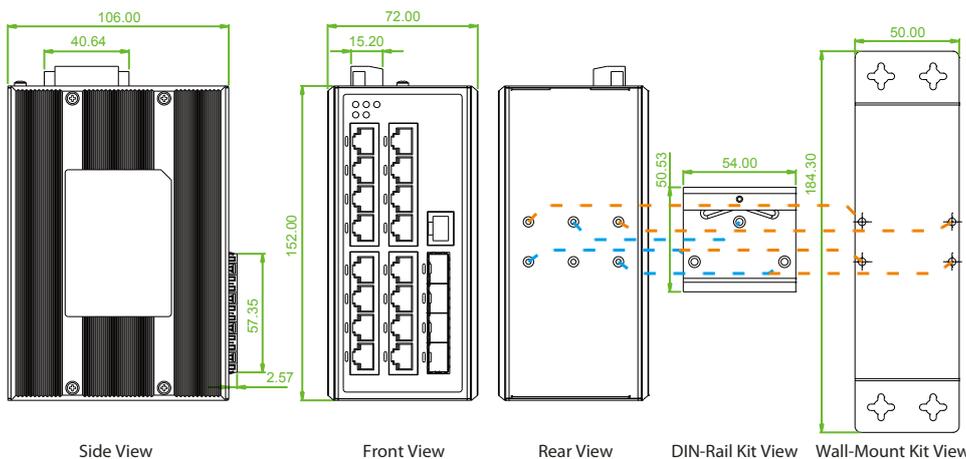

Ordering Information

Model Name	Managed	Total Port	UTP Port	Fiber Port	Certification				Operating Temperature
			10/100/1000 Base-T	100/1000 Base-X	Railway EN50121-4	Safety UL60950-1	EN61000-6-2 EN61000-6-4	CE FCC	
IGS-404SM	V	8	4	4 SFP	V	V	V	V	-10~60°C
IGS-404SM-E	V	8	4	4 SFP	V	V	V	V	-40~75°C
IGS-803SM	V	11	8	3 SFP	V	V	V	V	-10~60°C
IGS-803SM-E	V	11	8	3 SFP	V	V	V	V	-40~75°C
IGS-812SM	V	20	8	12 SFP	V	V	V	V	-10~60°C
IGS-812SM-E	V	20	8	12 SFP	V	V	V	V	-40~75°C
IGS-1604SM	V	20	16	4 SFP	V	V	V	V	-10~60°C
IGS-1604SM-E	V	20	16	4 SFP	V	V	V	V	-40~75°C

Model Naming Rule

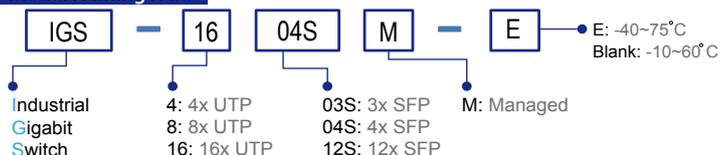

Accessories

DR-4524	Industrial Power, Input 85 ~ 264VAC, Output 24VDC, 48W, -10 ~ +50°C
MDR-40-24	Industrial Power, Input 85 ~ 264VAC, Output 24VDC, 40W, -20 ~ +70°C
SFP Transceiver	Compatible, Reliable, 5-year Warranty

SFP Naming Rule

